


Spare Parts Catalog

CMS 830 C (Type 573)

Component Type 001

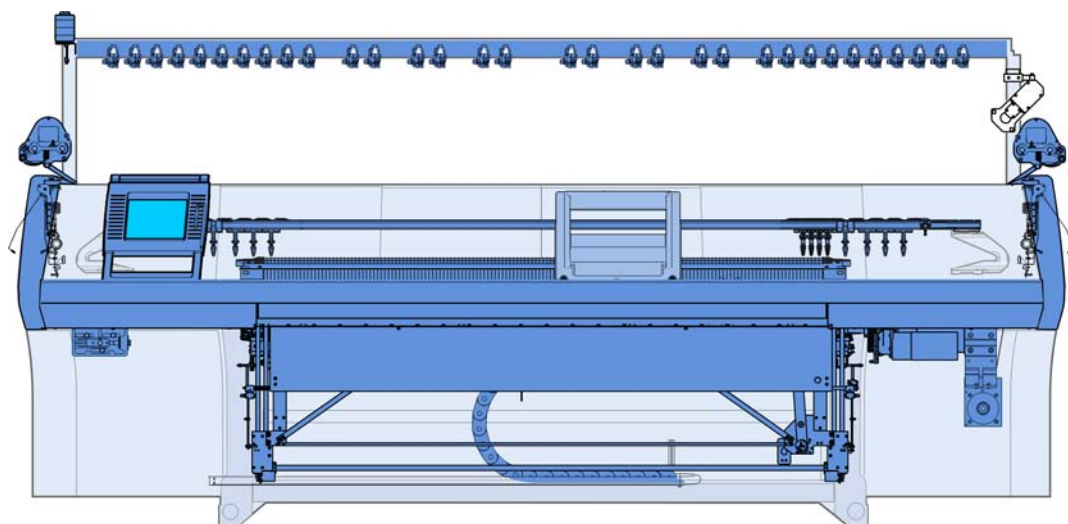

Document No. 243959_00_GB

Issue 10/2007

Impressum

All rights reserved.

The utilisation of texts and pictures, also in extracts, without our agreement is unfavourable to the copyright.

Our products are being developed further continuously. They are therefore subject to technical modifications.

The indications of this catalog are without liability.

©

H. Stoll GmbH & Co.KG

Stollweg 1

D-72760 Reutlingen, Germany

Phone: +49 (07121) 313-289

Fax: +49 (07121) 313-347

e-mail: spareparts@stoll.com

Introduction

Notes for the order

This catalog serves to order spare parts.

It applies only to the machine type recorded on the title page.

With orders of spare parts we earnestly request the following details, as otherwise a satisfactory delivery of parts is not possible:

1. Type of machine, gauge, no. of machine.
2. Page no., designation, ident. no., quantity.

Please use the order form!

Use original spare parts from Stoll for repairing only.

Order form

Telefon +49 (7121) 313-289
 Telefax +49 (7121) 313-347
 email: spareparts@stoll.com

H. Stoll GmbH & Co. KG
 PO box 2544

D-72715 Reutlingen

Order number

Receipt date

Company

Name

Street

Postal code town

Phone

Fax

Customer no.

Shipping mode

Date of order

Maschine type

Gauge

Masch.-Nr.

Sirix-Nr.

Spare parts order








Page no.	Designation	Ident no.	Piece no.	Comment

Date

Signature

Search help

In order to make the search of the spare parts easier, the following elements will be used in the spare parts catalog:

Symbol	Meaning
Σ	Indicates an assembly
	Position indicator with the position number (X).
	Indicates an element of another assembly.
	Indicates an assembly which is represented more detailed beside.
	Indicates an assembly which is represented on another page more detailed.
	Screw torques (z) deviating from the preferential row.
	Detail, represented enlarged in the direction of the arrow.
	Indicates a group of parts.
	Indicates the left side or view.
	Indicates the right side or view.
	Indicates a section or a view in the viewing direction.

Torques

Drehmomente Torques Couples Coppias Momentos de rotación [Nm] ± 10 % (für $\mu_{ges} = 0,12$)		Festigkeitsklassen Property class Classes de résistance Classi di resistenza Clases de resistencia		
		4,8	8,8	12,9
Regelgewinde Coarse-pitch thread Filetage à pas gros Filetto regolatore Filete regulador	M3	0,6	1,2	2,5
	M4	1,2	2,5	5
	M5	2,5	5	9
	M6	5	9	18
	M8		18	40
	M10		40	
	M12		80	

Preferential row of screw torques

- Torques are **valid** for:
Connection steel-steel, black, phosphatized, galvanized, rolled or cut thread as well as only for plain (head) supports.
- Torques are **not valid** for:
protected screws with: Lock washers, rib heads, coated and clamping screws and nuts. They are also not used for self-grooving threads.
- Torques differing from this preferential row of torques must be taken from the corresponding location in the drawings.

Table of contents

Impressum	2
Introduction	3
Search help.....	5
Torques.....	6
Drive and racking	11
Drive and racking.....	12
Drive.....	13
Motor and belt drive.....	14
Tension bearing.....	15
Racking.....	16
Energy chain and carriage driver.....	17
Needle beds	18
Needle bed E2,5.2.....	19
Continuation needle bed E2,5.2	20
Left clamping/cutting bed E3-4	21
Right clamping/cutting bed E3-4.....	22
Cover on the left and on the right	23
Connection measuring bar	24
Carriage	25
Overview of Carriage Parts	26
Needle cam at the top.....	27
Needle cam at the bottom	28
Yarn carrier driving without guiding part.....	29
Yarn carrier driving with guiding part.....	30
Jack cam box.....	31
Holding-down jack cam box E2,5.2	32
Carriage assembly.....	33


Carriage guide	34
Needle detector.....	35
Brush holder.....	36
Carriage cover	37
Spare parts package carriage guide bar.....	38
Main take-down	39
Take-down rollers and left bearing	40
Take-down motor and right bearing.....	41
Stripper angle.....	42
Mounting plate	43
Swivel-mounted bearing	44
Floating axle.....	45
Impulse giver and motor	46
Rear take-down roller.....	47
Front take-down roller	48
Front roller elements	49
Pressure angle rail	50
Take-down closing device.....	51
Closer shaft.....	52
Right swivel support.....	53
Left swivel holder	54
Swivel holder in the middle	55
Auxiliary take-down.....	56
Auxiliary take-down.....	57
Motor	58
Left bearing of the auxiliary take-down	59
Right bearing of the auxiliary take-down.....	60
Contact lever	61
Take-down roller	62
Comb take-down.....	63
Comb take-down.....	64
Drive shaft of comb	65
Comb unit.....	66
Switch lever comb take-down	67

THE RIGHT WAY TO KNIT

Swivel lever comb take-down	68
Yarn delivery device	69
Yarn guide system with 32 FKE	70
Left yarn guide	71
Left yarn tensioner	72
Left tension axle.....	73
Yarn brake and yarn deflector	74
Right yarn guide.....	75
Right yarn tensioner.....	76
Right tension axle	77
Bobbin board	78
Additional board.....	79
Yarn carriers and yarn carrier rails	80
Complete yarn carriers	81
Left friction feed wheel.....	82
Right friction feed wheel	83
Fluff absorption	84
Fluff absorption	85
Lint container	86
Set of tubes.....	87
Operation and control	88
Input unit.....	89
Starting unit.....	90
Bearing of the engaging rod	91
Signal light	92
Collecting area - control.....	93
Shock stop motion	94
Measuring device.....	95
Protective units	96
Lateral safety covers.....	97


Panelling	98
Rear panel.....	99
Electrical equipment	100
Fuses	101
Circuit diagram as PDF.....	102
Trailing cable.....	103
Cable set installation.....	104
Loom of cables base 1 OKC	105
Loom of cables base 2 OKC	106
Loom of cables 84"	107
Loom of cables comb.....	108
Control electronics	109
Left control cabinet.....	110
Right control cabinet	111
Deliverable accessories	112
Tool	113
Lubricating stuff.....	114
Mechanical parts.....	115
Special equipment	116
Complete intarsia yarn carriers.....	117
Carriage IYC	118
Bow and head IYC	119
Carriage of plating yarn carrier	120
Yarn length measuring device	121
IRO NOVA storage feed wheel.....	122
Feed wheel SFE	123
Additional board at the bottom	124

Drive and racking

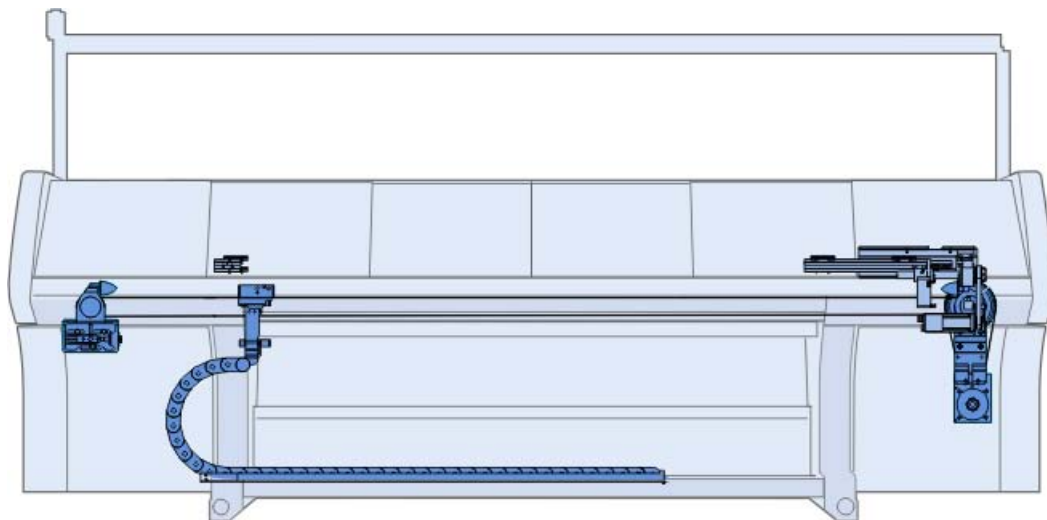


Drive and racking

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Drive unit racking	244 581			
1	Drive unit		2	Racking	

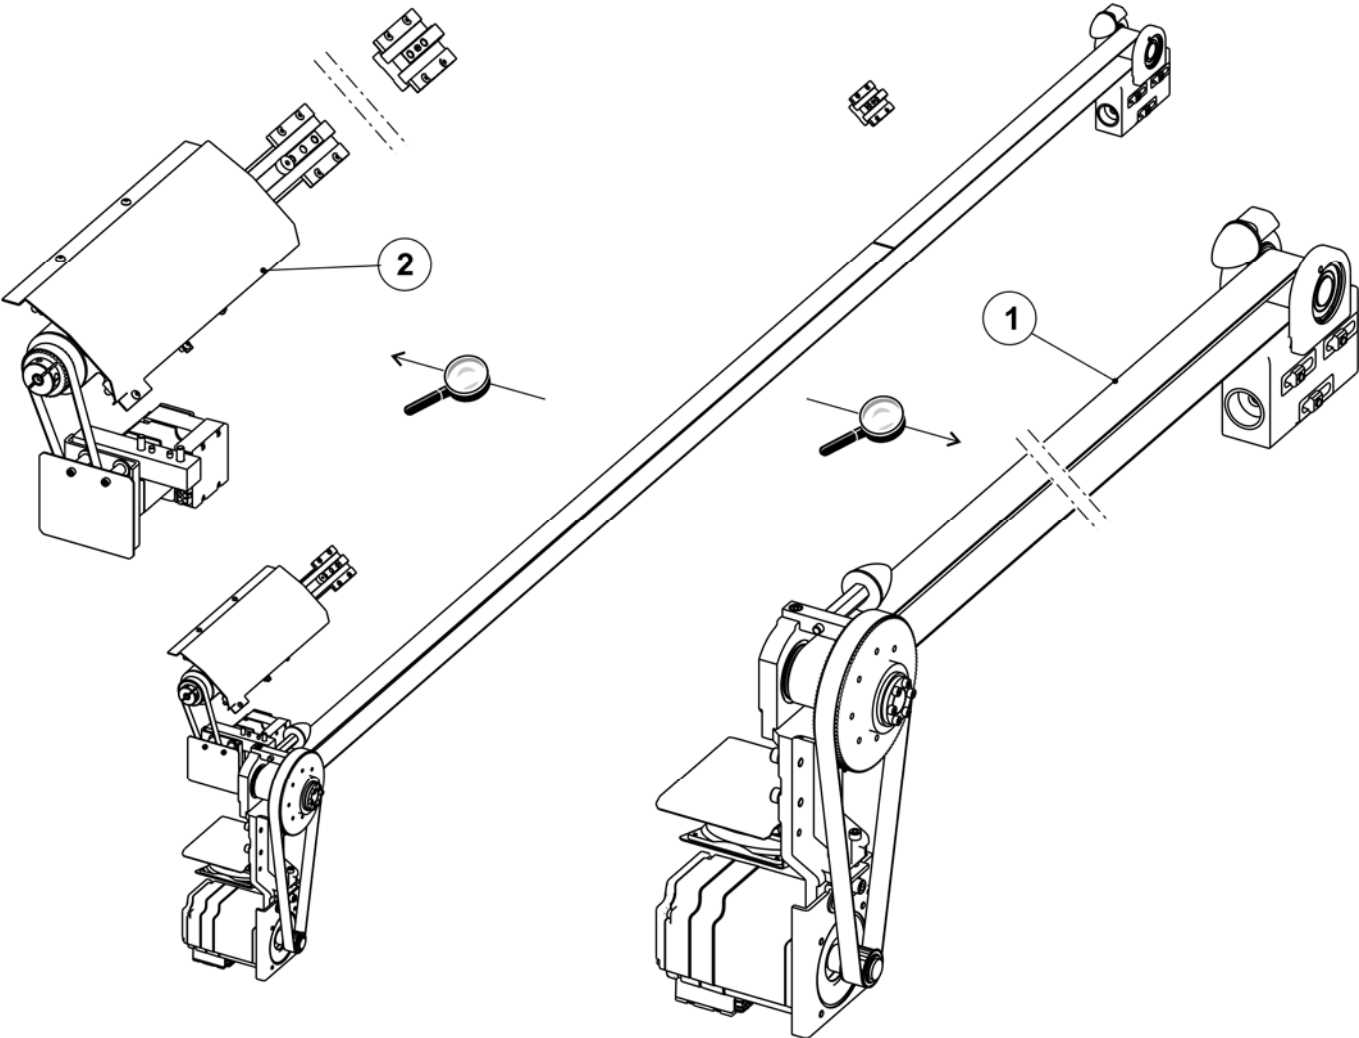


Drive

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Drive unit racking	244 581	23	Ventilator complete	242 413
10	Stop point	226 553	23a	Ventilator	213 722
11	Drive unit complete	240 743	23b	Ventilator plate drive motor	241 823
12	Tension bearing complete	241 655	550	Cap screw M8X12	023 138
14	Toothed belt 50AT10/7150	236 656	904	Cap screw M10x80	020 165
16	Distance pipe	222 099	905	Slide nut M10X12	023 471
17	Parabolic spring	200 661	906	Spring washer A 10	021 010
18	Hexagon bolt	214 275	907	Cap screw M10x25	020 157

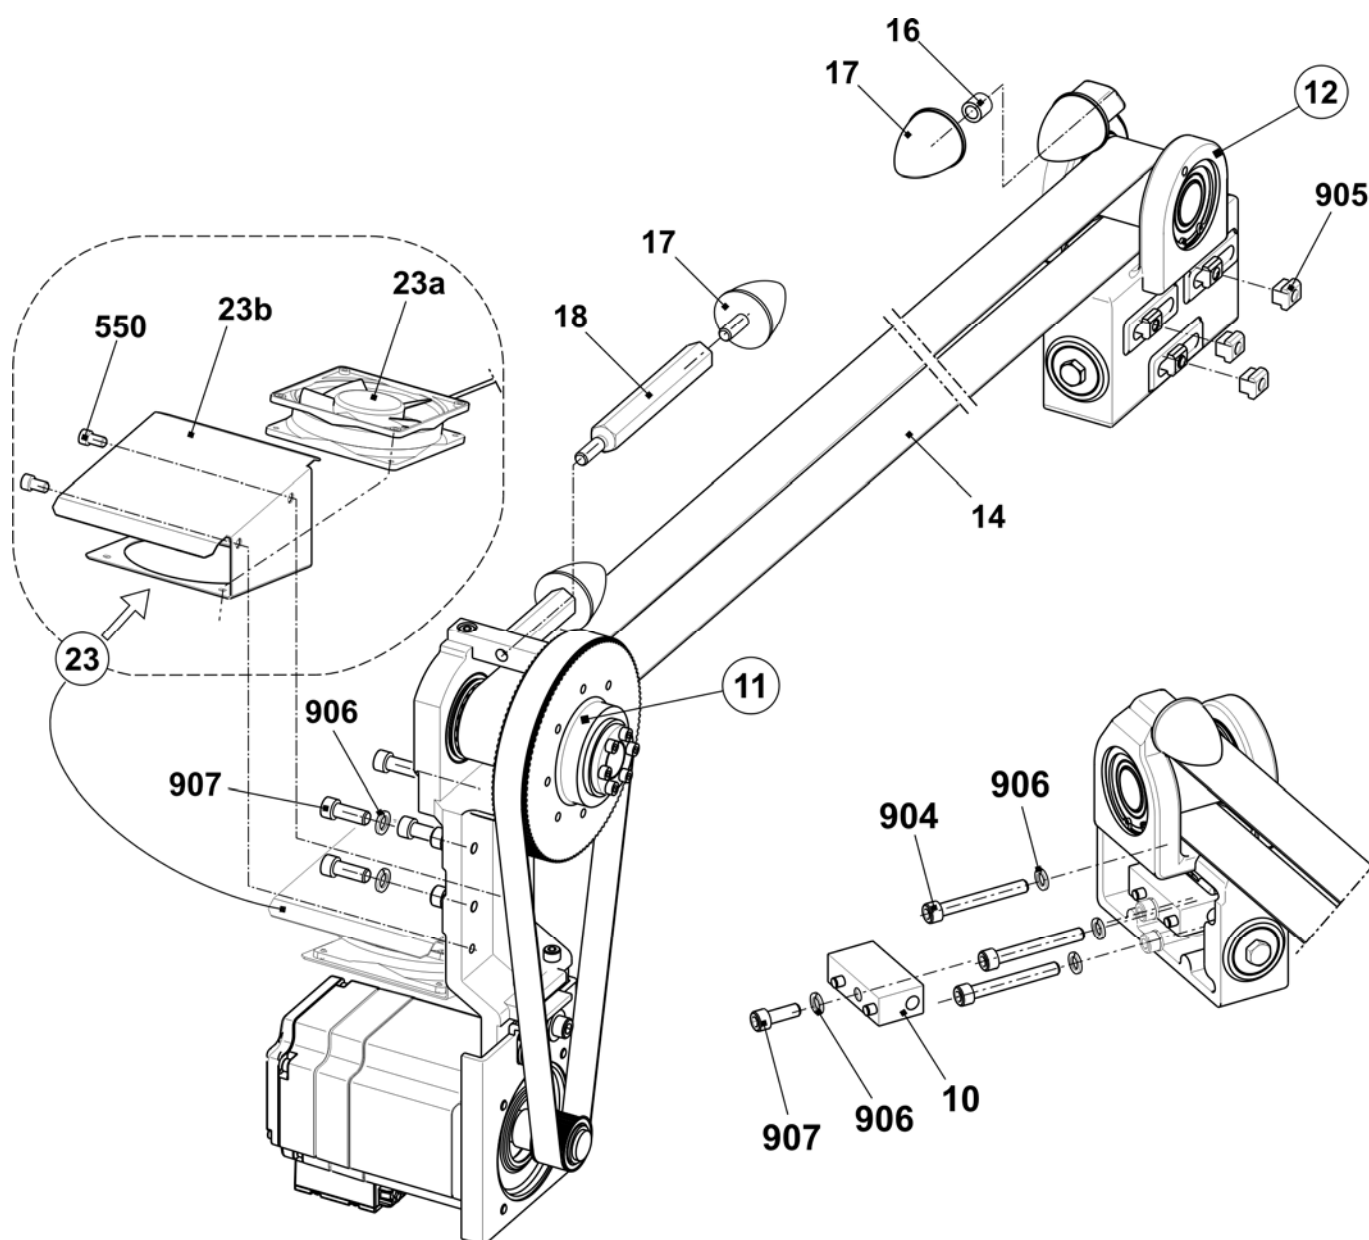


Tension bearing

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Tension bearing complete	241 655	500	Ball bearing 6207-2RS	022 915
1	Housing tension bearing	241 656	501	Locking ring 72x2.5	022 914
2	Tension roller	222 055			

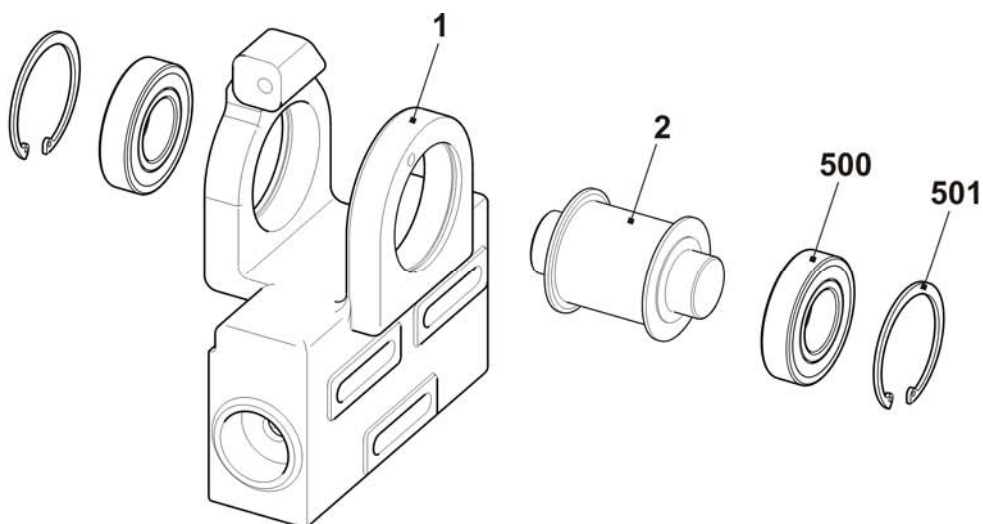


Racking

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Drive unit racking	244 581			
1	Racking motor complete	241 454	504	Cap screw M5x12	020 132
2	Bearing	227 605	505	Washer	022 175
3	Spindle bearing complete	240 798	507	Shim 0.03x11x80	023 286
4	Card racking limit switch	229 396	508	Shim 0.05x11x80	023 287
5	Racking cover plate	230 048	509	Shim 0.03x15x85	023 162
6	Racking strip	241 921	510	Shim 0.05x15x85	023 163
7	Racking strip on the left	240 696	511	Shim 0.1x15x85	023 164
8	Guide strip	206 382	512	Shim 0.2x15x85	023 170
9	Toothed belt 150 S 5M 490	229 281	518	Shim 0.03x15x75	023 395
13	Switching metal plate	240 722	519	Shim 0.05x15x75	023 396
19	Stop screw	221 386	520	Shim 0.1x15x75	023 397
20	Cover plate	232 544	521	Shim 0.2x15x75	023 398
21	Distance bolt	232 543	900	Cap screw M6x12	022 795
500	Cap screw M4x4	022 767	901	Countersunk screw M6x10-12.9	023 183
501	Cap screw M6x16	023 116	902	Cap screw M8x35	020 144
503	Countersunk screw M6x10-12.9	023 183	903	Cap screw M8x25-12.9	020 142

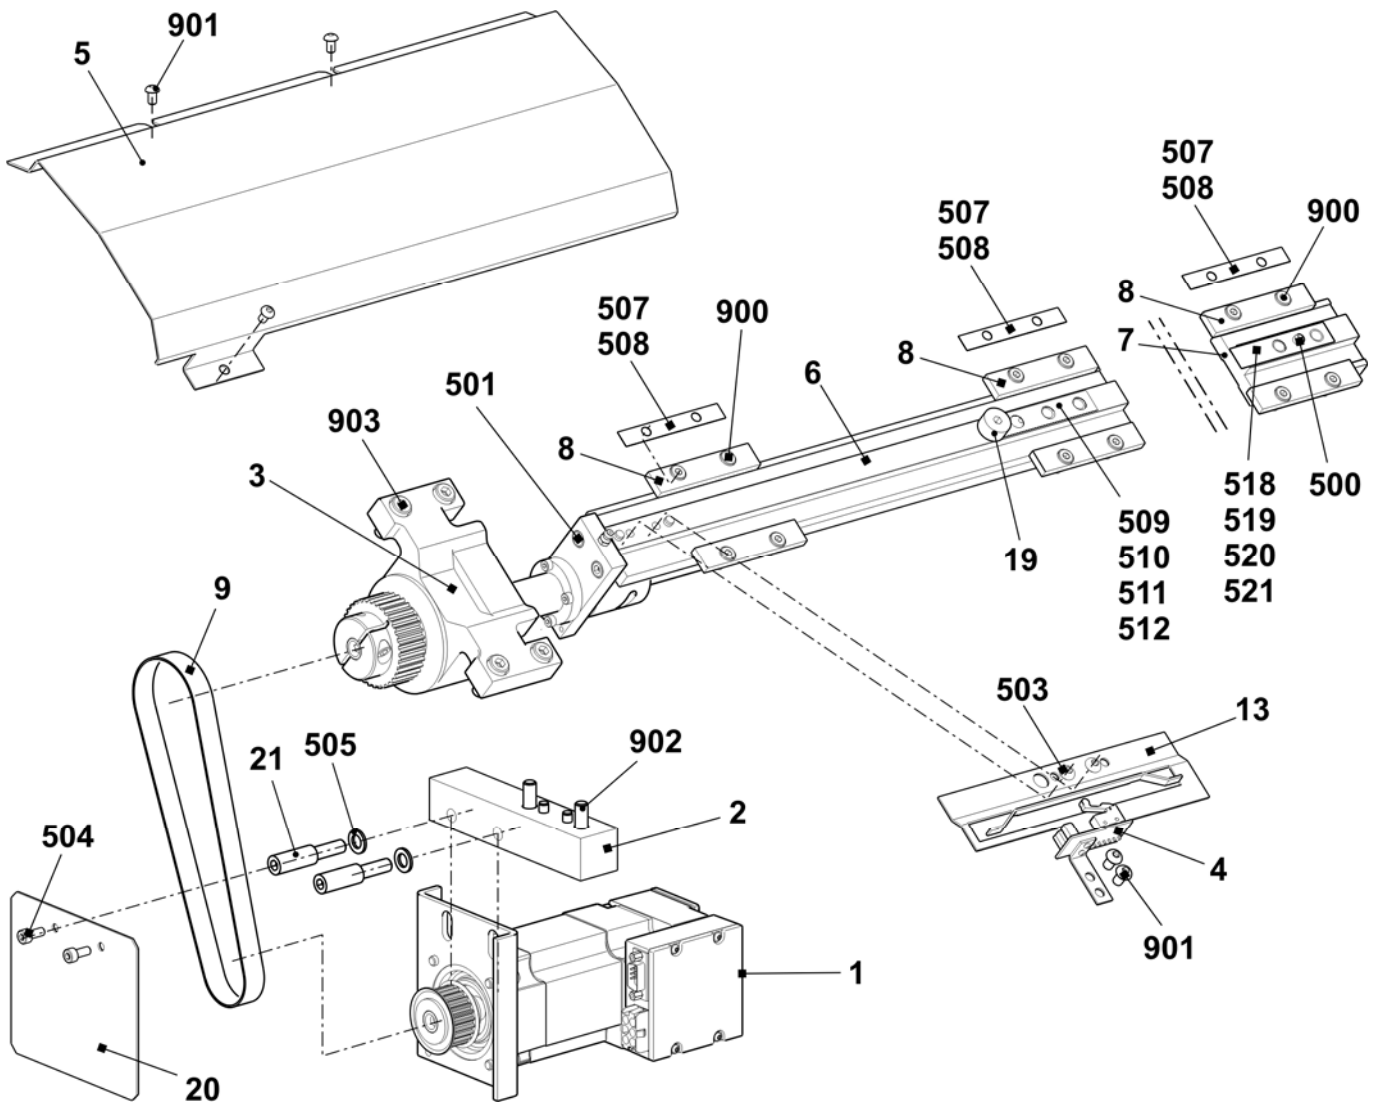


Energy chain and carriage driver

Pos	Designation	Ident No	Pos	Designation	Ident No
1	Energy chain 41 links	236 927	5	Continuation carriage driver complete	
4	Spacer	214 584	55	Cable holder	204 688
501	Cap screw M6x8	023 411	56	Cellular caoutchouc black	202 597
502	Cap screw M6x12	020 134	550	Cap screw M8x16	023 144
503	Cap screw M6x16	020 135	551	Circlip S6	022 752
5	Carriage driver complete	241 430	552	Cap screw M8X30	020 143
51	Carriage driver	241 404	553	Cap screw M6x16	020 135
52	Cable driver	251 262	554	Cap screw M6x12	020 134
53	Clamping plate	226 111	555	Countersunk screw M5x6	023 284
54	Cover strip	230 698	556	Fixing element	026 489

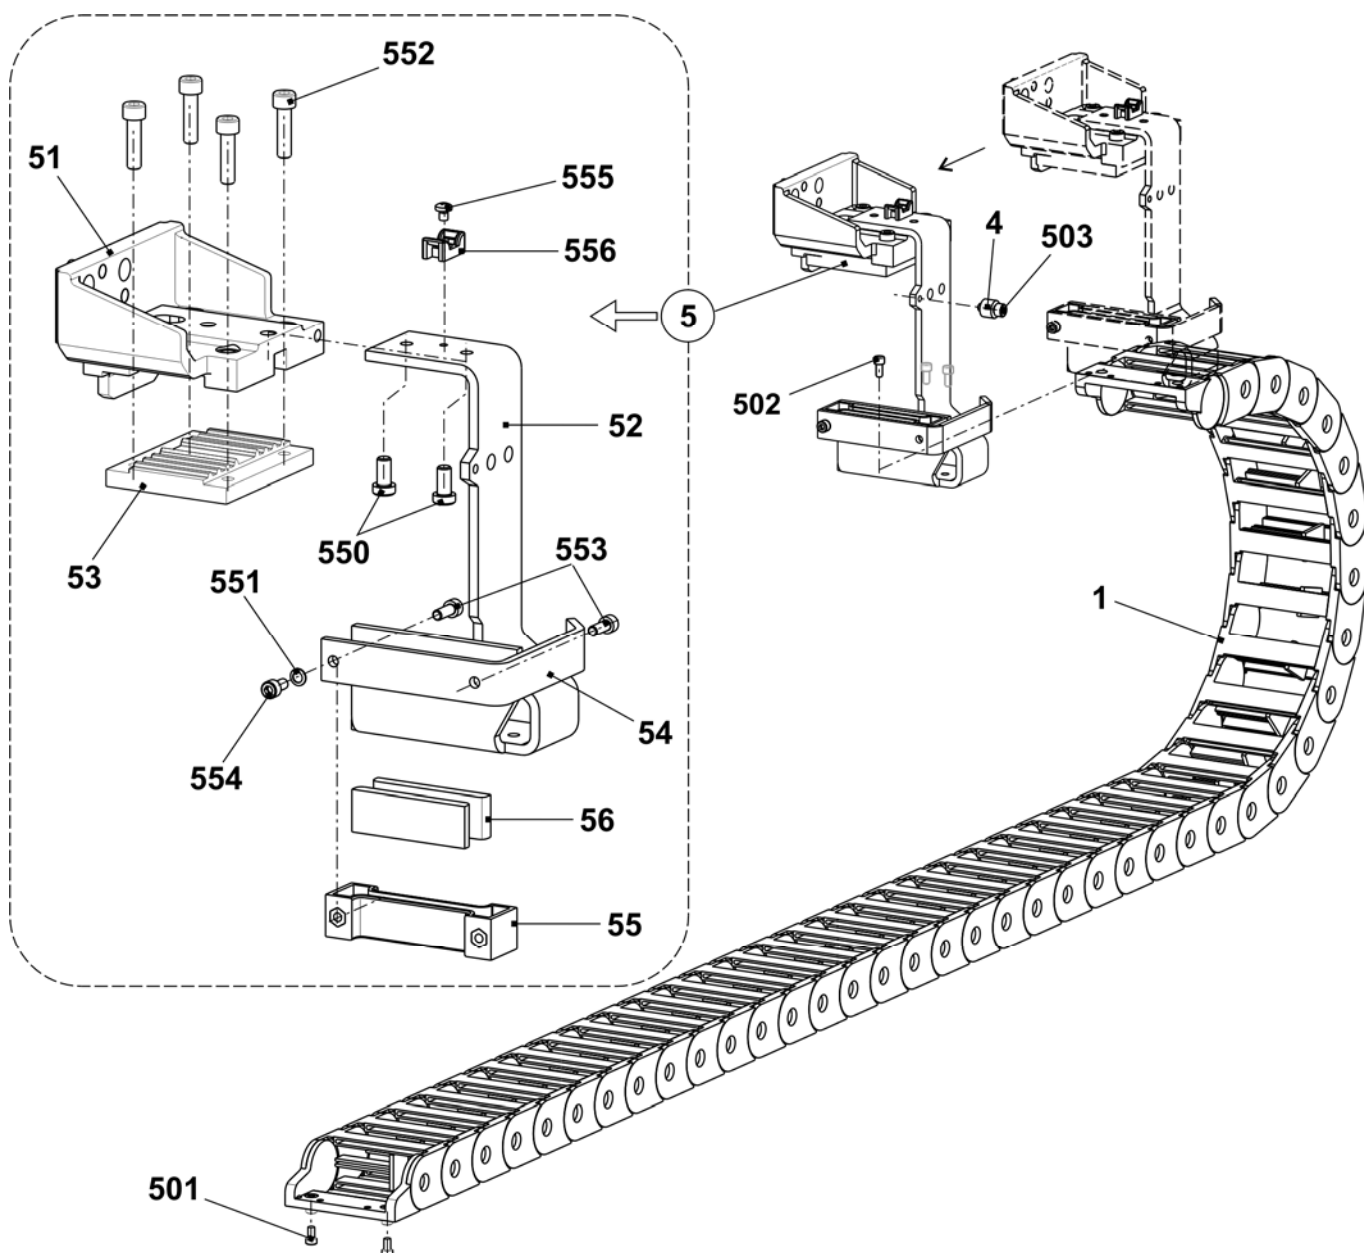


Needle beds

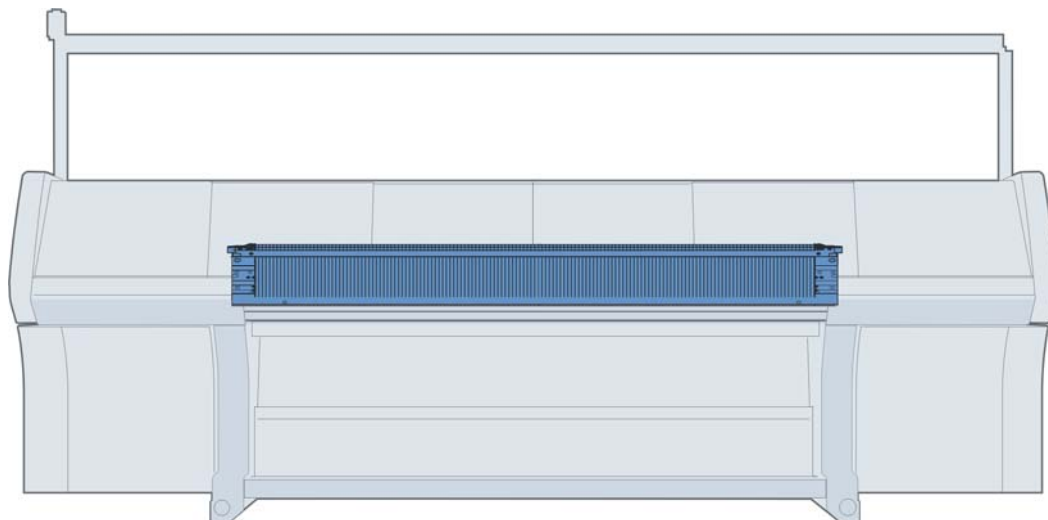


Needle bed E2,5.2

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Needle bed complete at the front and rear E2,5.2	237 415			
1	Needle bed at the front + rear	237 300	25	Fixed wire D=1.5	239 206
2	Needle ultra-coarse E2,5.2	238 071	52	Holding-down jack bed front E5	237 303
3	Coupling part E3-4	239 194	53	Holding-down jack bed rear E5	237 306
4	Intermediate slider E3-4	218 799	57	Limiter on the right E4-E8	205 344
5a	Selection jack E3-4	213 372	58	Holding-down jack slide E4-5	237 374
5b	Selector spring E4-E8	200 690	30*	Adjusting piece D = 15	206 375
7	Holding-down jack E2,5.2	237 199	31*	Set screw complete	207 712
8	Spring steel wire E4-5 Ø=1	237 406	40*	Disk brush	235 612
9	Support E2,5.2	237 200	41*	Plate brush 12	202 600
10	Spring E2,5.2	237 425	503	Cap screw M5x8	023 154
13	Spring slide at the front E4-5	237 380	505	Cap screw M5x12	022 943
14	Spring slide at the rear E4-5	237 381	506	Set screw M6x12	022 400
17	Fixed wire D=1.6	237 384	507	Sprung thrust piece B-M10	023 177
20	Support	206 352	520*	Cap screw M5x12	020 032

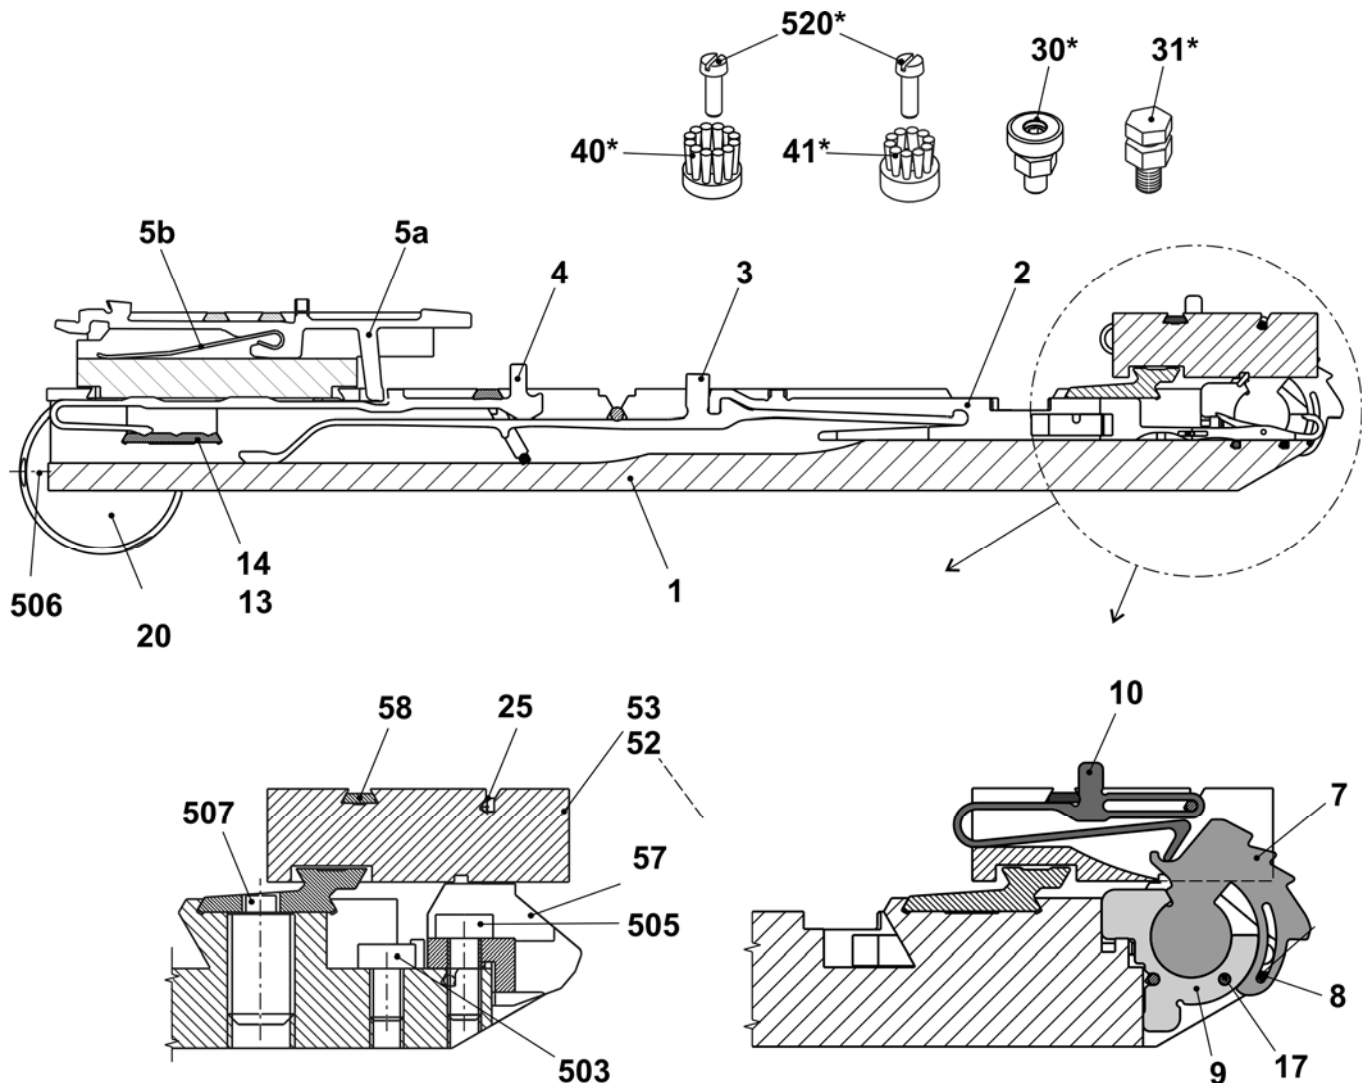


Continuation needle bed E2,5.2

Pos	Designation	Ident No	Pos	Designation	Ident No
2	Holding-down jack bed front E5	237 303	23	Clamping part	236 649
3	Holding-down jack bed rear E5	237 306	24	Needle rail on the left + right	237 837
4	Selection jack bed at the front E5	237 309	31*	Adjusting bolt	240 765
5	Selection jack bed at the rear E5	237 312	500	Cap screw M5x10	022 918
6	Limiter on the left E4-E8	205 343	501	Cap screw M5x20	020 133
7	Limiter on the right E4-E8	205 344	502	Cap screw M6X14	022 658
9	Needle rail on the left	237 835	503	Cap screw M5x8	023 154
10	Needle rail on the right	237 836	504	Cap screw M5x25	023 523
11	Cover rail at the front E5	237 377	508	Shim 0.02x18.5x34	023 194
12	Cover rail at the rear	237 379	509	Shim 0.03x18.5x34	023 195
15	Cover rail	237 382	510	Shim 0.05x18.5x34	023 196
16	Cover rail	237 383	511	Shim 0.10x18.5x34	023 197
18	Fixed wire D=2.8	223 862	512	Shim 0.20x18.5x34	023 253
19	Spring steel wire D=2.0	223 854	513	Cap screw M2.5x6	242 022
21	Eccentric	204 603	514	Cap screw M3x5	022 688
22	Needle rail in the middle	237 838			

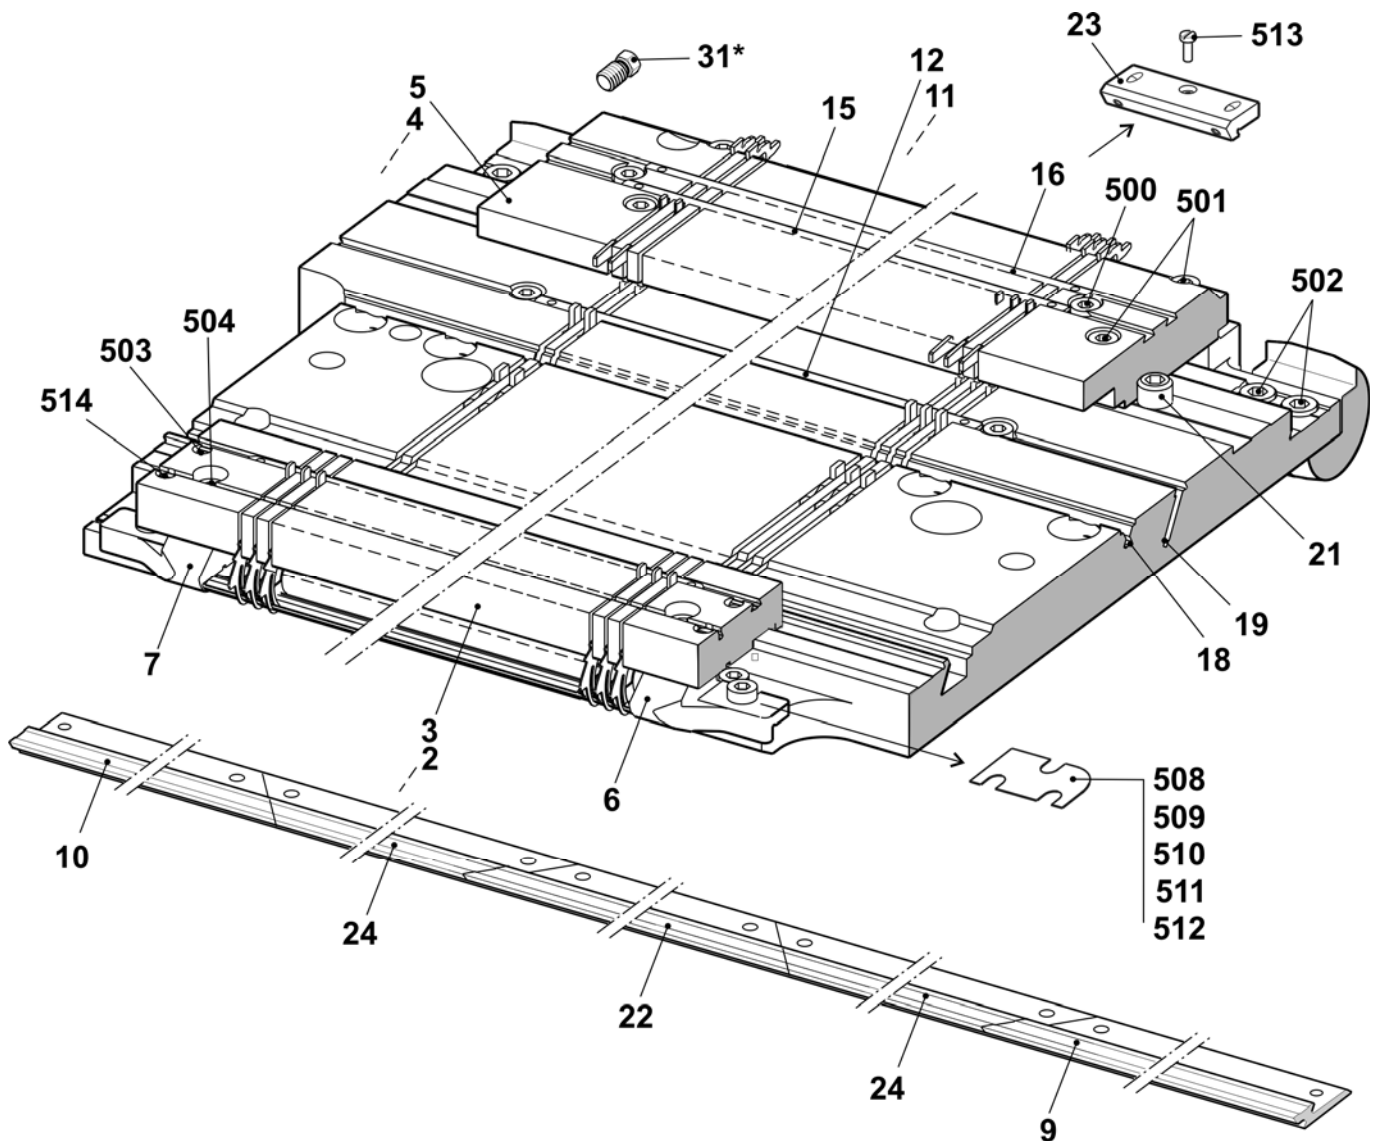


Left clamping/cutting bed E3-4

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Left clamping/cutting bed E3- 4	251 322	10	Clamp on the left complete	231 502
1	Guide plate EPT on the left E3-4	251 319	11	Coupling part E3-4	213 348
1a	Cover rail	211 358	12	Intermediate slider E3-4	218 799
1b	Cover rail	216 105	13	Selection jack E3-4	213 372
1c	Cover rail	209 224	14	Selector spring E4-E8	200 690
1d	Fixed wire	215 927	500	Cap screw M4x10	023 136
1e	Bolt	208 094	501	Cap screw M4x16	020 131
1f	Axle	211 349	503	Hexagon nut M4-8	023 046
1g	Guide pin	211 351	504	Washer 4	020 870
1h	Selection jack bed at the left E3-4	215 906	505	Washer 4.3x7x0.5	022 153
1i	Spring slide	215 908	507	Circlip 3.2	021 019
5	Cover on the left complete E3-4	215 925	508	Tension spring 4x0.55x18.9	023 392
6	Tuck hook on the left E3-4	215 887	509	Compression spring 0.8x4x26.3	023 333
7	Slider	215 827	510	Ball 5	023 309
8	Tuck needle on the left E3-4	231 476	520*	Cap screw M6x25	023 335
9	Blade on the left	231 496	521*	Washer 7.6x11.6x1.5	023 334

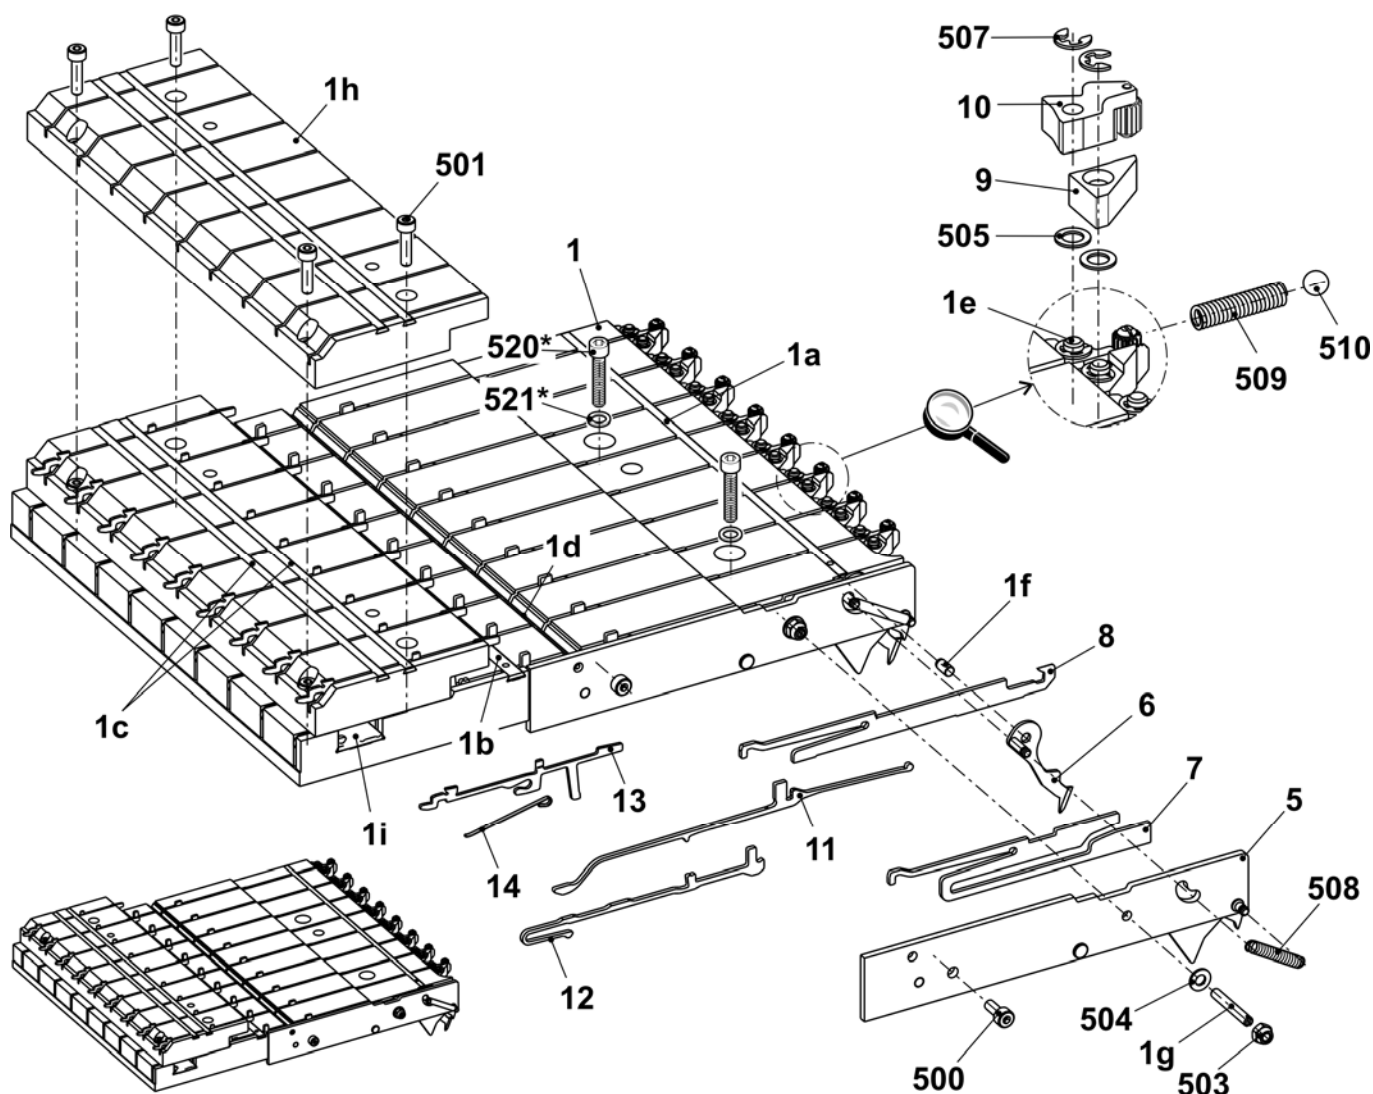


Right clamping/cutting bed E3-4

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Right clamping/cutting bed E3- 4	251 323	10	Clamp on the right complete	231 449
1	Guide plate EPT on the right E3-4	251 321	11	Coupling part E3-4	213 348
1a	Cover rail	211 358	12	Intermediate slider E3-4	218 799
1b	Cover rail	216 105	13	Selection jack E3-4	213 372
1c	Cover rail	209 224	14	Selector spring E4-E8	200 690
1d	Fixed wire	215 927	500	Cap screw M4x10	023 136
1e	Bolt	208 094	501	Cap screw M4x16	020 131
1f	Axle	211 349	503	Hexagon nut M4-8	023 046
1g	Guide pin	211 351	504	Washer 4	020 870
1h	Selection jack bed on the left E3-4	215 907	505	Washer 4.3x7x0.5	022 153
1i	Spring slide	215 908	507	Circlip 3.2	021 019
5	Cover on the right complete E3-4	215 926	508	Tension spring 4x0.55x18.9	023 392
6	Tuck hook on the right complete E3-4	215 888	509	Compression spring 0.8x4x26.3	023 333
7	Slider	215 827	510	Ball 5	023 309
8	Tuck needle on the right E3-4	231 443	520*	Cap screw M6x25	023 335
9	Blade on the right	231 455	521*	Washer 7.6x11.6x1.5	023 334

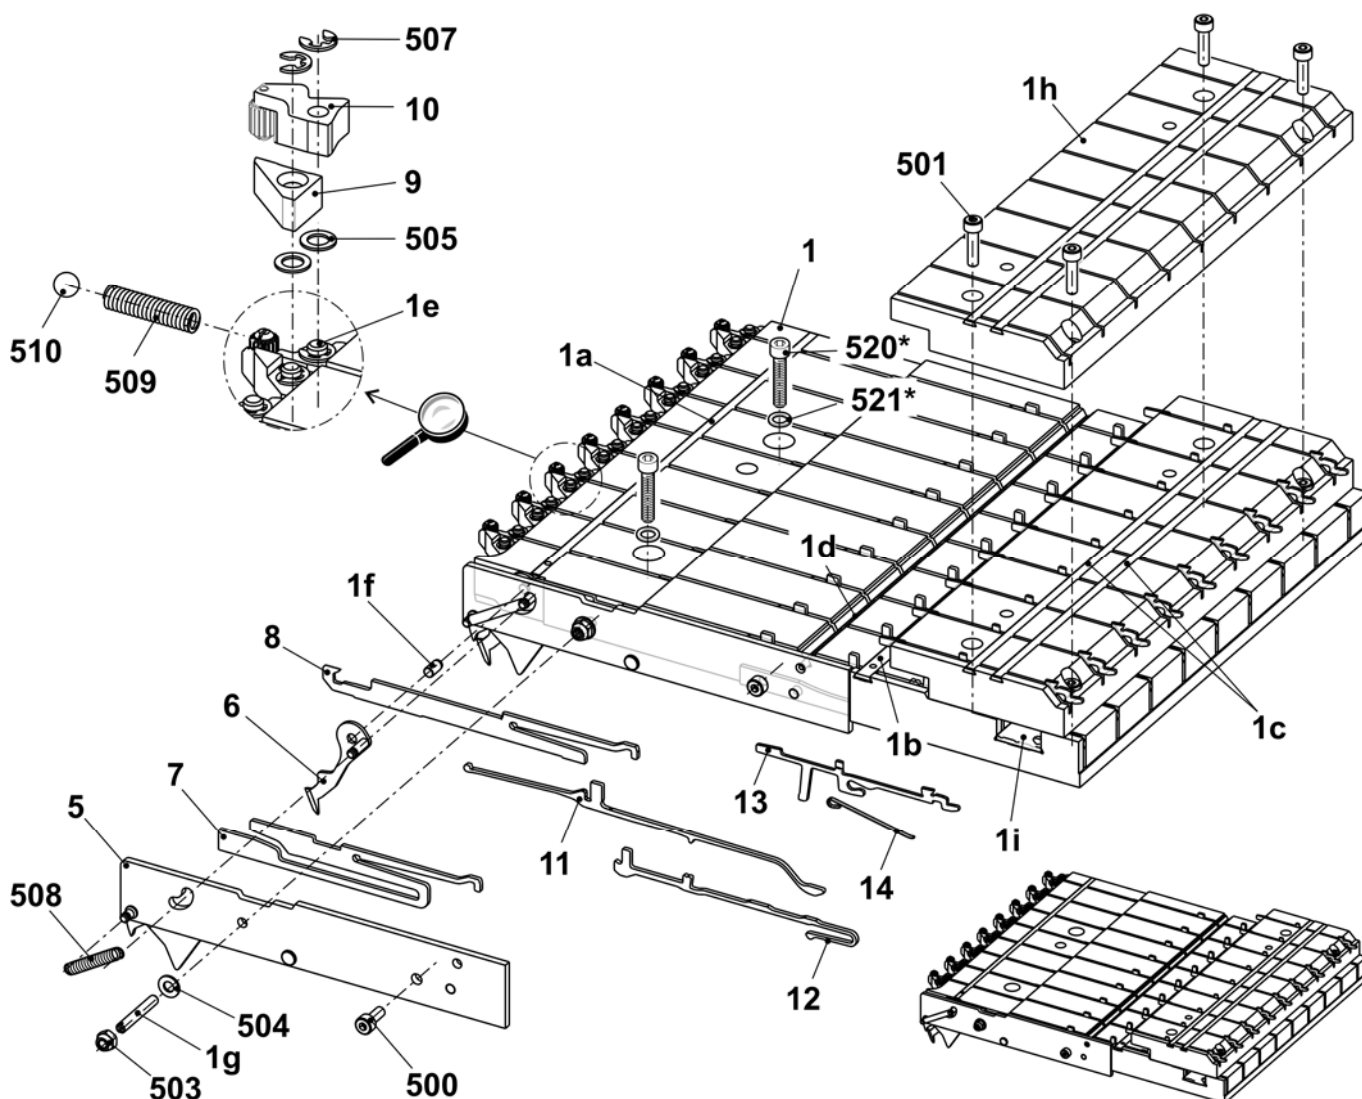


Cover on the left and on the right

Pos	Designation	Ident No	Pos	Designation	Ident No
1	Cover on the left	243 428	500	Countersunk screw M8x10	241 930
2	Cover on the right	243 429			

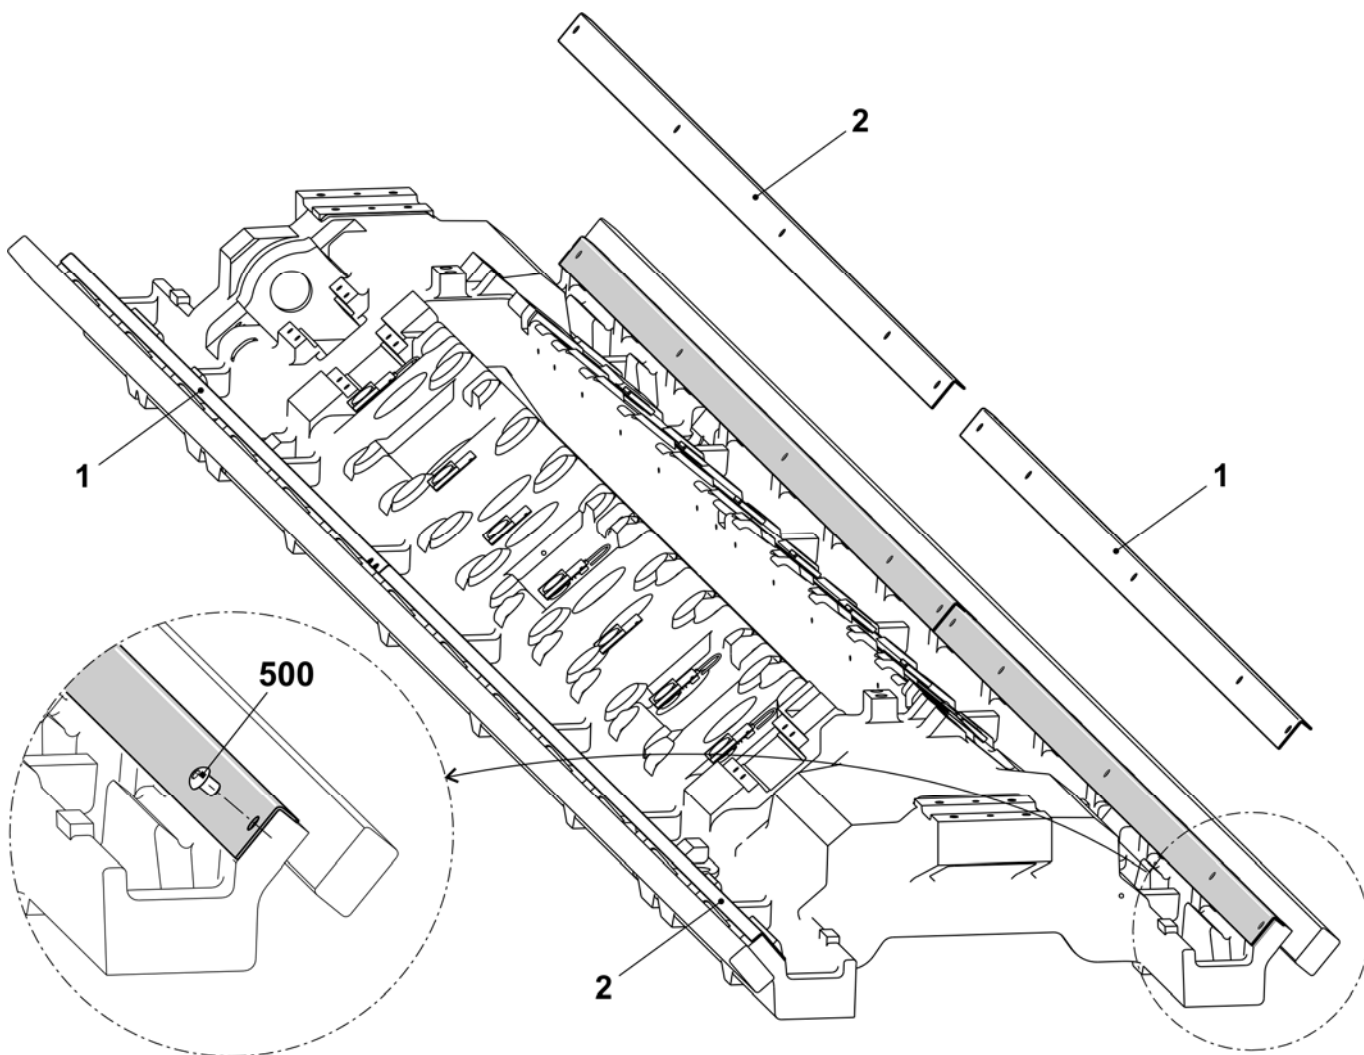


Connection measuring bar

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Connection measuring bar coarse	244 606			
1	Bearing fork	240 689	500	Cap screw M6x16	020 135
2	Stop point	209289	501	Countersunk screw M6x20	241 603

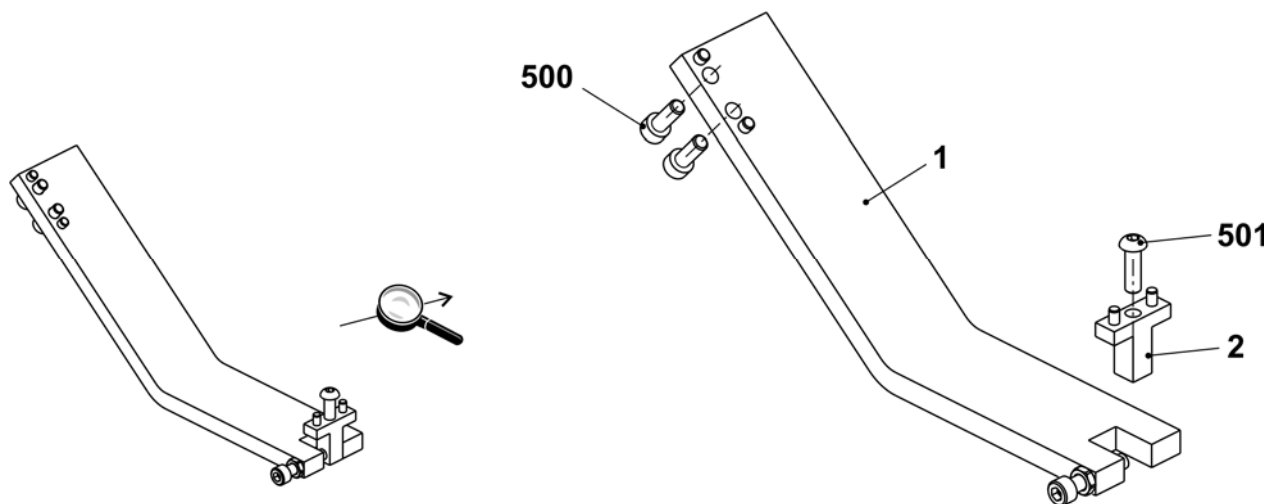


Carriage

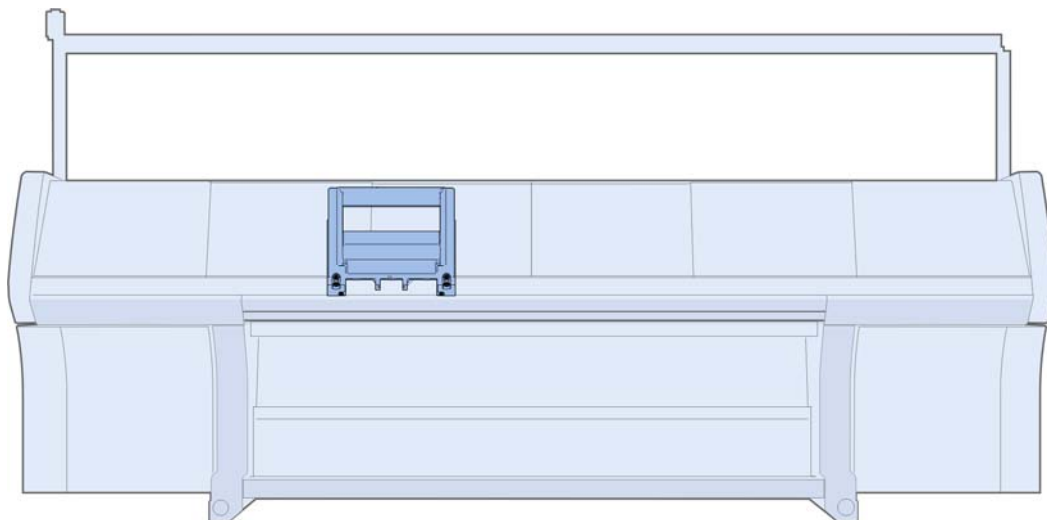


Overview of Carriage Parts

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Carriage complete E2,5.2	244 340	12	Bolt	243 171
1	Needle cam complete	244 344	13	Carriage assembly 3 cam boxes C	244 343
2	YC driving outside complete	241 080	14	Cover plate on the left	250 274
3	YC driving in the middle complete	241 081	15	Cover plate on the right	250 275
4	Jack cam box complete	244 345	16	Motor unit complete	214 946
5	Holding-down jack cam box E2,5.2	244 346	16a	Gear rack at the top	214 290
7	Distributor at the rear 830C okc	244 182	16b	Gear rack in the middle	214 291
8	Distributor at the front 830C okc	244 207	16c	Gear rack at the bottom	214 292
9	Selection system complete E2 - E8	216 218	560	Screw M4x30	023 290
10	Wiper (felt)	241 411	23	Guide plate at the rear on the left	245 323
11	Bolt	212 392	24	Guide plate at the rear on the right	245 324

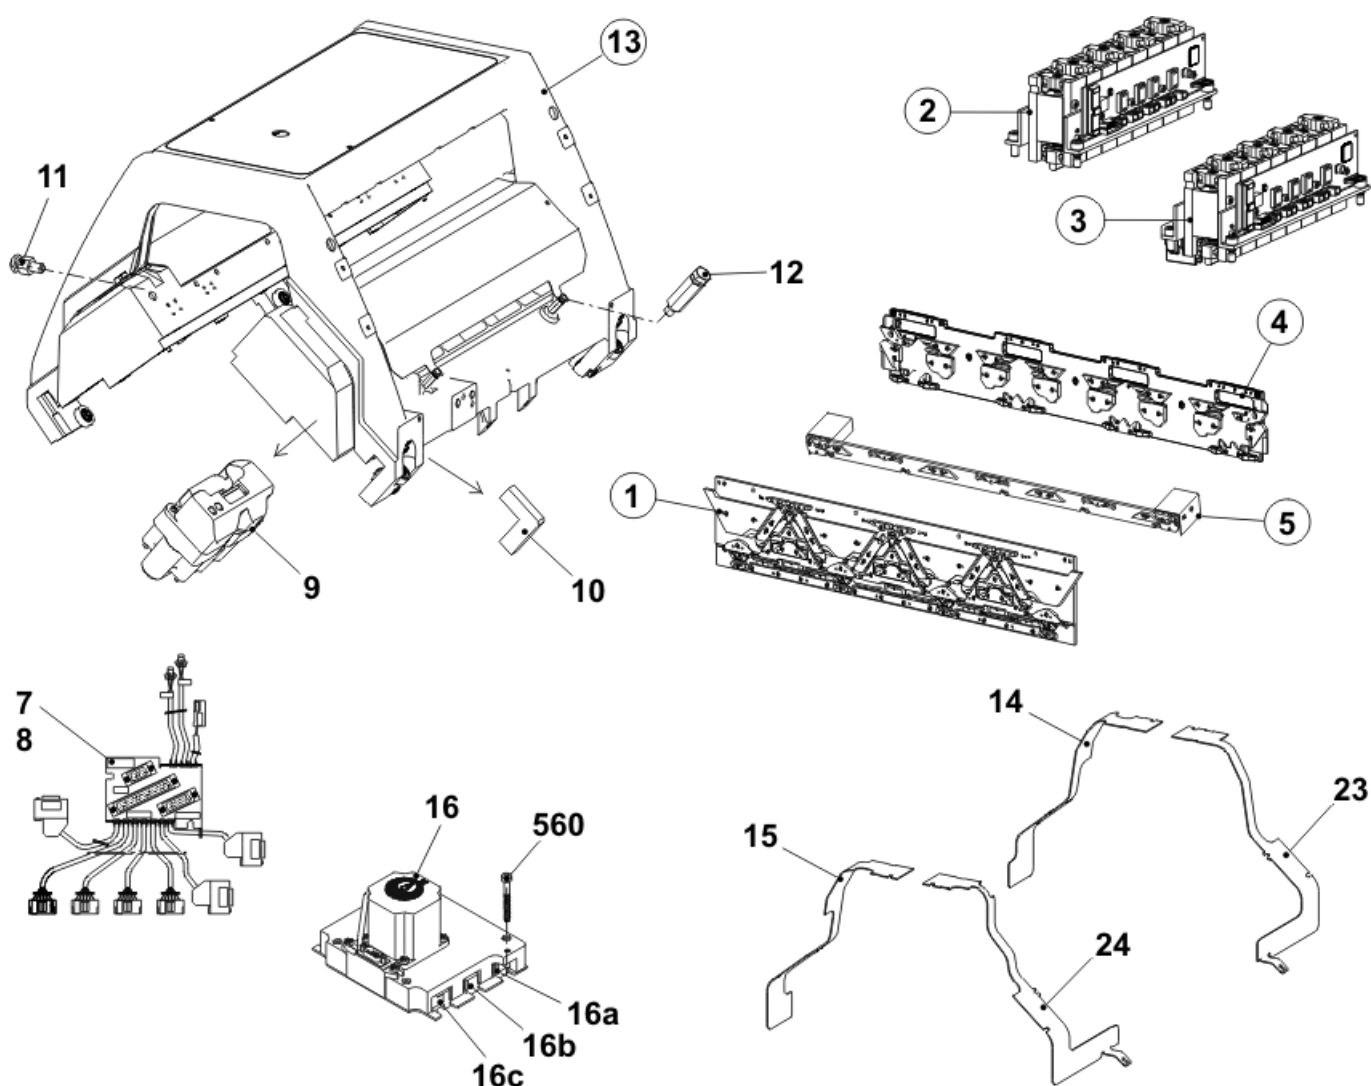


Needle cam at the top

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Needle cam complete	244 344			
21	Stitch forming cam on the left complete	214 657	24	541 Disc 4.3x7x0.5	022 153
22	Stitch forming cam on the right complete	214 656		542 Circlip 3.2	021 019
23	Rod guide element on the left	214 477		543 Compression spring	023 344
23a	Rod guide element on the left	214 475	25	Switching piece	214 322
24	Rod guide element on the right	214 478	26	Slider	214 336
24a	Rod guide element on the right	214 473	30	Spacer	214 603
24b	Spring rod	214 476	500	Cap screw M4x8	020 091

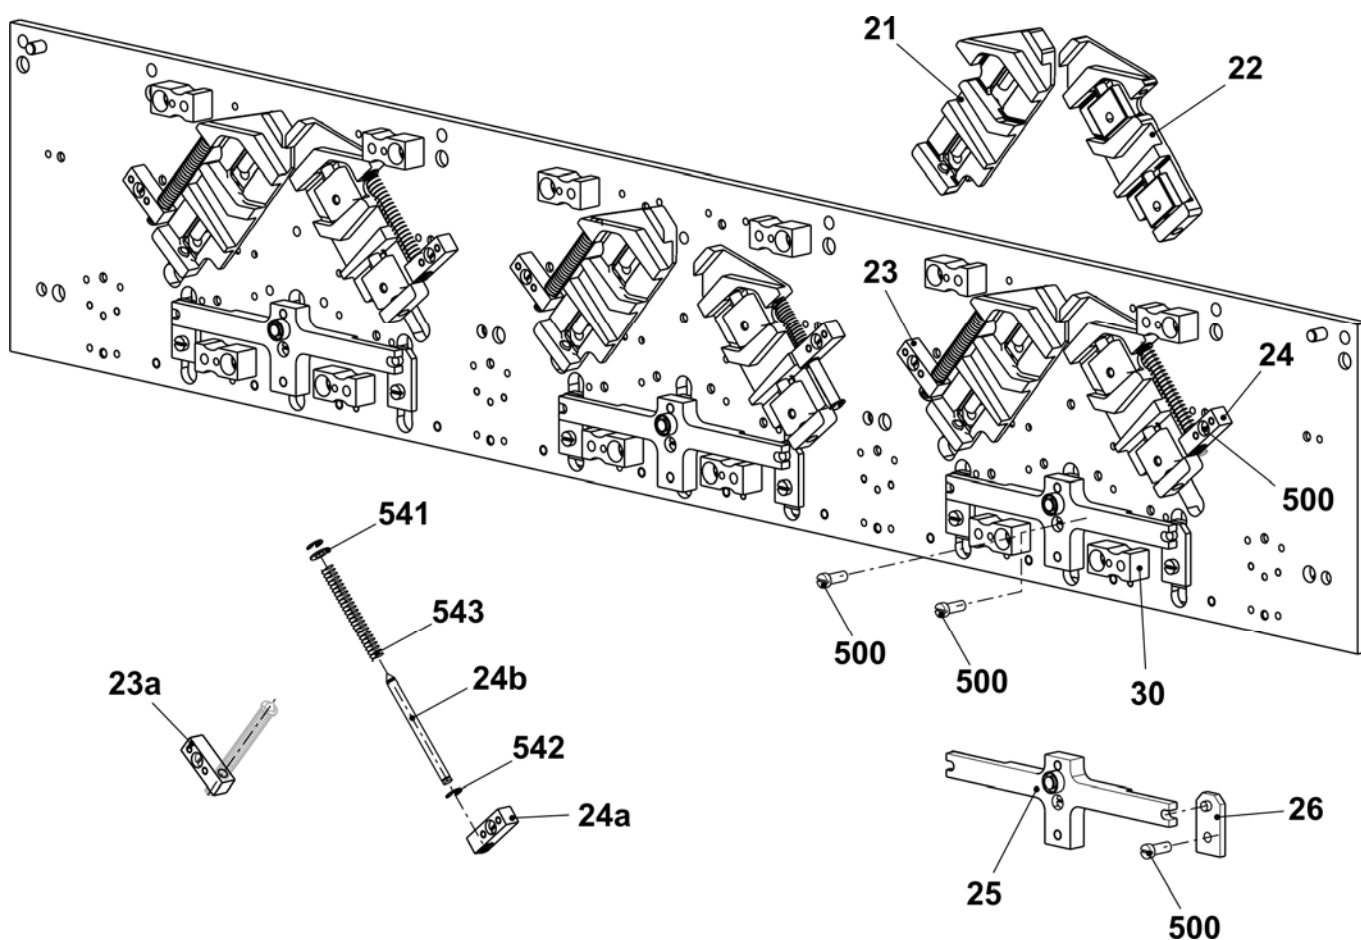


Needle cam at the bottom

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Needle cam box complete (at the bottom)	244 344			
1	Needle cam plate E2,5-5	245 214	12	Stitch cam on the right E3-4	214 896
2	Entry cam on the left E3-4	214 850	13	Knitting raising plate	214 286
3	Entry cam on the right E3-4	214 851	14	Raising cam without split	238 110
4	Entry cam in the middle E3-4	214 852	15	Receiving cam	214 190
5	Entry cam	214 579	16	Tuck limit cam E2,5.2	238 120
6	Knitting position cam E3-4	220 179	17	Limit cam on the left E3-4	218 048
7	Pressure strip E3-4	214 663	18	Limit cam on the right E3-4	218 049
8	Pressure part take-over on the left E3-4	216 008	19	Pointer E3-4	218 050
9	Pressure part take-over on the right E3-4	216 009	20	Screw	214 576
10	Tuck pressure part E3-4	216 130	31	Limit cam at the bottom E3-4	215 994
11	Stitch cam on the left E3-4	214 895	500	Cap screw M4x8	020 091

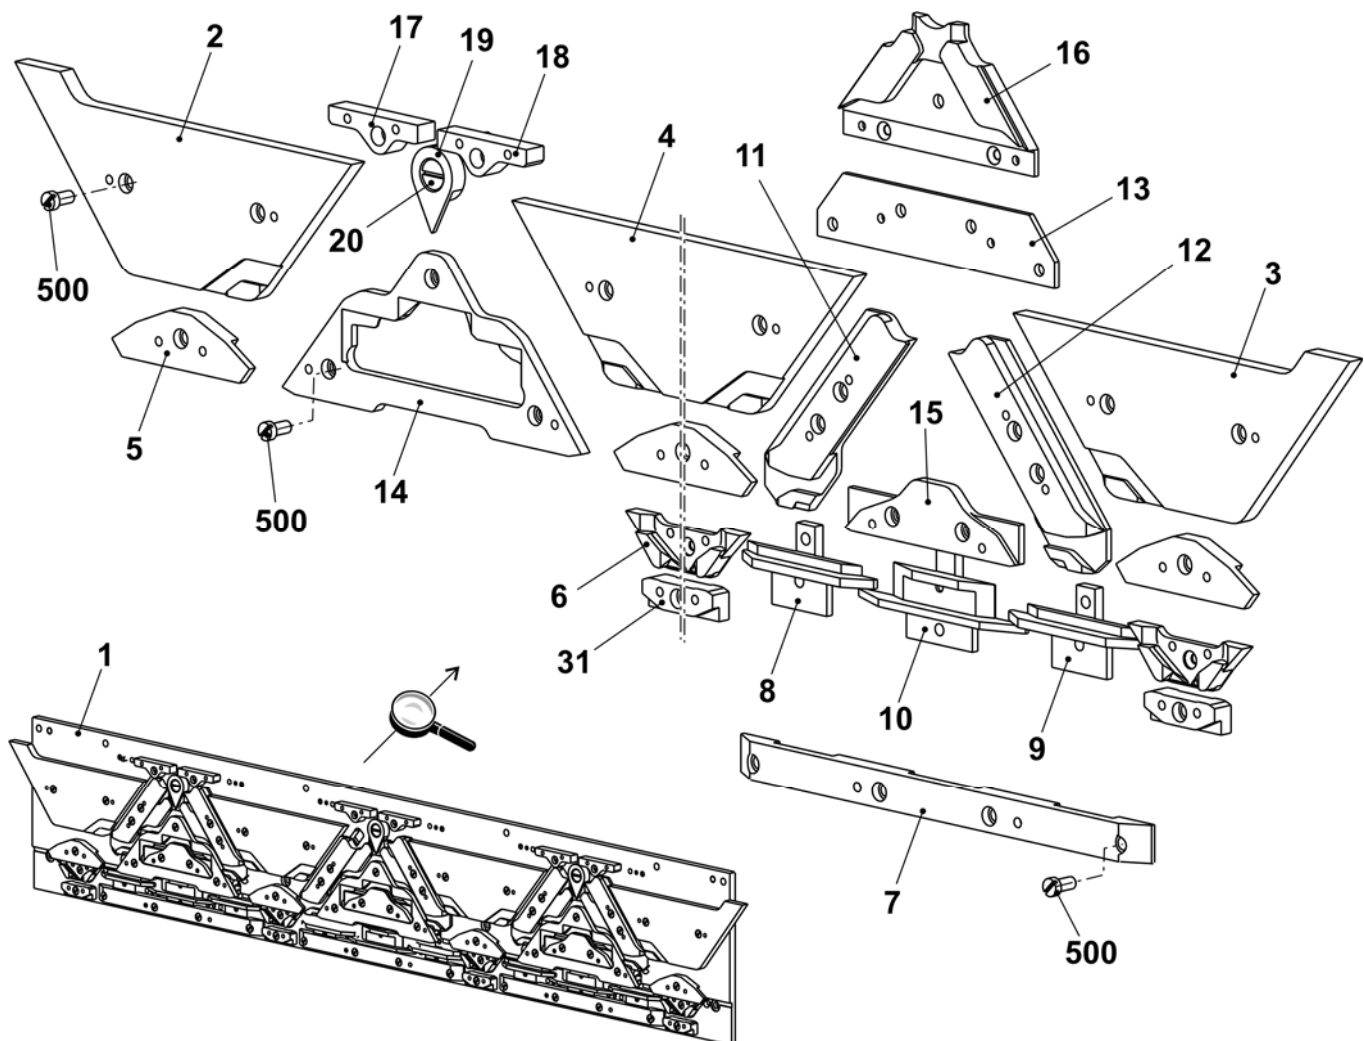


Yarn carrier driving without guiding part

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	YC driving outside complete	241 080			
1	Yarn carrier plunger complete	242 214	500	Cap screw M4x14-I-Torx	242 279
2	Support angle for jack	241 038	501	Cap screw M3x12-12.9	022 648
3	Card yarn carrier final stages OKC	300 960	900	Cap screw M6X14	022 658
4	Support angle for YC driving	242 903	901	Shoulder screw	231 899

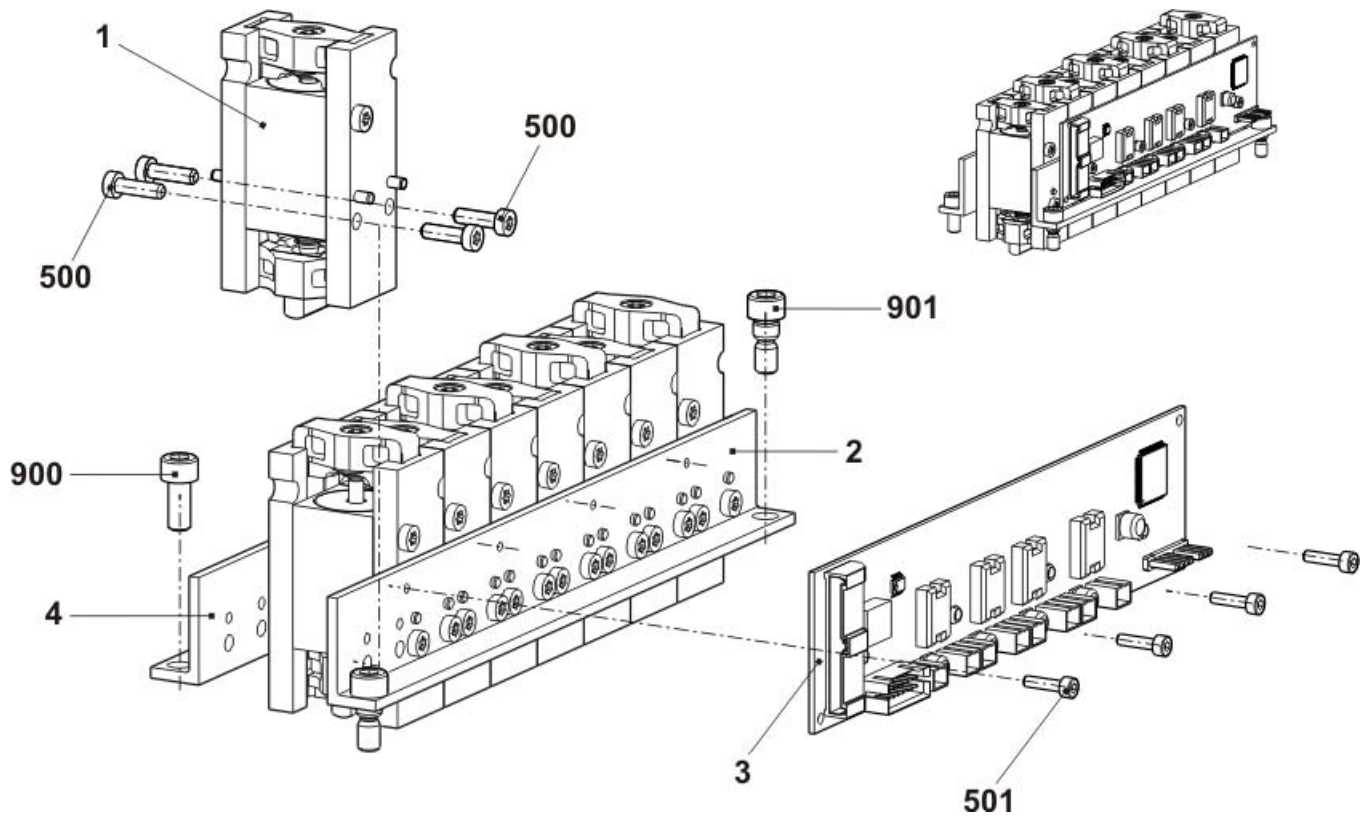


Yarn carrier driving with guiding part

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	YC driving in the middle complete	241 081			
1	Yarn carrier plunger complete	242 214	500	Cap screw M4x14-I-Torx	242 279
2	Support angle for jack	241 038	501	Cap screw M3x12-12.9	022 648
3	Support angle for YC driving	241 044	502	Screw KB60X20	243 625
4	Card yarn carrier final stages OKC	300 960	900	Cap screw M6X14	022 658
5	Guiding part	239 972	901	Shoulder screw	231 899

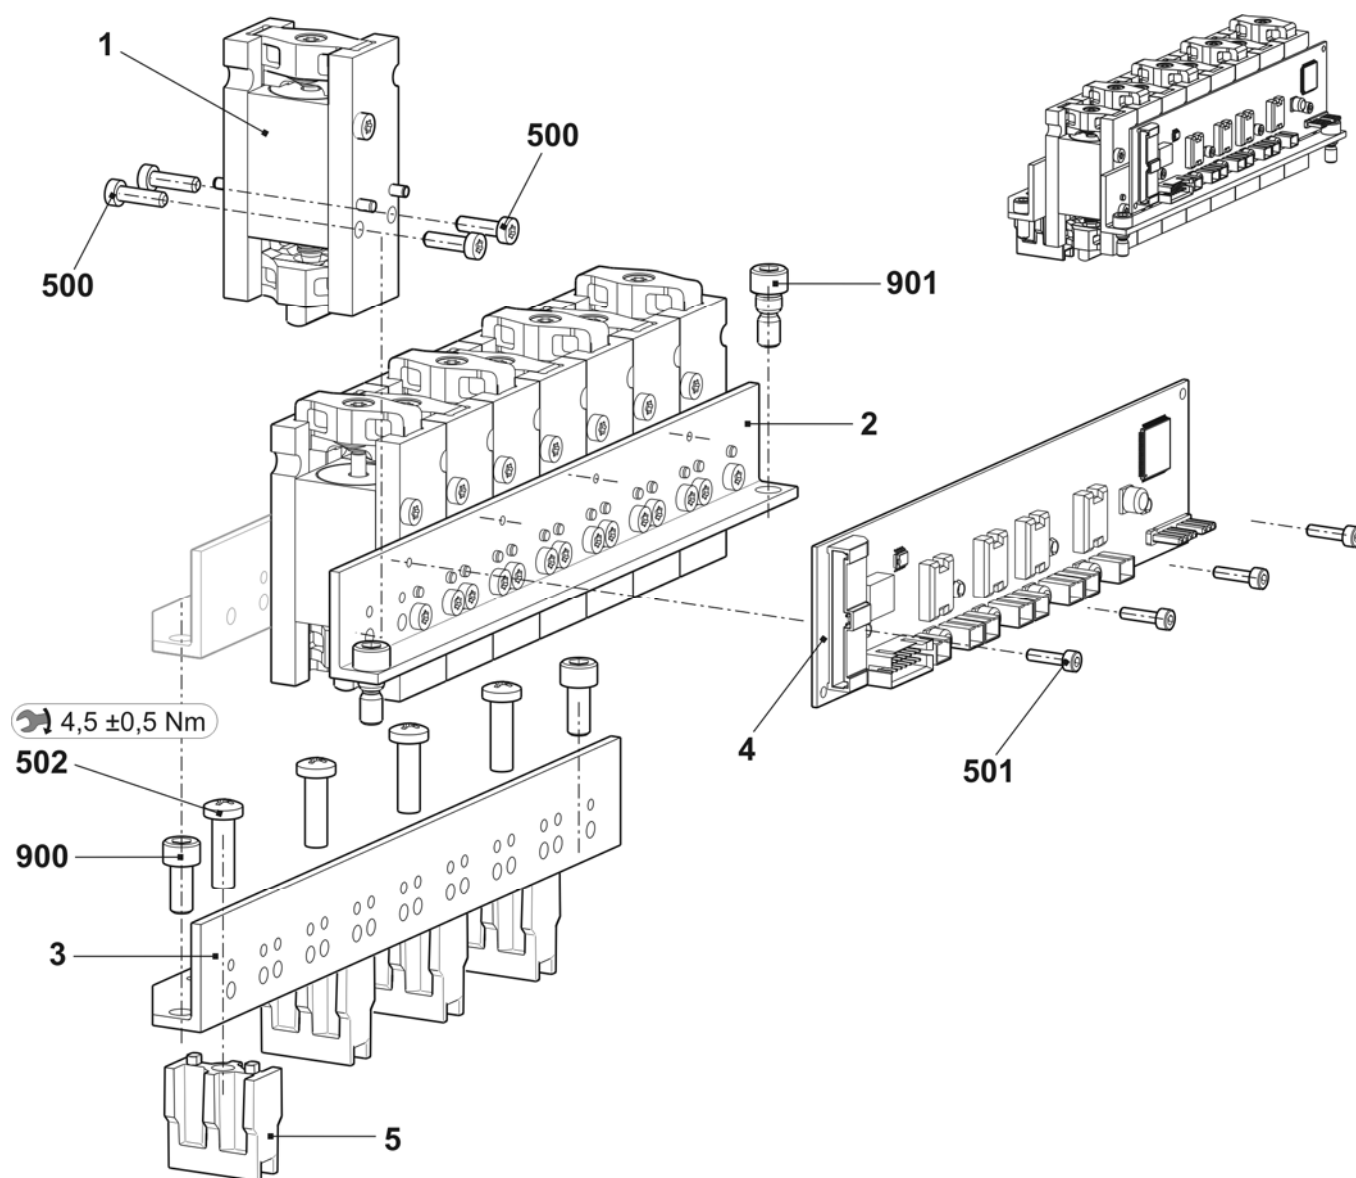


Jack cam box

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Jack cam box complete	244 345	9	Cam on the right E3-4	213 938
1	Jack cam plate E2,5-5	245 215	12	Selector cam on the left	213 868
2	Cam on the left	214 594	13	Selector cam on the right	213 870
3	Cam on the right	214 596	14	Selector cam	213 869
4	Cam on the left	214 586	15	Offering cam	210 185
5	Cam on the right	214 587	500	Cap screw M4x8	020 091
6	Cam on the left E3-4	213 911	900	Countersunk screw M3x4	023 142
7	Cam on the right E3-4	213 615	901	Shim 0.1x12x75	022 830
8	Cam on the left E3-4	213 920	902	Shim 0.2x12x75	022 831

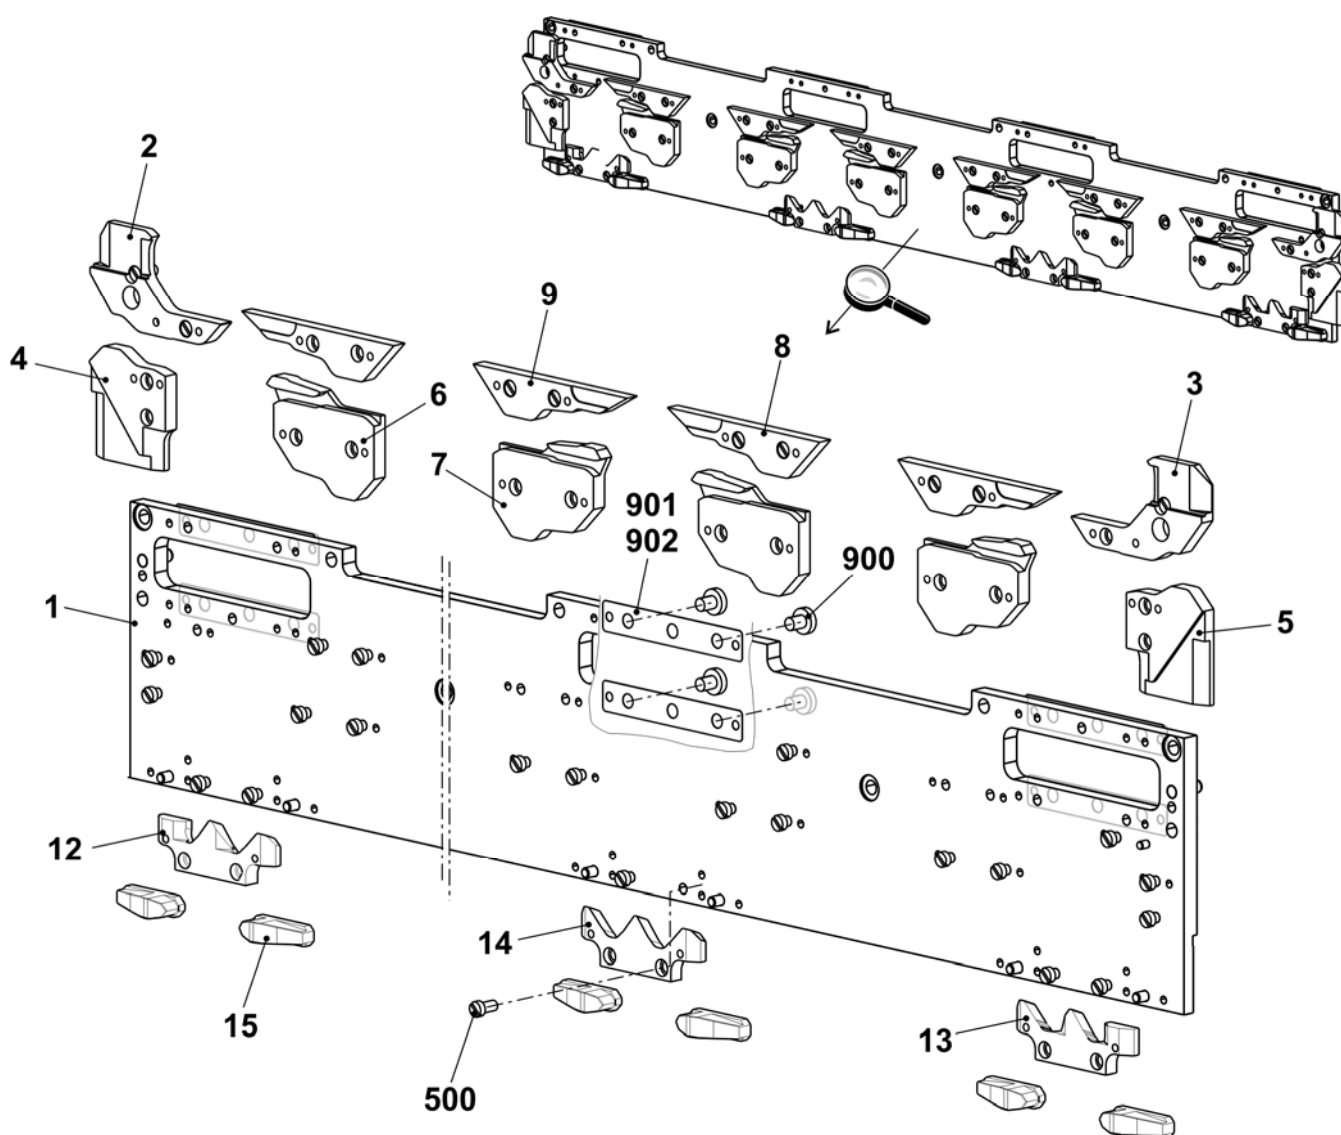


Holding-down jack cam box E2,5.2

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Holding-down jack cam box E2,5.2	244 346	10	Magnetic support E4-5	237 285
1	Jack cam box plate	237 424	11	Slider	237 453
2	Closer exterior E2,5.2	237 436	500	Cap screw M4x8	020 020
3	Closer E2,5.2	237 435	501	Screw KB30x8	236 228
4	Jack opener E2,5.2	237 346	502	Cap screw M4x10	023 136
5	Jack opener switchable E2,5.2	237 437	503	Countersunk screw M4x10	023 450
6	Yoke	237 343	504	Cap screw M4x16	020 131
7	Magnet holding-down jack control 40V/BI	237 426	505	Countersunk screw M4x10	020 295
8	Guidance on the left	227 308	506	Compression spring 0.48x7.02x17.29	023 654
9	Guidance on the right	227 309	507	Countersunk screw M4x8	023 579

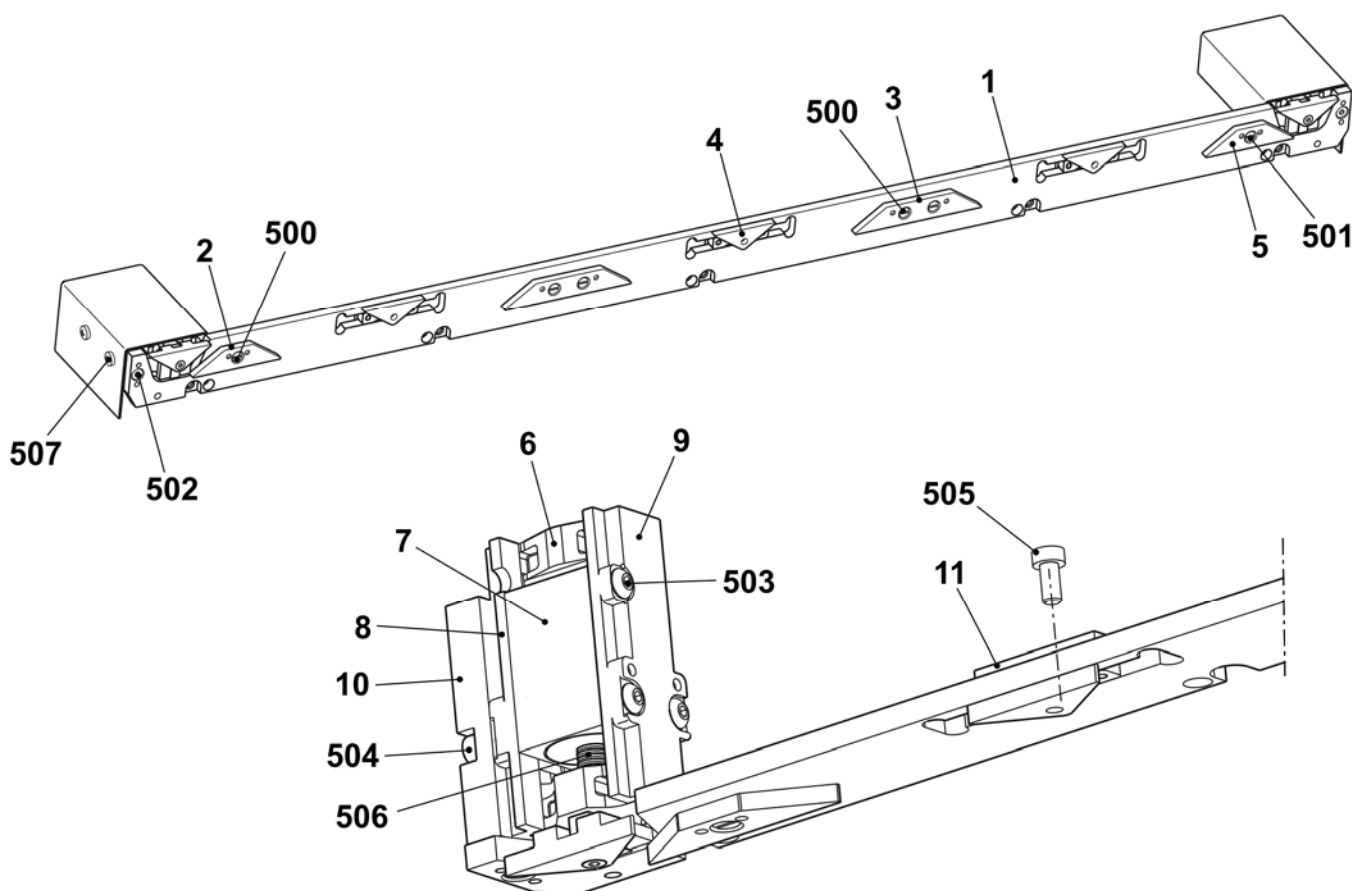


Carriage assembly

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Carriage assembly 3 cam boxes C	244 343			
1	Carriage frame 3 cam boxes C	244 318	13	Fixing bolt linking spot	244 179
2	Carriage part 3 cam boxes C	242 697	500	Cap screw M8X30	020 143
3	Carriage cover at the top, 4 cam boxes	251 195	502	Countersunk screw M6x10	023 183
4	Shim	225 312	514	Setting pin 5x14	020 670
5	Shoulder screw	211 750	515	Threaded bushing	041 863
8	Bush	207 546	520	Circlip 6	021 022
9	Bush	209 275	522	Shim 0.2x10x70	023 699
10	Bush	209 274	523	Shim 0.1x10x70	023 698
11	Eccentric	222 983	524	Shim 0.05x10x70	023 697

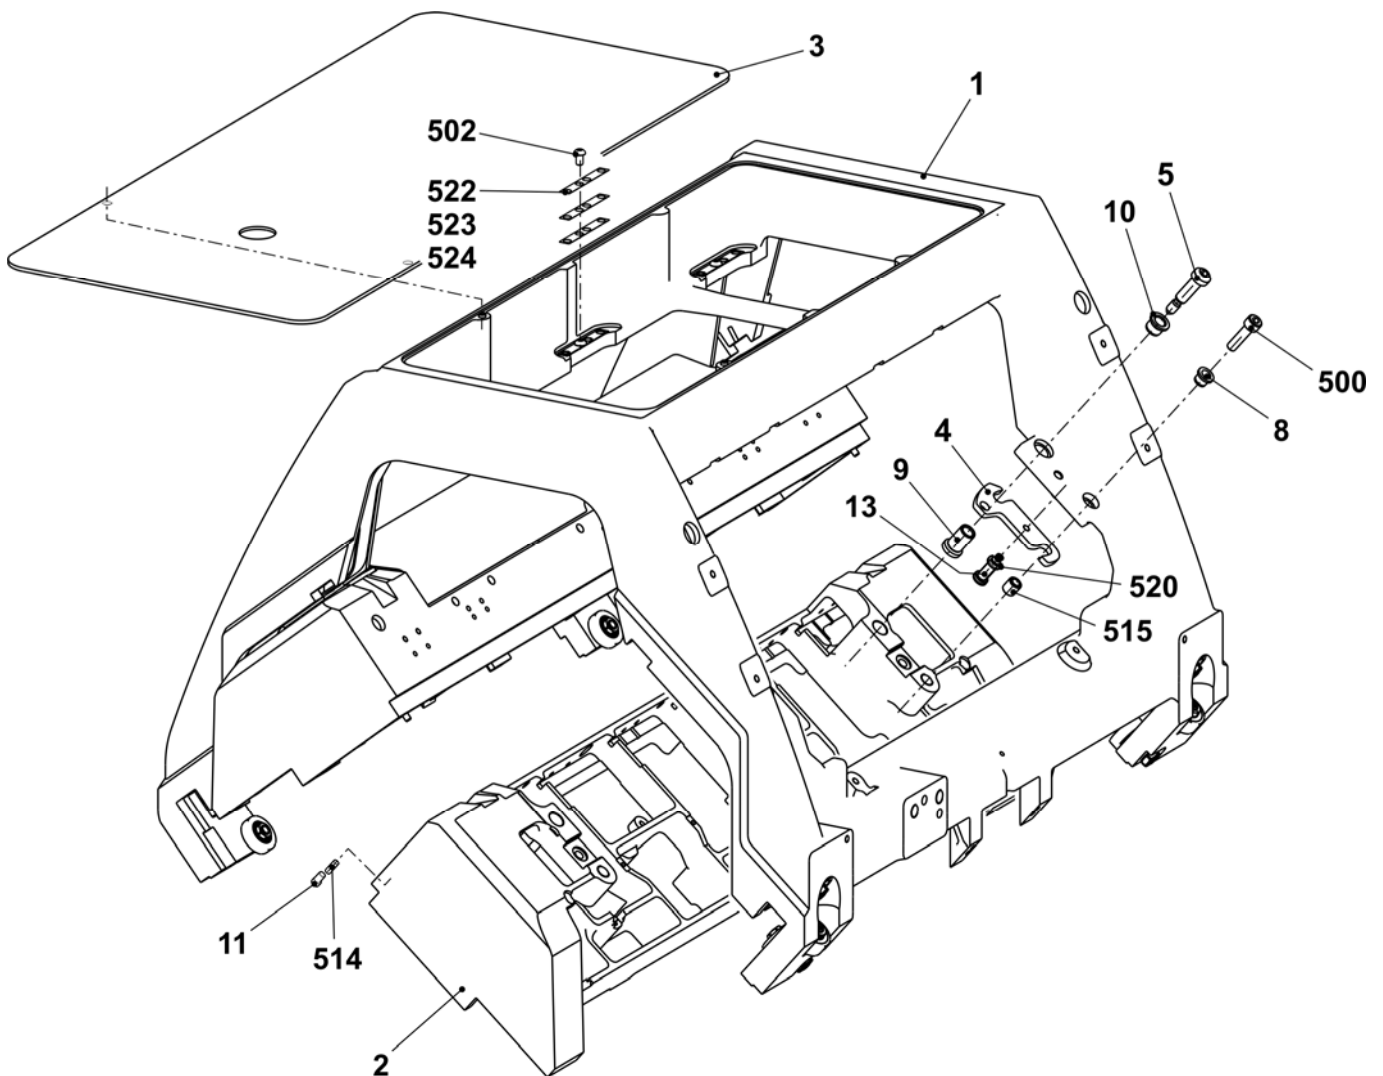


Carriage guide

Pos	Designation	Ident No	Pos	Designation	Ident No
6	Bearing bolt eccentric 0,5	242 060	510	Shim ring 12x18x1	023 315
7	Bearing bolt eccentric 0,5	240 624	511	Adjusting washer 10x16x1	023 260
12	Bolt pre-assembled	244 283	518	Ball bearing 62201-2RS	241 408
508	Nut M10	023 316	519	Ball bearing 62300-2RS1	242 070

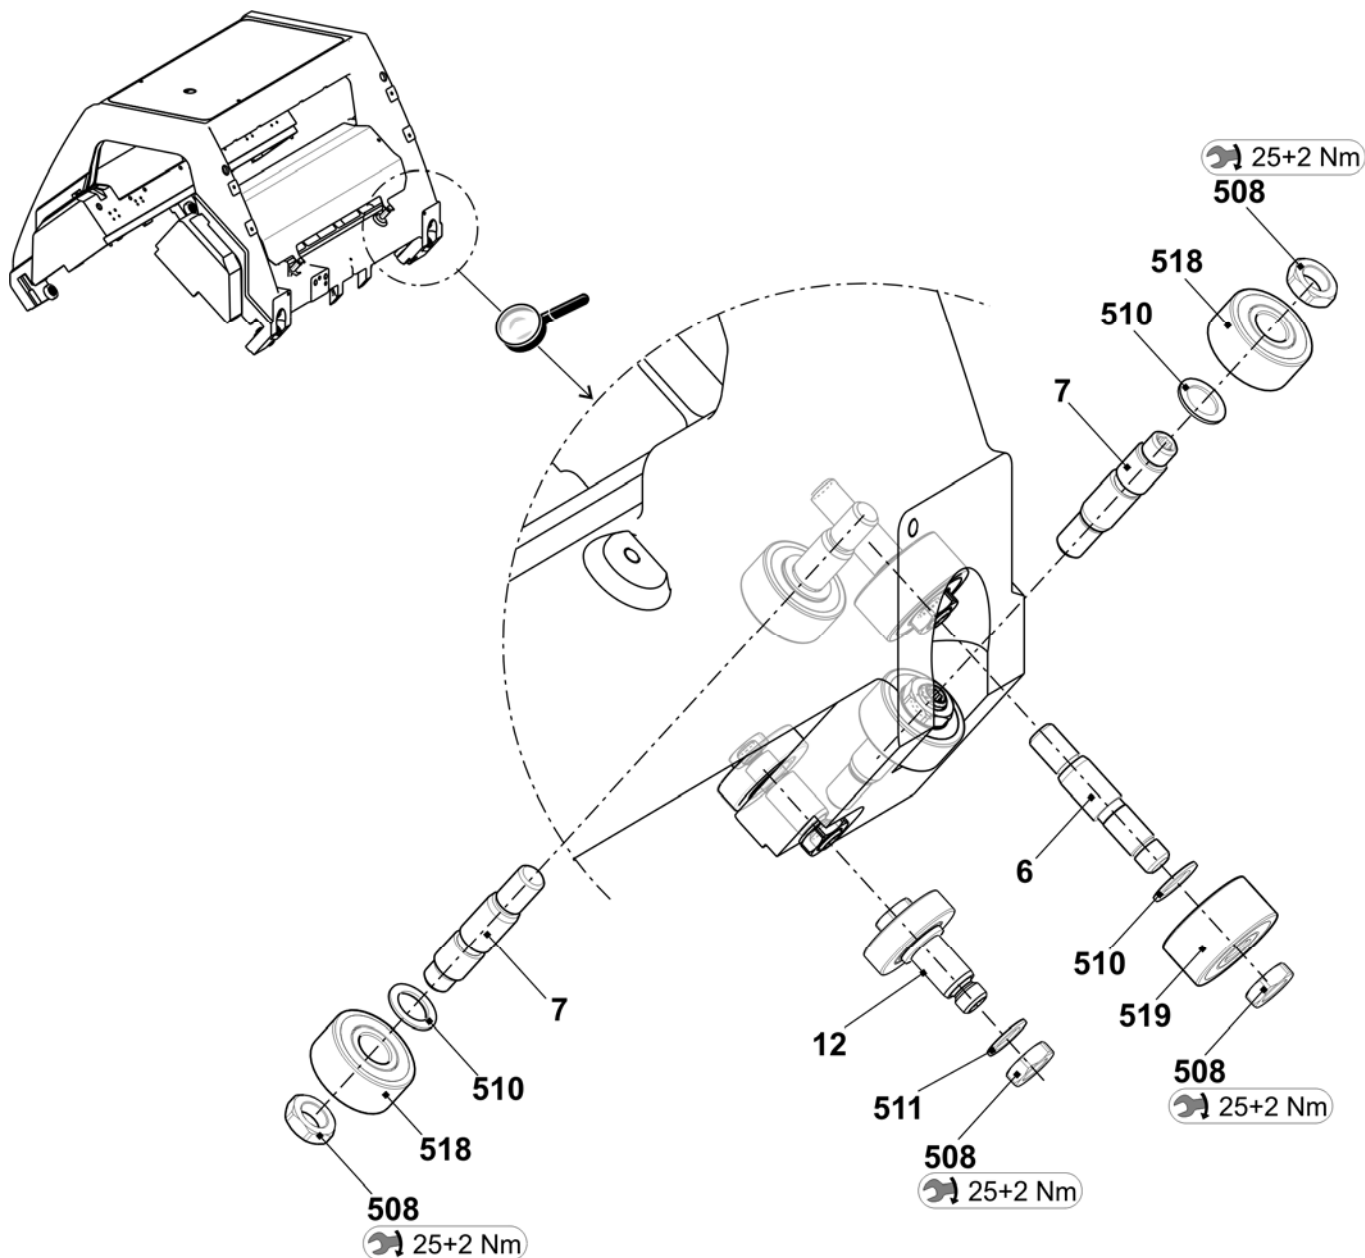


Needle detector

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Needle detector	237 675			
1	Needle detector pre-assembled	221 773	500	Oval head screw M4x6	023 427
2	Sensor pre-assembled	237 674			

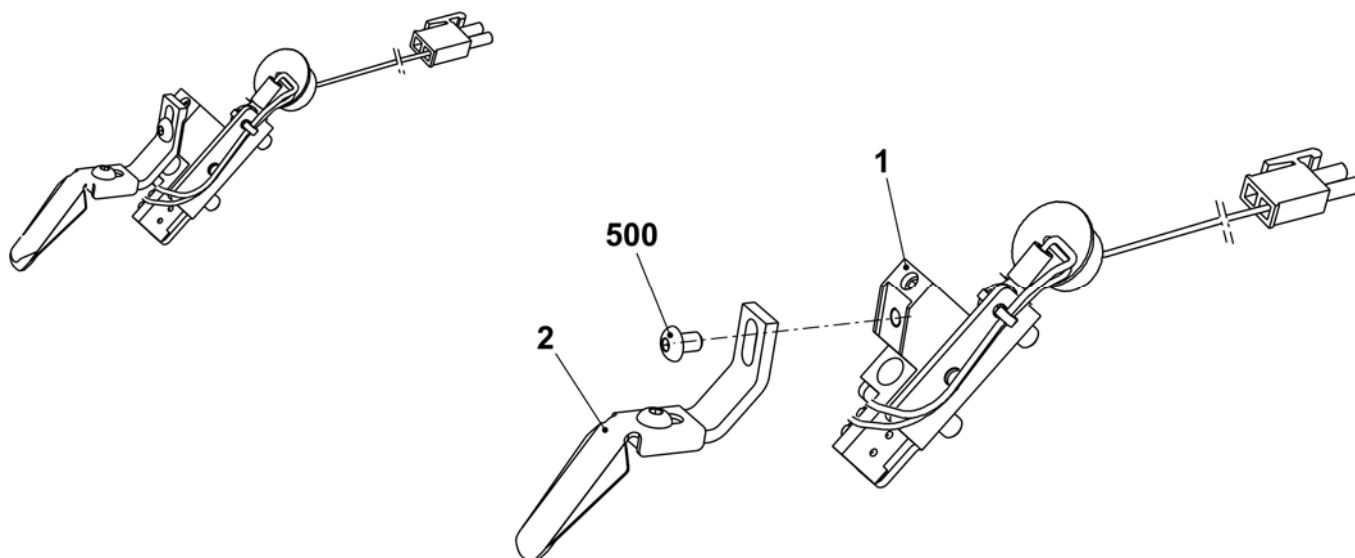


Brush holder

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Brush holder complete E3-4	214 710			
1	Brush holder	213 009	500	Countersunk head screw M4x12	023 062
2	Brush clamp	213 010	501	Hexagon nut M8x5	023 750
3	Threaded rod	209 740	502	Adjusting washer 5x10x0.5	023 348
4	Needle brush E2-4	061 407	503	Locking ring 5x0.6	023 347

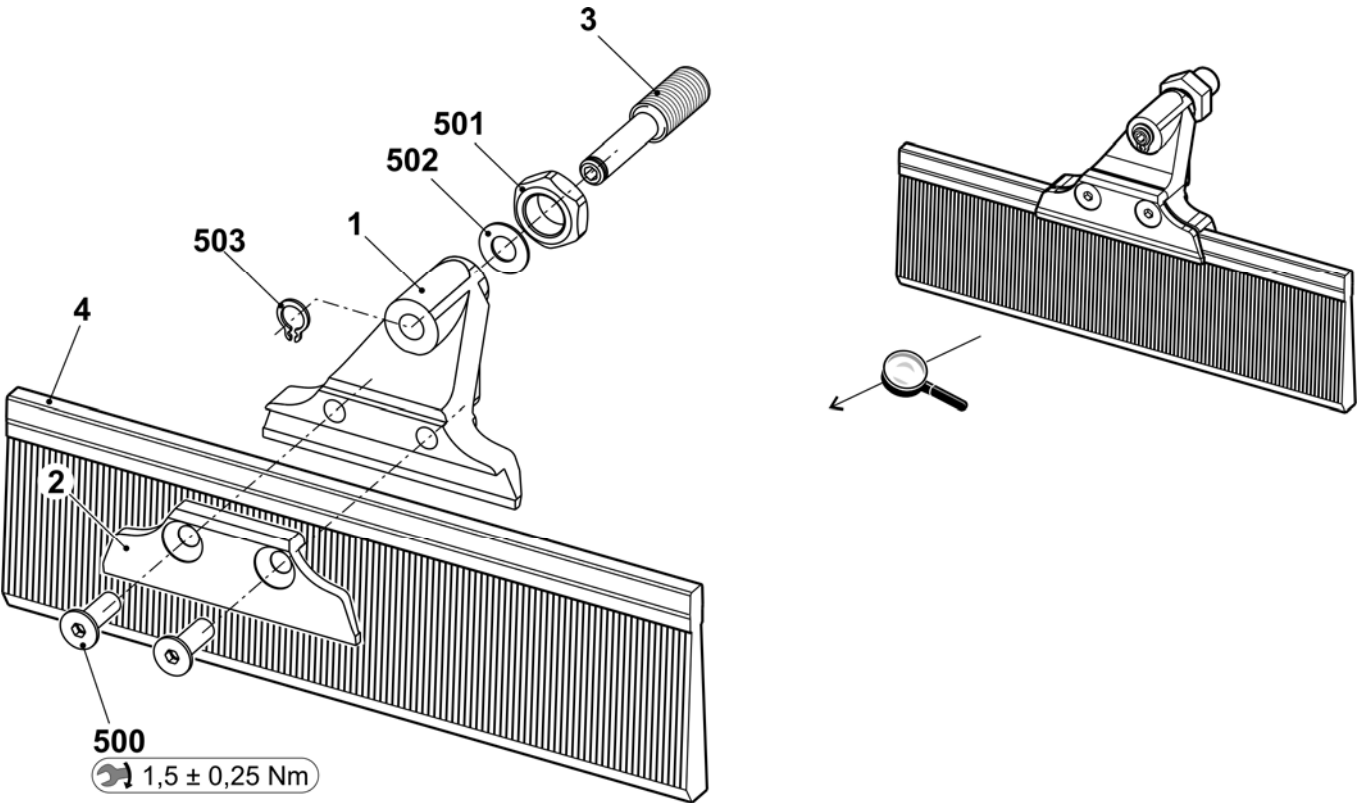


Carriage cover

Pos	Designation	Ident No	Pos	Designation	Ident No
2	Carriage cover at the front 3 cam boxes	251 205	502	Serrated lock washer 6.4	022 385
3	Carriage cover at the rear 3 cam boxes	251 206	503	Hexagon nut M6	022 899
12	Fixing bolt	242 382	504	O-ring	242 420

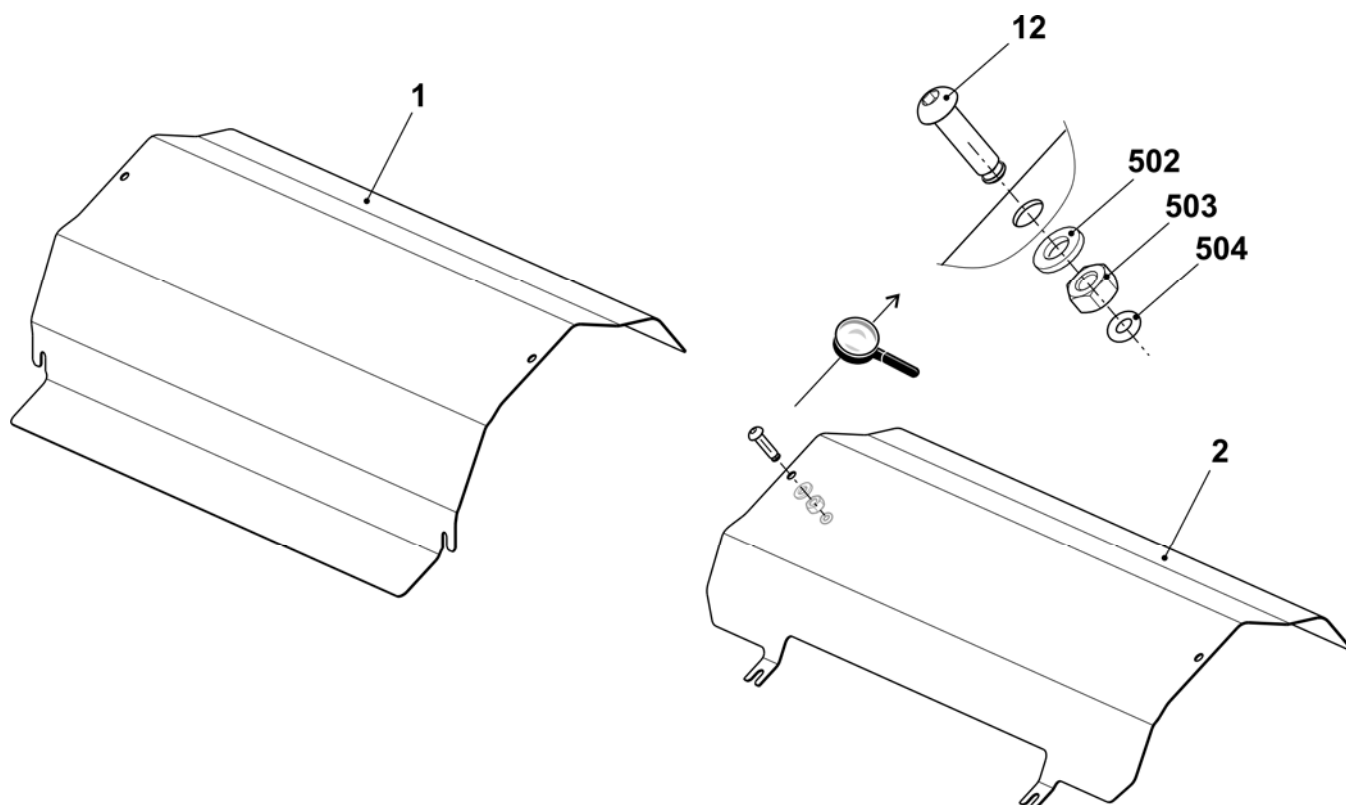


Spare parts package carriage guide bar

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Spare parts package carriage guide bar 84"	252 993	501	Shim 0.05x22x42	243 291
1	Carriage guide bar	242 486	502	Shim 0.10x22x42	243 292
2	Adjusting eccentric	241 219	503	Shim 0.20x22x42	243 293
500	Shim 0.03x22x42	243 289	510*	Cap screw M8X20	020 141

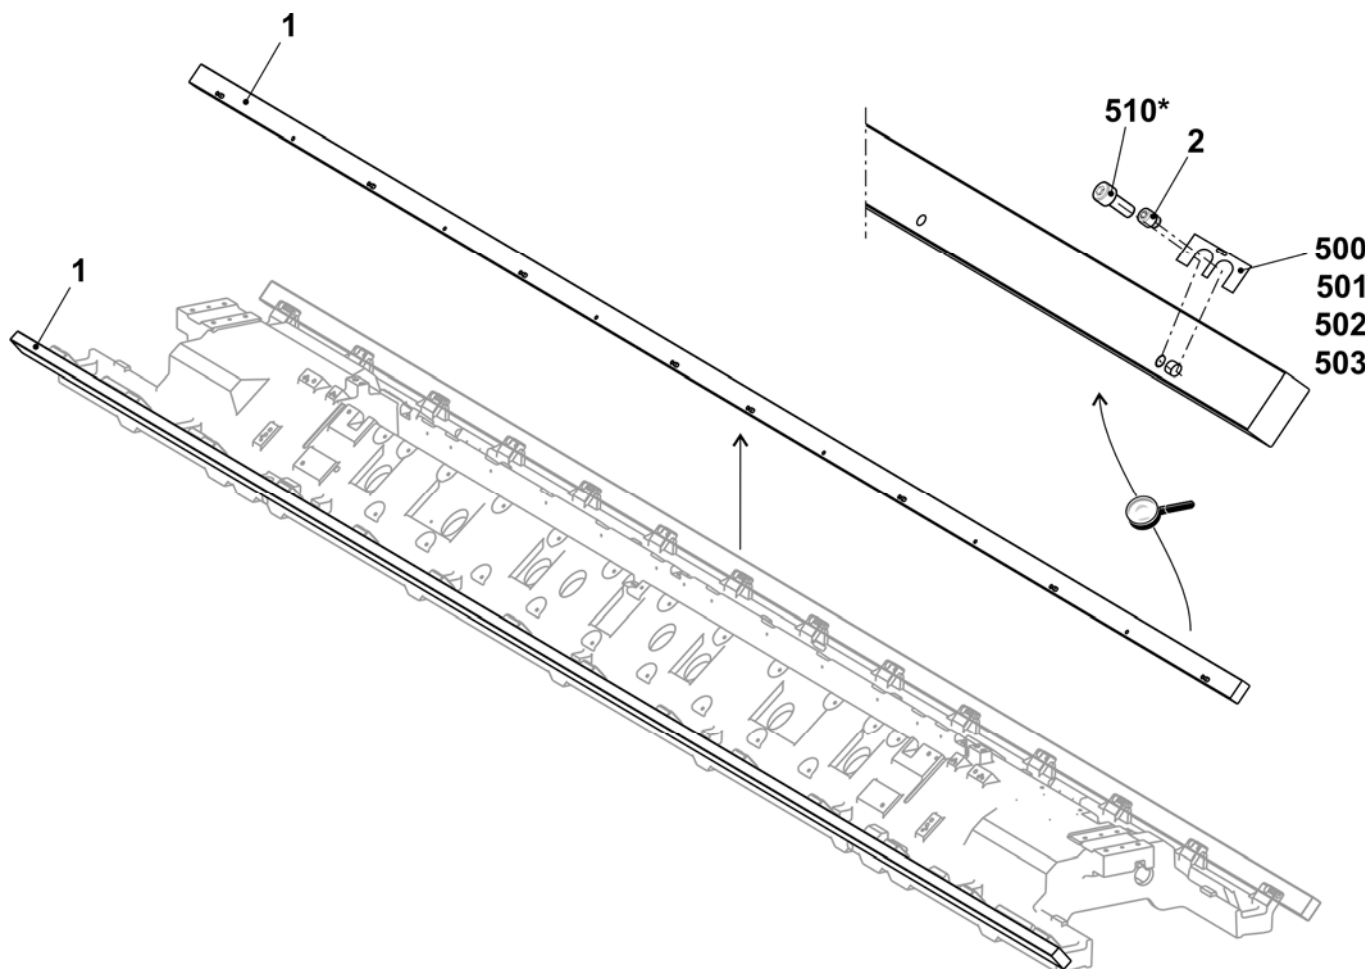


Main take-down

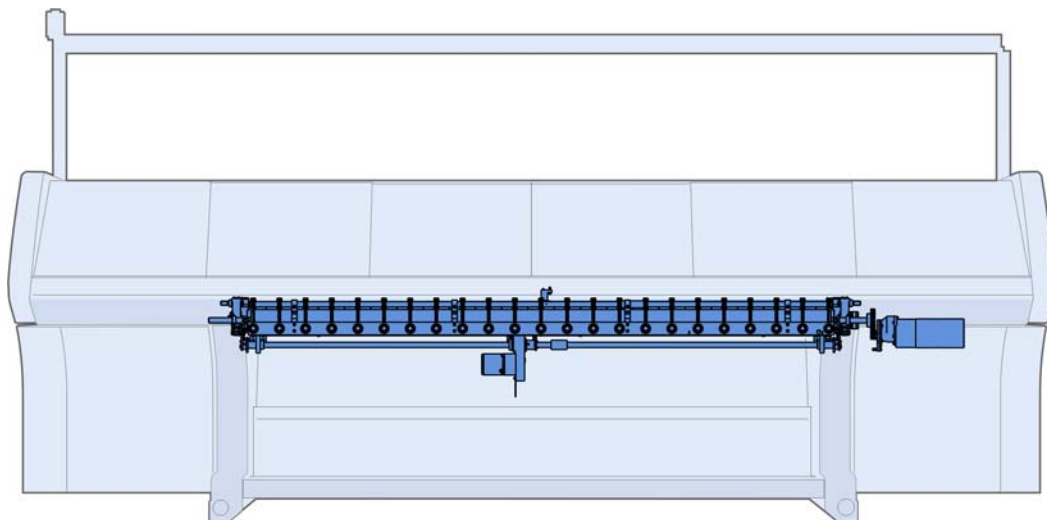


Take-down rollers and left bearing

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Main take-down 84" E5-14 + E2,5.2	242 222			
3	Shaft on the left at the rear	237 818	17	Main take-down on/off complete 84"	237 352
4	Stripper angle at the rear complete	241 935	18	Bearing block in the middle complete	237 357
5	Bolt	208 538	500	Countersunk screw M5x10	023 247
6	Rod	237 192	502	Washer 18	023 295
7	Mounting plate on the left complete	231 725	503	Locking ring 18x1.2	020 955
9	Swivel-mounted bearing	235 286	504	Cap screw M8X25	020 142
11	Floating axle on the left	237 354	505	Washer 8	020 883
13	Take-down roller at the rear complete E5 - E14 + E2,5.2	243 810	506	Cap screw M6x16	020 135
15	Take-down roller at the front complete	242 371	507	Set collar A20	020 938
16	Stop point	232 364	508	Set screw M6x8	022 684

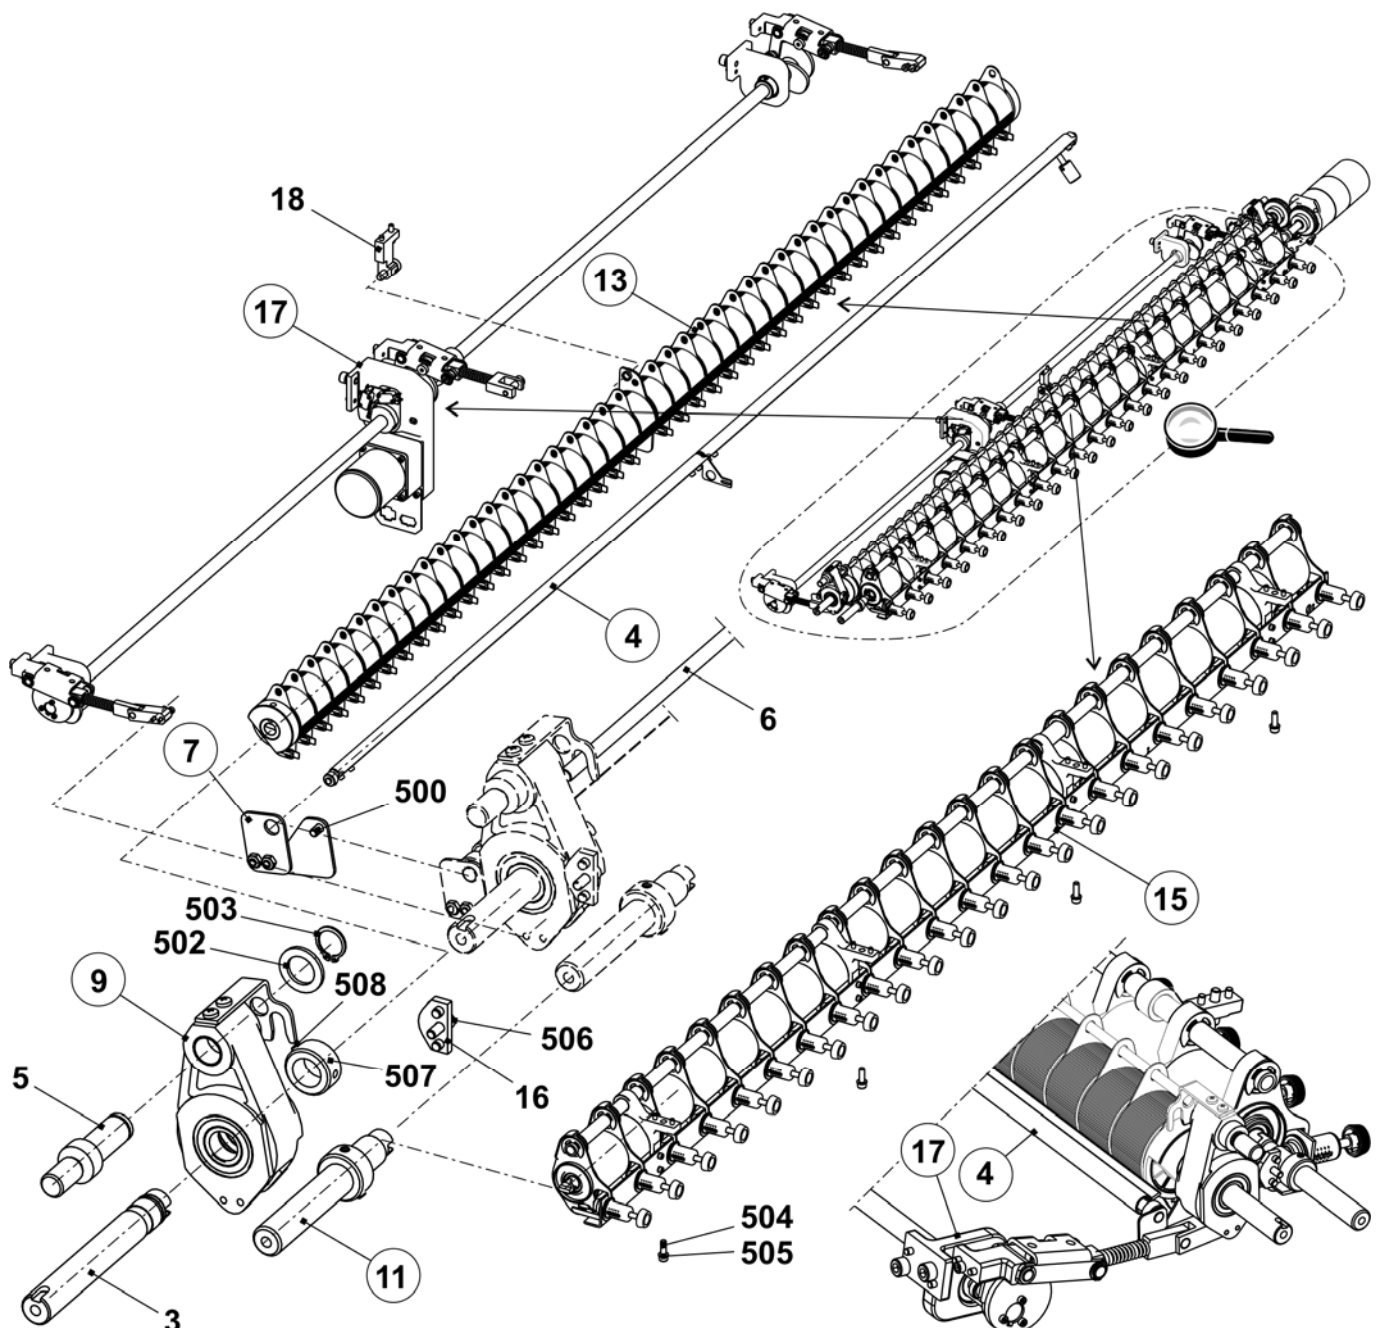


Take-down motor and right bearing

Pos	Designation	Ident No	Pos	Designation	Ident No
1	Clutch set	237 293	501	Hexagon screw M6X16	020 356
8	Mounting plate on the right complete	240 069	502	Washer 18-200	023 295
9	Swivel-mounted bearing	235 286	503	Locking ring 18x1.2	020 955
10	Floating axle on the right	237 353	504	Cap screw M8x25-12.9	020 142
12	Motor take-down + comb	214 279	506	Cap screw M6x16	020 135
14	Flange	241 754	507	Set collar A20	020 938
16	Stop point	232 364	508	Set screw M6x8	022 684
19	Connection cable winding plate OKC	241 703			

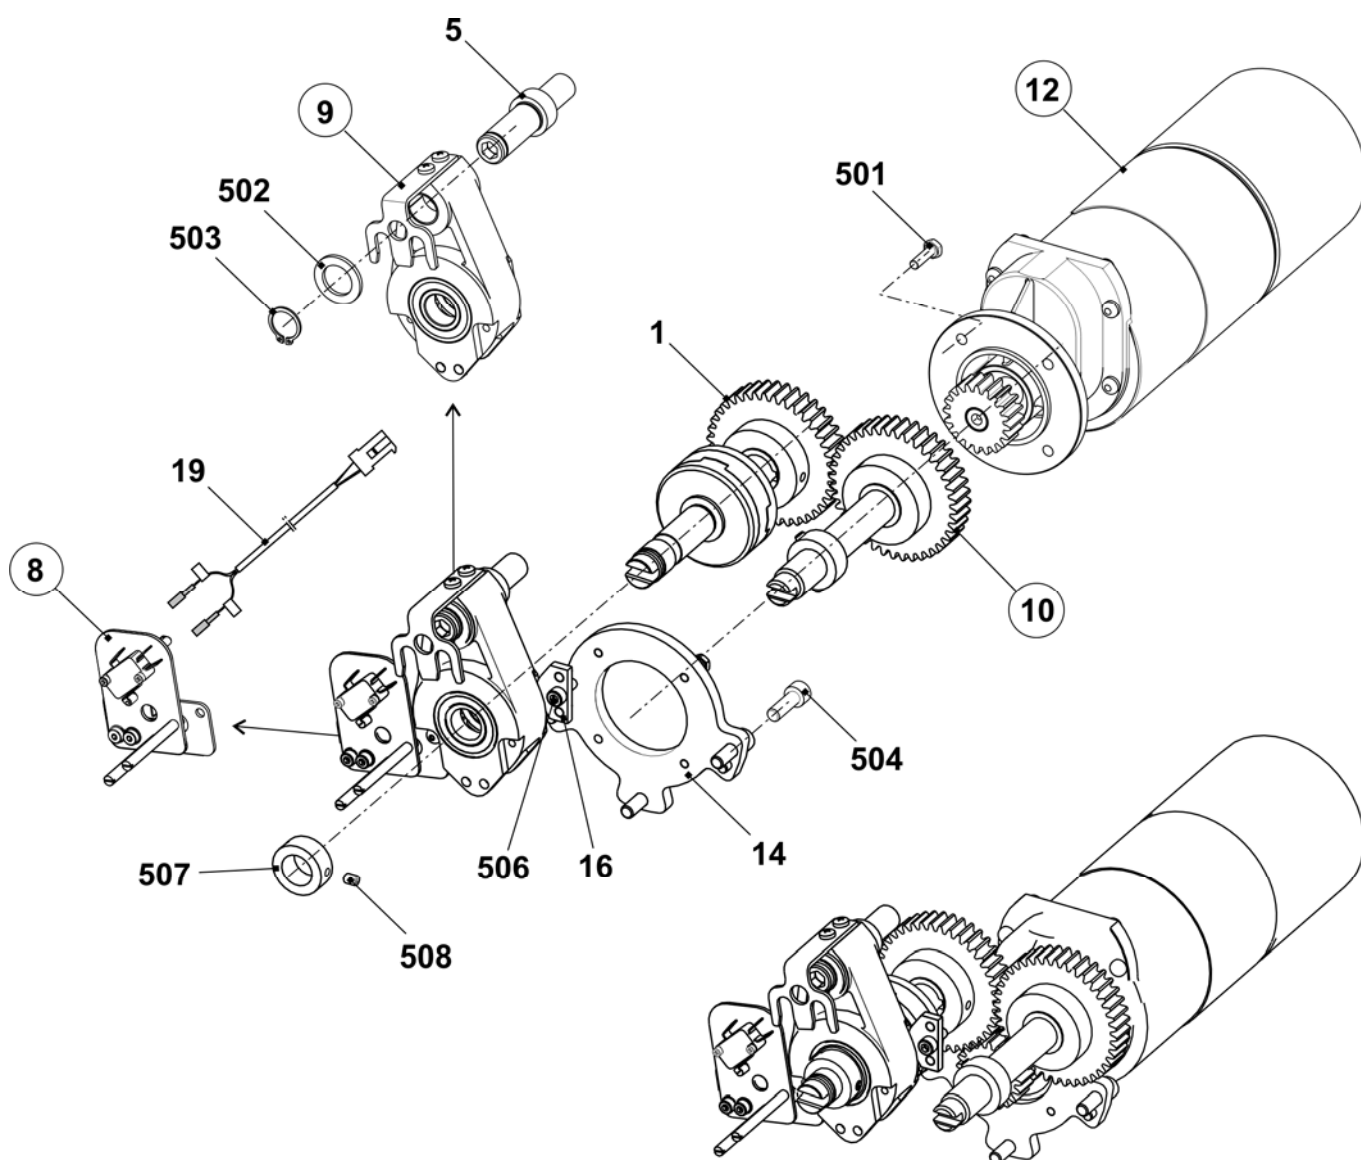



Stripper angle

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Stripper angle at the rear complete	241 935	6	Strap	235 731
1	Stripper angle on the right	241 933	7	Stripper angle on the left	241 934
2	Shaft	240 127	8	Setting weight	229 248
3	Cam	209 278	500	Cap screw M5x8	023 319
4	Bolt	228 310	501	Set collar	020 934
5	Axle	228 803	502	Set screw M5x6	022 738

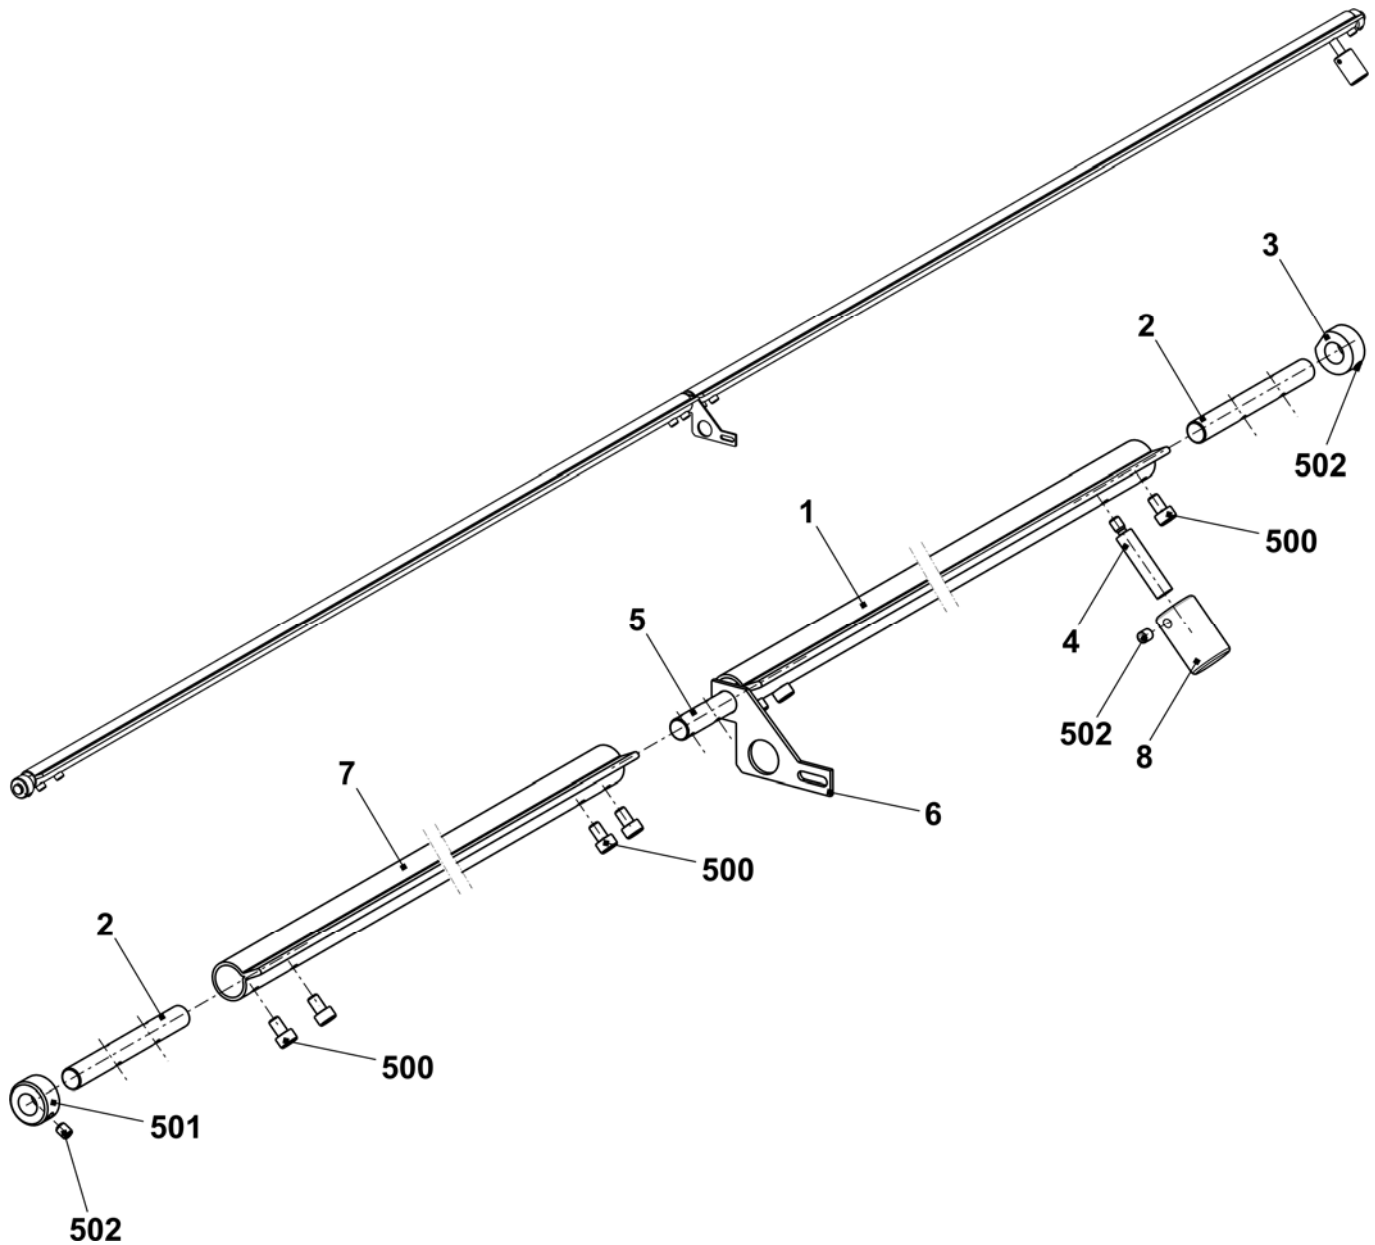


Mounting plate

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ L	Mounting plate on the left complete	231 725	Σ R	Mounting plate on the right complete	240 069
1	Mounting plate on the left	231 541	1	Mounting plate on the right	240 068
2	Retaining plate on the left	231 539	2	Shoulder screw	240 067
500	Countersunk screw M5x10	023 247	3	Retaining plate on the right	240 066
501	Serrated lock washer J5.3	022 489	500	Hexagon nut M4-6	022 536
			501	Microswitch	026 259
			502	Shoulder screw M3x16	022 583
			503	Cap screw M5x8	244 278
			504	Washer 5-200	020 871

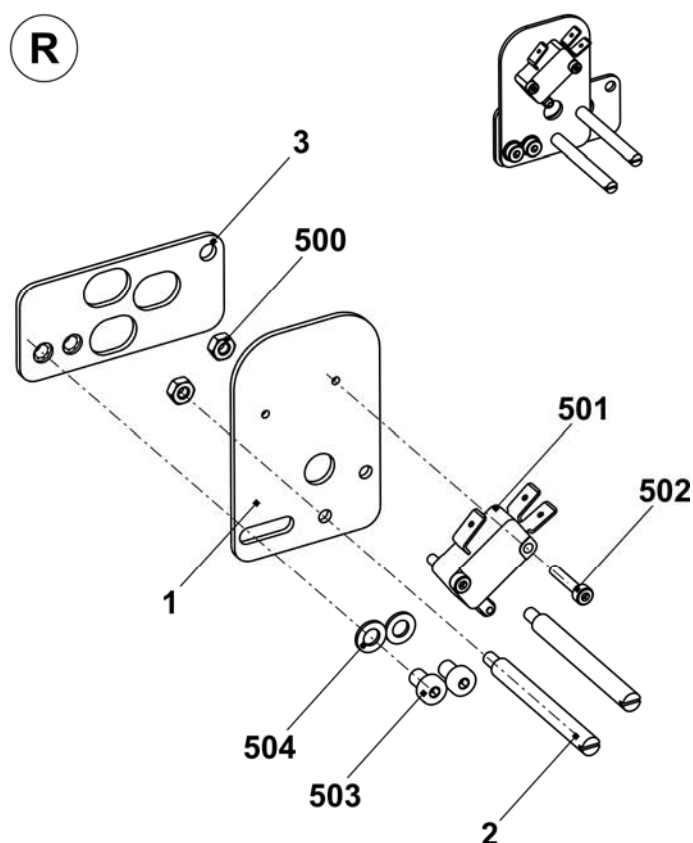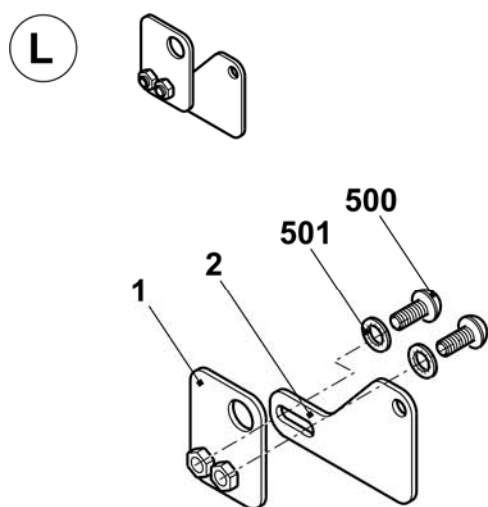



Swivel-mounted bearing

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Swivel-mounted bearing	235 286	502	Locking ring 42x1.75	023 293
1	Lever	232 485	504	Ball bearing 6004-2Z	022 720
2	Sheet metal support	209 393	505	Slide bearing 18x20x15	022 951
500	Countersunk screw M5x8	022 779			

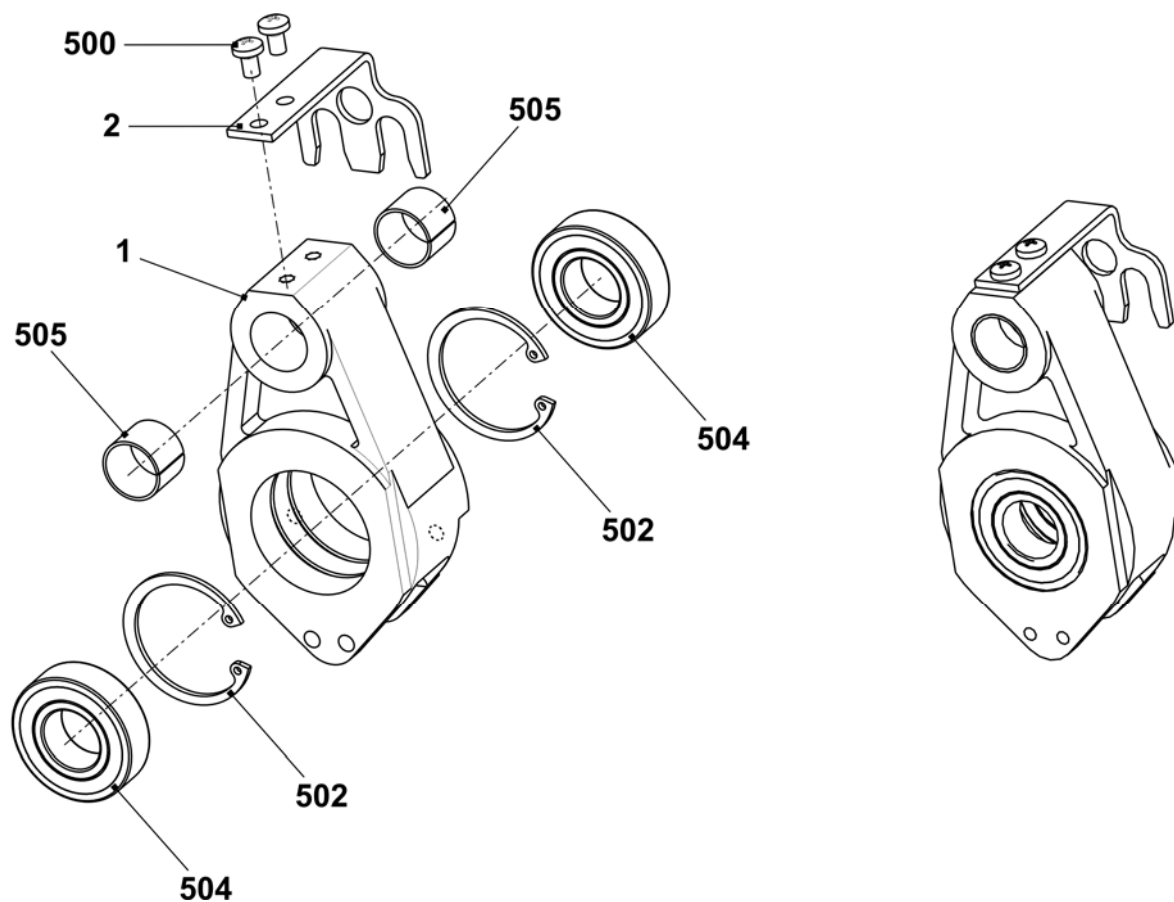


Floating axle

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ L	Floating axle on the left	237 354	Σ R	Floating axle on the right	237 353
1	Shaft on the left at the front	237 334	1	Shaft on the right at the front	237 340
500	Set collar	020 938	2	Gear wheel z=40, m=2	213 744
501	Set screw M6x8	022 684	500	Set collar	020 938
			501	Set screw M6x8	022 684
			502	Feather key A 6x6x25	023 017

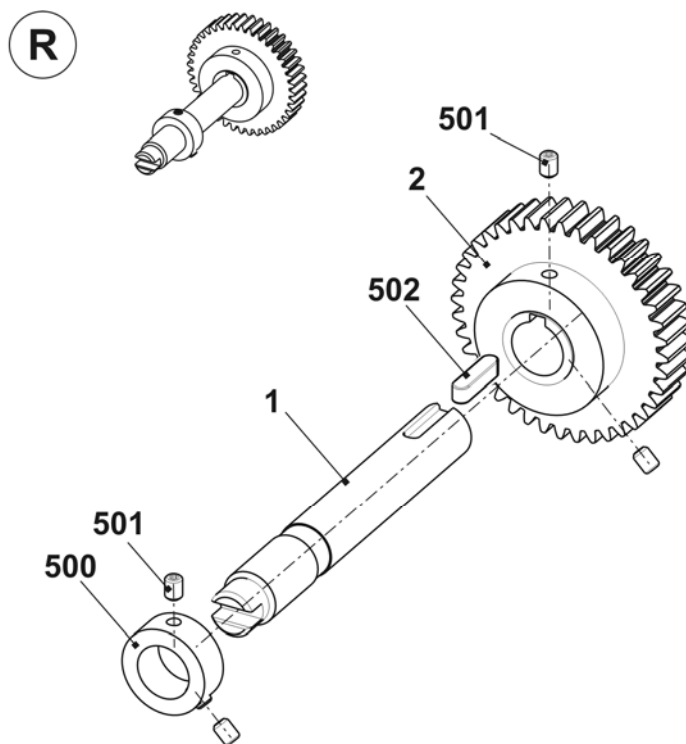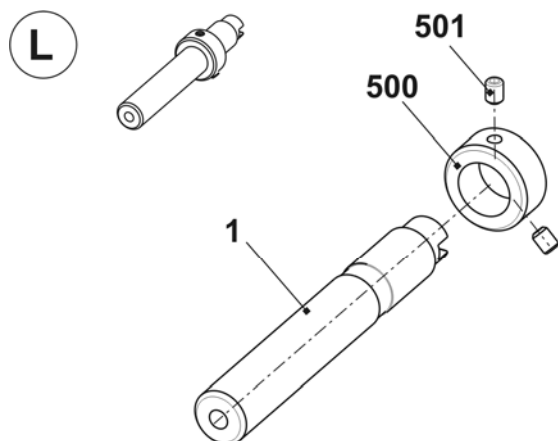


Impulse giver and motor

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Motor take-down unit + comb	214 279	500	Cap screw M4x8	022 501
2	Impulse disc	208 716	504	Washer 4-200	020 879
3	Photoelectric sensor take-down + comb	300 744	506	Circlip	022 774
4	Cover	212 262	507	Shim ring 4x8x1	023 369

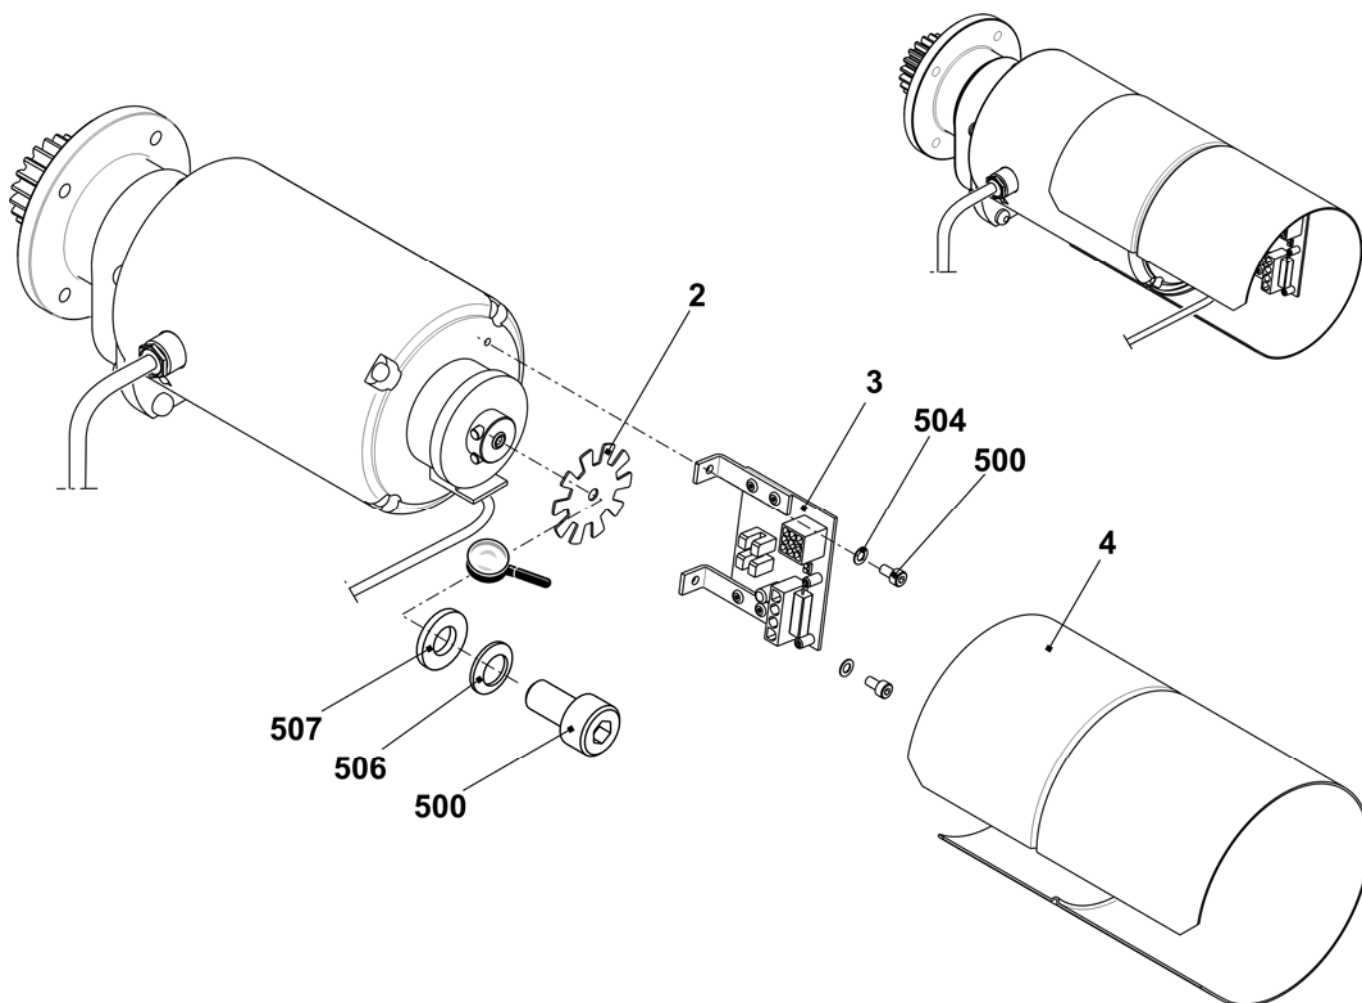


Rear take-down roller

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Take-down roller at the rear co. E5 - E14 + E2,5.2	243 810	10	Support	232 578
1	Roller (E5 – E14 + E2,5.2)	206 770	10a	Supporting plate	232 512
2	Stripper	241 612	10b	Bearing	232 571
3	Shaft	237 190	10c	Ring	222 895
4	Ring on the left	250 573	510	Ball bearing 16007	021 697
5	Ring on the right	250 574	511	Slide bearing GFM-101216-06	023 280
6	Spacer slide	222 062	512	Slide bearing GFM-101216-09	023 356
7	Stop ring on the left	204 369	11	Brush	225 819
8	Spacer slide	240 104	500	Set screw M10x15-4	020 635
9	Stop ring on the left	222 910	501	Setting pin 6x32	020 685

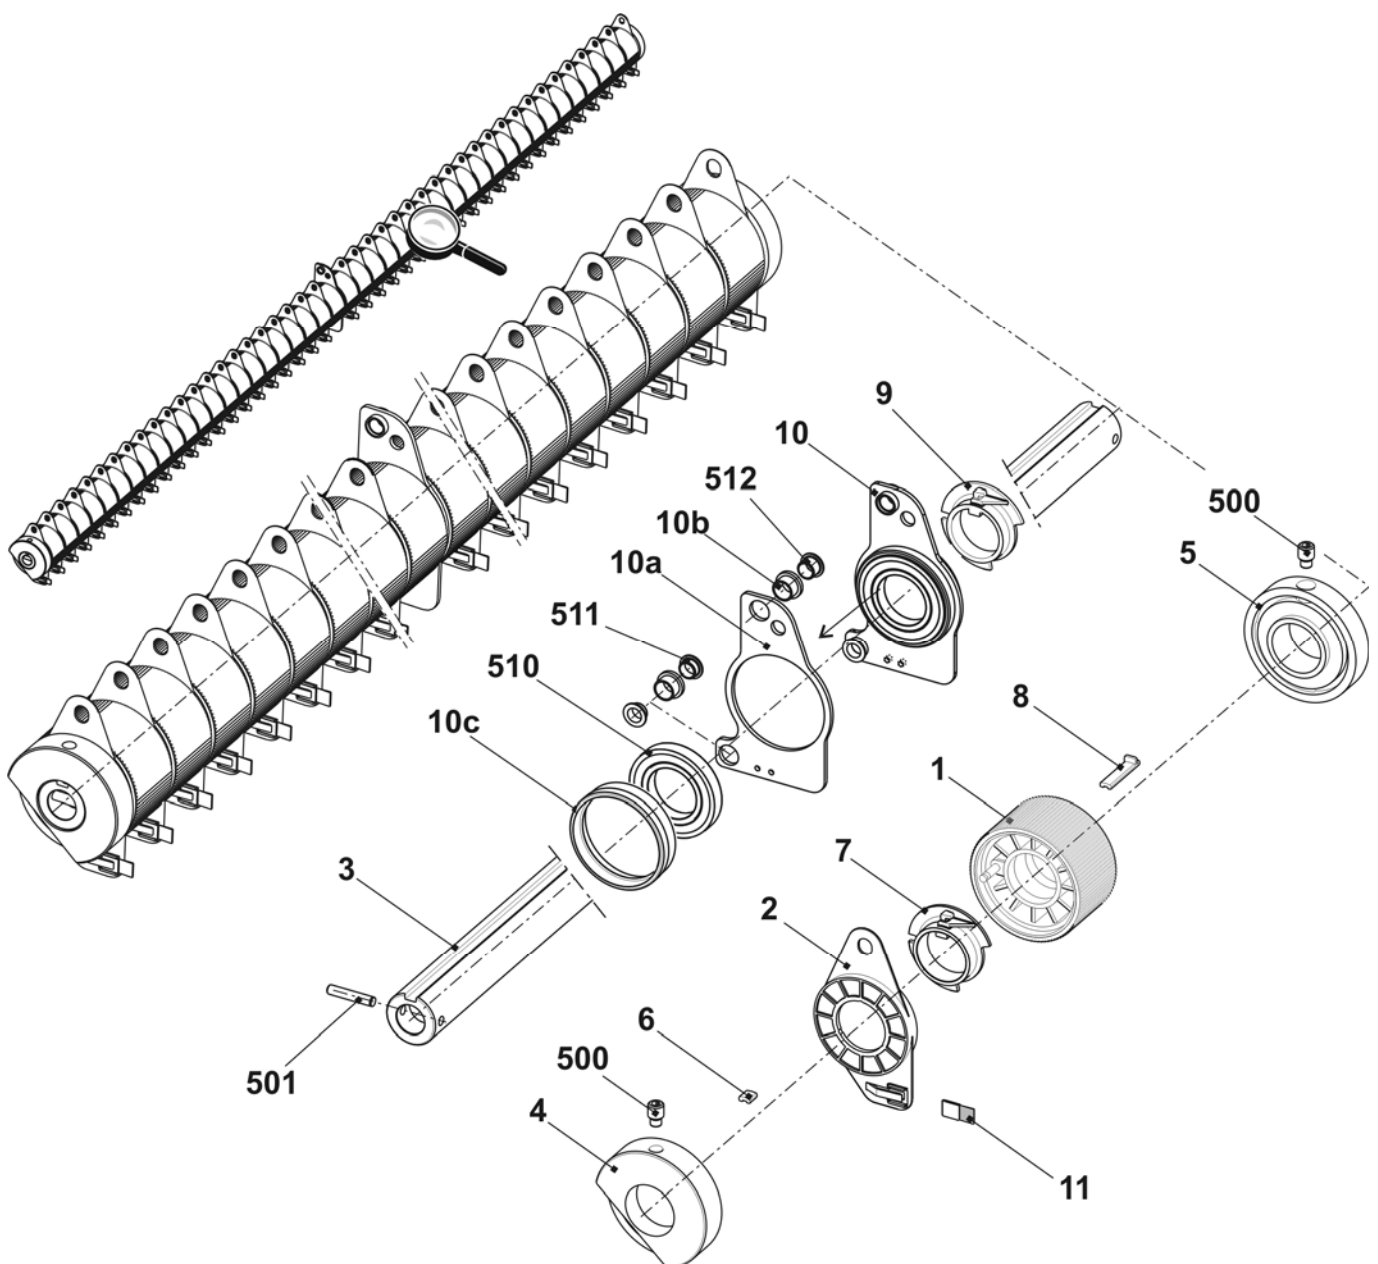


Front take-down roller

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Take-down roller at the front complete	242 371	4	Fixed piece	221 935
1	Take-down roller at the front	237 313	500	Compression spring 1x10x30	023 741
2	Angle rail complete	242 316	501	Cap screw M5x12	020 132
3	Pressure sleeve	220 911	502	Washer 5-200	020 880

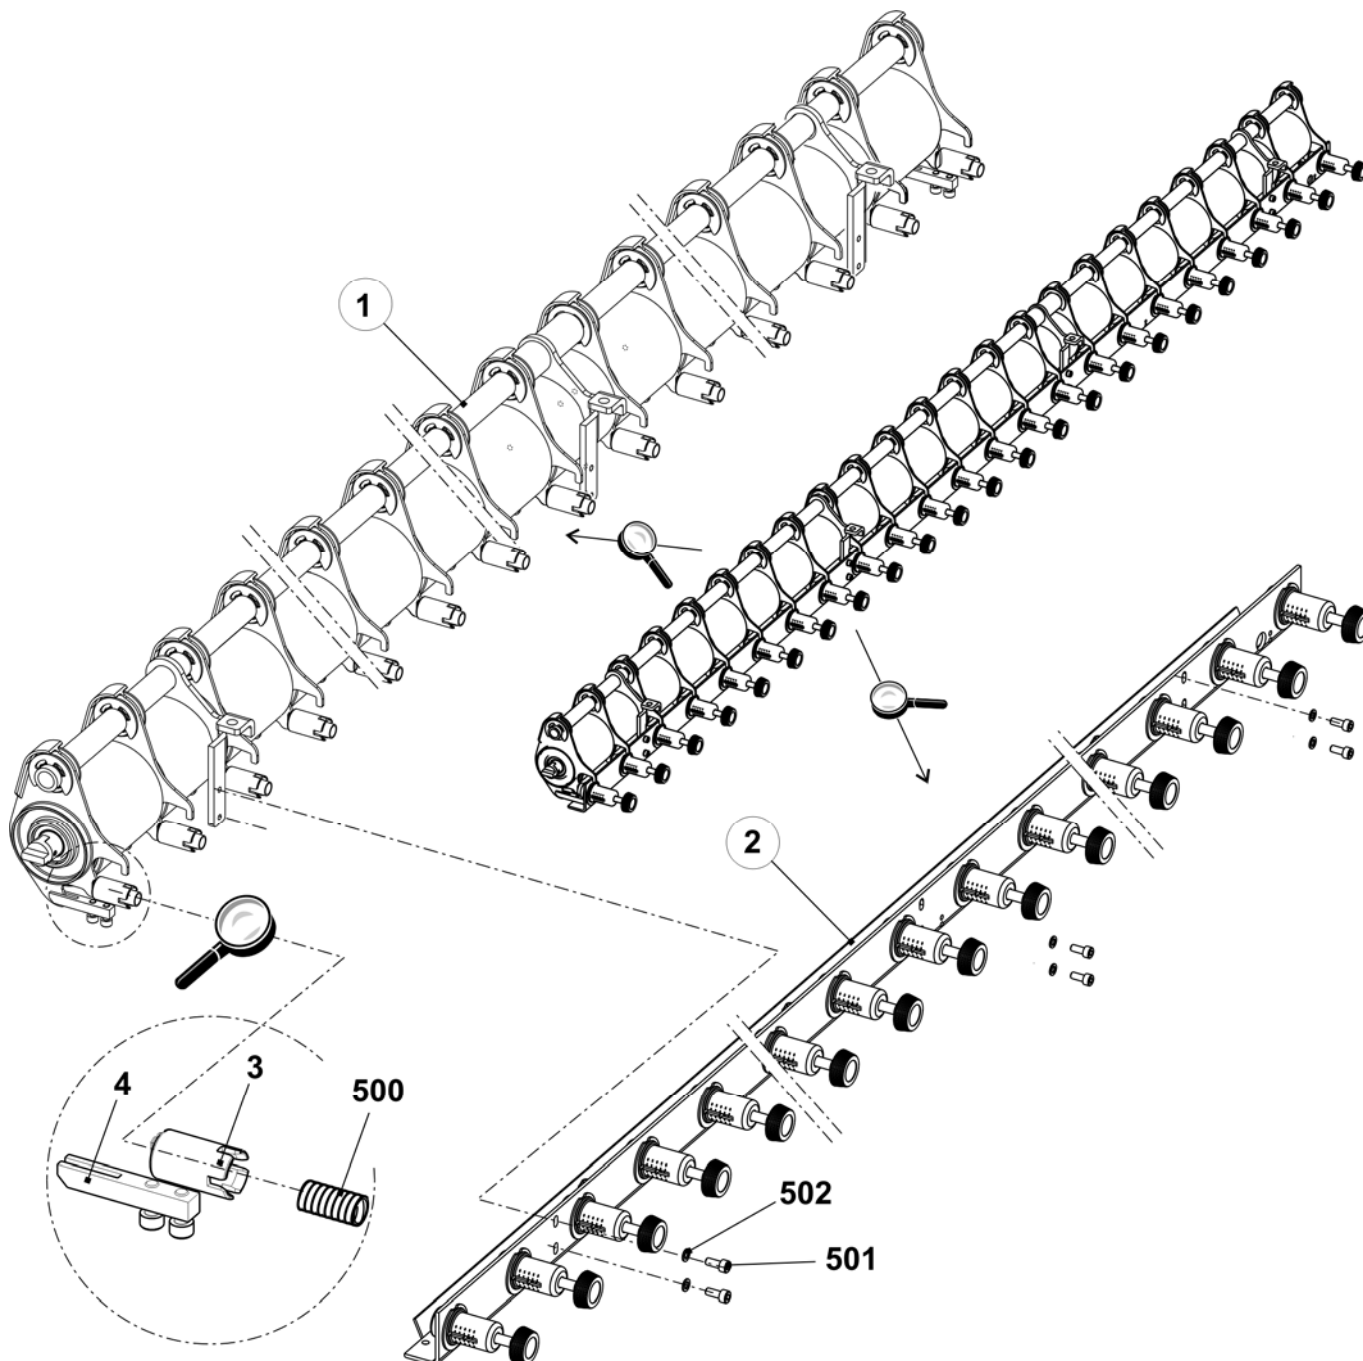


Front roller elements

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Take-down roller at the front	237 313	4	Roller	220 905
1	Bearing support on the left complete	221 225	5	Tube	237 191
10	Universal joint	221 137	6	Bearing support on the right complete	221 240
11	Adaptor	221 132	10	Universal joint	221 137
12	Bearing support	220 913	11	Adaptor	221 132
13	Gear wheel	220 910	12	Bearing support	220 913
510	Cap screw M5x20	020 133	13	Gear wheel	220 910
511	Washer 5-100hv	023 542	510	Cap screw M5x20	020 133
515	Spring dowel sleeve 4x20	023 551	511	Washer 5-100hv	023 542
2	Support	251 557	515	Spring dowel sleeve 4x20	023 551
3	Bearing support complete	221 241	7	Distance pipe on the right	253 407
12	Bearing support	220 913	8	Distance pipe on the left	253 408
13	Gear wheel	220 910	500	Circlip	021 025
511	Washer 5-100hv	023 542			
512	Cap screw M5x30	022 396			

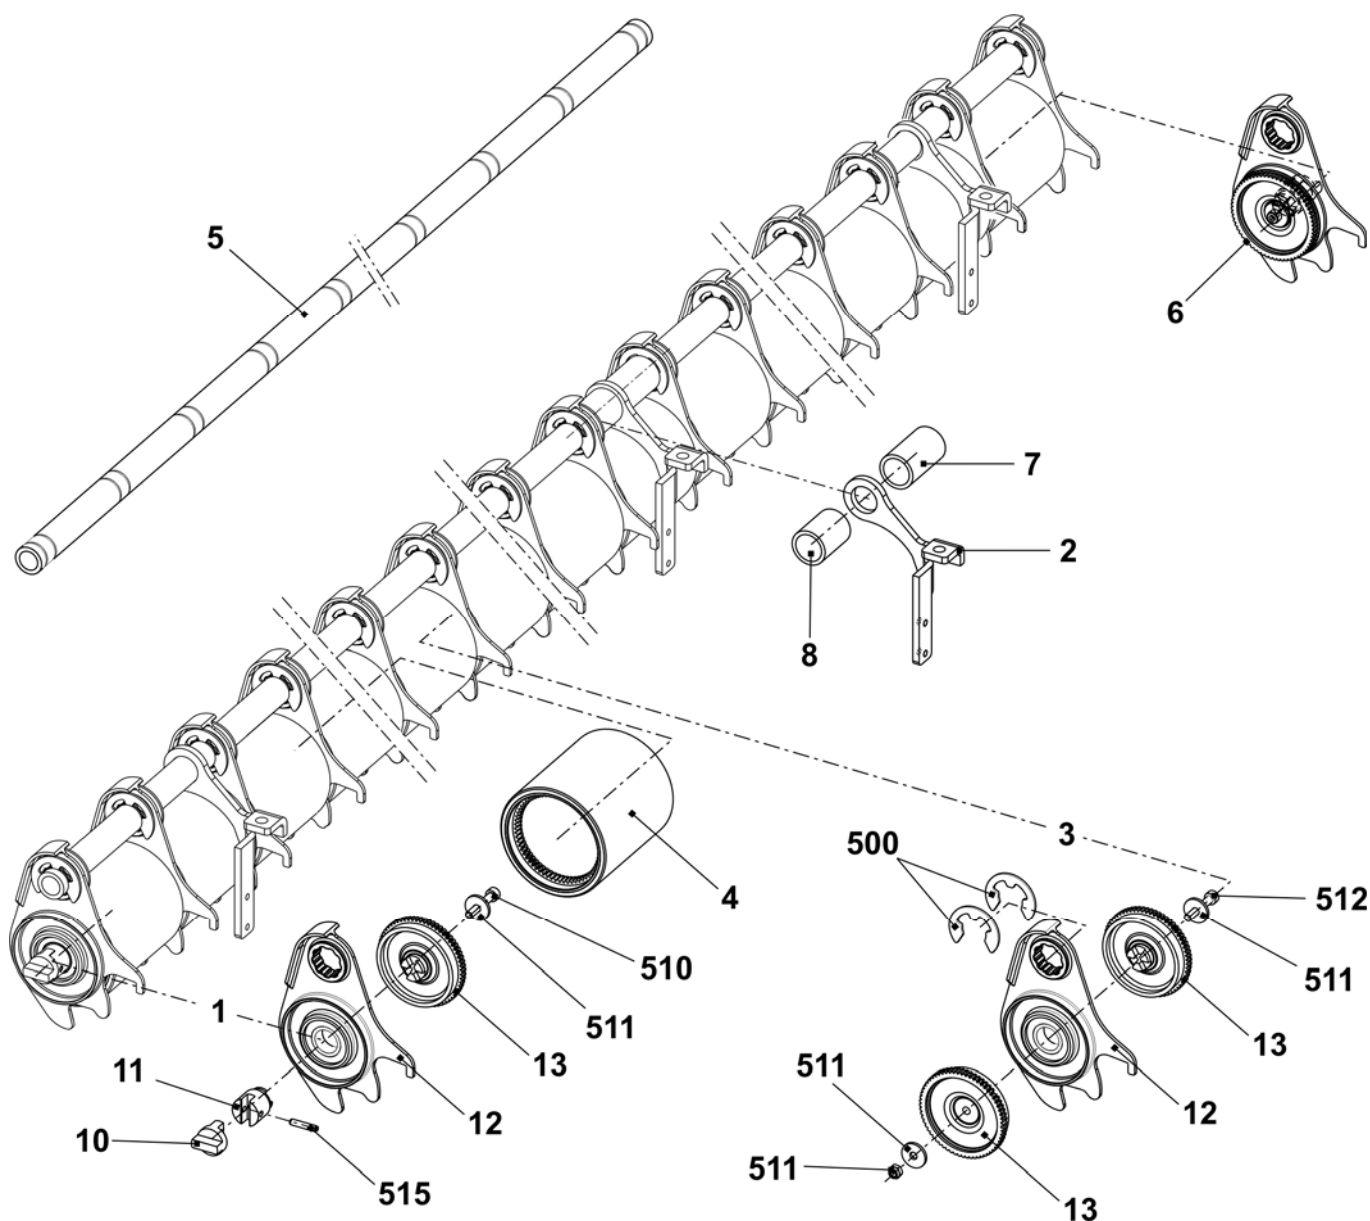


Pressure angle rail

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Angle rail complete	242 316	500	Washer 6	022 431
1	Switch complete with cable	221 265	501	Hexagon nut M5-8	023 541
2	Spring flange	242 327	502	Compression spring 0.8x9.2x27.5	023 537
3	Angle rail	242 277	503	Cap screw M2x12	023 522
4	Winding plate	237 195	504	Washer 2-200	022 908
5	Locking ring	242 325	505	Shoulder screw M5x20x5	023 675

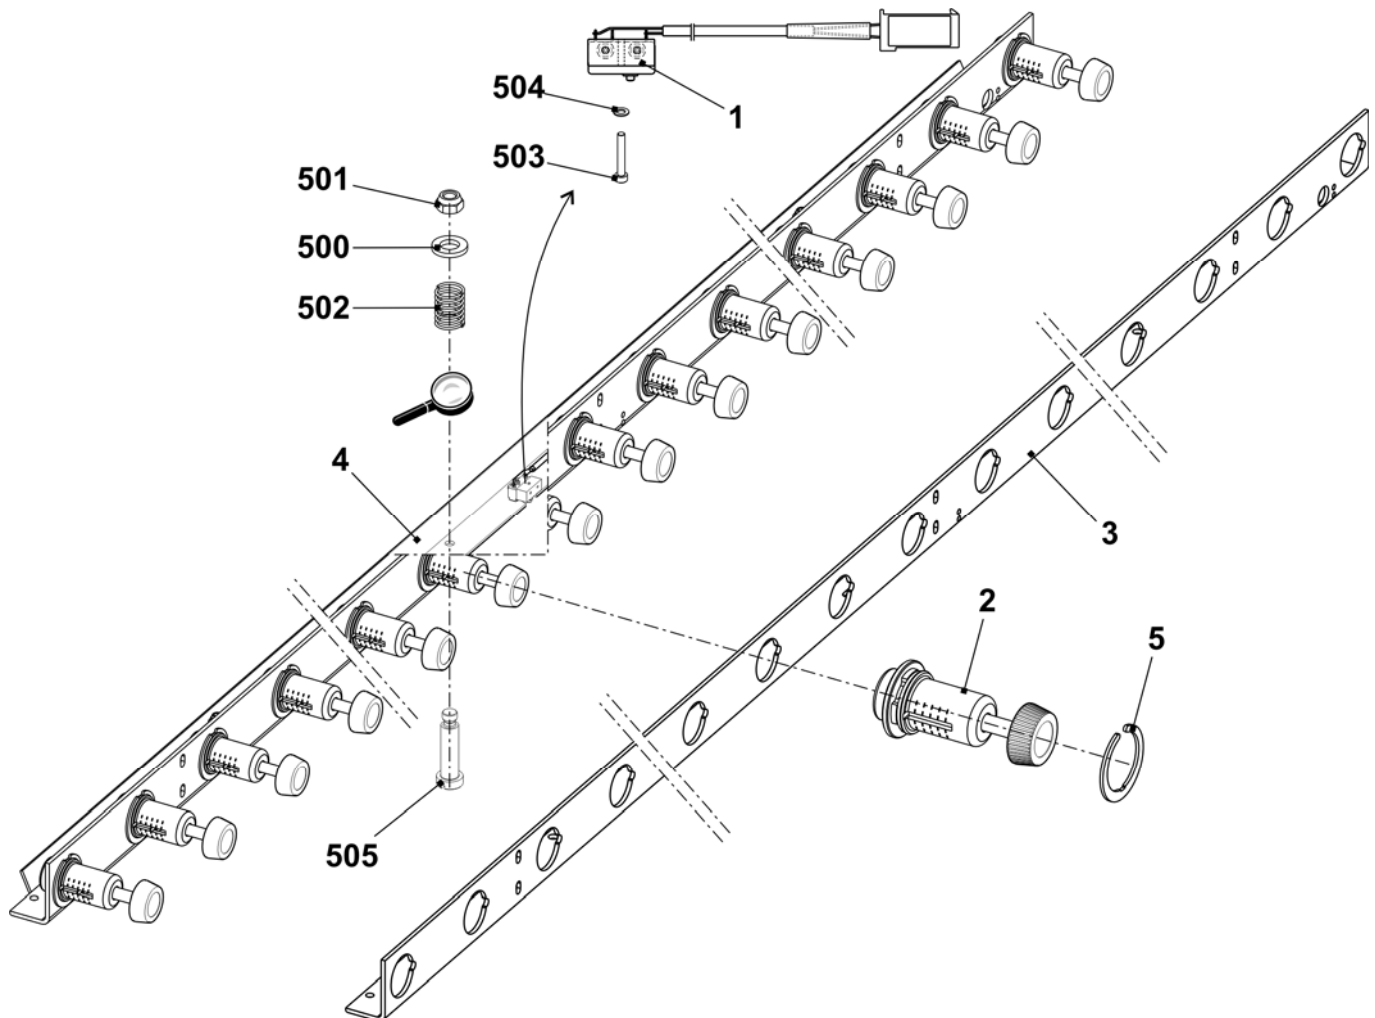


Take-down closing device

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Main take-down on/off complete	237 352	500	Cap screw M5x8	023 319
1	Motor complete	235 246	501	Set screw M4x4	022 875
1a	Motor 25W	232 456	505	Cap screw M3x15	020 009
1b	Gear	234 983	506	Assembling element	209 543
2	Sheet metal	232 992	550	Deep groove ball bearing 6004-2Z	022 720
3	Gear wheel	232 434	551	Locking ring 42x1.75	023 293
5	Support in the middle complete	235 247	900	Cap screw M6X14	022 658
12	Microswitch XGK2-S21 250 VAC	210 510	901	Cap screw M10x16	023 895
19	Swivel support on the right complete	239 148	902	Cap screw M6x25	023 746
20	Swivel holder on the left complete	239 189	903	Cap screw M10x25	023 751
21	Swivel holder in the middle complete	239 188	910	Cap screw M5x55	023 321
22	Cable switch HAAB open	232 442			

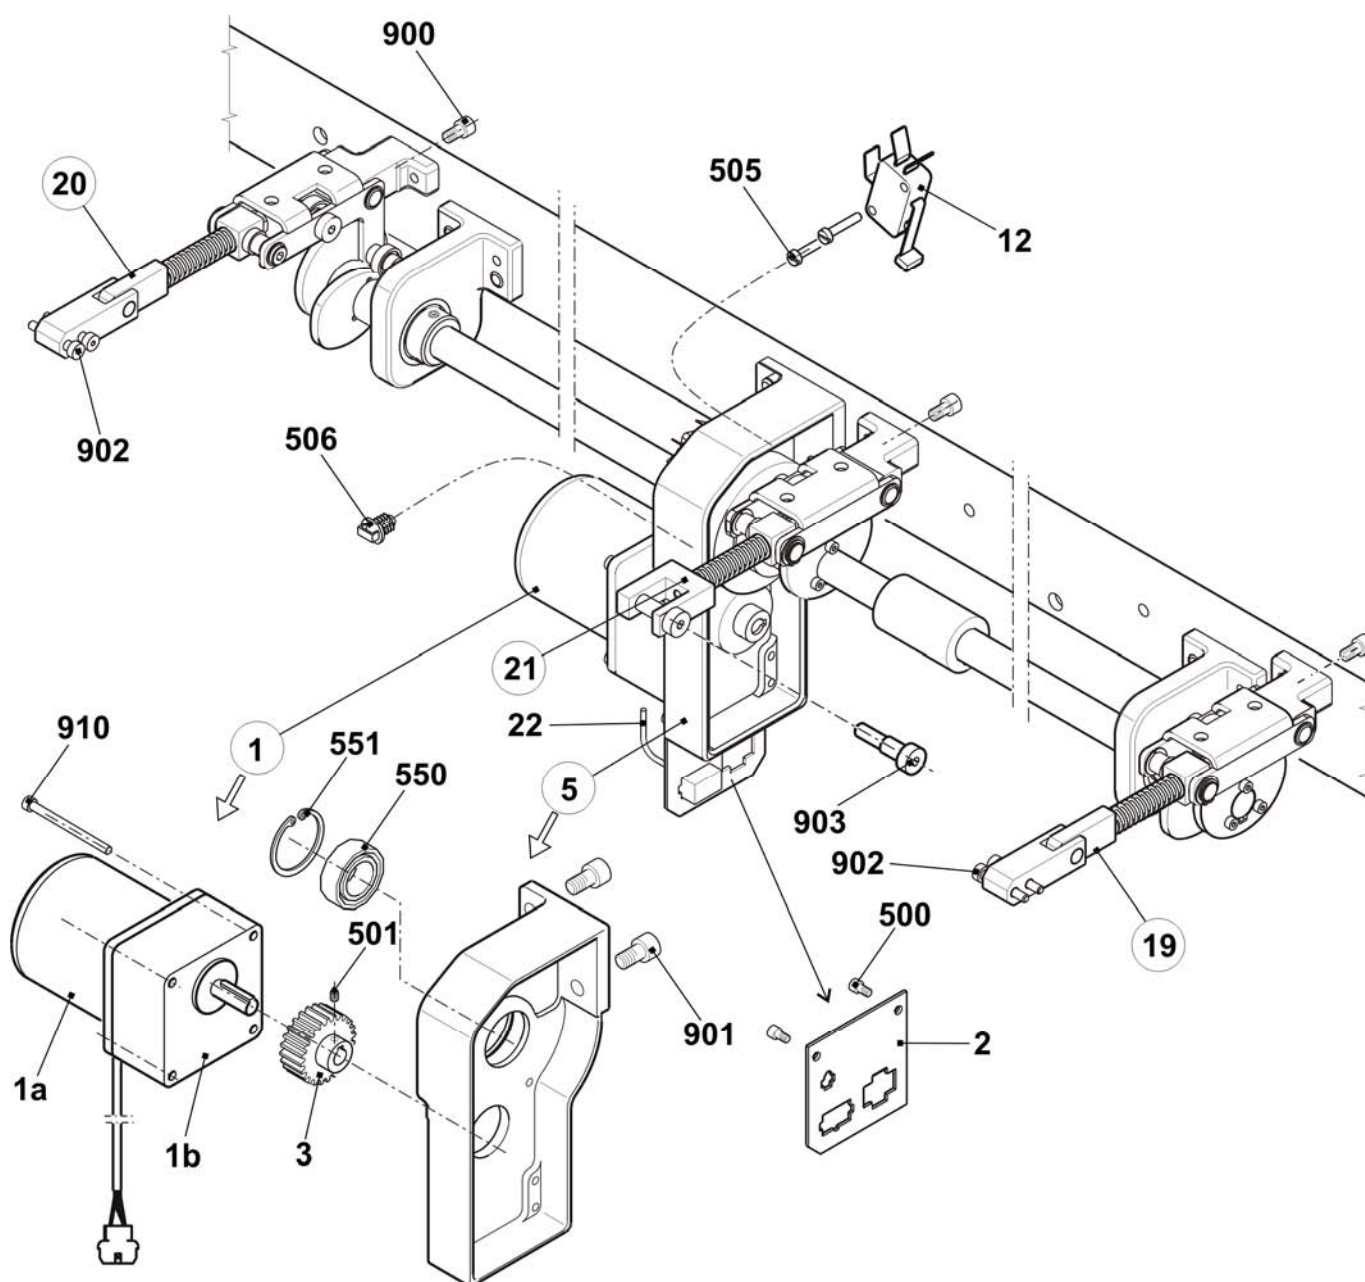


Closer shaft

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Main take-down on/off complete	237 352	16	Guide bush	235 623
4	Gear wheel	213 744	17	Eccentric	232 382
6	Shaft	237 180	18	Distance pipe	235 128
7	Shaft	237 181	502	Feather key A 6x6x25	023 017
8	Spacer	232 385	503	Set screw M6x8	023 723
9	Trip cam	232 383	504	Set screw M6x5	023 192
10	Coupling	232 604	508	Set collar A20	020 938
13	Support on the outside complete	235 248	510	Cap screw M4x25	023 302
13a	Support	234 780	511	Cap screw M4x14	023 604
14	Eccentric	235 135	513	Deep groove ball bearing 6004-2Z	022 720
15	Guide bush	234 876	901	Cap screw M10x16	023 895

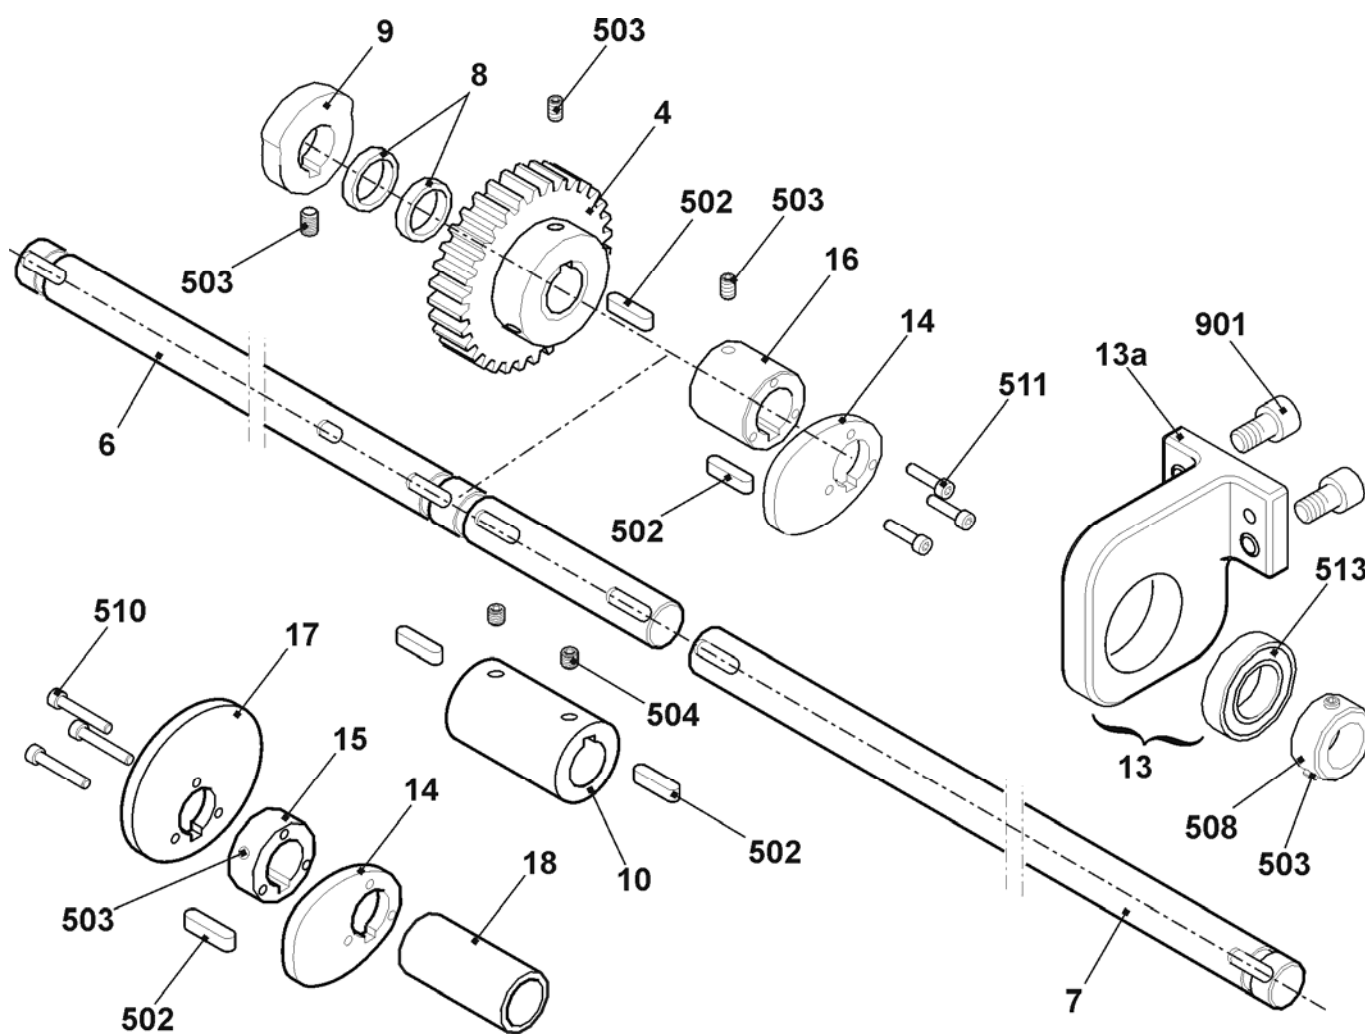


Right swivel support

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Swivel support on the right complete	239 148	11	Lever	238 739
1	Support	239 163	500	Deep groove ball bearing 619/8-2RS	023 728
2	Bearing pin	239 164	501	Deep groove ball bearing 6000-2Z	022 599
3	Bow	238 974	502	Hexagon nut M8-8	022 843
	3a Clip bearing 11-MCM-12-04	023 639	503	Adjusting washer 10x16x2	023 600
4	Shoulder screw	239 133	504	Slide bearing GFM-081014-06	023 358
5	Distance bush	239 134	505	Slide bearing GSM-0810-10	023 896
6	Shoulder screw	239 132	506	Shim ring 12x18x1	023 315
7	Swivel-mounted bearing	239 100	507	Locking ring 12x1	020 951
8	Bearing bolt	239 117	508	Compression spring 2.5x12.5x67.5	023 743
9	Spring mandrel on the inside	232 388	509	Dowel pin 10x20	023 616
10	Lever	238 370	510	Slide bearing GSM-1012-10	239 178

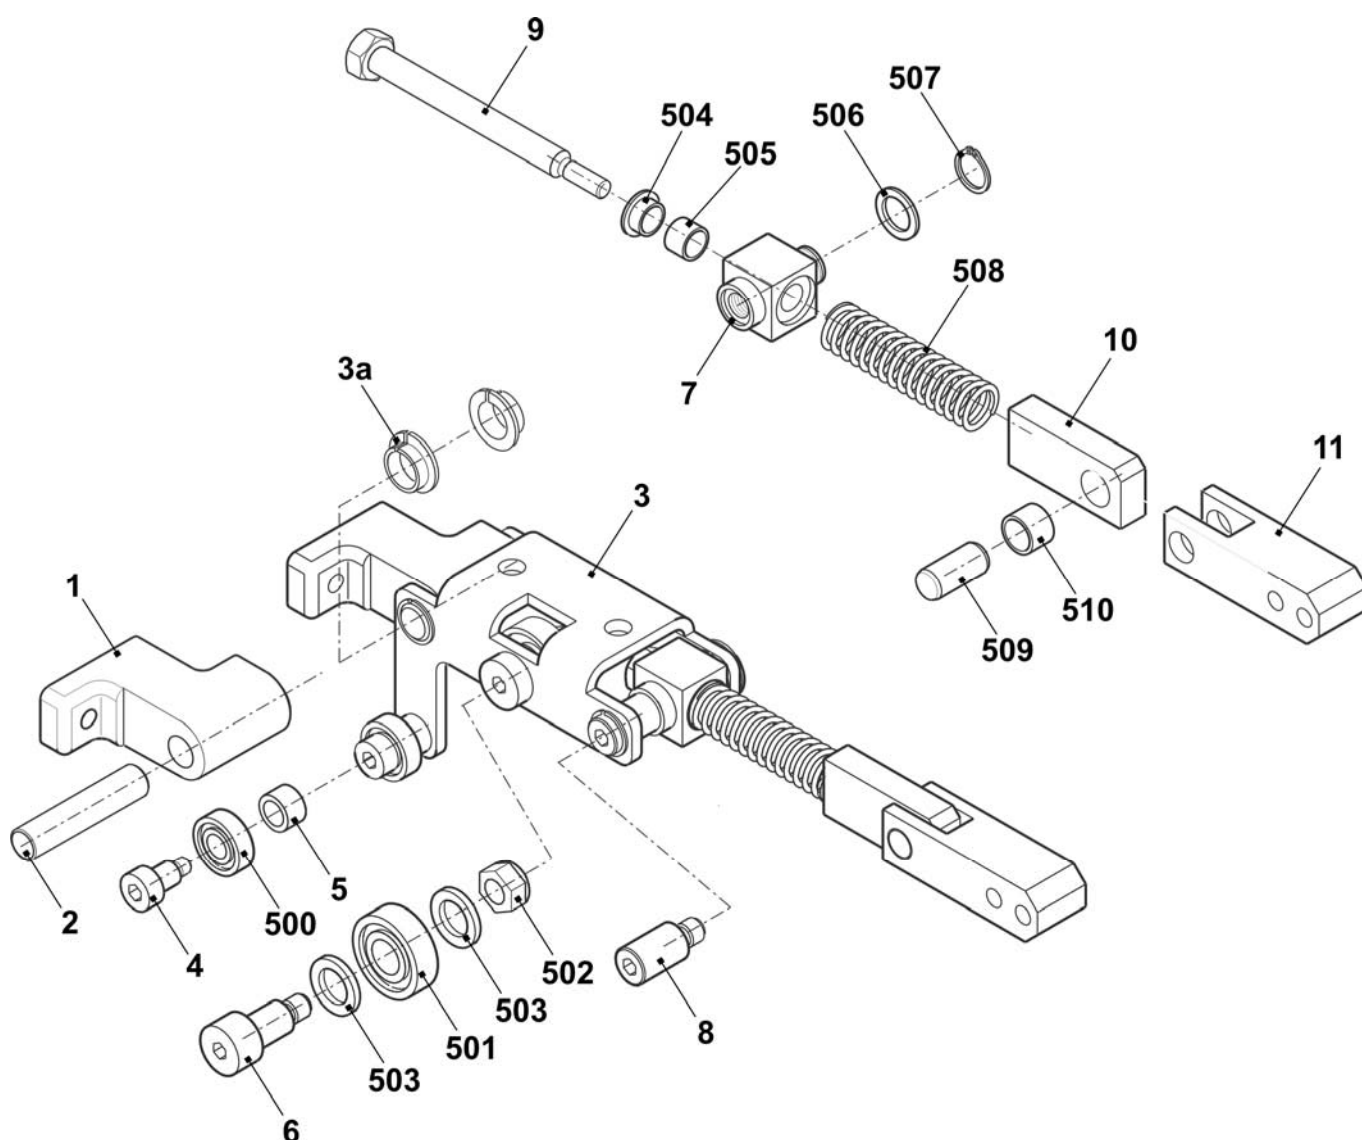


Left swivel holder

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Swivel holder on the left complete	239 189	11	Lever	238 739
1	Support	239 163	500	Deep groove ball bearing 619/8-2RS	023 728
2	Bearing pin	239 164	501	Deep groove ball bearing 6000-2Z	022 599
3	Bow on the left	239 184	502	Hexagon nut M8-8	022 843
3a	Clip bearing 11-MCM-12-04	023 639	503	Adjusting washer 10x16x2	023 600
4	Shoulder screw	239 133	504	Slide bearing GFM-081014-06	023 358
5	Spacer	239 134	505	Slide bearing GSM-0810-10	023 896
6	Shoulder screw	239 132	506	Shim ring 12x18x1	023 315
7	Swivel-mounted bearing	239 100	507	Locking ring 12x1	020 951
8	Bearing bolt	239 117	508	Compression spring 2.5x12.5x67.5	023 743
9	Spring mandrel on the inside	232 388	509	Dowel pin 10x20	023 616
10	Lever	238 370	510	Slide bearing GSM-1012-10	239 178

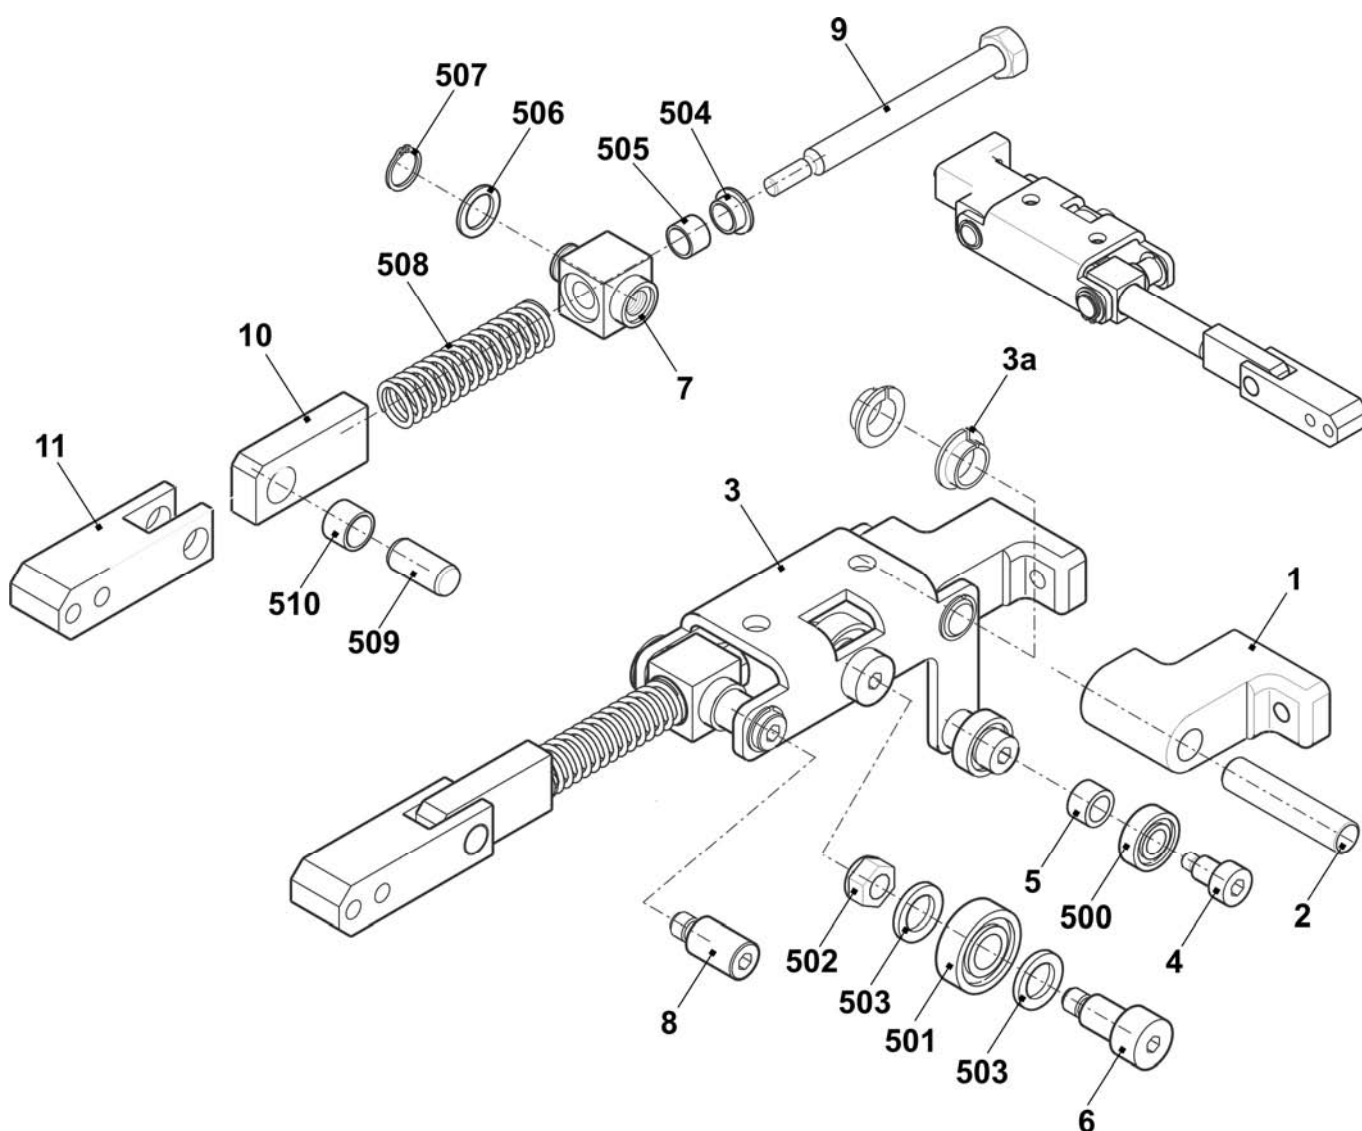

Swivel holder in the middle

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Swivel holder in the middle complete	239 188	10	Angle	238 778
1	Support	239 163	501	Deep groove ball bearing 6000-2Z	022 599
2	Bearing pin	239 164	502	Hexagon nut M8-8	022 843
3	Bow	238 974	503	Adjusting washer 10x16x2	023 600
3a	Clip bearing 11-MCM-12-04	023 639	504	Slide bearing GFM-081014-06	023 358
6	Shoulder screw	239 132	505	Slide bearing GSM-0810-10	023 896
7	Swivel-mounted bearing	239 100	506	Shim ring 12x18x1	023 315
8	Bearing bolt	239 117	507	Locking ring 12x1	020 951
9	Spring mandrel on the inside	232 388	508	Compression spring 2.5x12.5x67.5	023 743

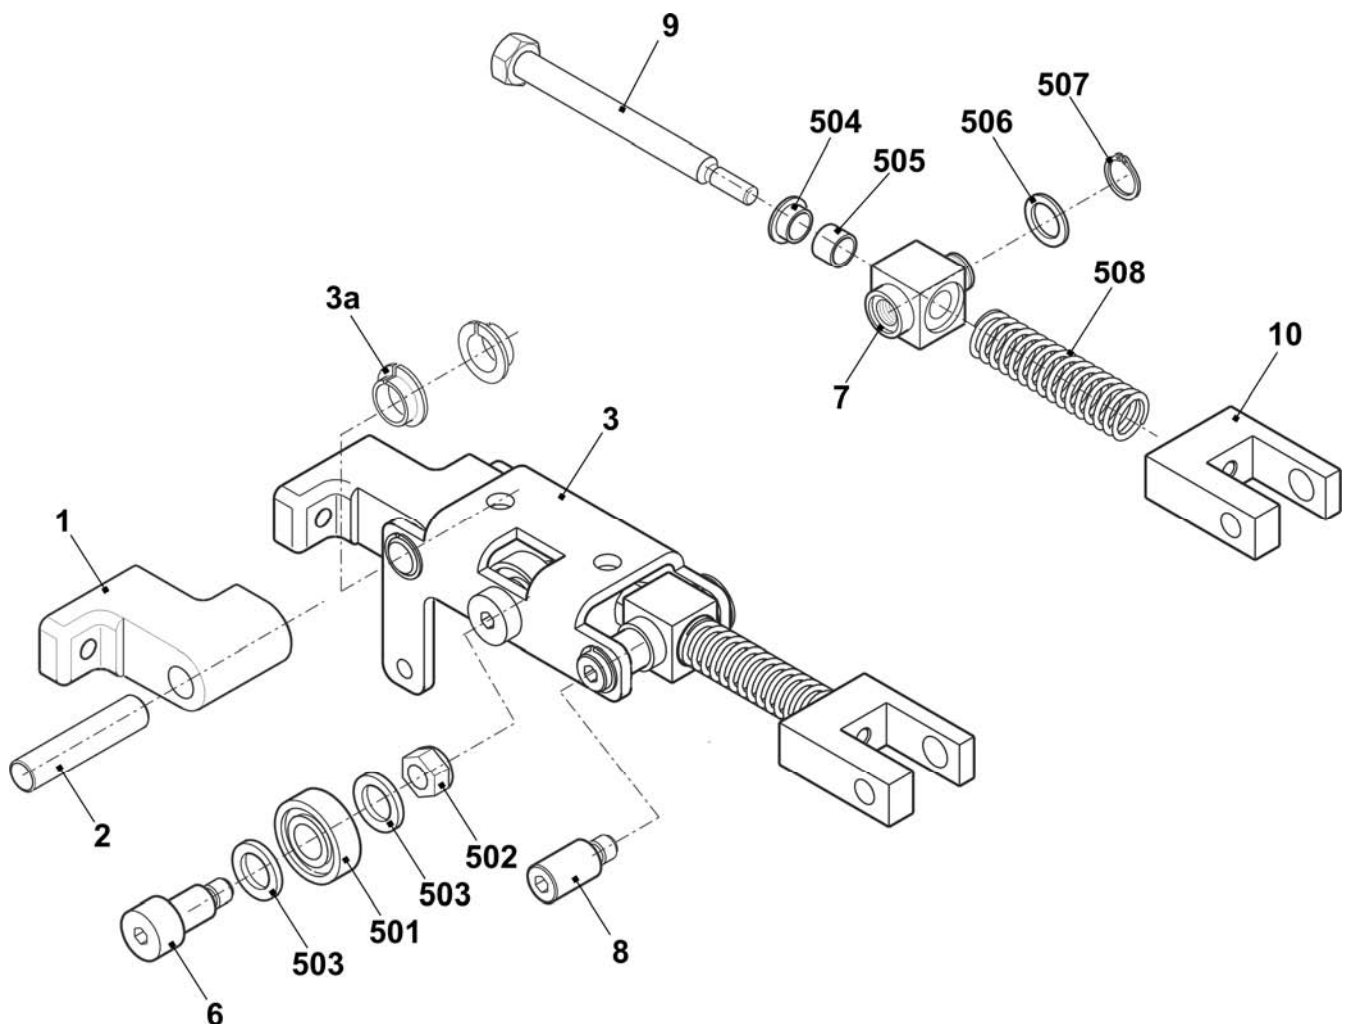


Auxiliary take-down




Auxiliary take-down

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Auxiliary take-down	237 087	11	Distance pipe	235 189
1	Motor auxiliary take-down complete	235 602	12	Distance pipe	235 192
2	Bearing on the left	236 894	13	Cover plate	237 127
3	Support complete	235 354	14	Roll	235 178
	3a Slide bearing FSM-1517-20	237 060	500	Cap screw M5x10	022 918
4	Bearing on the right	235 353	501	Countersunk screw M4x8	023 579
5	Contact lever complete	235 356	502	Cap screw 6x10-12.9	235 448
6	Take-down roller complete	237 128	503	Stop disc GTM-1524-015	235 447
7	Contact shaft	237 126	504	Disc 5	020 871
8	Lever	235 164	530	Dowel pin 6M6x10	023 268
9	Clamping lever	235 156	900	Cap screw M6x12	020 134
10	Eccentric	236 952			

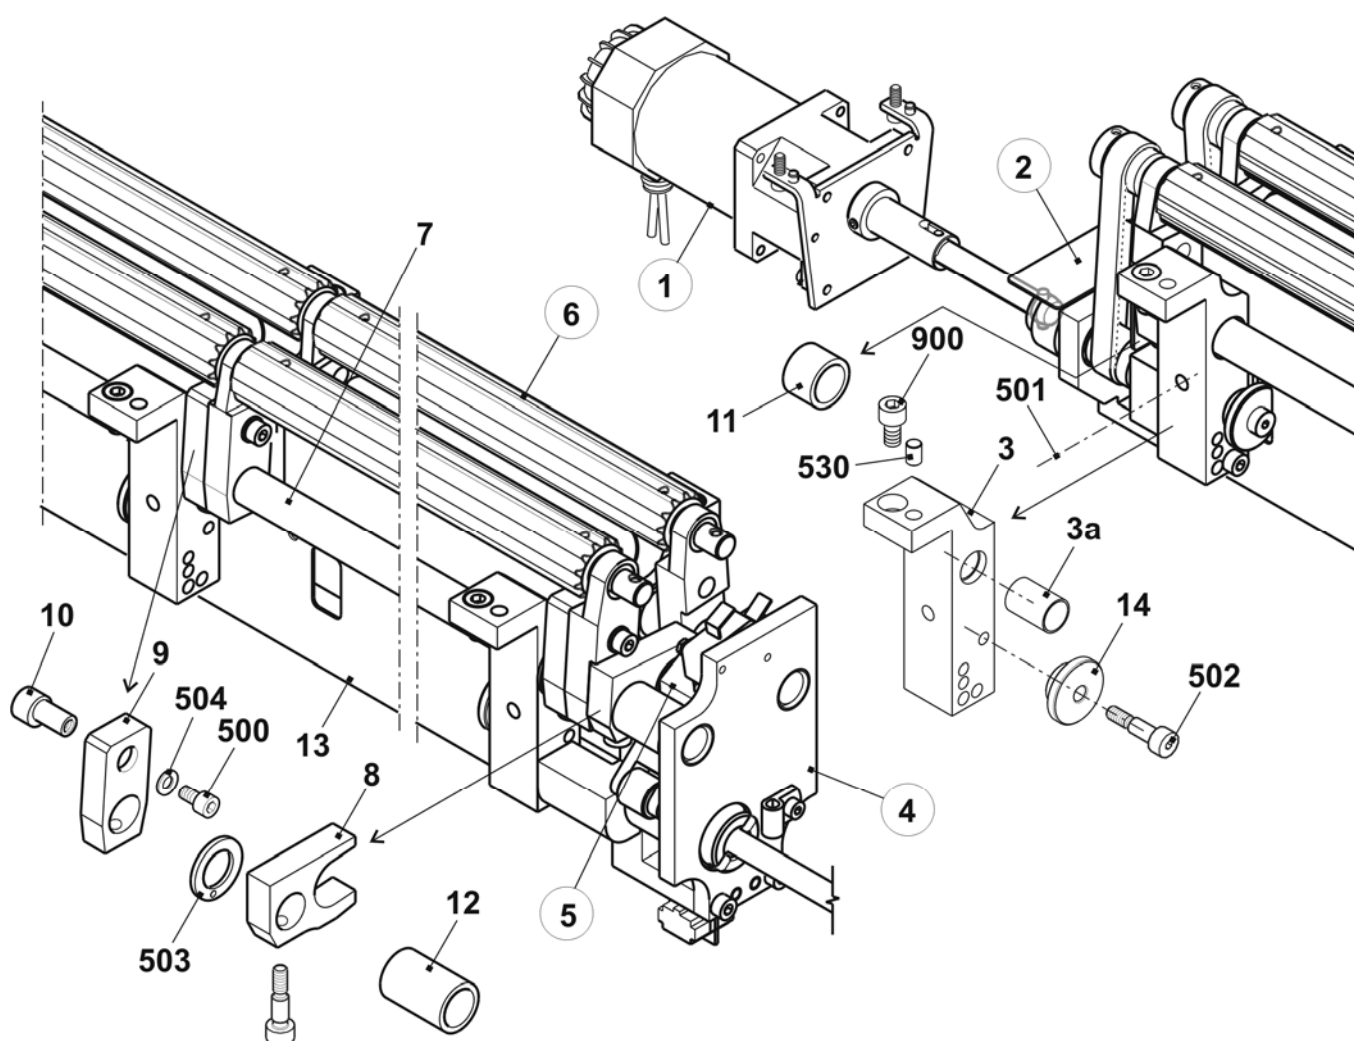


Motor

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Motor with 2 phases auxiliary take-down complete	235 602			
1	Motor 1.8NM 30MIN-1	234 805	501	Cap screw M6x16	020 135
2	Motor bracket	235 276	502	Compression spring 0.63x10.97x40	023 500
3	Drive sleeve	235 285	503	Adjusting washer 6x12x1	023 444
4	Shaft	235 300	504	Dowel pin 5x22-A-ST	023 716
500	Set screw M6x10	023 543	900	Cap screw M6x12	020 134

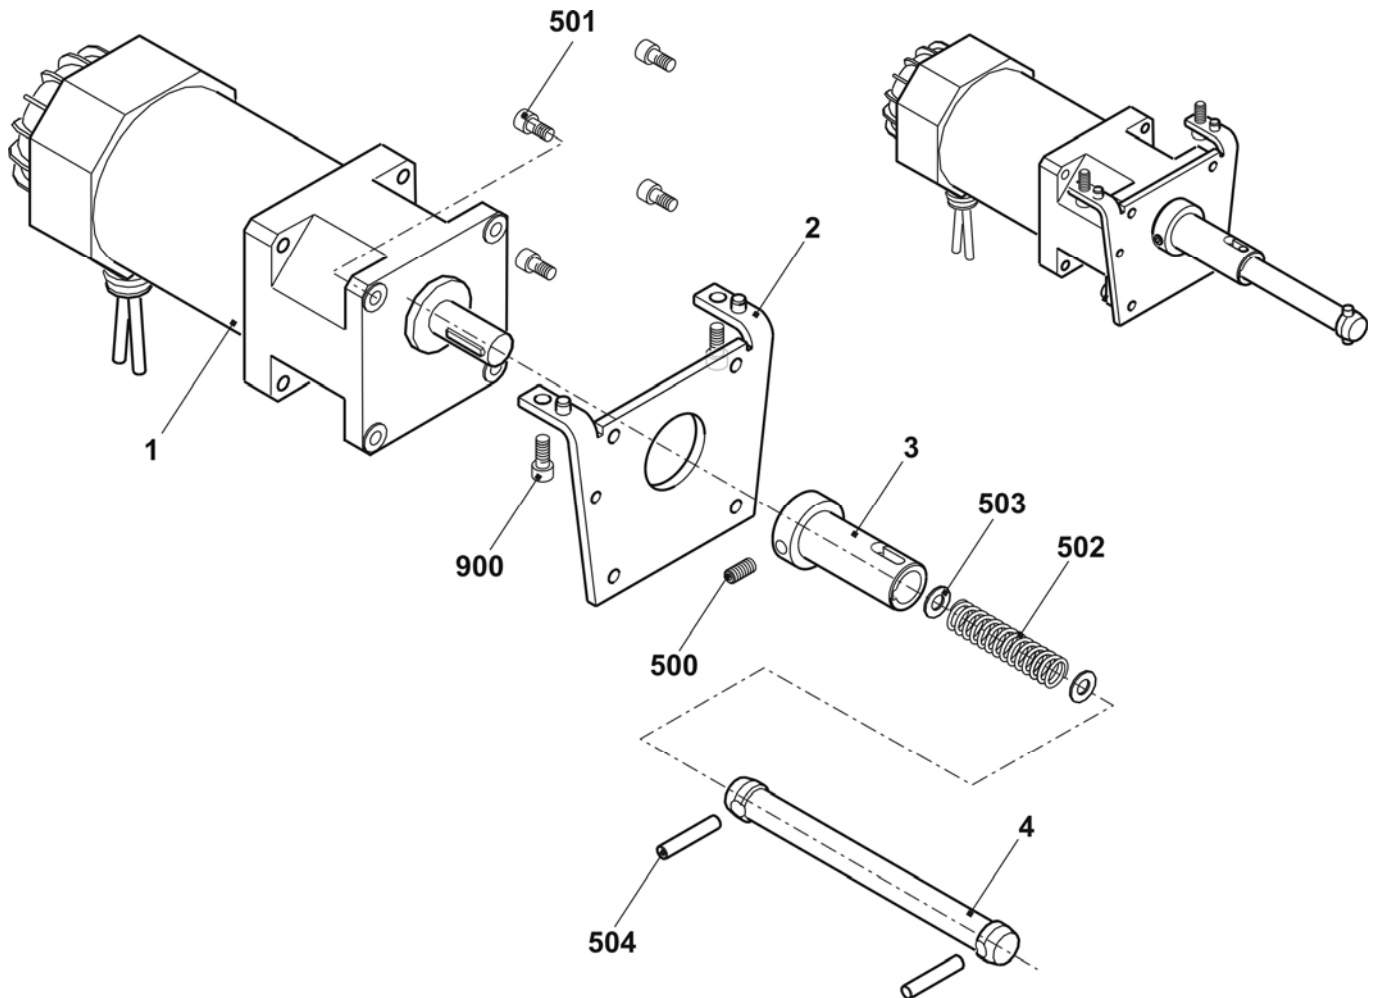


Left bearing of the auxiliary take-down

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Bearing on the left	236 894			
1	Drive bearing	237 422	9	Timing belt pulley	237 043
	500 Setting pin 5x12	021 988	10	Toothed belt HPS5M NG CLEAN	237 118
2	Cover plate	236 970	501	Deep groove ball bearing 61900-2RS1	023 714
3	Cover plate	237 037	502	Needle roller bearing 10x14x10	023 664
4	Bolt	236 964	503	Cap screw M4x8	022 501
5	Bolt	236 963	504	Countersunk screw M4x12	023 062
6	Gear wheel	236 914	505	Locking ring 10x1	020 950
7	Gear wheel	236 916	506	Spring dowel sleeve 3x18	237 059
8	Gear wheel	236 917	900	Cap screw M5x35	022 879

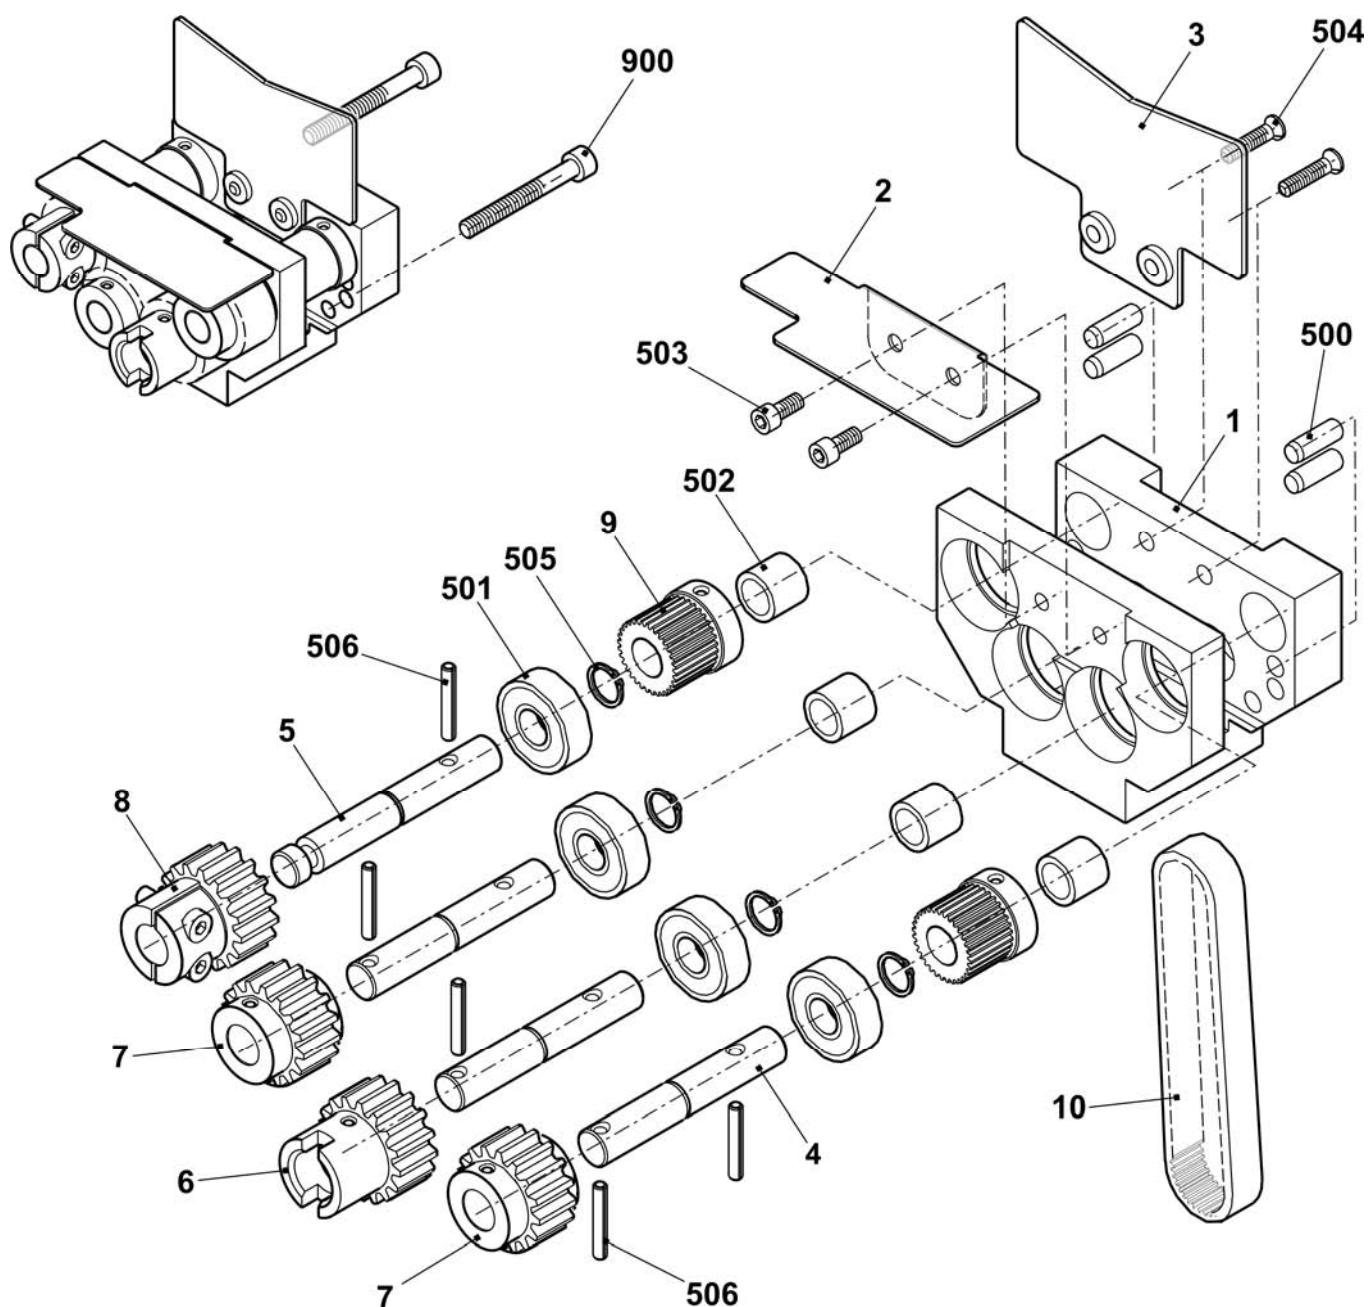


Right bearing of the auxiliary take-down

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Bearing on the right	235 353	502	Compression spring 1.6x6.4x27.1	023 288
1	Bearing on the right	237 520	503	Slide bearing GFM-2427-07	023 712
	501 Setting pin 5x12	021 988	504	Hexagon screw M3x16	237 058
2	Plate	235 168	505	Cap screw M4x8	022 501
3	Microswitch	026 259	506	Set screw M6x12	023 724
4	Cable clip N-3B 5 mm	210 729	507	Cap screw M5x16	022 726
5	Cable switch HIAB ST468	235 027	509	Slide bearing GFM-1517-09	235 342
6	Sheet metal for plug	236 068	510	Feather key A 4x4x20	235 349
7	Shaft	235 159	511	Countersunk screw M4x8	023 579
8	Eccentric	235 165	512	Washer 3	020 877
500	Slide bearing GFM-101216-09	023 356	900	Cap screw M5x35	022 879

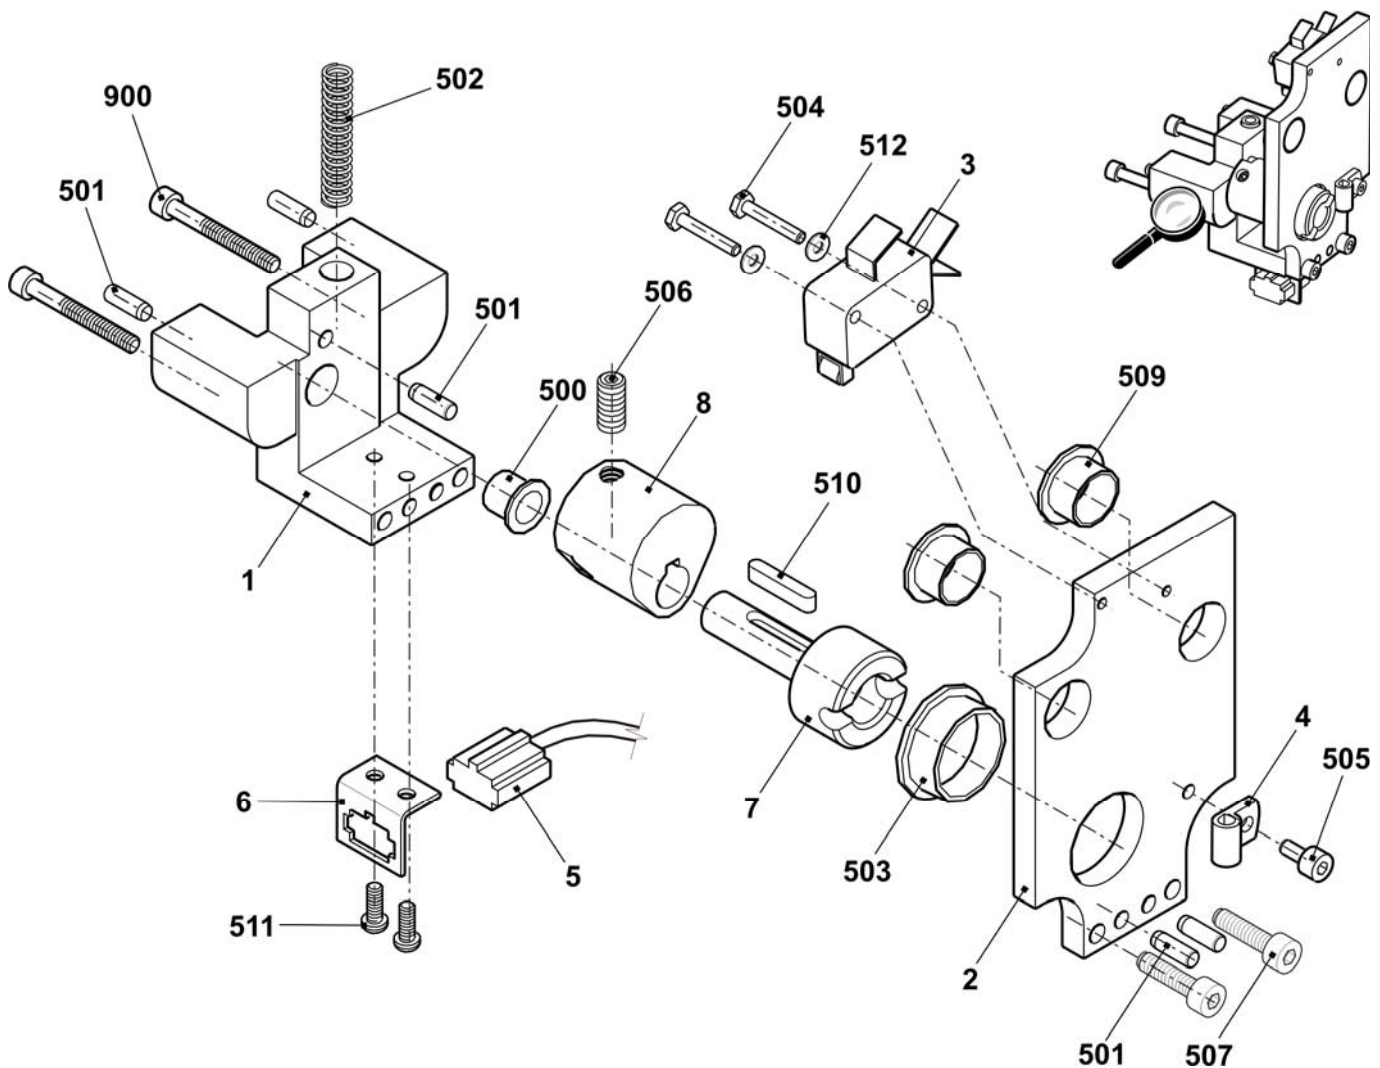


Contact lever

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Contact lever complete	235 356	501	Cap screw 10x16-12.9	023 748
1	Lever	235 172	502	Countersunk screw 1-M4x45	023 291
2	Tilting lever	235 173	503	Compression spring 1.6x6.4x27.1	023 288
3	Roller	235 176	504	Washer 4-200HV	020 870
4	Roll	235 171	505	Hexagon nut M4-8	023 046
500	Slide bearing GFM-10x1216-06	023 280	506	Dowel pin 5x22-A-ST	023 716

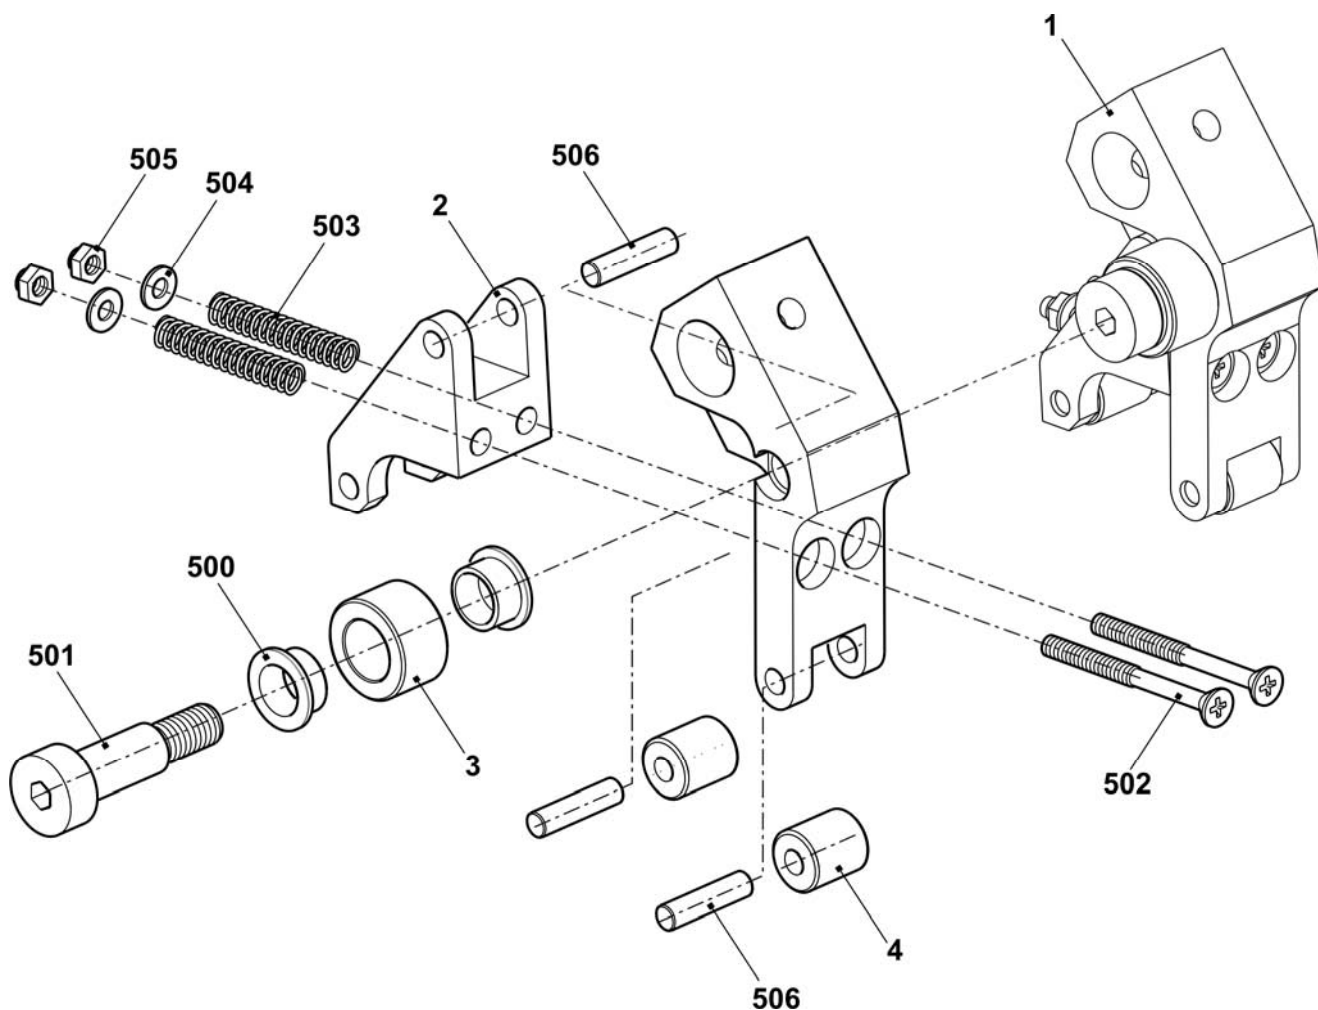


Take-down roller

Pos	Designation	Ident No	Pos	Designation		Ident No
Σ	Take-down roller complete	237 128		5a	Needle roller bearing 10x14x12	023 665
1	Take-down roller	237 125	6	Lever bearing in the middle complete		235 359
2	Timing belt pulley	237 043	500	Slide bearing GFM-101214-07		023 627
3	Bolt	236 973	501	Spring dowel sleeve 3x18		237 059
5	Lever bearing on the right/left complete	235 358				

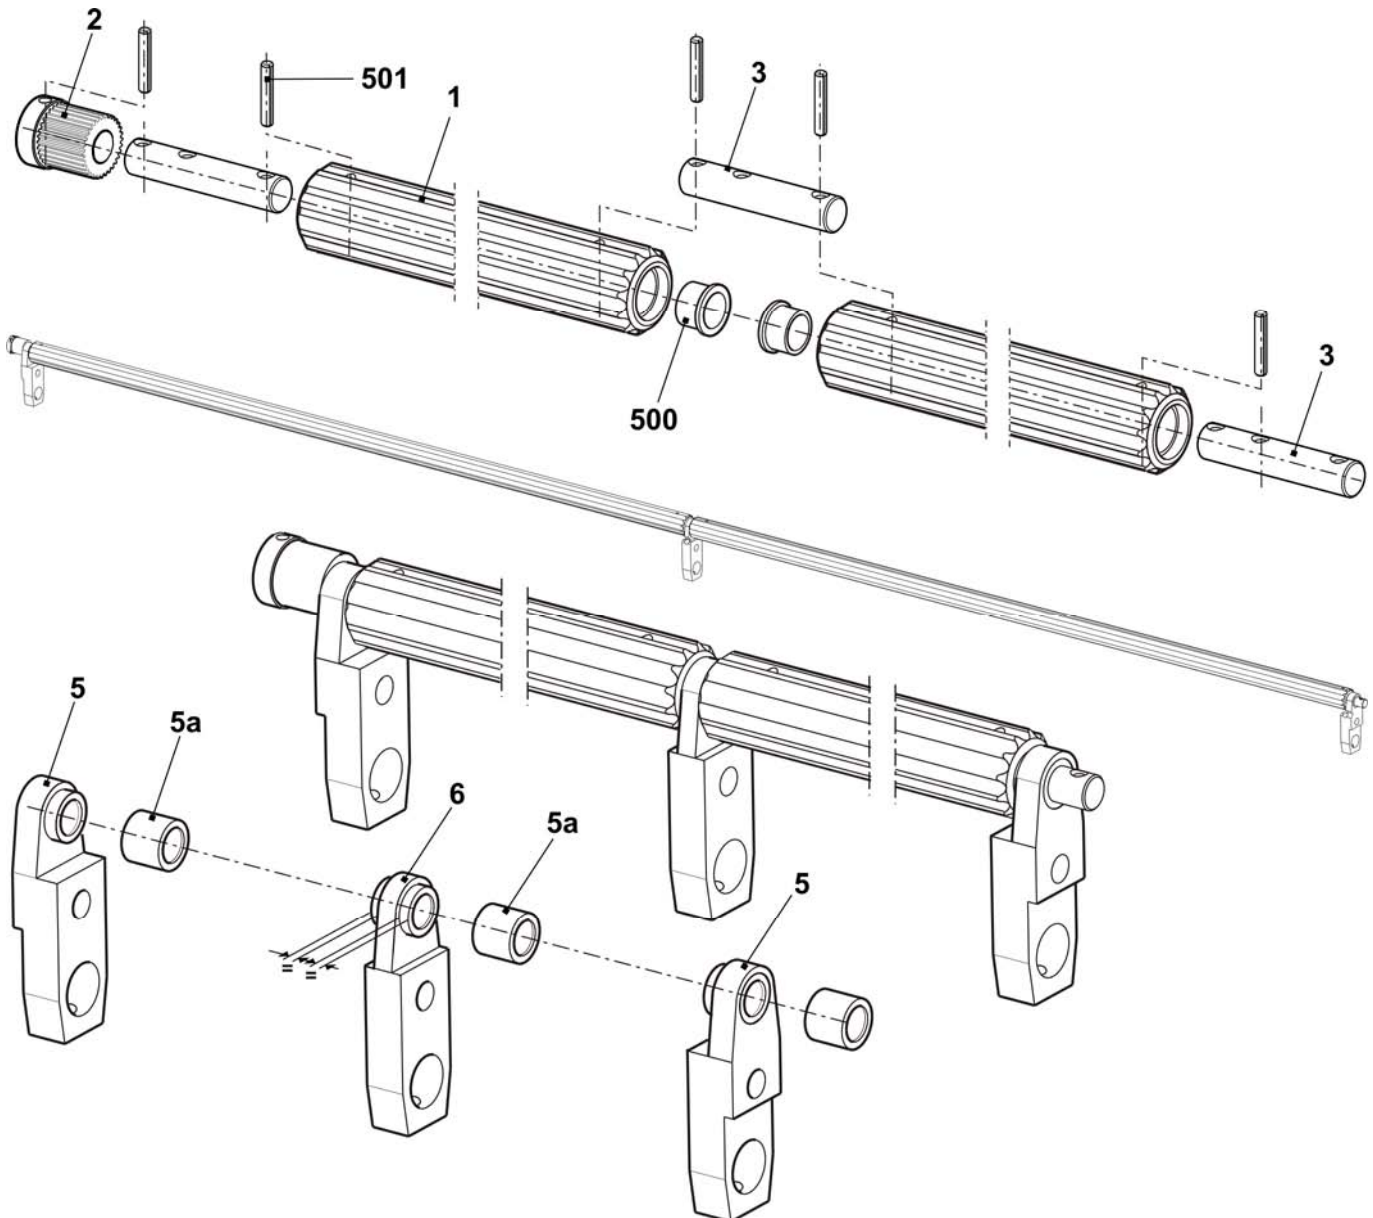


Comb take-down

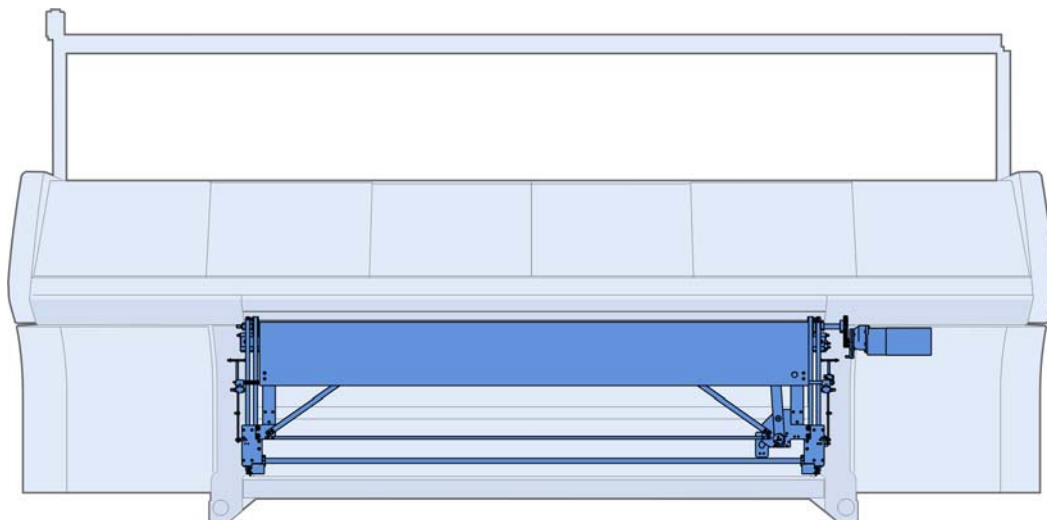


Comb take-down

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Comb take-down E2,5.2C	244 331			
3	Bolt	222 152	33	Swivel lever on the right	252 858
5	Toothed belt	240 065	34	Swivel lever on the left	252 859
6	Eccentric pin	222 320	35	Guide plate	252 830
8	Flange	207 695	36	Clamping plate	227 159
9	Shaft long	236 875	500	Cap screw M6x16	020 135
10	Protective plate	240 055	501	Countersunk screw M5x10	023 247
11	Bolt	207 689	505	Cap screw M8X20	020 141
12	Drive shaft comb complete	214 583	507	Cap screw M6X65	240 162
14	Timing belt pulley at the bottom complete	211 822	509	Hexagon screw M6X16	020 356
15	Timing belt pulley at the top complete	211 823	515	Hexagon nut	020 845
22	Proximity switch at the top complete	231 516	517	Washer	020 876
23	Proximity switch at the bottom complete	231 520	524	Locking ring 17x1	023 299
28	Comb guide on the left	240 110	525	Serrated lock washer	022 489
29	Comb guide on the right	240 109	530	Tension spring 15x1.5x70.94	251 614
31	Comb unit E2,5.2	244 329	532	Shim 0.2x12x27	023 735
32	Motor take-down + comb	214 279	534	Shim 0.5x12x27	023 736

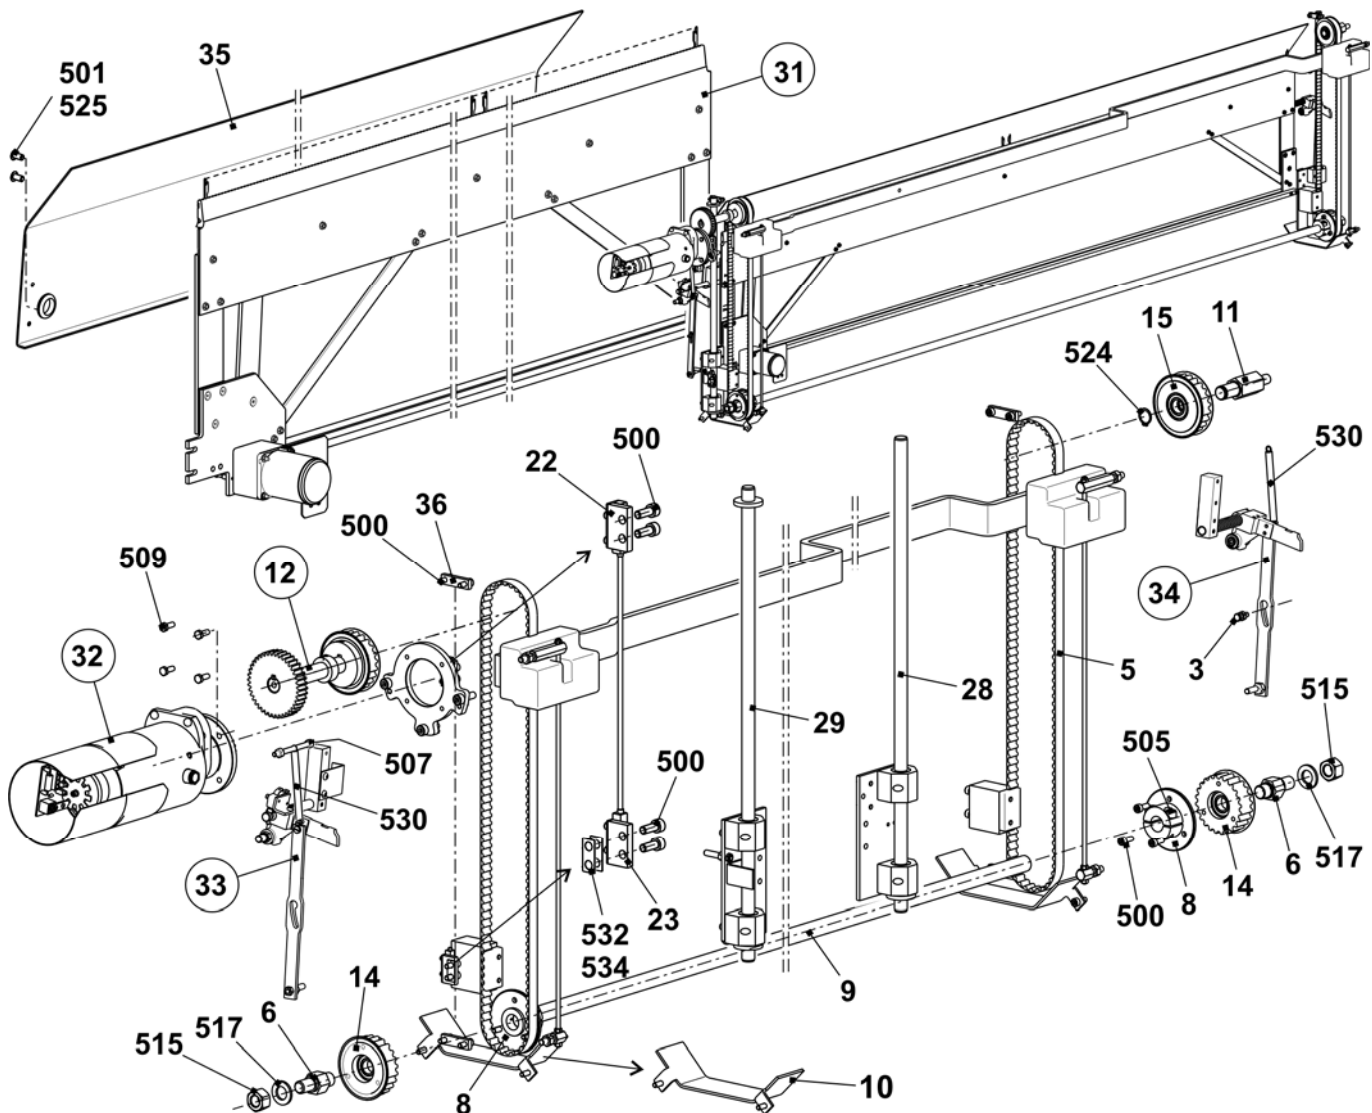


Drive shaft of comb

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Drive shaft of comb complete	214 583			
1	Shaft	213 969	500	Feather key A 6x6x25	023 017
2	Gear wheel z=40, m=2	213 744	502	Set screw M6x8	022 684
	Always order pos. 502 additionally		503	Set screw M6x12	023 898
3	Timing belt pulley at the top	206 394	504	Set collar	020 938
	Always order pos. 503 additionally				

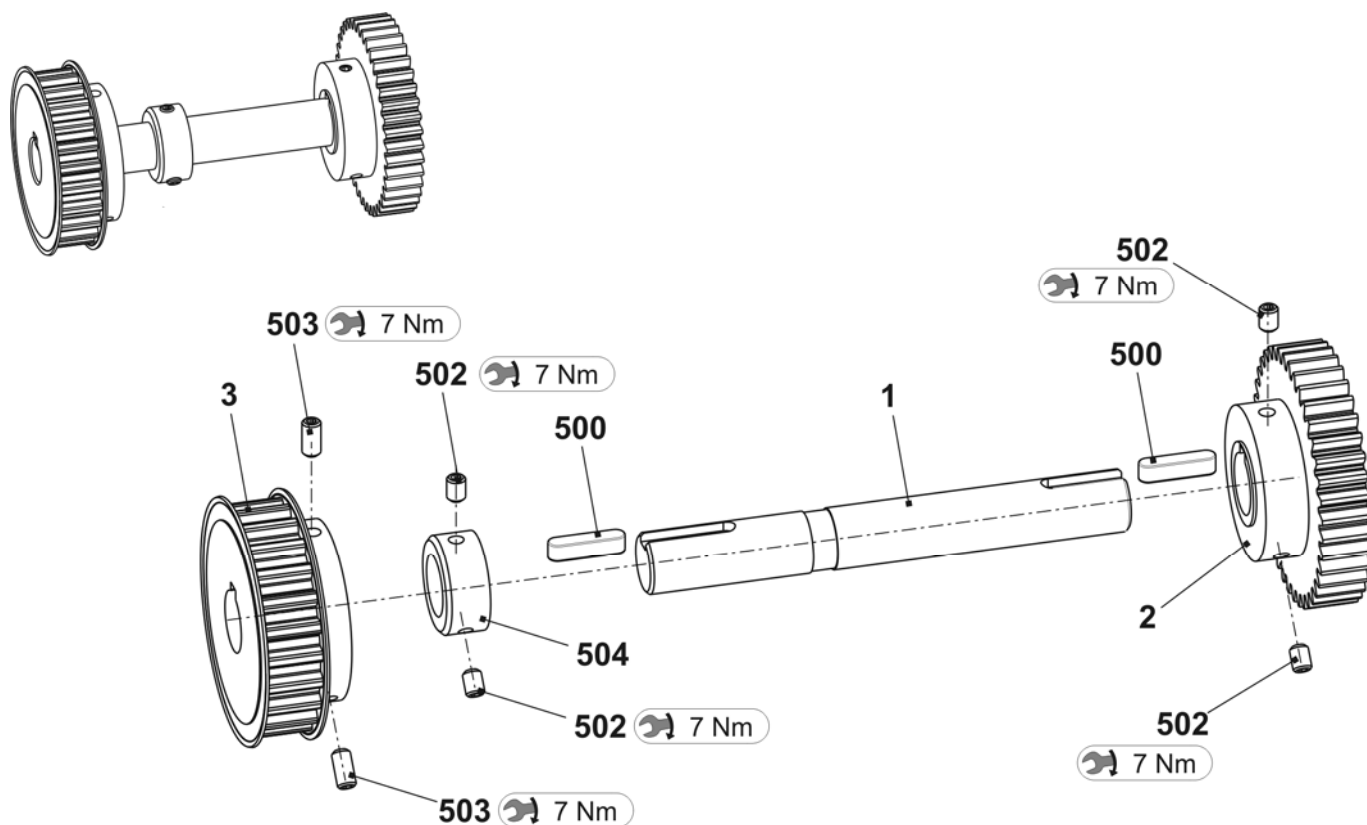


Comb unit

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Comb unit E2,5.2	244 329			
1	Hook bed E5	237 468	11	Switch lever complete	240 060
2	Closer E3-8	230 105	12	Intermediate plate	218 742
3	Body E3-8	230 093	13	Stabilizer	237 056
4	Cover rail	237 065	500	Cap screw M4x50	023 102
5	Hook slider E5	237 463	502	Countersunk head screw M5x12	023 340
6	Strut	218 740	504	Hexagon nut M4-8	023 046
7	Collar bolt complete	211 036	505	Hexagon nut M5-04	020 854
8	Cross slider	237 069	508	Washer 5-200	020 871
9	Cover rail	237 074	510	Cap screw M4x35	023 550
10	Plunger	205 678	511	Circlip	022 774

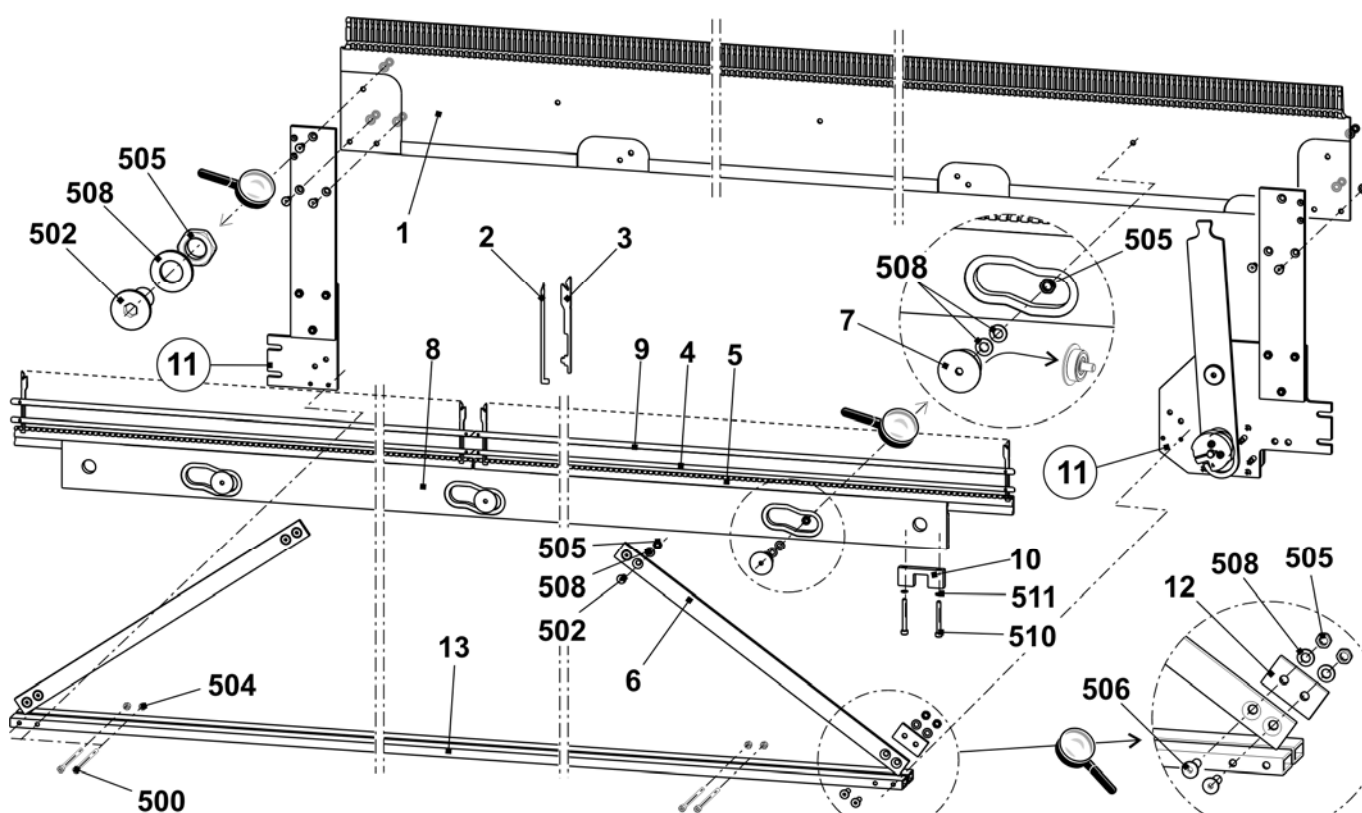


Switch lever comb take-down

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Switch lever complete	240 060			
1	Screwing plate on the right	240 058	500	Cap screw M3x25	023 093
2	Screwing plate on the left	240 059	501	Cap screw M4x20	023 171
3	Lever	215 228	502	Cap screw M4x16	023 123
4	Bearing bolt	215 675	504	Countersunk screw M6x12	023 435
5	Eccentric	205 681	505	Countersunk screw M5x16	023 417
6	Tension lifter	215 287	506	Shim ring 16x22x2	023 449
7	Motor comb hook 515	213 872	507	Adjusting washer 10x16x1	023 260
10	Gear 2GN50K	213 986	510	Hexagon nut M5	020 854
13	Intermediate plate	213 980	511	Collar bearing 10x16x22	022 841
14	Retaining plate	218 977	515	Spacer	210 488

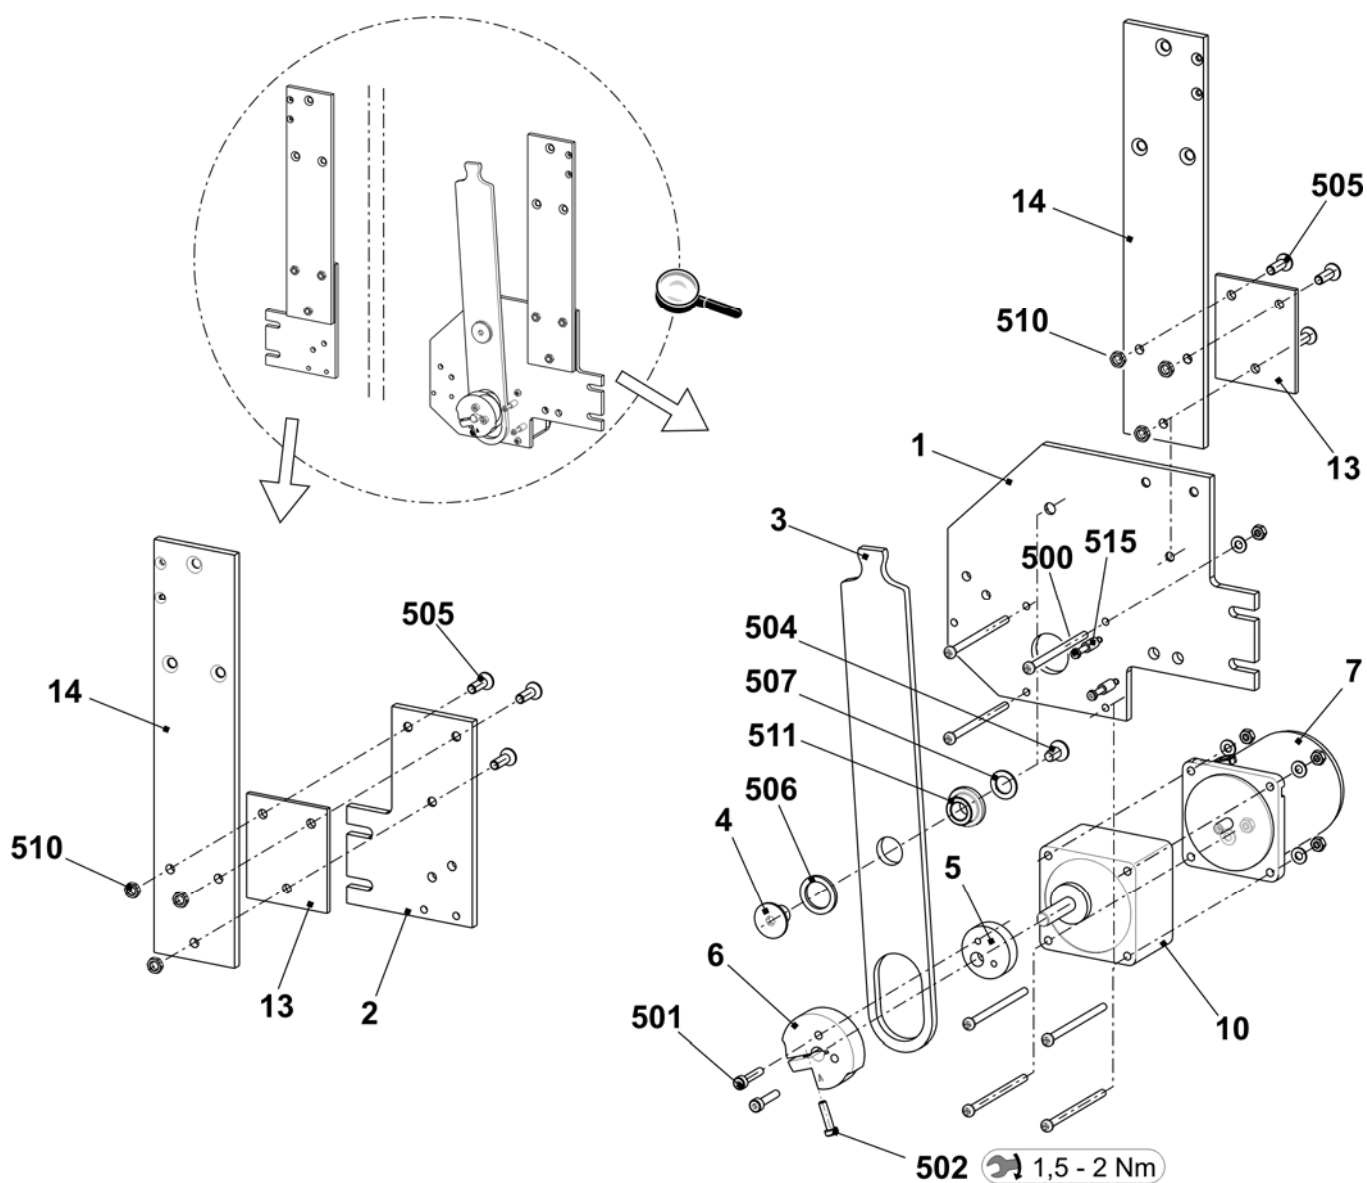


Swivel lever comb take-down

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ L	Swivel lever on the left	252 859	Σ R	Swivel lever on the right	252 858
1	Support	252 780	1	Support	252 780
2	Shaft	223 994	2	Shaft	238 339
4	Plunger	251 099	3	Microswitch	026 259
5	Swivel lever	239 248	4	Plunger	251 099
6	Bolt	214 053	5	Swivel lever	239 248
7	Eccentric bolt	243 225	6	Bolt	214 053
500	Compression spring 1.4x13.6x93	023 572	7	Angle	224 009
501	Spring dowel sleeve ISO8752-5x20	020 794	8	Angle	238 304
502	Dowel pin 5x22	023 716	9	Eccentric bolt	243 225
504	Shoulder screw M5x29x35	251 618	500	Countersunk screw M5x10	023 247
505	Shoulder screw M5x5.8x6.2	023 365	501	Spring dowel sleeve 5x20	020 794
507	Washer 10-200	020 884	502	Dowel pin 5x22	023 716
508	Locking ring	020 950	503	Spring dowel sleeve 5x12	020 793
509	Shoulder screw M5x12x18	020 539	504	Shoulder screw M5x29x35	251 618
511	Hexagon nut M6-6	022 899	505	Shoulder screw M5x5.8x6.2	023 365
			506	Cap screw M4x8	022 501
			507	Washer 10	020 884
			508	Locking ring 10x1	020 950
			509	Shoulder screw M5x12x18	020 539
			510	Shoulder screw M3x16	022 583
			511	Washer 3	020 877
			513	Hexagon nut M6-6	022 899

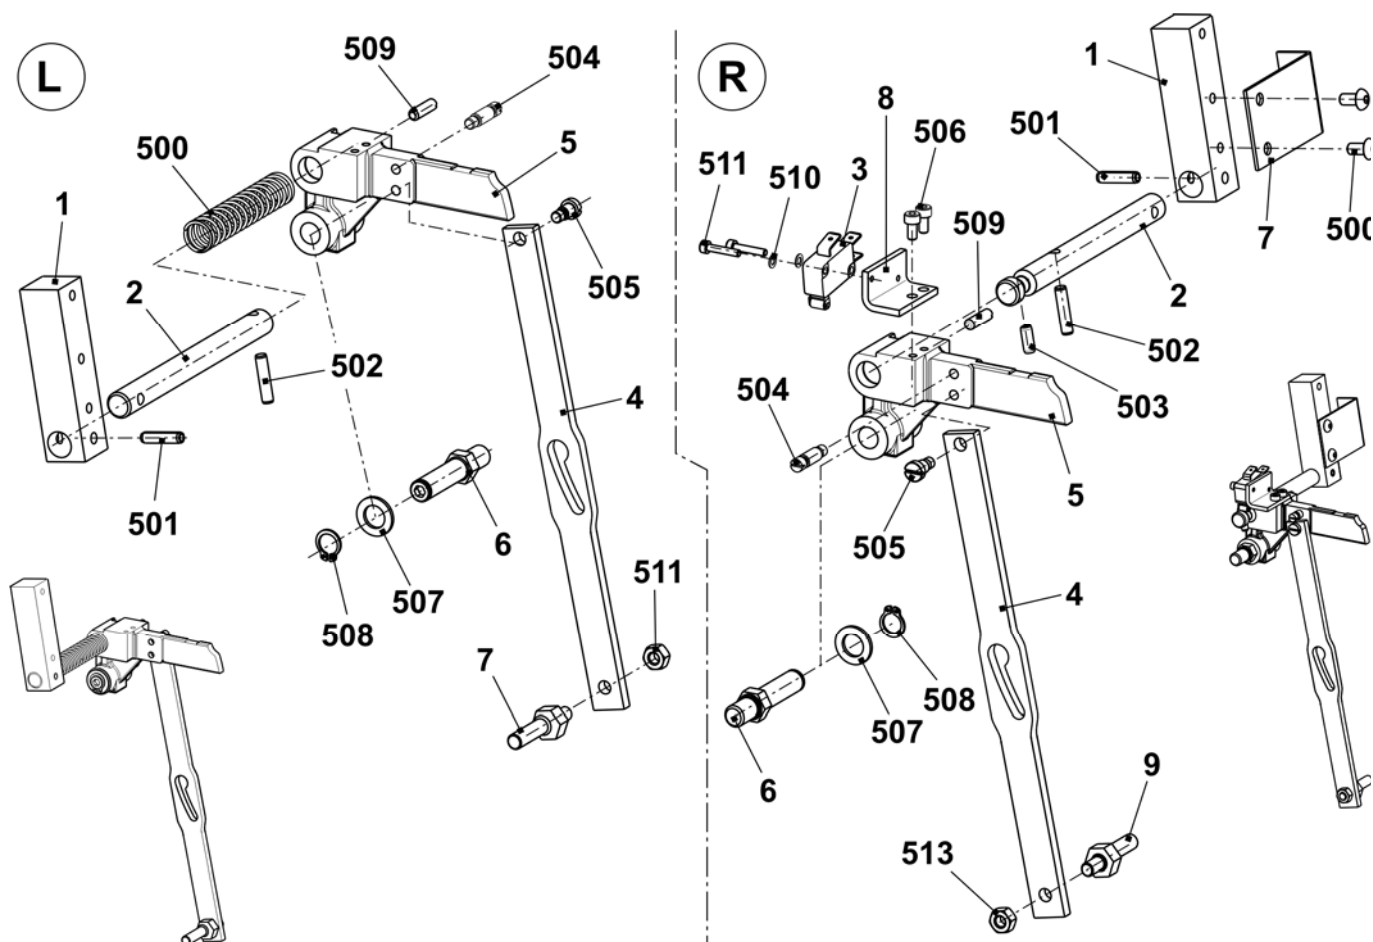


Yarn delivery device

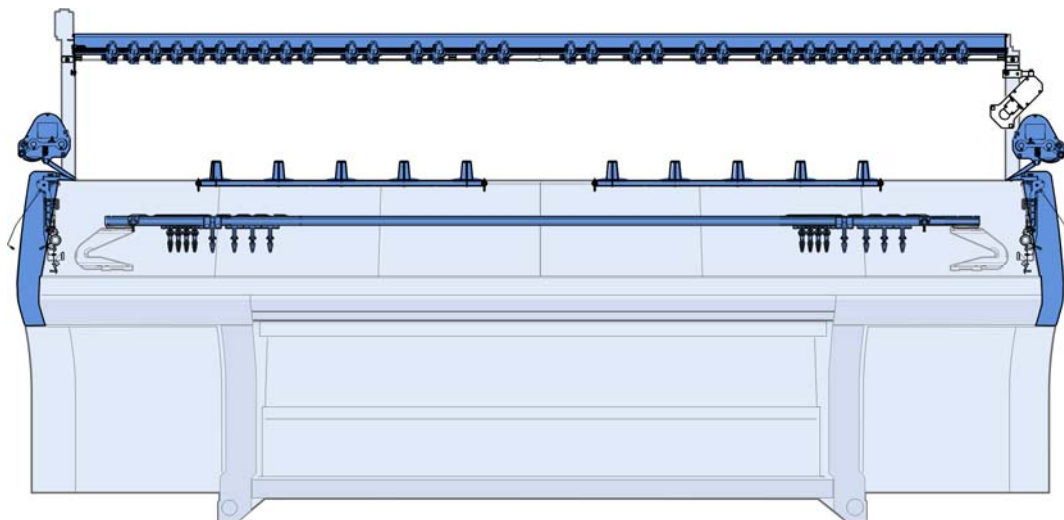


Yarn guide system with 32 FKE

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Yarn guide system 32 FKE 84"	242 991	13	Support on the left	243 602
1	Support	243 112	14	Support on the right	243 603
2	Yarn control device (FKE)	237 124	500	Serrated lock washer	023 388
3	Connection cable FKE-3 84"	240 349	501	Self-locking screw M6x12	023 415
4	Yarn guide bar	236 932	502	Screw M6x20	023 721
5	Support on the right	243 601	503	Ribbed safety nut M6-10	023 414
6	Support on the left	243 600	505	Washer 6	022 431
7	Support	239 295	506	Countersunk screw M8x16	023 113
8	Yarn guide bracket complete	241 581	507	Square nut M8	023 269
9	Sliding block	228 851			

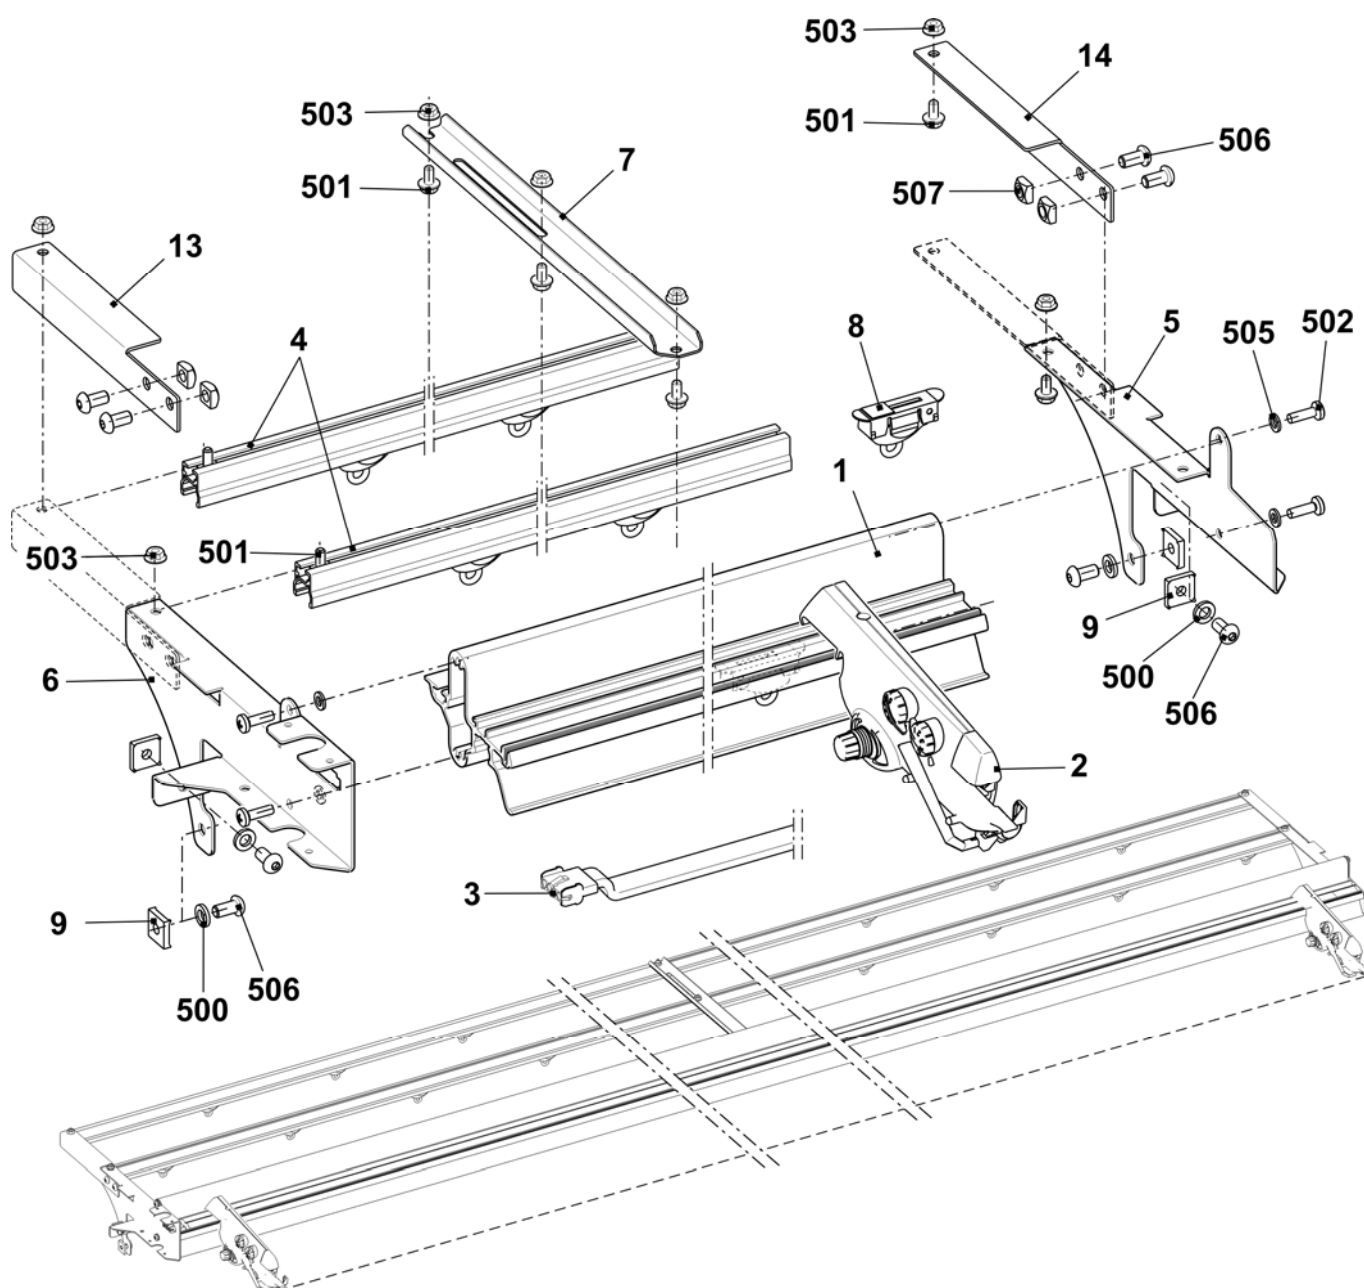


Left yarn guide

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Safety cover on the left complete E3 - E5	241 271	13	Yarn brake not adjustable	244 356
5	Yarn brake complete	244 347	14	Clamping bow	244 409
6	Shaft	241 318	15	Ground cable	244 404
7	Yarn tensioner on the left complete E3 - E5	241 363	501	Ceramic eyelet	240 640
8	Cover	240 783	502	Compression spring 0.90x5.40x13.60	241 360
9	Wire bow on the left	241 370	504	Washer	022 537
10	Yarn deflector	242 011	510	Screw KB 60x20	237 682
11	Connection cable yarn tensioner OKC	240 808	512	Flat connector 2x45° M6	243 117

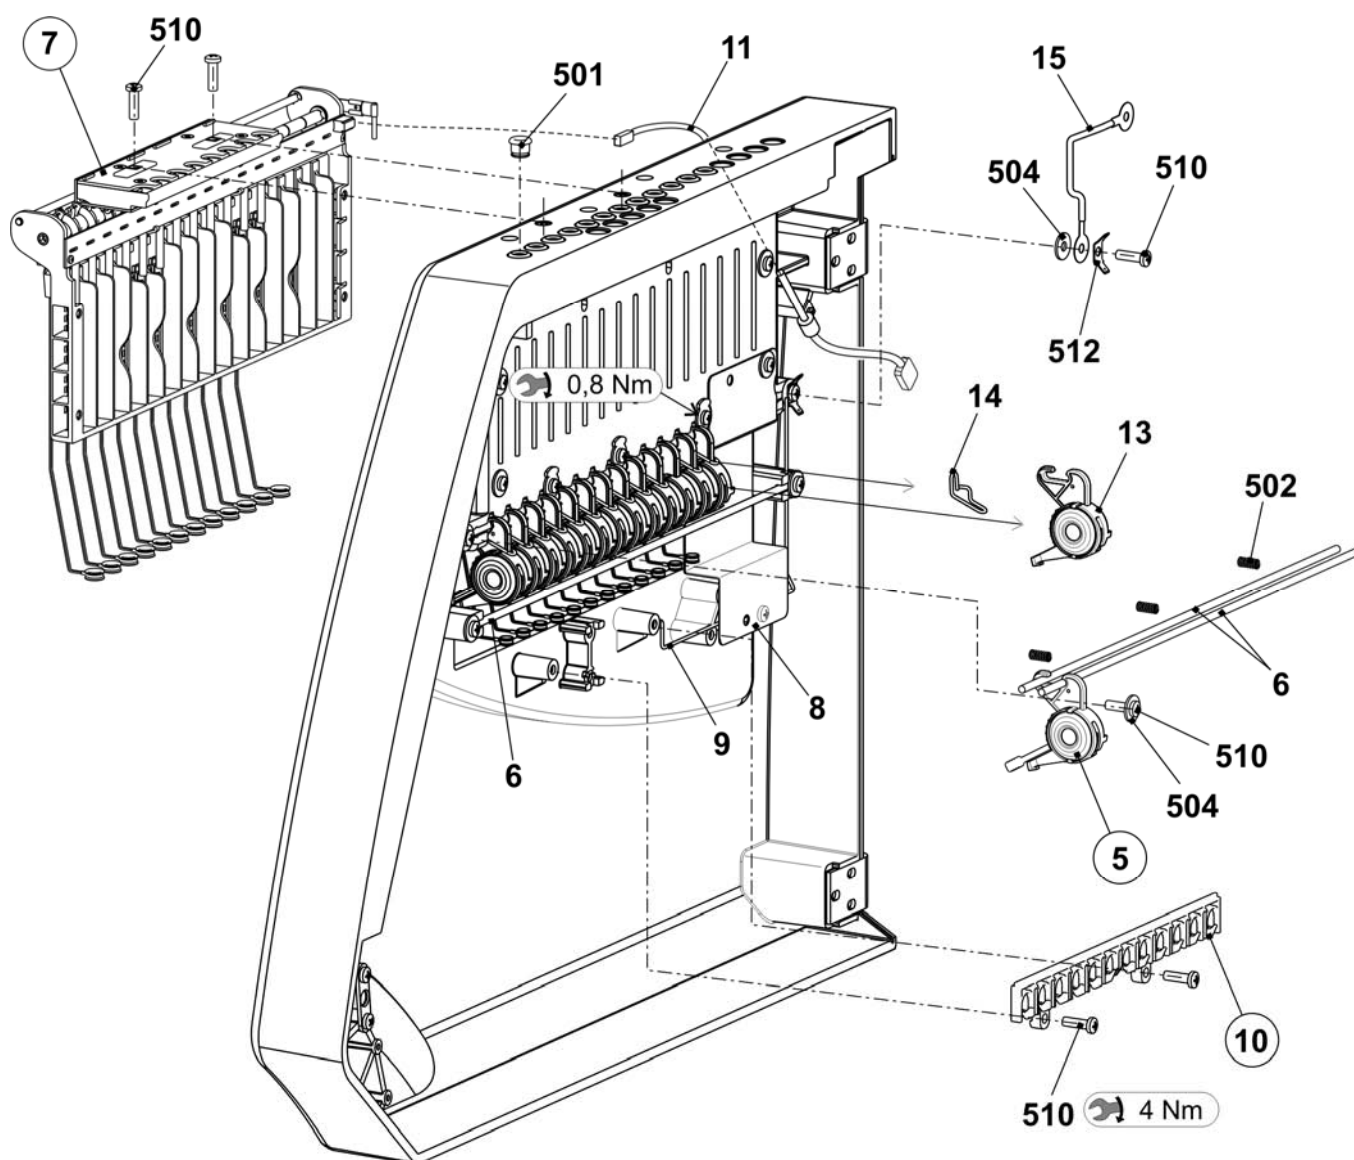


Left yarn tensioner

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Yarn tensioner on the left complete E3 - E5	241 363			
1	Card yarn tensioner 16-fold on the left	241 345	8	Grounding sheet metal of tension axle	243 121
2	Tension axle on the left complete E3 - E8	241 366	9	Ground cable yarn tensioner OKC	243 105
3	Housing	241 367	500	Screw KB 30x8	236 228
4	Slider	241 694	501	Circlip	021 022
5	Stop point	241 368	502	Tension spring 5.05x0.55x53 (E3-E5)	023 502
6	Cover	242 268	503	Circlip	021 020
7	Spacer	242 048	504	Countersunk screw M4x10	241 914

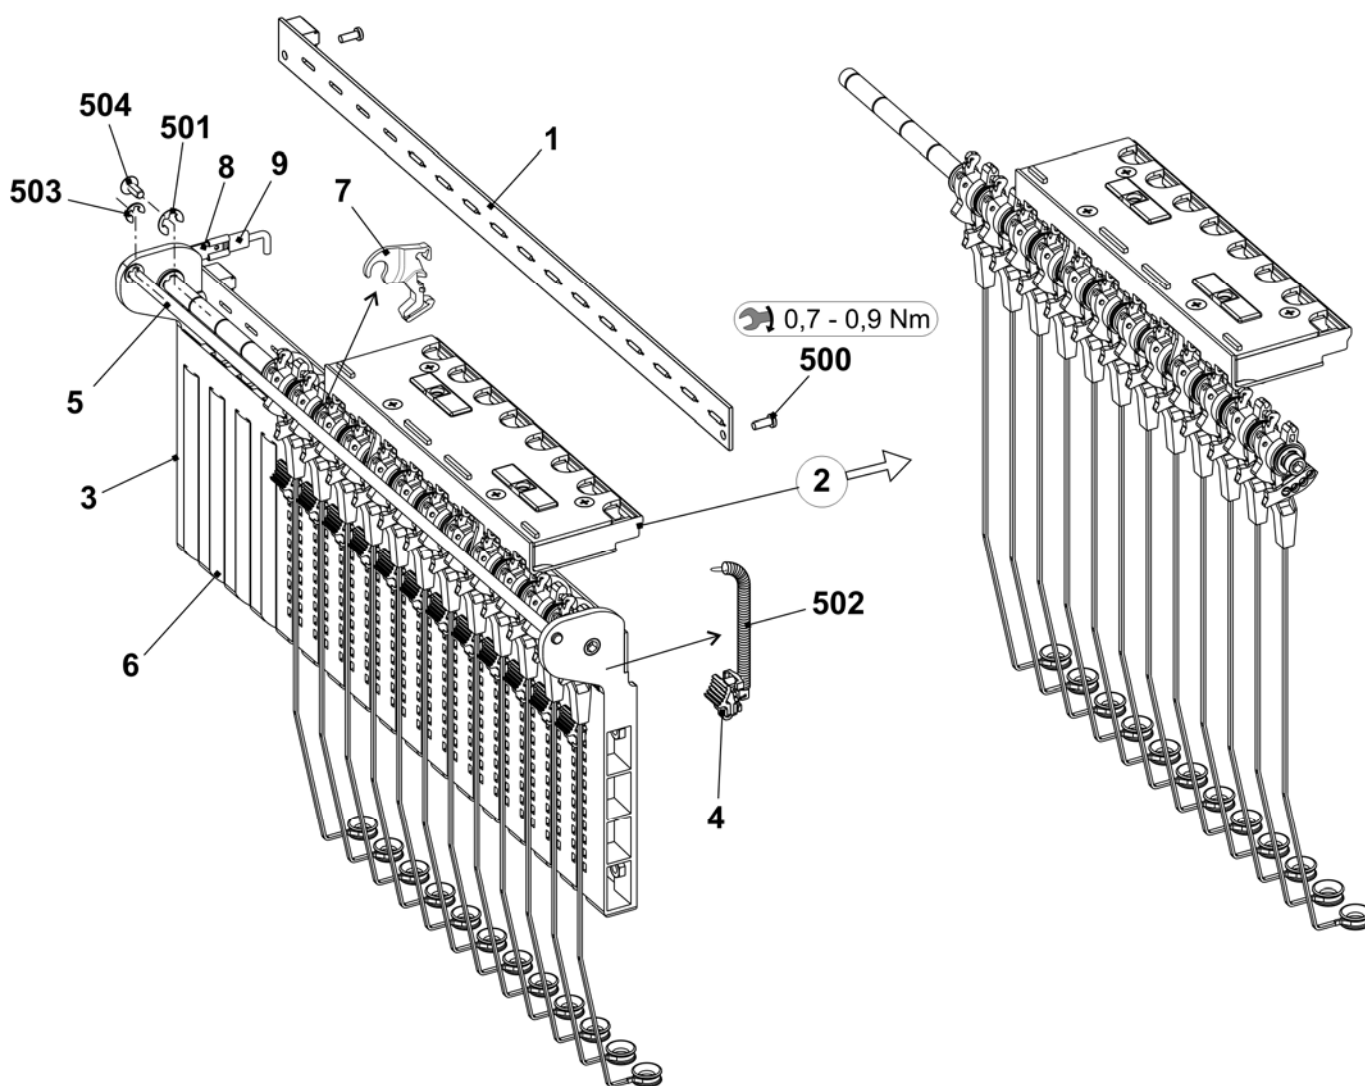



Left tension axle

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Tension axle on the left co. E3 – E8	241 366	5	Thread clamp AKF	238 695
1	Axle	243 107	51	Housing AKF	238 689
2	Tension arm pre-assembled E3 - E8	242 770	52	Cover AKF	237 926
6	Wire bow	238 694	53	Sheet metal at the bottom (housing AKF)	240 719
500	Shim ring 8x14x0.5	023 501	54	Lever AKF	238 692
501	Circlip	021 022	55	Thrust piece AKF	238 690
502	Grooved pin 2x6	243 172	56	Slider AKF	238 691
			57	Wire bow	238 694
			58	Wire	237 940
			551	Screw KB 35x12	237 681
			552	Screw KB 40x8	236 227
			553	Compression spring 0.30x4.50x18.50	241 437
			554	Grooved pin 2x6	243 172

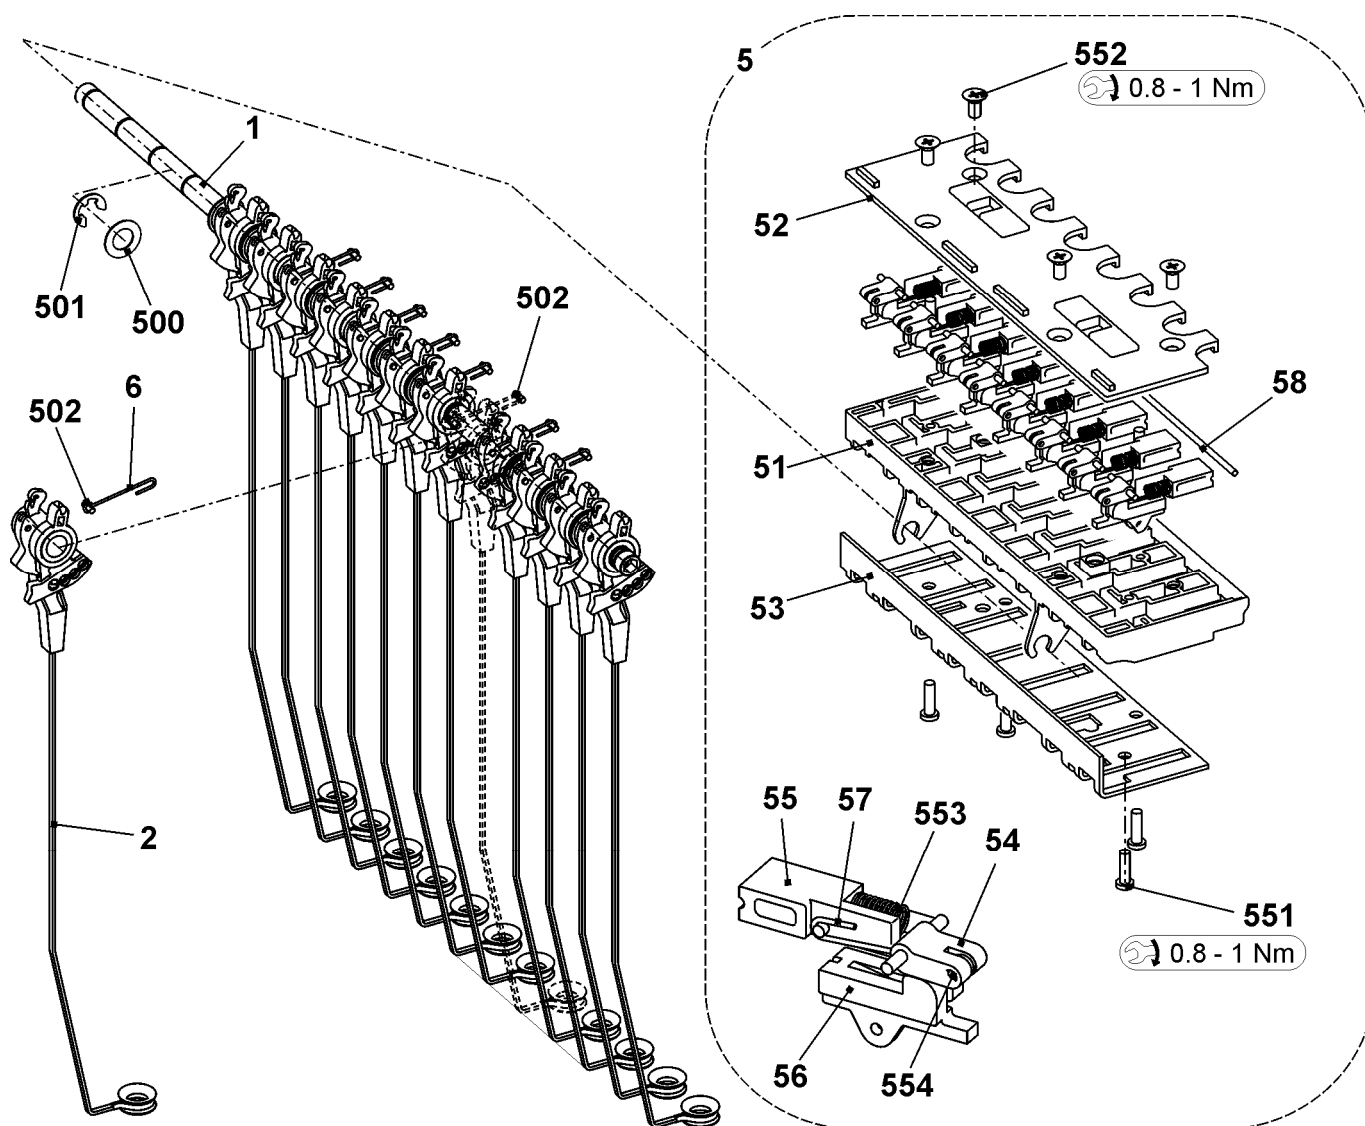


Yarn brake and yarn deflector

Pos	Designation	Ident No	Pos	Designation	Ident No
A	Yarn brake complete	244 347	B	Yarn deflector	242 011
1	Support	240 607	1	Support yarn deflector	242 009
2	Slider	240 606	2	Ceramic eyelet open	240 733
3	Brake disk	244 355			
4	Ceramic eyelet open	243 778			
500	Compression spring 0.65x20.15x14.80	241 361			
501	O-ring 11x2	241 434			

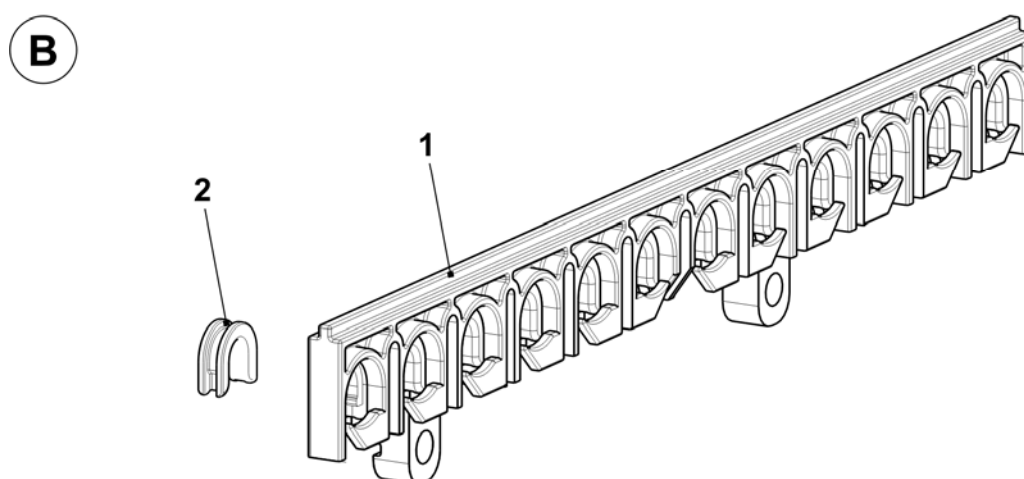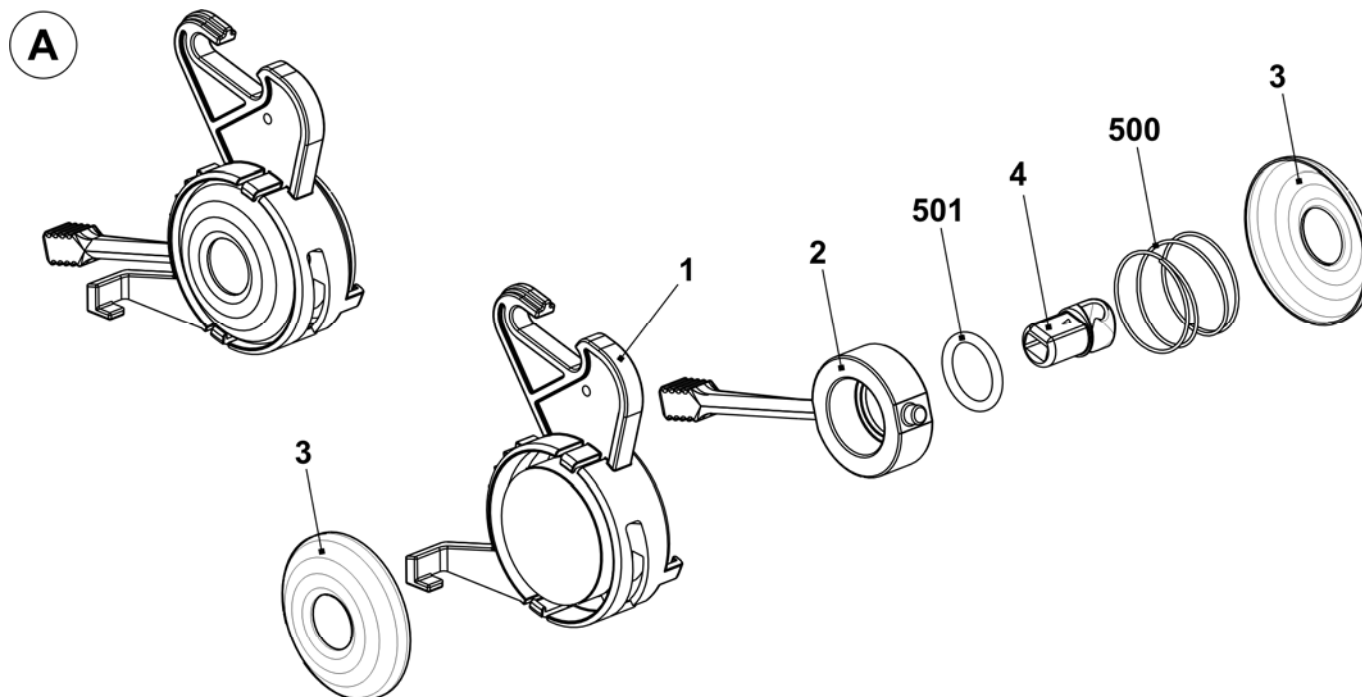


Right yarn guide

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Safety cover on the right co. E3 - E5	241 274	13	Yarn brake not adjustable	244 356
5	Yarn brake complete	244 347	14	Clamping bow	244 409
6	Shaft	241 318	15	Ground cable	244 404
7	Yarn tensioner on the right complete E3 - E5	241 382	501	Ceramic eyelet	240 640
8	Cover	240 783	502	Compression spring 0.90x5.40x13.60	241 360
9	Wire bow on the right	241 369	504	Washer	022 537
10	Yarn deflector	242 011	510	Screw KB 60x20	237 682
11	Connection cable yarn tensioner OKC	240 808	512	Flat connector 2x45° M6	243 117

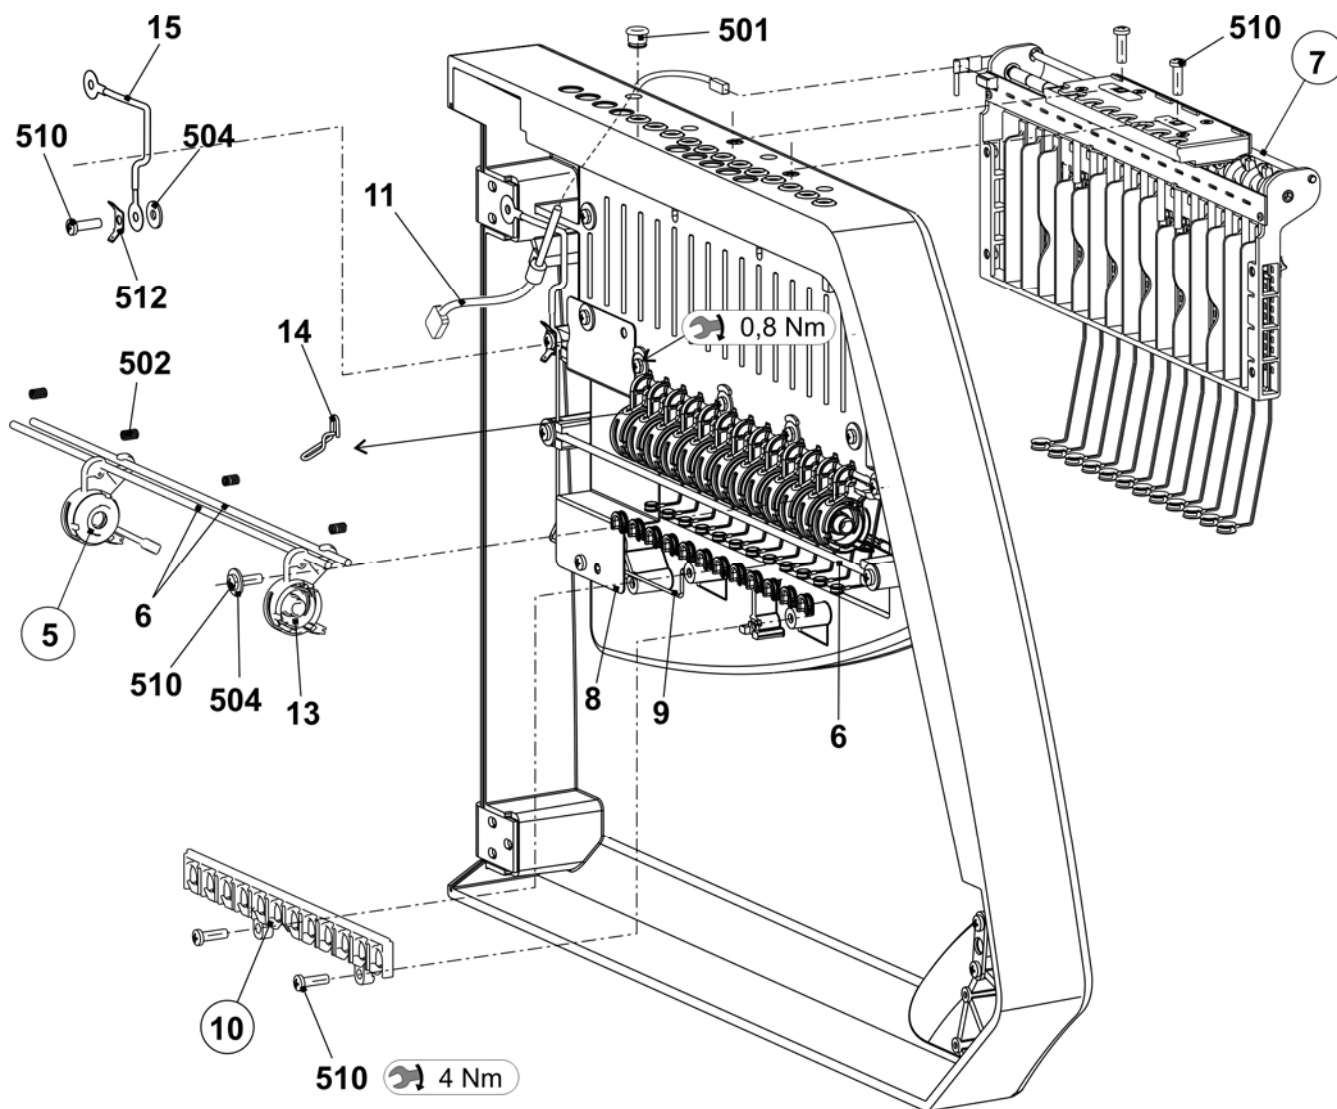


Right yarn tensioner

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Yarn tensioner on the right E3 - E5	241 382			
1	Card yarn tensioner 16-fold on the right	241 346	8	Grounding sheet metal of tension axle	243 121
2	Tension axle on the right co. E3 - E8	241 379	9	Ground cable yarn tensioner OKC	243 105
3	Housing	241 367	500	Screw KB 30x8	236 228
4	Slider	241 694	501	Circlip	021 022
5	Stop point	241 368	502	Tension spring 5.05x0.55x53 (E3-E5)	023 502
6	Cover	242 268	503	Circlip	021 020
7	Spacer	242 048	504	Countersunk screw M4x10	241 914

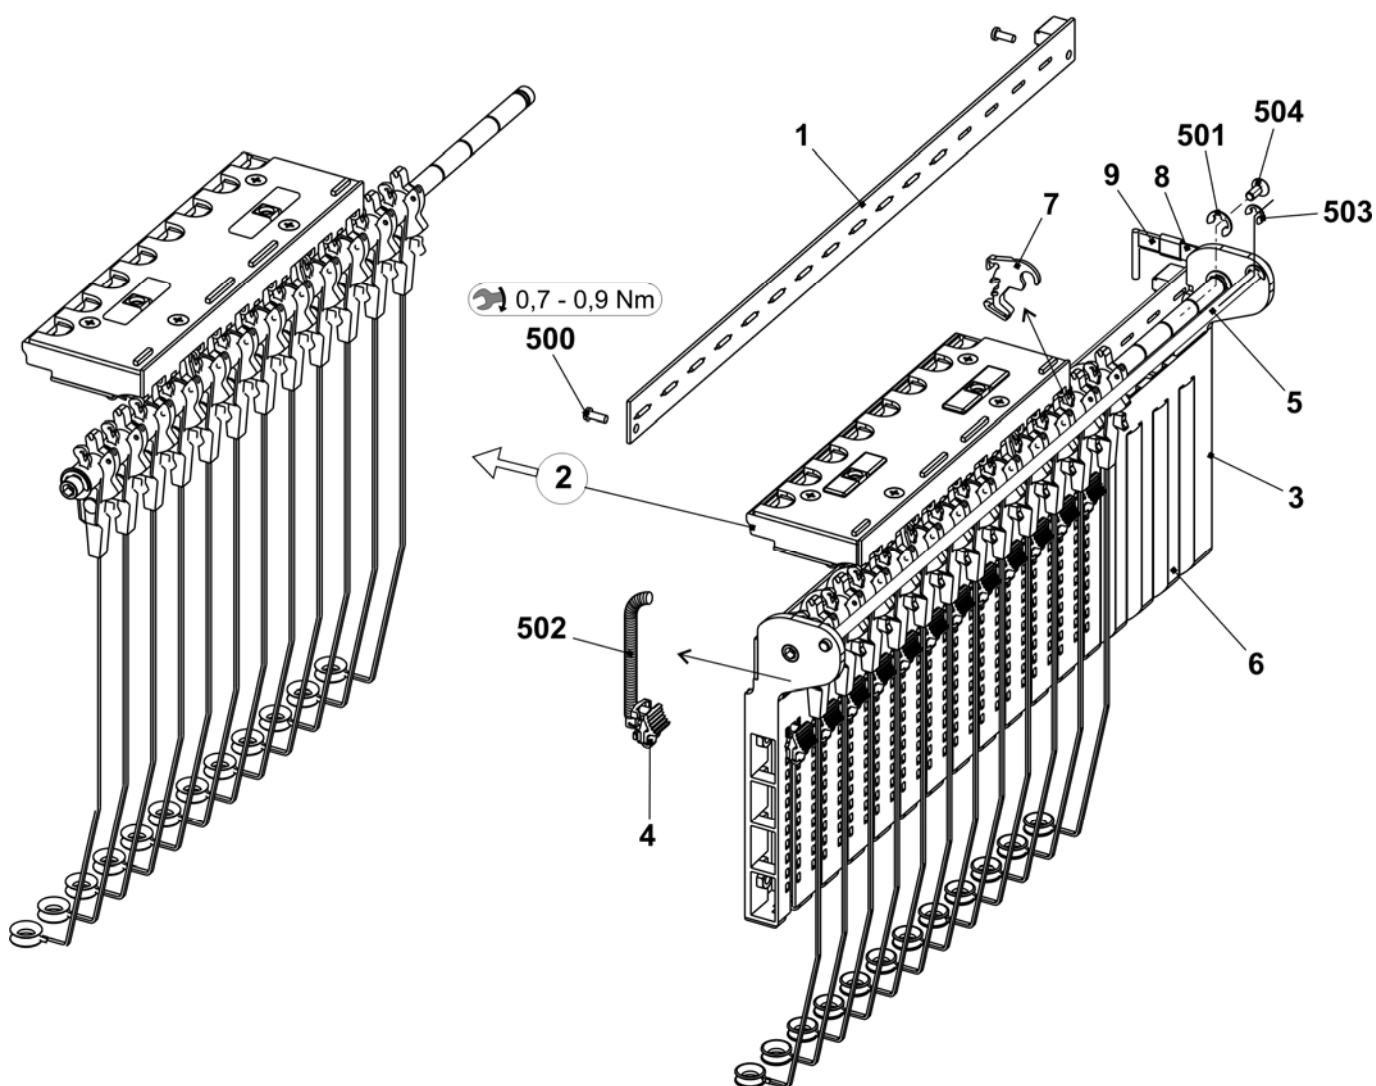


Right tension axle

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Tension axle on the right co. E3 – E8	241 379	5	Thread clamp AKF	238 695
1	Axle	243 107	51	Housing AKF	238 689
2	Tension arm pre-assembled E3 - E8	242 770	52	Cover AKF	237 926
6	Wire bow	238 694	53	Sheet metal at the bottom (housing AKF)	240 719
500	Shim ring 8x14x0.5	023 501	54	Lever AKF	238 692
501	Circlip	021 022	55	Thrust piece AKF	238 690
502	Grooved pin 2x6	243 172	56	Slider AKF	238 691
			57	Wire bow	238 694
			58	Wire	237 940
			551	Screw KB 35x12	237 681
			552	Screw KB 40x8	236 227
			553	Compression spring 0.30x4.50x18.50	241 437
			554	Grooved pin 2x6	243 172

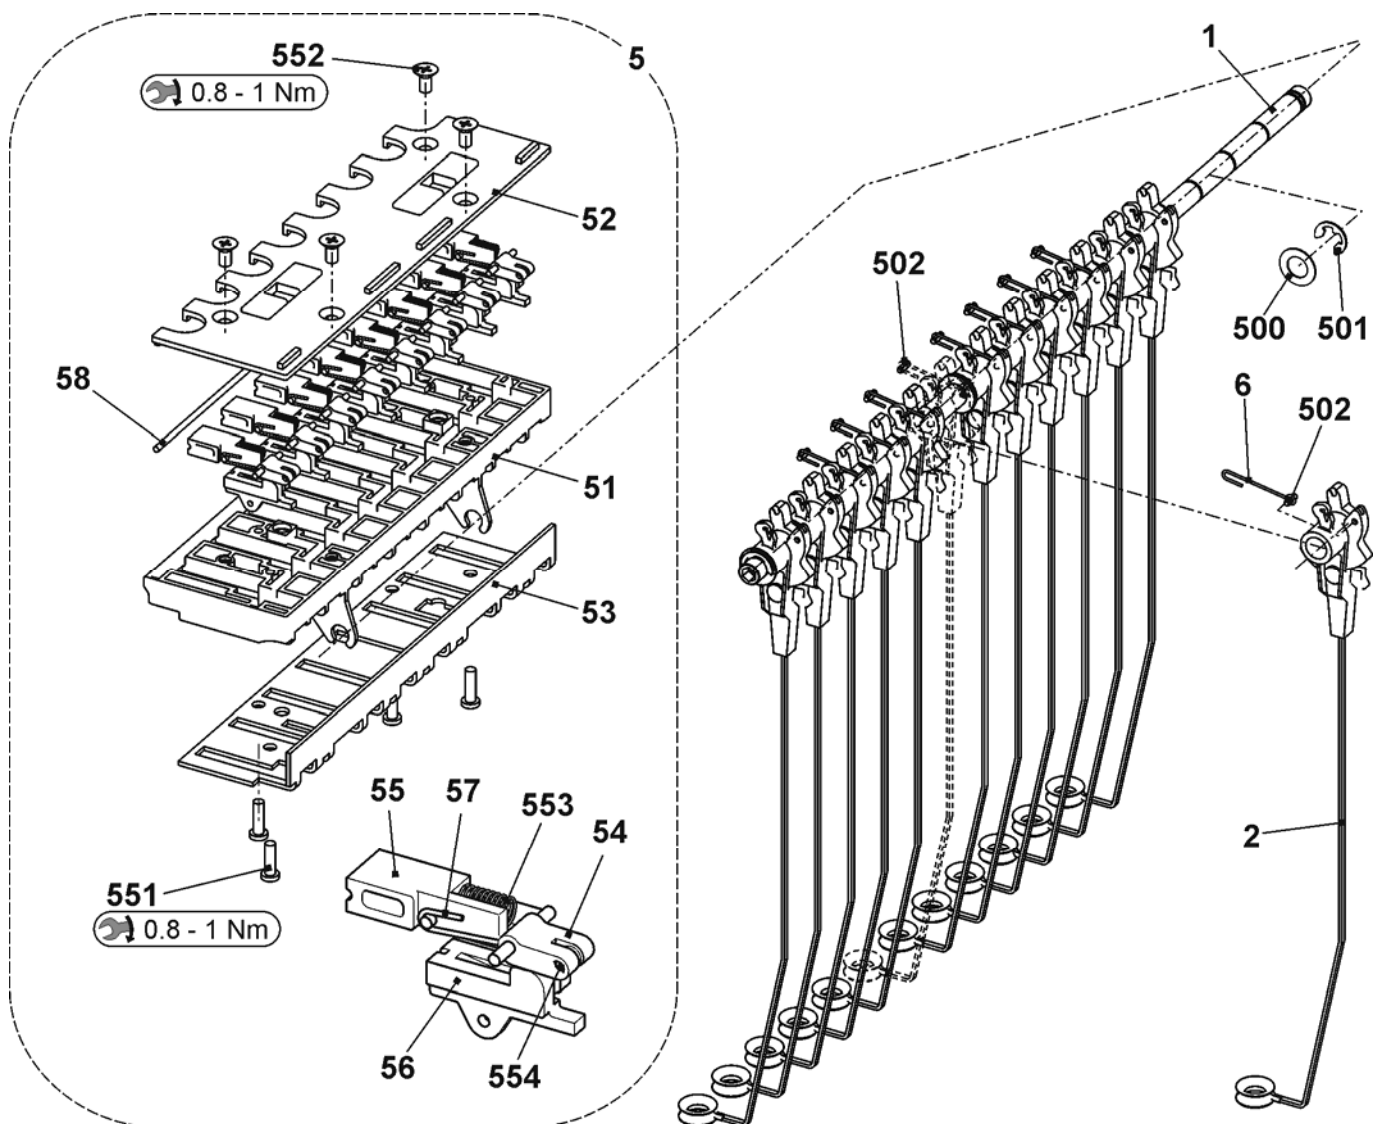


Bobbin board

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Table complete 84" (E5-14)	240 681			
1	Table	251 246	15	Positioning pin	251 050
4	Support element	228 594	20	Energy chain display (38 links)	253 888
7	Magnet switch protective hood	219 983	37	Cable USB extension 84 OKC	243 070
8	Magnet switch protective hood	220 159	40	Sliding block	228 851
10	Guide rail at the top complete	240 684	42	Support of left feed wheel	250 966
14	Lamp at the top complete	236 693	43	Support of right feed wheel	250 967
14a	Lamp long RL60V - 230 V	212 580	504	Countersunk screw M8x16	023 113
14b	Clamping bow	209 504	516	Countersunk screw M3x8	023 251
14c	Cellular caoutchouc 40x20	208 018	518	Countersunk screw M8x18	251 331
14d	Lamp support	221 951			

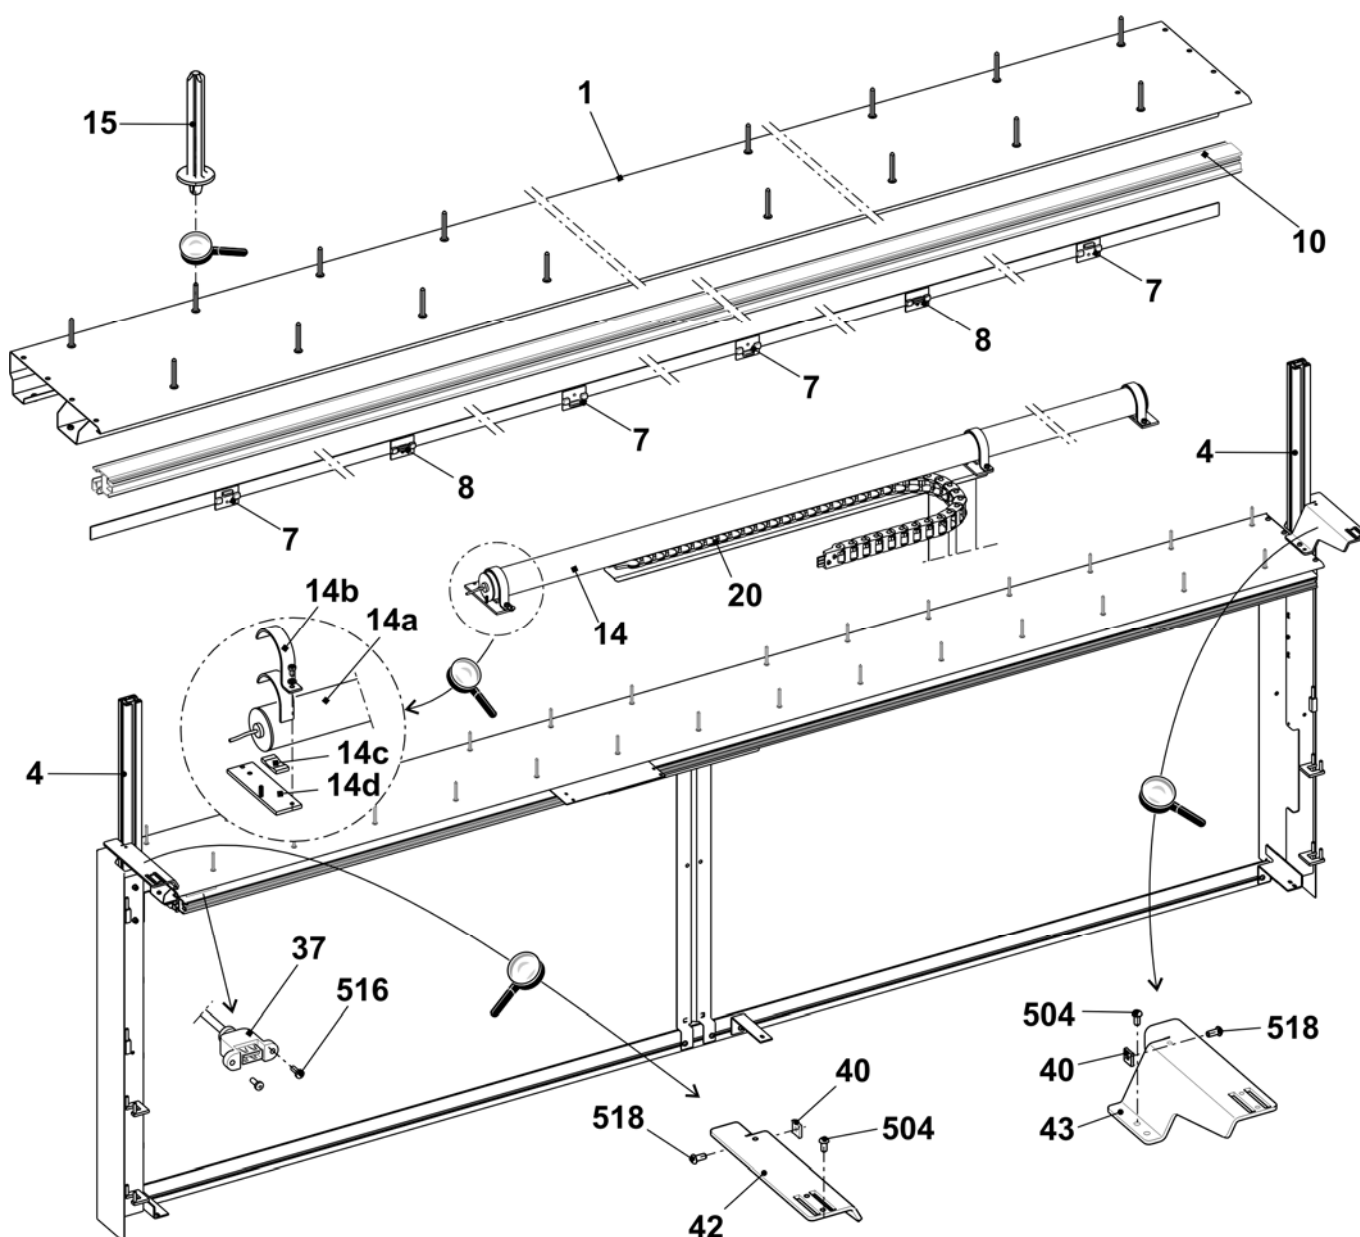


Additional board

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Additional board 7XX/8XX	241 928			
1	Additional board welded	241 927	4	Disc D=130	062 385
2	Positioning pin	202 777	500	Countersunk screw M4x30	023 681
3	Bobbin support	200 363	501	Washer 5.3x30x1.25	023 556

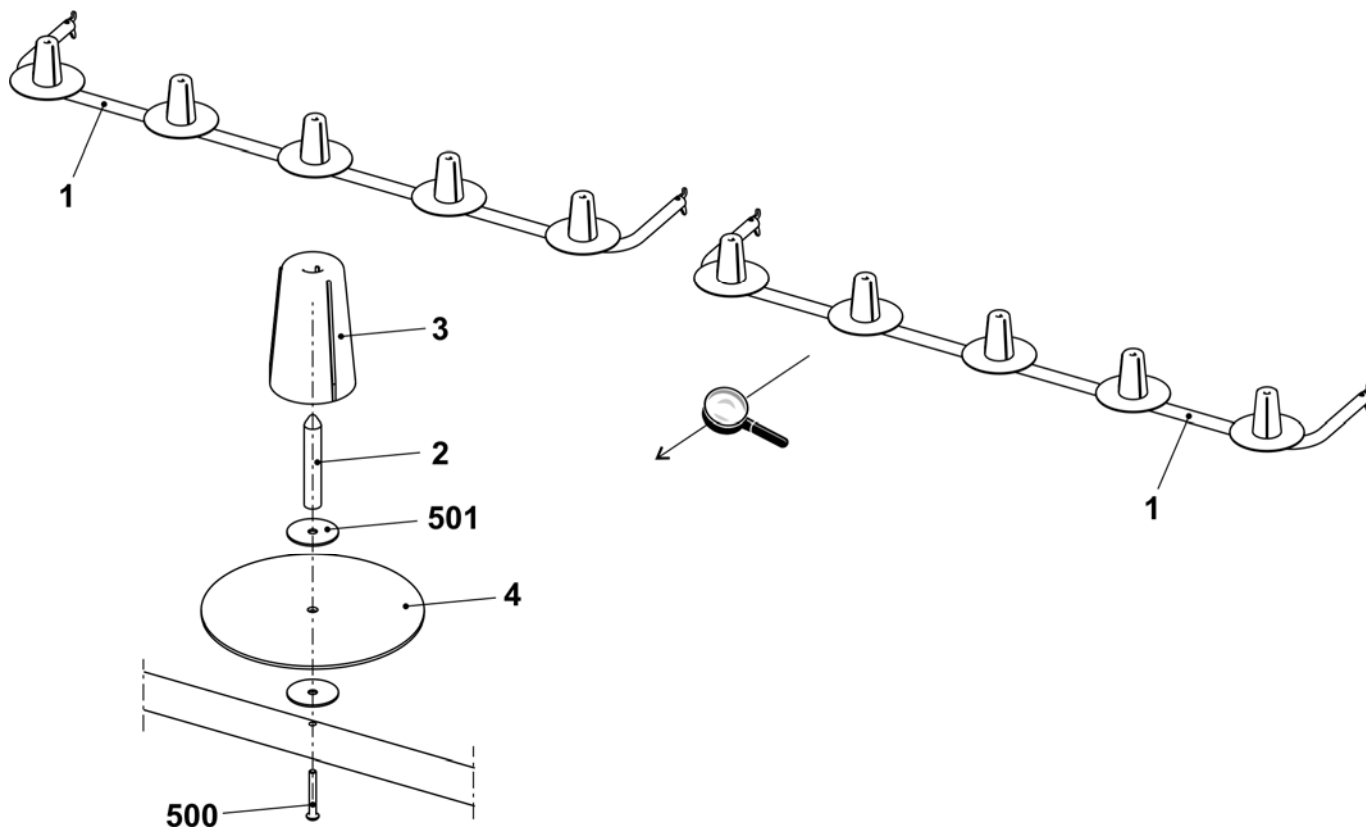


Yarn carriers and yarn carrier rails

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Yarn guide complete E2,5.2	237 281	1	YC bow 1+8 complete E3-4	216 266
8	Limiter on the right complete	244 098	2	YC bow 2+7 complete E3-4	216 267
9	Limiter on the left complete	244 099	3	YC bow 3+6 complete E3-4	216 268
10	Slider with eyelet	230 709	4	YC bow 4+5 complete E3-4	216 269
11	YC carriage complete	241 887	500	Hexagon screw M5x10	020 351
13	Shim	213 035	501	Washer 1-5	020 901
21	Yarn guide wheel	202 146	502	Cap screw M3.5x10	020 015
30*	Yarn carrier bar	236 807	530*	Cap screw M8x35	020 139

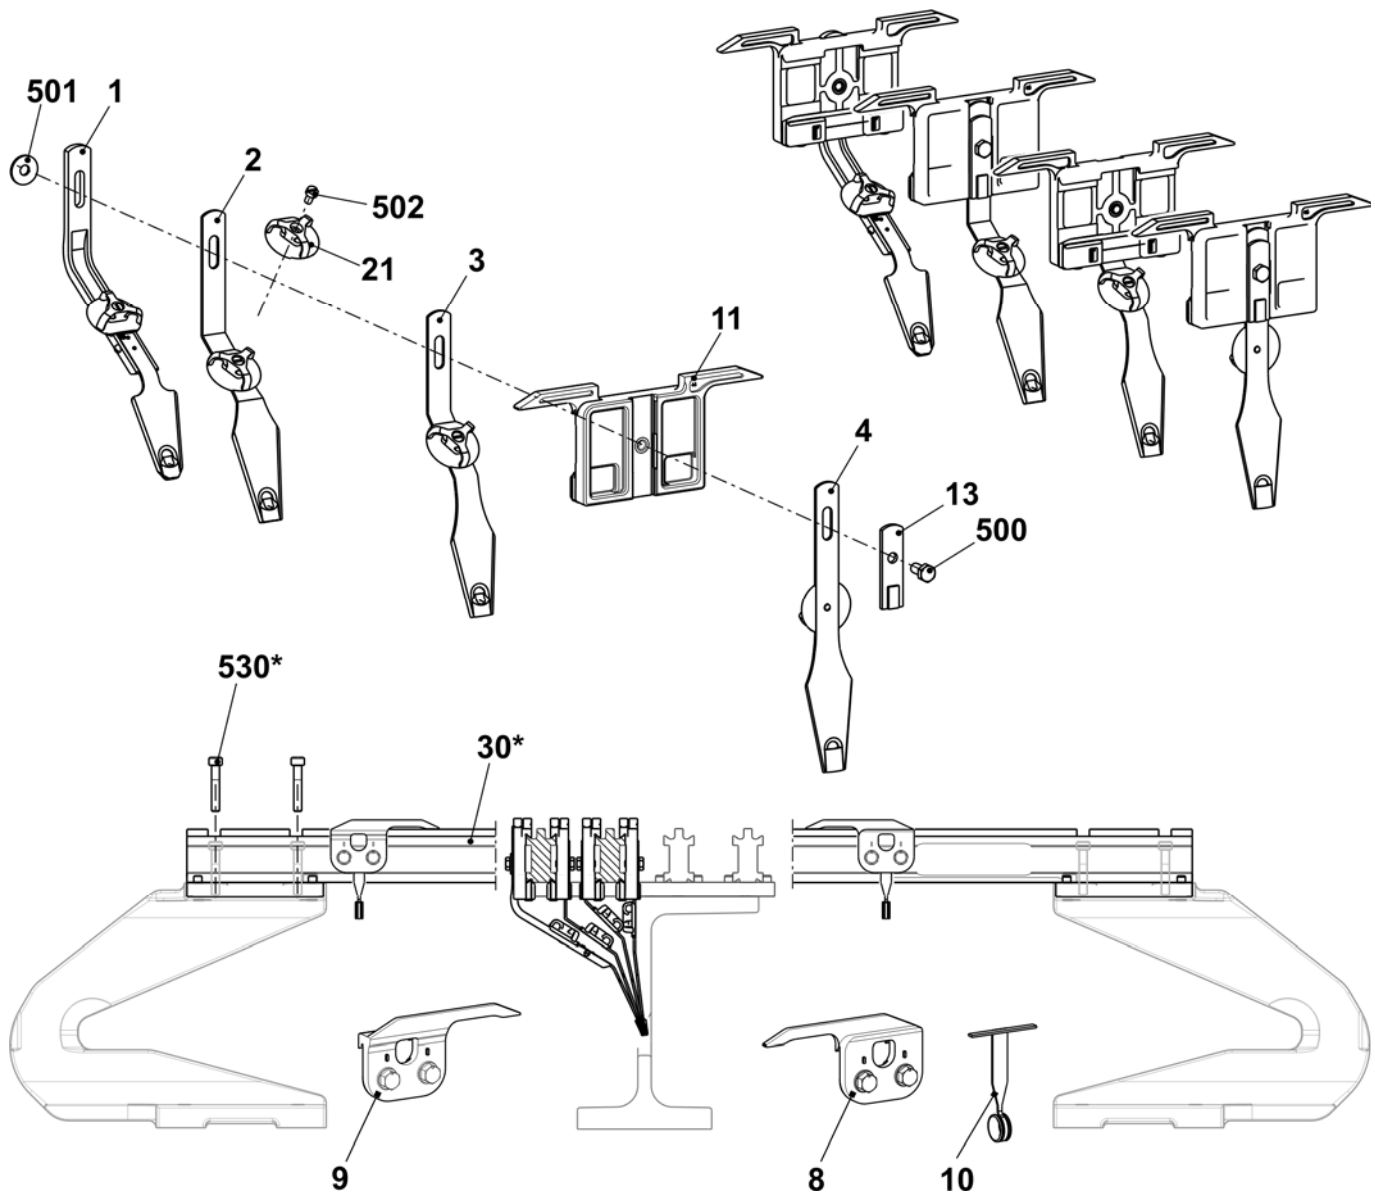


Complete yarn carriers

Pos	Designation	Ident No	Pos	Designation	Ident No
	Yarn guide complete E2,5.2	237 281			
1	YC carriage 1+8 complete E3-4	217 486	3	YC carriage 3+6 complete E3-4	217 488
2	YC carriage 2+7 complete E3-4	217 487	4	YC carriage 4+5 complete E3-4	217 489

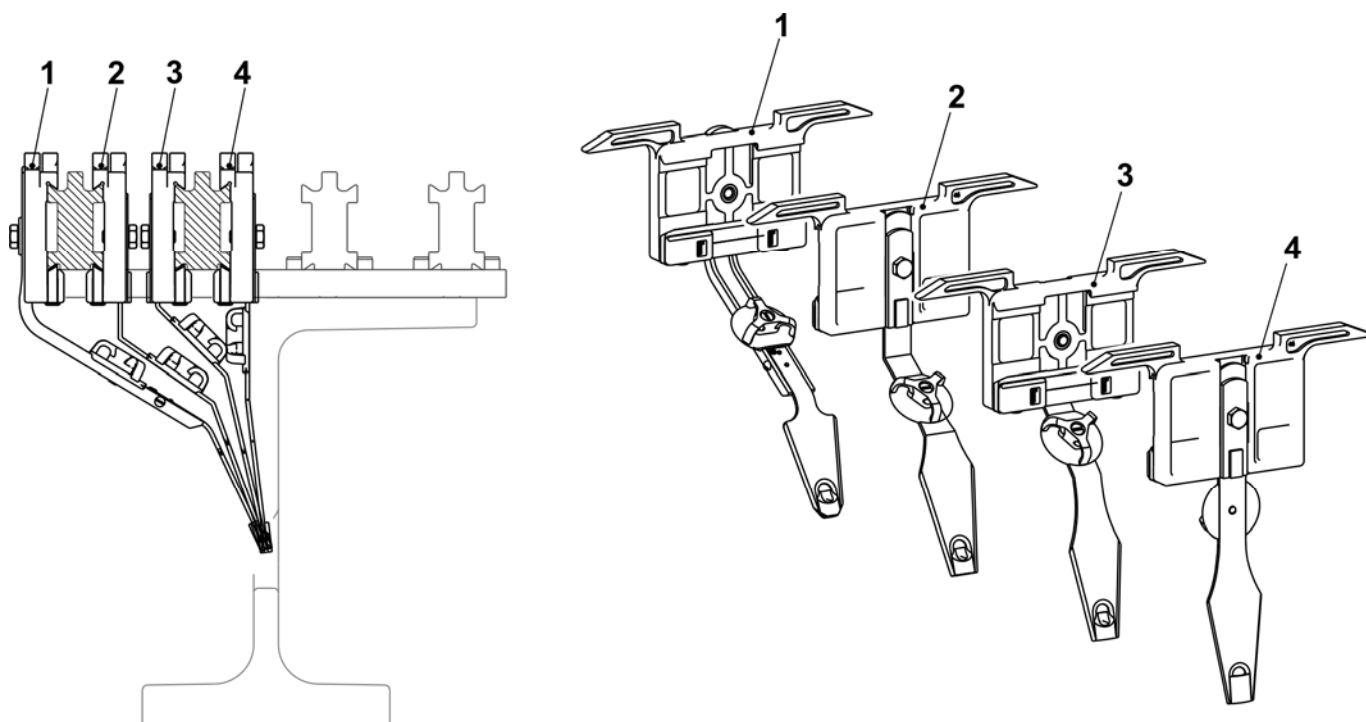


Left friction feed wheel

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Friction feed wheel on the left complete	243 571	13	Bush	221 391
1	Housing	240 368	14	Ribbed V-belt pulley	221 268
2	Friction roller complete	231 704	15	Ribbed V-belt pulley V3J 406	206 927
3	Three-phase AC motor complete	219 800	16	Rod	221 319
	3a Microswitch	008 664	17	Supporting plate	251 096
4	Deflector complete 8-fold	250 089	18	Cover	230 758
	4a Support rail	250 055	19	Knurled screw	223 361
	4b Eyelet holder complete	250 077	20	Rod	230 658
	540 Spring dowel sleeve 4x15	020 783	500	Screw KB30x8	236 228
	541 Hexagon nut M8-8	022 843	501	Screw 20x10	244 736
7	Yarn guide rod complete	239 431	503	Cap screw M5x12	020 132
	570 Eyelet 8	021 504	504	Cap screw M5x16	022 726
8	Stop motion rail on the right complete	230 690	506	Screw KB 40x14	241 358
9	Stop motion rail on the left co. with eyelets	230 683	507	Screw KB 40x25	241 595
	9b Eyelet	230 662	509	Washer 5.3x22x2.5	023 219
	590 Slide bearing	023 627	510	Washer	020 901
	591 O-ring	244 895	512	Adjusting washer 15x21x1	023 216
11	Strap	221 316	514	Washer 4.3	020 908
12	Cover	251 098	515	Countersunk screw M4x10	023 450

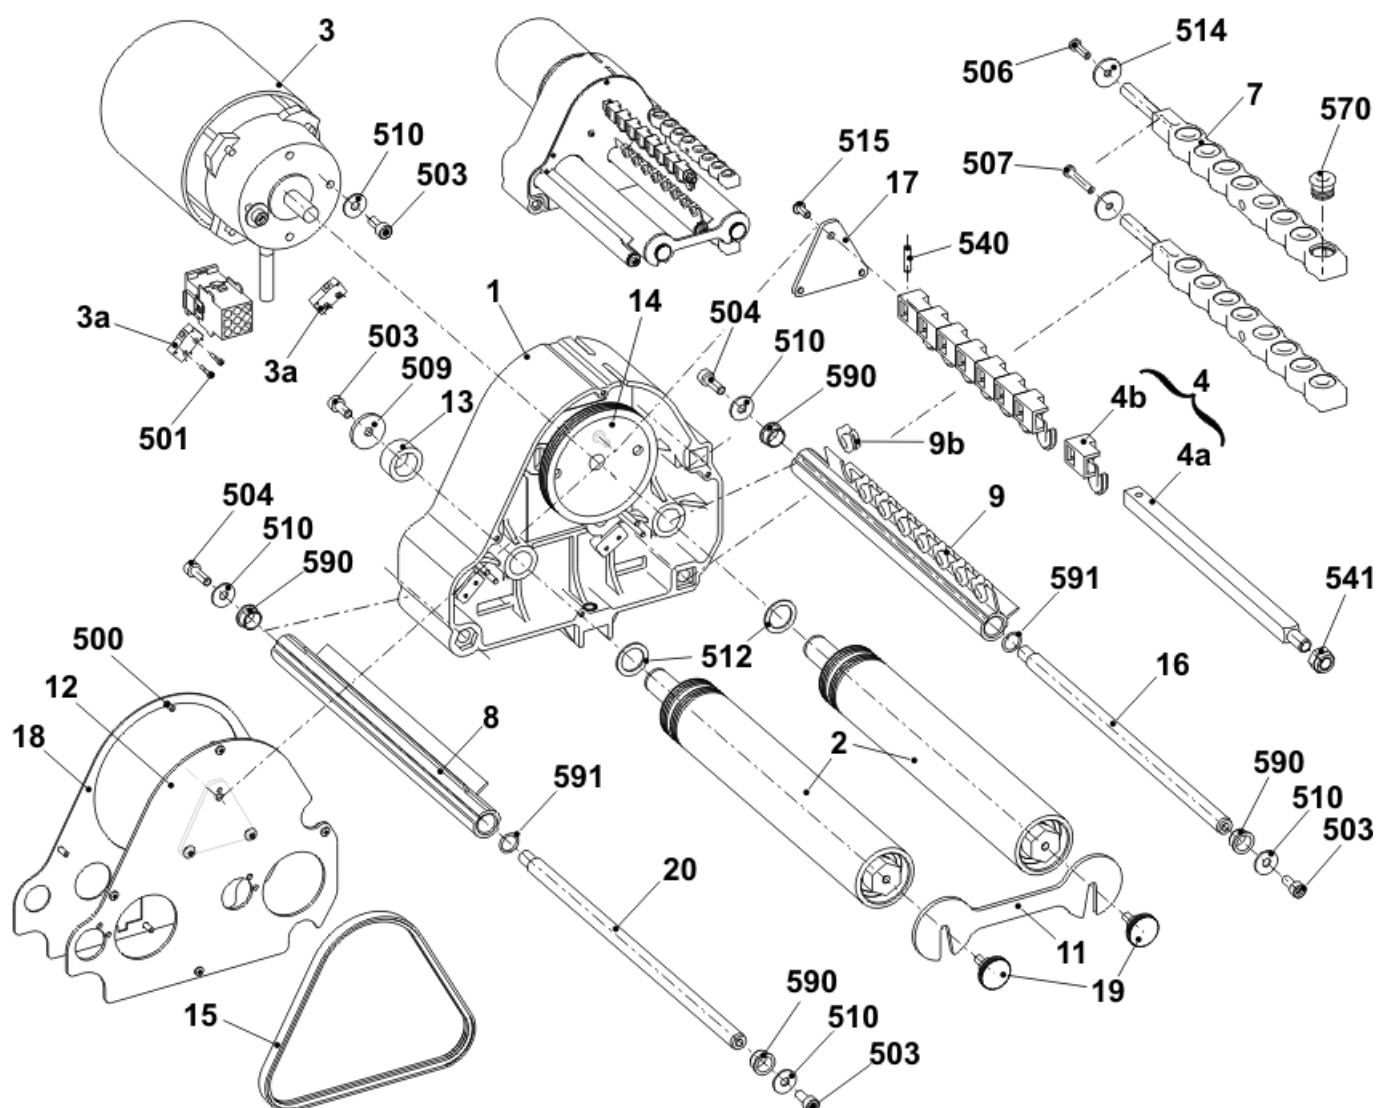


Right friction feed wheel

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Friction feed wheel on the right complete	243 572	13	Bush	221 391
1	Housing	240 368	14	Ribbed V-belt pulley	221 268
2	Friction roller complete	231 704	15	Ribbed V-belt pulley V3J 406	206 927
3	Three-phase AC motor complete	219 800	16	Rod	221 319
	3a Microswitch	008 664	17	Supporting plate	251 096
4	Deflector complete 8-fold	250 089	18	Cover	230 758
	4a Support rail	250 055	19	Knurled screw	223 361
	4b Eyelet holder complete	250 077	20	Rod	230 658
	540 Spring dowel sleeve 4x15	020 783	500	Screw KB30x8	236 228
	541 Hexagon nut M8-8	022 843	501	Screw 20x10	244 736
7	Yarn guide rod complete	239 431	503	Cap screw M5x12	020 132
	570 Eyelet 8	021 504	504	Cap screw M5x16	022 726
8	Stop motion rail on the right complete	230 690	506	Screw KB 40x14	241 358
9	Stop motion rail on the right co. with eyelets	230 682	507	Screw KB 40x25	241 595
	9b Eyelet	230 662	509	Washer 5.3x22x2.5	023 219
	590 Slide bearing	023 627	510	Washer	020 901
	591 O-ring	244 895	512	Adjusting washer 15x21x1	023 216
11	Strap	221 316	514	Washer 4.3	020 908
12	Cover	251 098	515	Countersunk screw M4x10	023 450

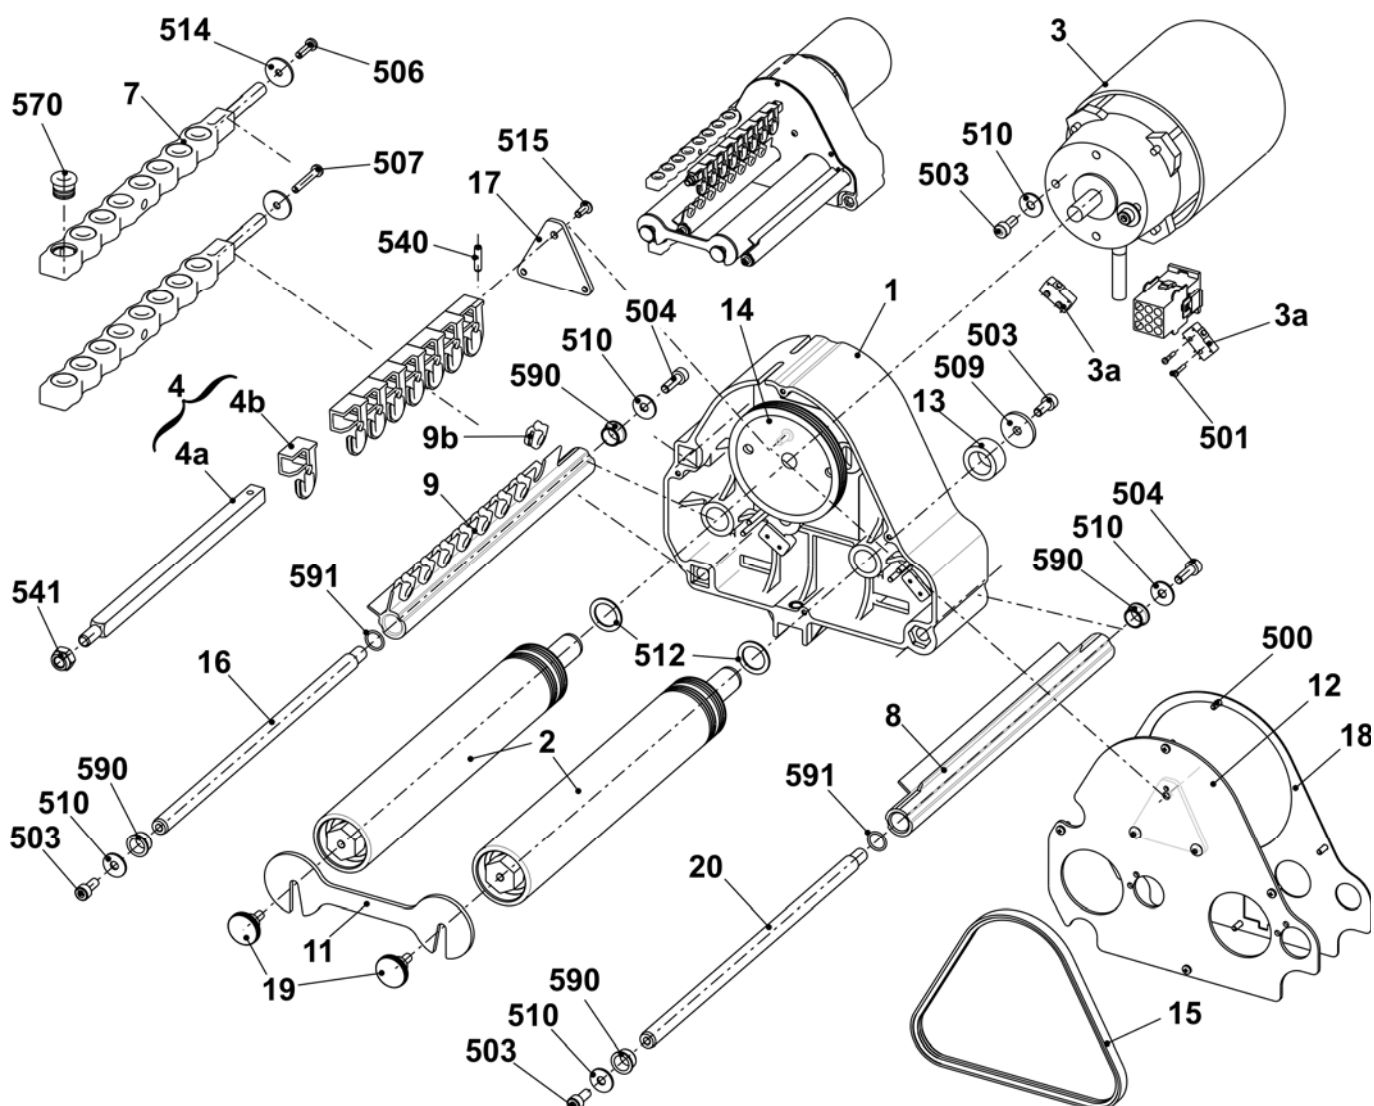


Fluff absorption

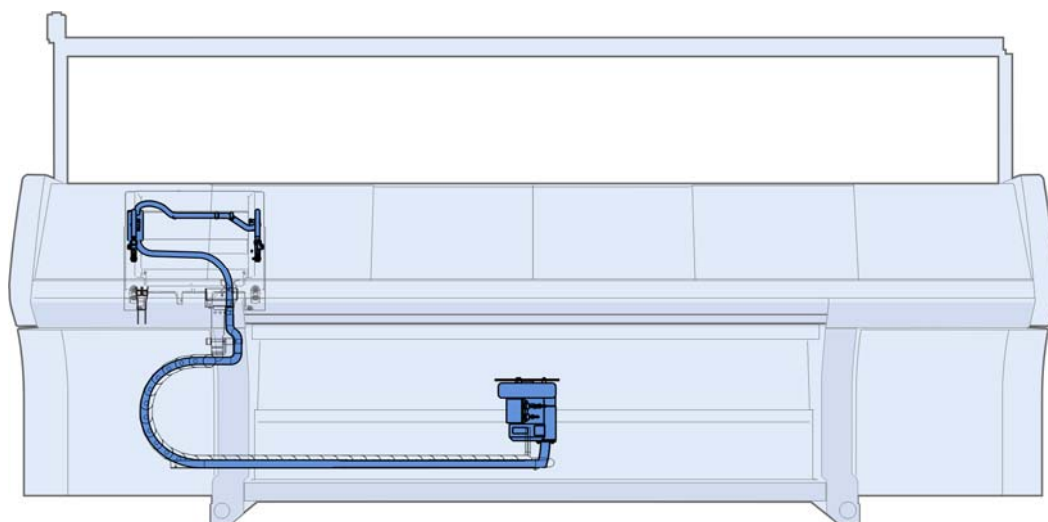


Fluff absorption

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Fluff absorption				
1	Suction fan complete	251 332	5	Set of tubes co. 730/830C	251 341
2	Suction hose 29x25x3750	251 336	550	Countersunk head screw M4x8	251 011
3	Hose fitting	214 653	551	Cap screw M4x8	022 501
4	Lint container	245 024			

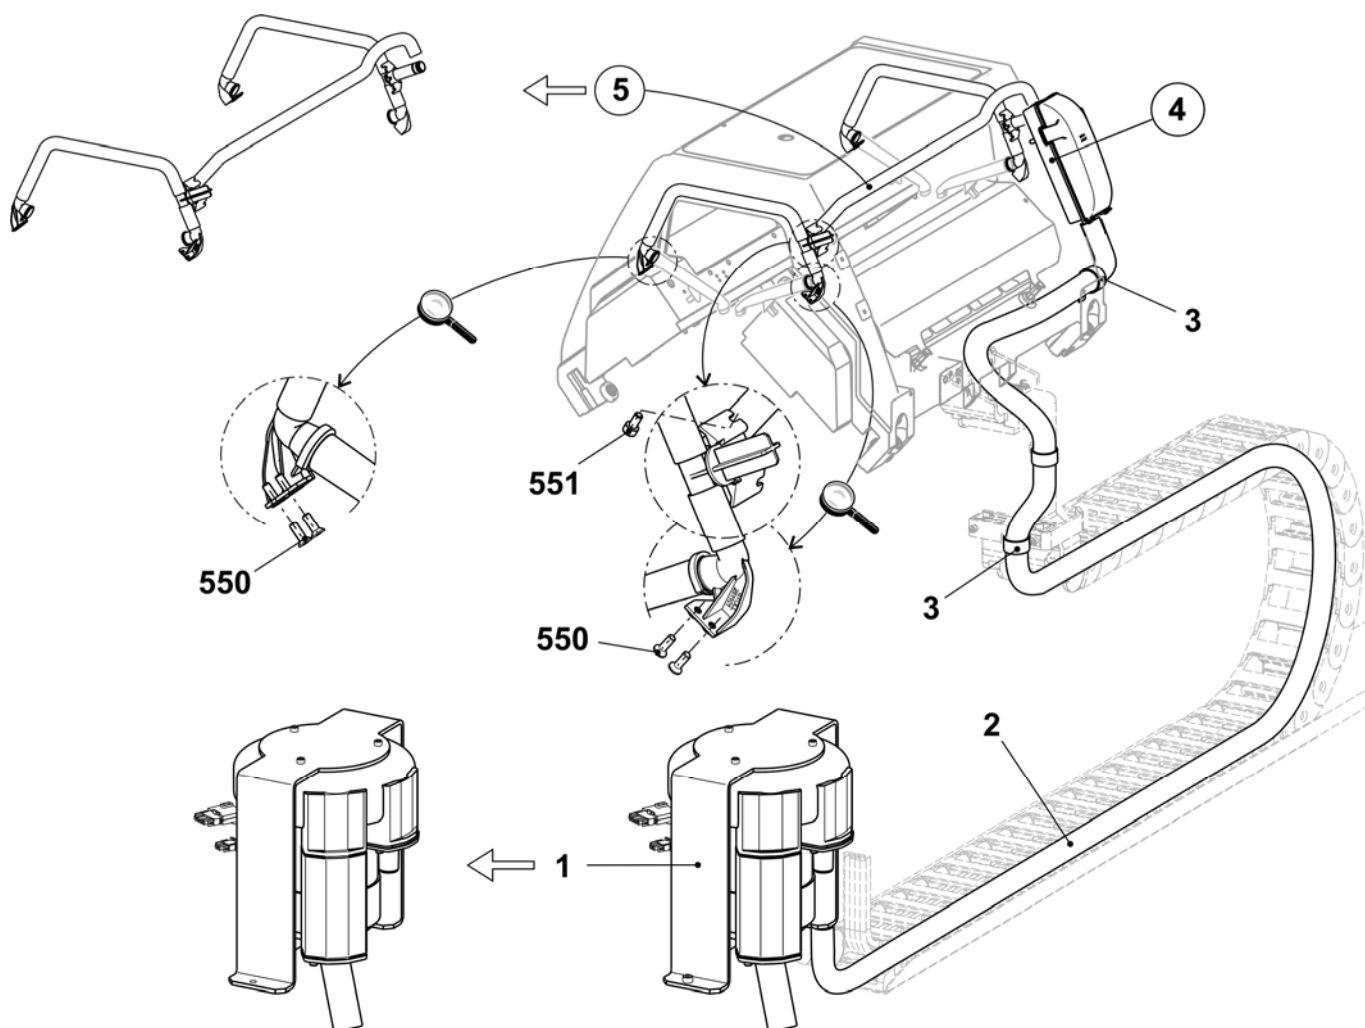


Lint container

Pos	Designation	Ident No	Pos	Designation	Ident No
Σ	Lint container		6*	Sealing plug	245 029
1	Lint container	245 024	10*	Cover with filter	251 335
5*	Sealing plug	245 028	501*	Cap screw M6x10	023 690

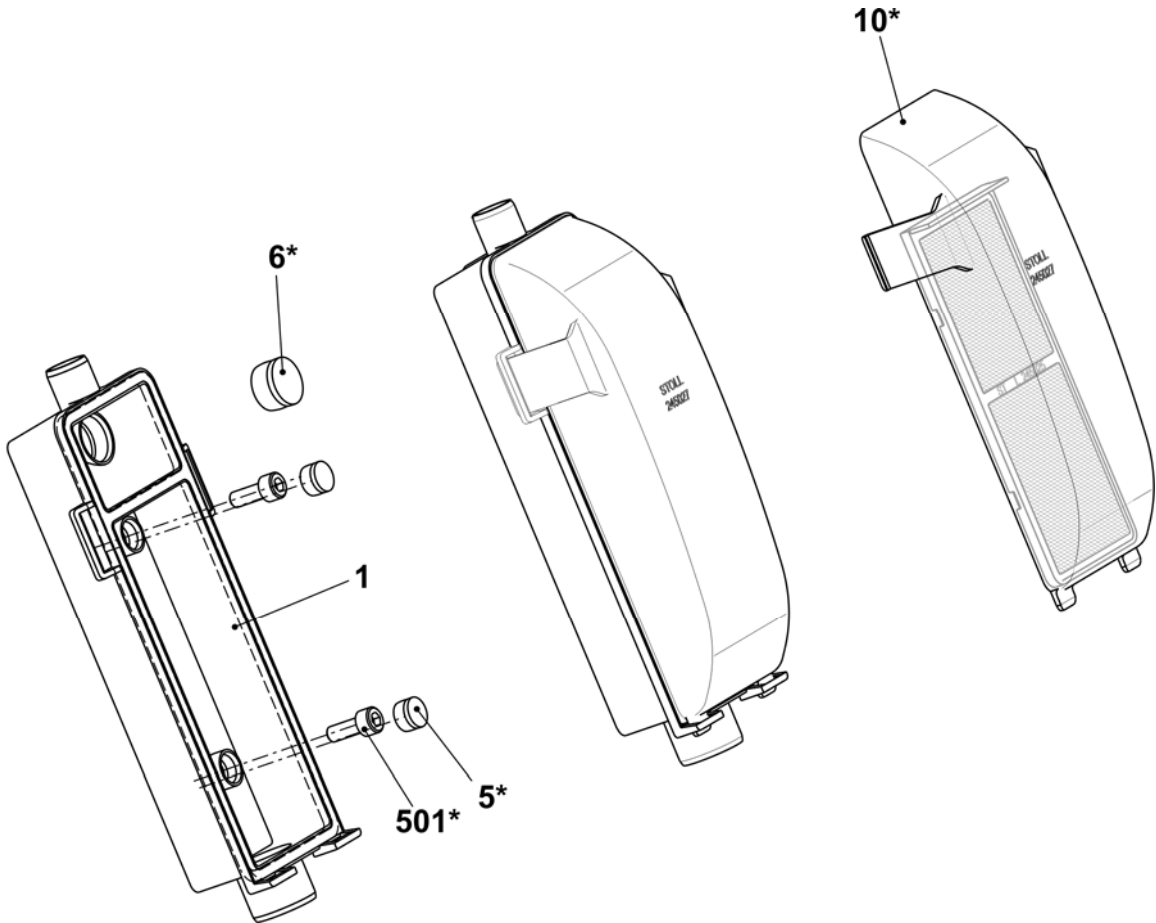


Set of tubes

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Set of tubes complete 740/830C	251 341			
1	Angle connection on the right	250 121	7*	7b* Bracket	250 805
2	Angle connection on the left	251 101		7c* Brush	251 327
3	T-piece FLENT	245 021		570* Screw KB30x6	241 424
	530 O-ring 15x1.5	250 054	500	Suction hose 20x16x440	244 983
	531* Cap screw M4x8	022 501	501	Suction hose 20x16x40	251 043
4	Connection piece Flent	245 022	502	Suction hose 20x16x720	251 046
7*	Suction tube complete	251 326	504*	Countersunk head screw M4x12	023 062
	7a* Suction tube	250 120	506*	Cable clip	250 051

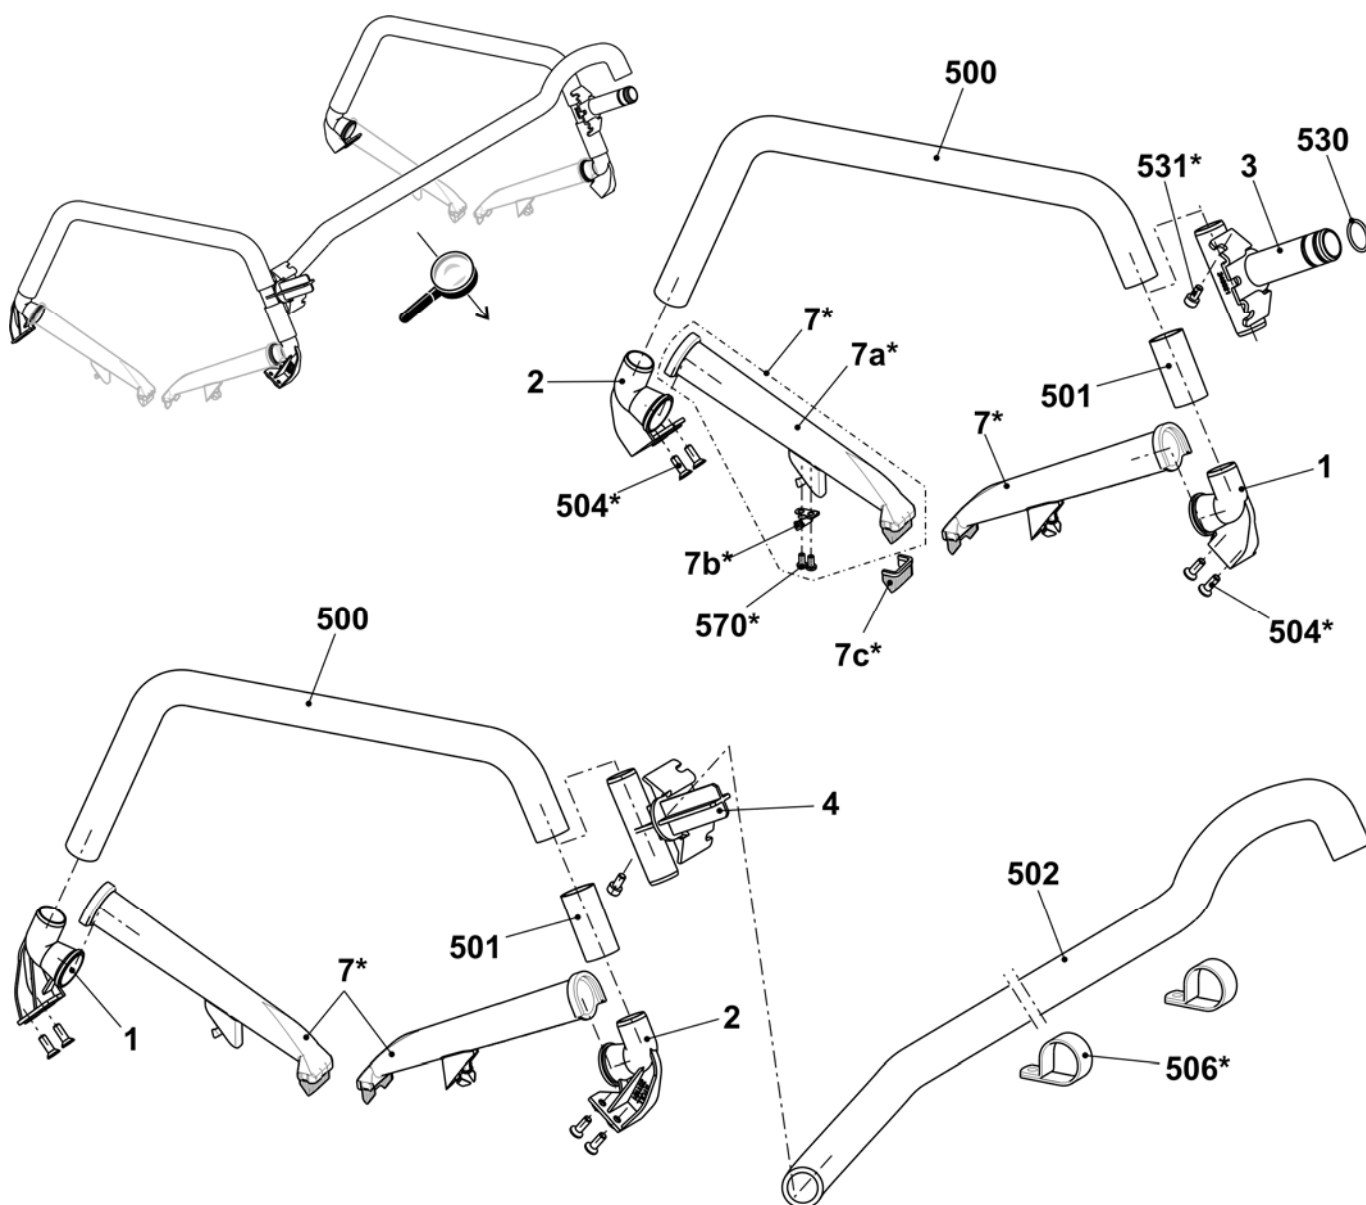


Operation and control

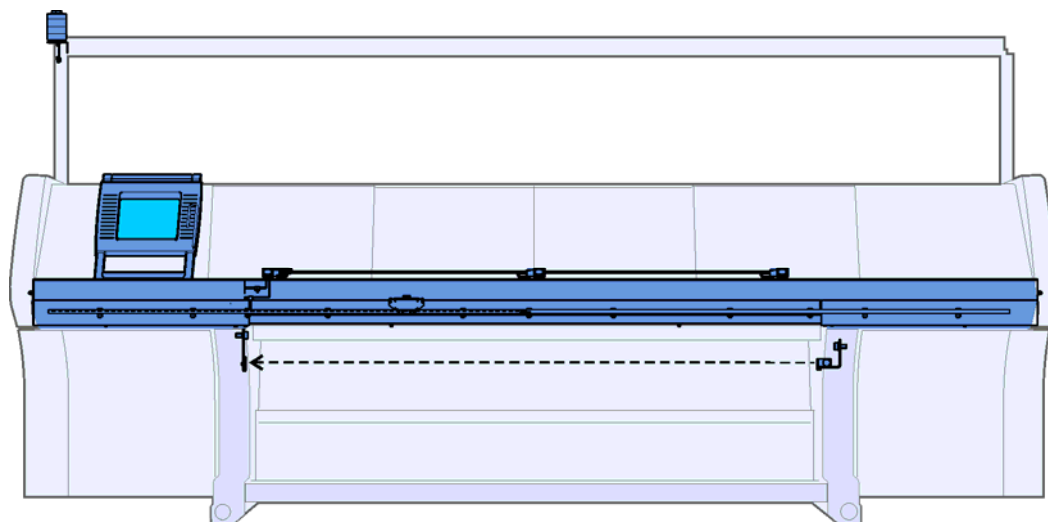


Input unit

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Input unit complete	240 194			
1	Base frame	240 195	6	Touch pen	242 812
3	Bearing strip complete	240 198	502	Washer	020 901
4	Display touch complete	250 298	503	Screw KB 50x12	240 359

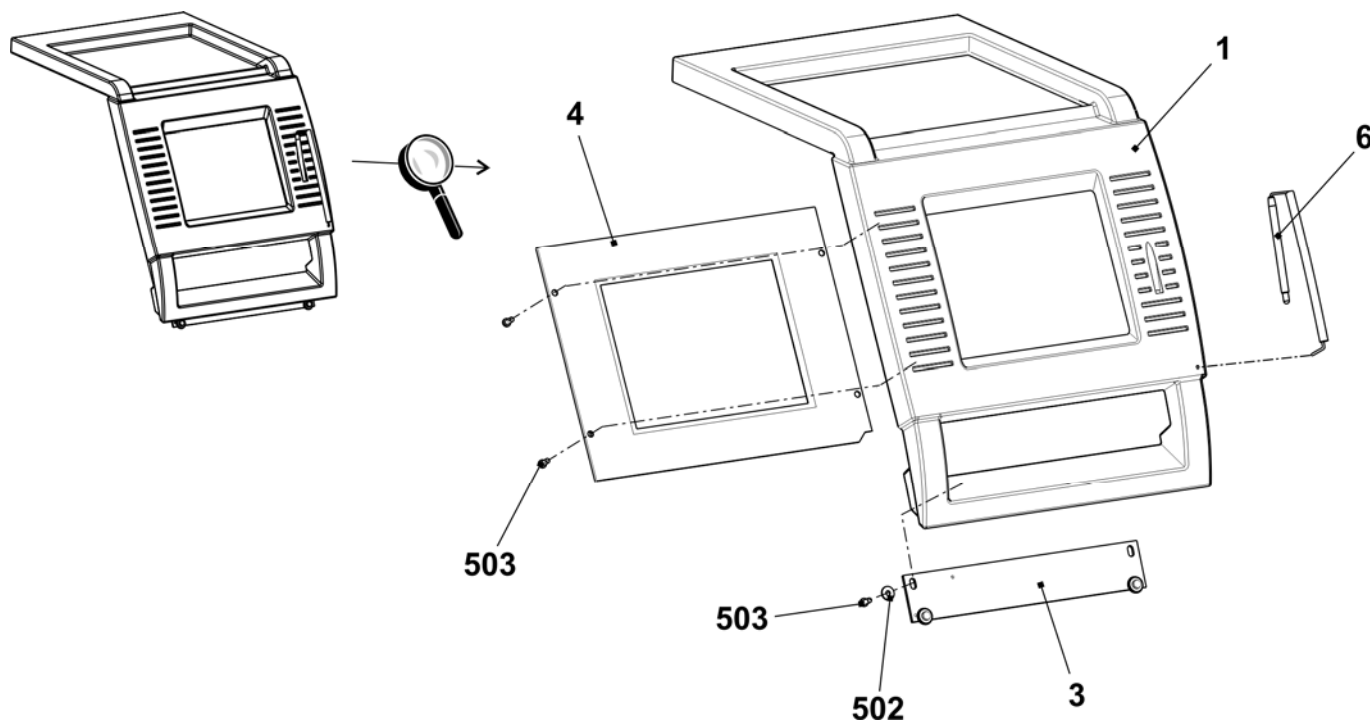


Starting unit

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Starting unit complete	241 039			
1	Engaging rod	241 030	502	Cap screw M6x16	020 135
2	Bearing on the left complete	250 071	503	Countersunk screw M5x14	023 588
3	Guide rail at the bottom complete	251 227	504	Cap screw M6x20-12.9	020 136
6	Cover plate on the right	251 216	505	Cap screw M6x12	020 134
7	Cover plate on the left	251 217	507	Washer	020 872
8	Fixing bolt	219 107	509	Screw M6x25	023 510
9	Switch with cable to protective hoods	223 350	511	Adhesive base	243 055
10	Sliding nut (sliding block)	225 099	512	Cap screw M6x10	023 690
11	Bearing on the right complete	252 964	520*	Countersunk screw M6x16	023 124

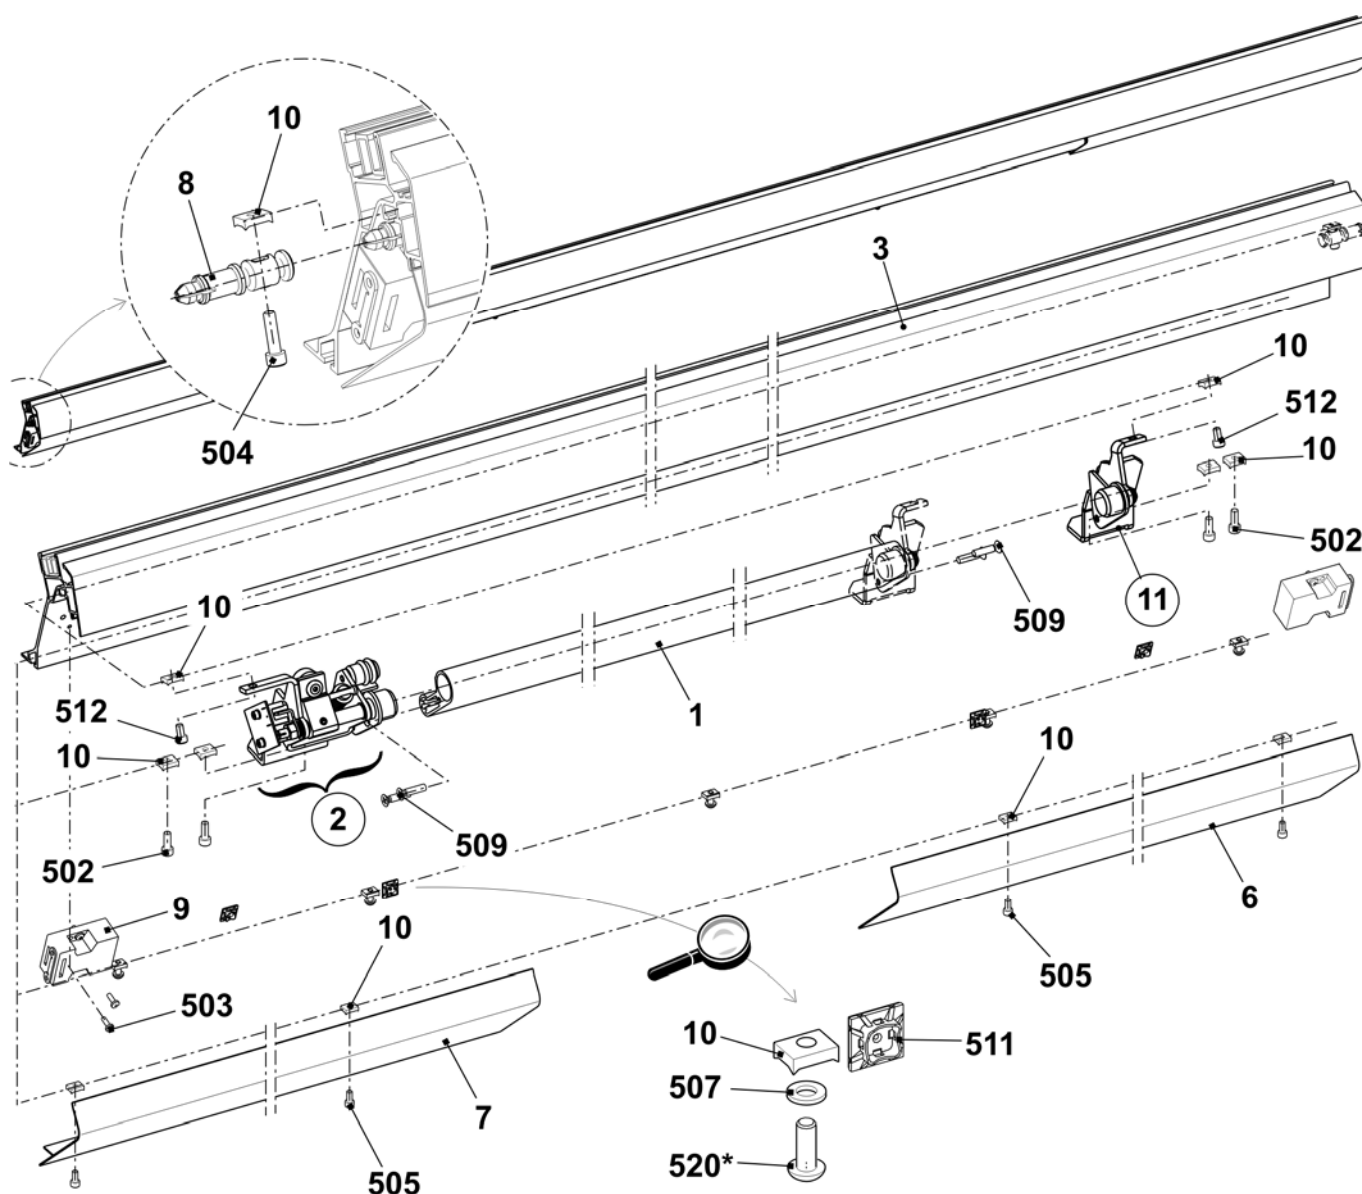


Bearing of the engaging rod

Pos	Designation	Ident no.	Pos	Designation	Ident no.
L	Bearing on the left complete	250 071			
1	Bearing on the left	245 218	505	Hexagon nut M8-6	020 838
1a	Clip bearing MCM12-04	023 639	506	Dowel pin 1.5x8	236 923
2	Support buffer	220 561	507	Spring dowel sleeve 6x20	023 719
2a	O-ring 14x4	023 237	508	Shoulder screw M4x24.8x7.7	240 299
3	Shaft on the left	245 219	509	Shoulder screw	251 316
4	Rotor	245 223	510	Shim ring 12x18x1	023 315
5	Switch flag	245 220	511	Locking ring 12x1	020 951
6	Spring pin	251 340	512	Compression spring 1.25x15x98.2	023 609
7	Disc	245 222	513	Compression spring 0.5x11x12	251 369
8	Shoulder screw	245 224			
9	Distance bolt	240 287	R	Bearing on the right complete	252 964
500	Cap screw M4x6	023 067	1	Bearing on the right	240 230
501	Cap screw M4x8	022 501	1a	Clip bearing MCM 12-04	023 639
502	Shim ring 4x8x1	023 369	2	Shaft on the right	242 888
503	Card engaging OKC	240 167	500	Shim ring 12x18x1	023 315
504	Adhesive magnet direct current	026 233	502	Locking ring 12x1	020 951

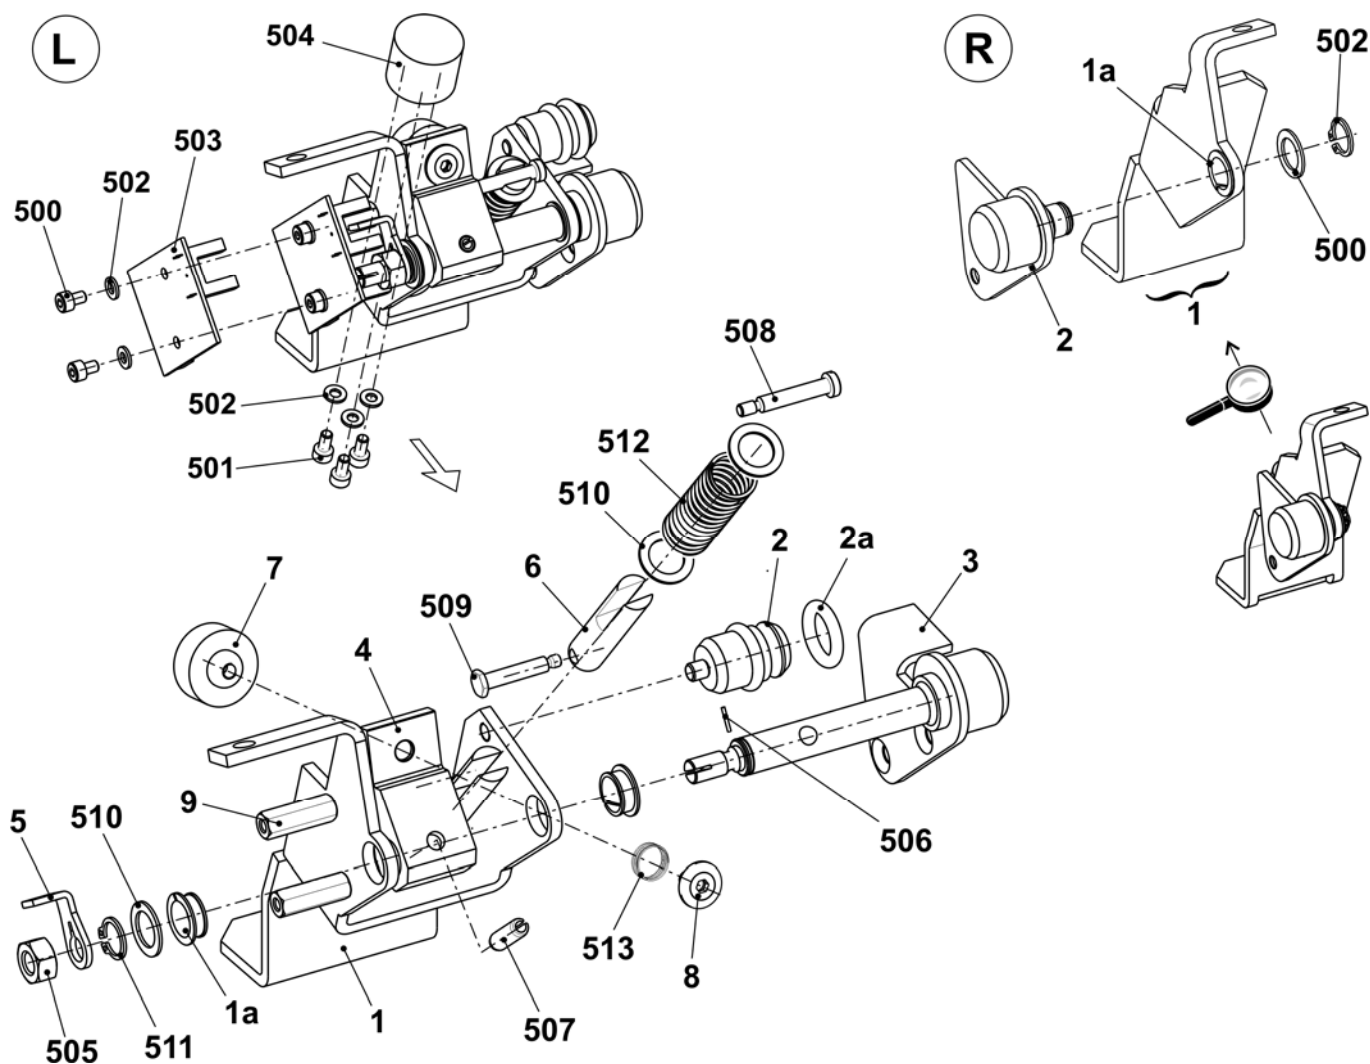


Signal light

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Signal light LED single lamp with horn	251 153			
	500 Countersunk screw M4x14	023 037			
	501 Serrated lock washer A4.3-FS	022 482			

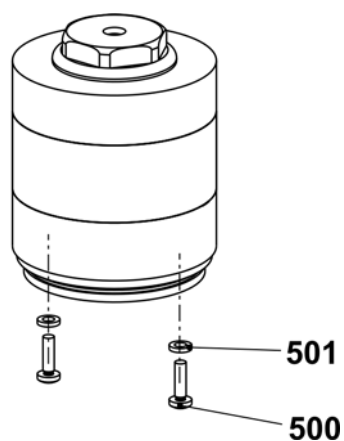


Collecting area - control

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Collecting area - control	240 157	504	Photoelectric sensor WL100-P4330	243 355
1	Angle support photoelectric sensor	243 353	505	Reflector 20x20 mm	243 356
2	Mounting plate reflector	243 354	900	Cap screw M6x12	020 134
501	Cap screw M3x10	022 991	901	Washer	020 872
502	Blind rivet A3x8-Al	023 158			

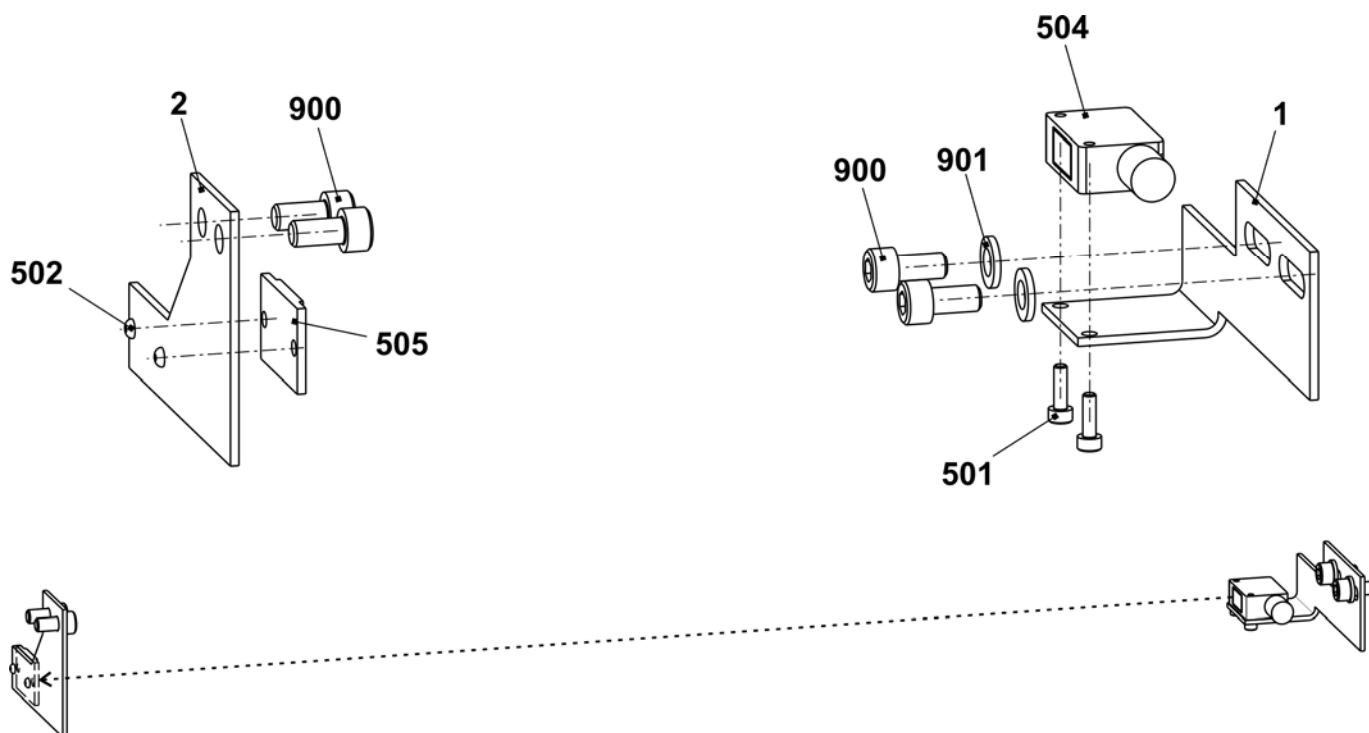


Shock stop motion

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Shock stop motion complete	237 280			
1	Shock stop motion (Piezo)	220 011	500	Countersunk screw M4x8	023 036
2	Cable connection piezo	220 061	502	Cable clip N-3B 5 mm	210 729
3	End plug piezo sensor	220 062			

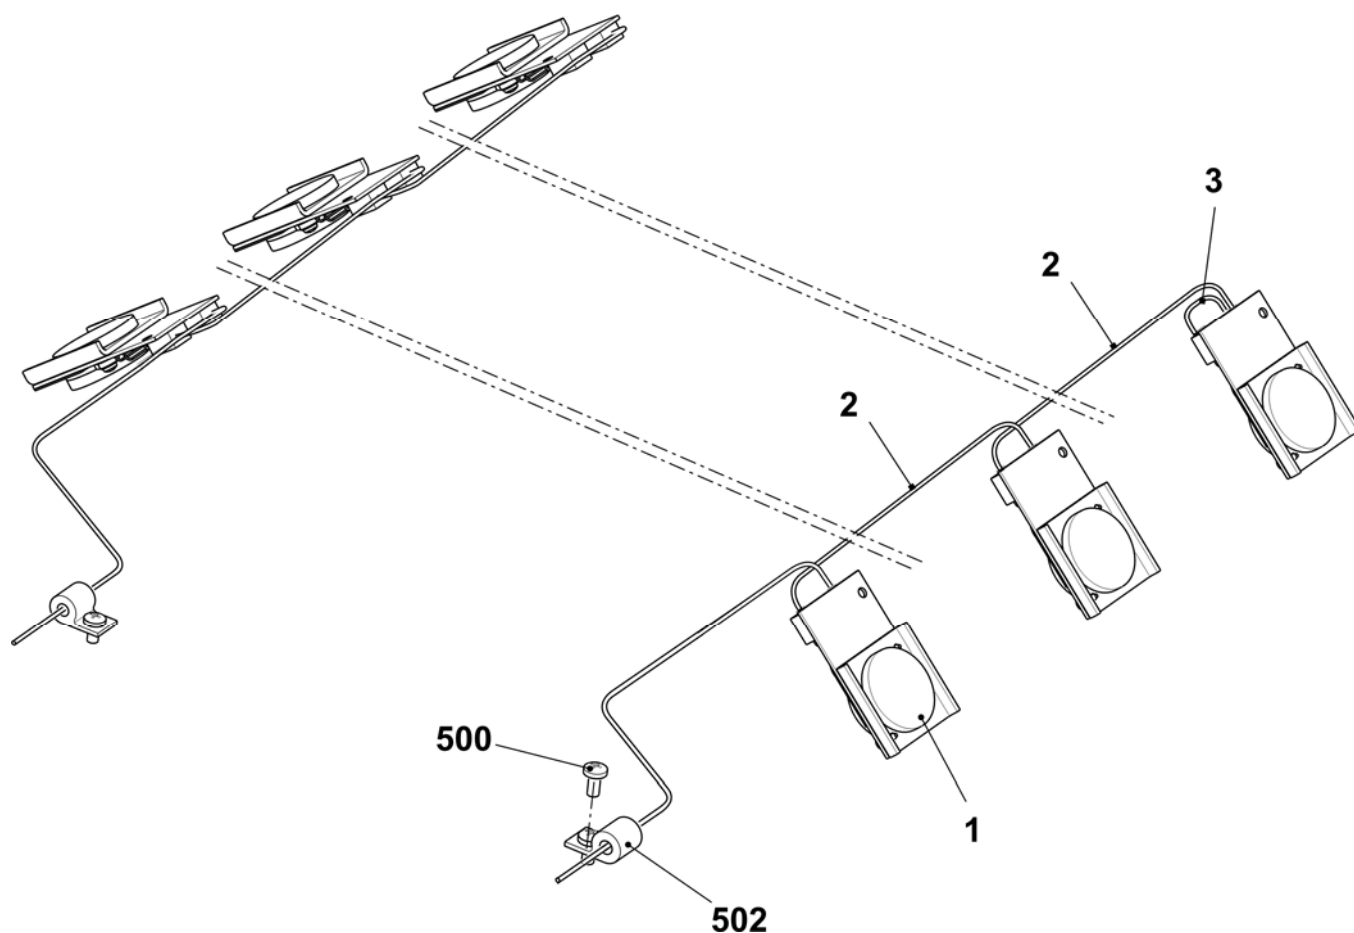


Measuring device

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Measuring device	242 221	5*	Measuring head complete	240 562
1	Measuring bar	241 804			
2	Guidance	212 210			
4	Guidance	240 672			
501	Washer	020 881			
502	Countersunk screw	241 603			

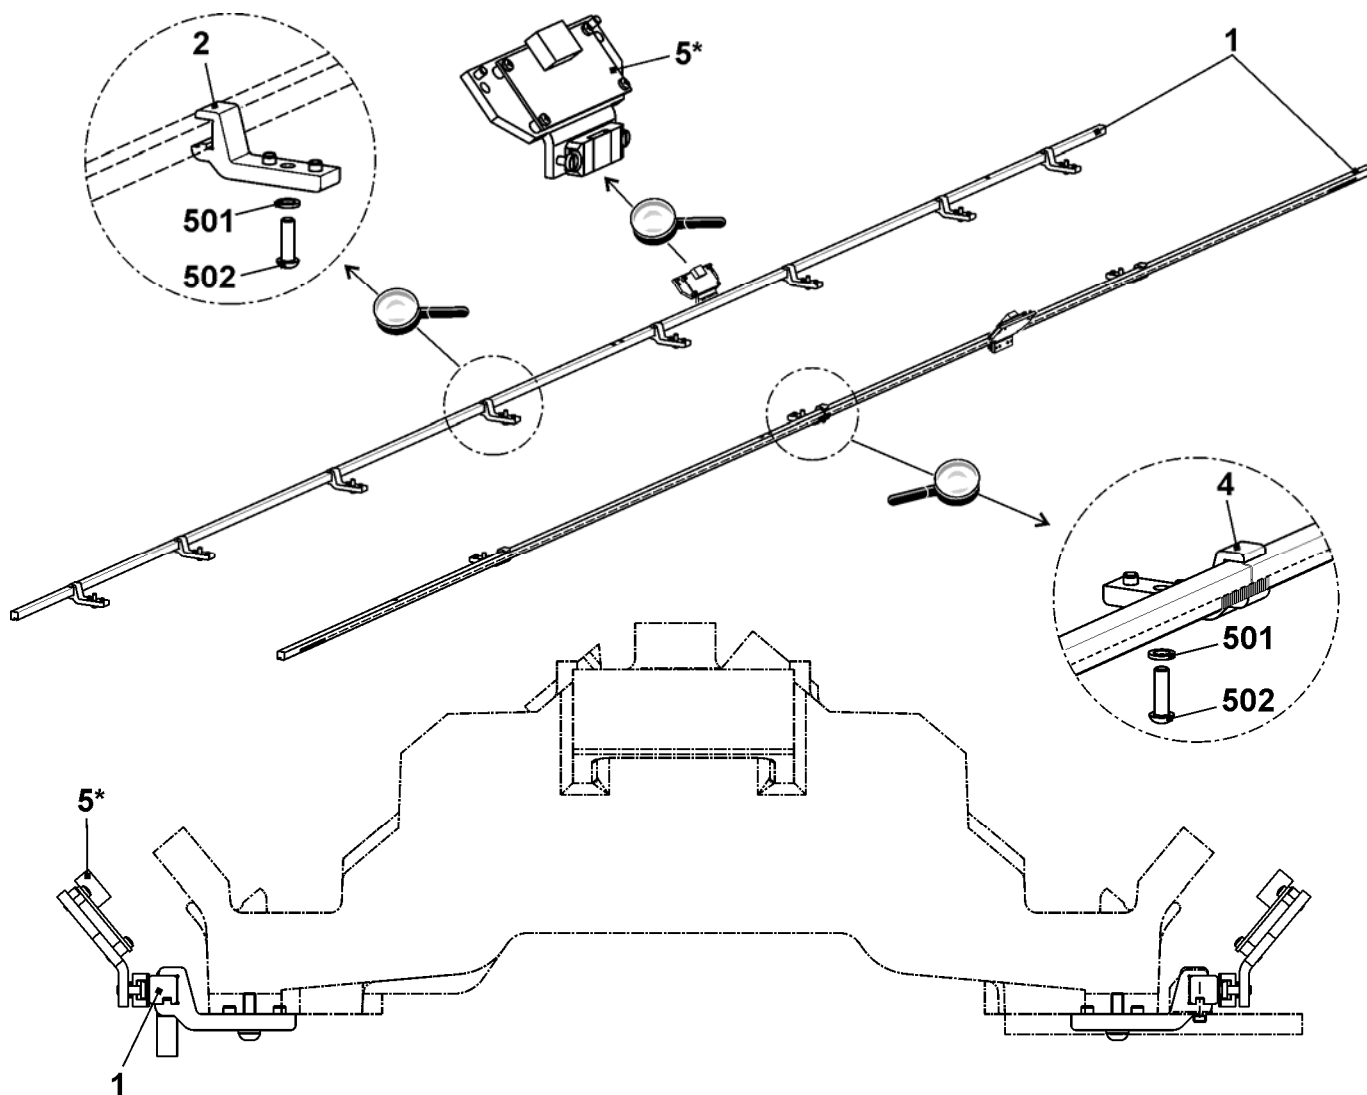


Protective units

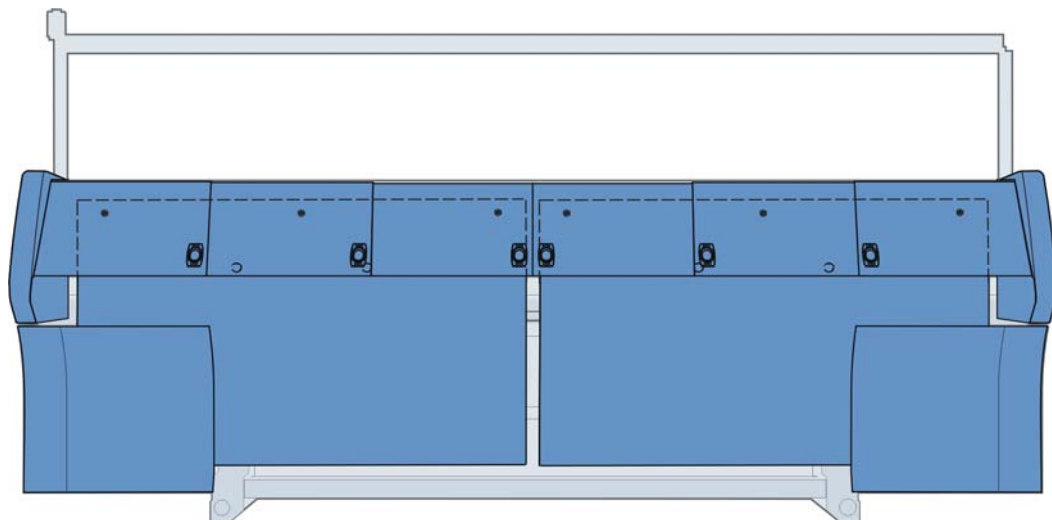


Lateral safety covers

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Safety cover on the left co. E3 - E5	241 271	Σ	Safety cover on the right co. E3 - E5	241 274
1	Safety cover on the left	250 562	1	Safety cover on the right	250 563
2	Hinge	241 994	505	Screw KB 60x30	237 683
3	Plate	224 717	510	Screw KB 60x20	237 682
4	Locking plate	219 748			

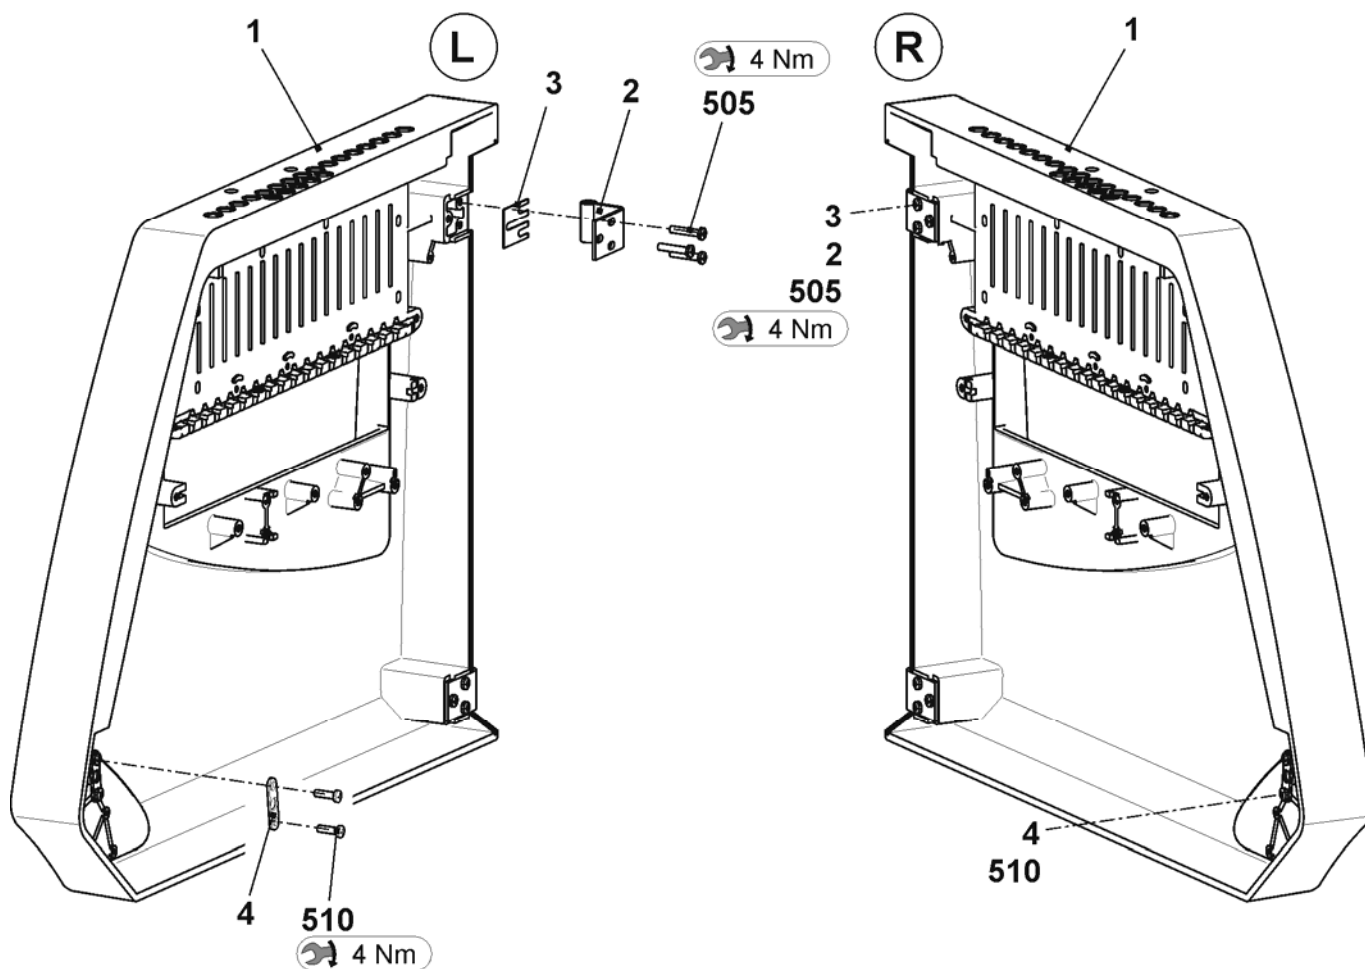


Panelling

Pos	Designation	Ident no.	Pos	Designation	Ident no.
1	Cover 1 (complete)	251 280	1-6	b Inlet type handle	240 210
	1a Cover 1	251 274		c Stripper	219 393
2	Cover 2 (complete)	251 281		d Magnet	204 666
	2a Cover 2	251 275	7	Control unit panelling on the left complete	251 237
3	Cover 3 (complete)	251 282		7a Control unit panelling on the left	251 190
	3a Cover 3	251 276	8	Control unit panelling on the right co.	251 238
4	Cover 4 (complete)	251 283		8a Control unit panelling on the right	251 191
	4a Cover 4	251 277	7-8	x Side part	244 989
5	Cover 5 (complete)	251 284		y Hinge	250 273
	5a Cover 5	251 278		z Strap	240 412
6	Cover 6 (complete)	251 285		500 Screw KB 50x12	240 359
	6a Cover 6	251 279		501 Cap screw M6x10	023 690

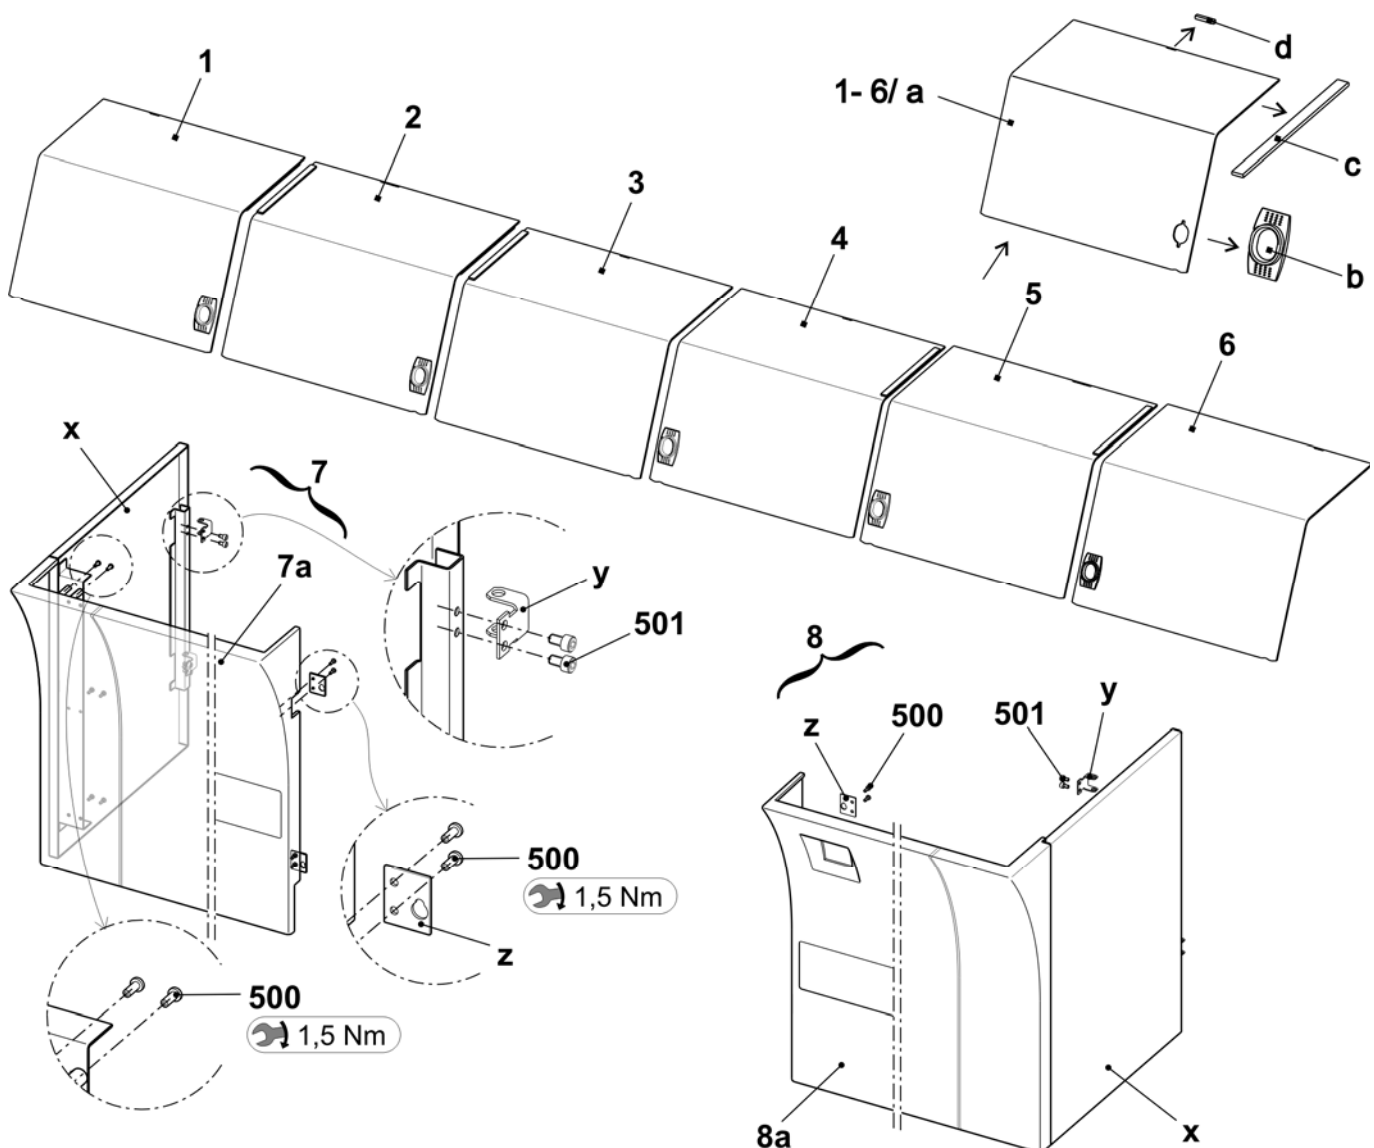


Rear panel

Pos	Designation	Ident no.	Pos	Designation	Ident no.
1	Panelling at the rear complete	251 571	11	Panelling	251 570
			12	Safety sash fastener	243 052

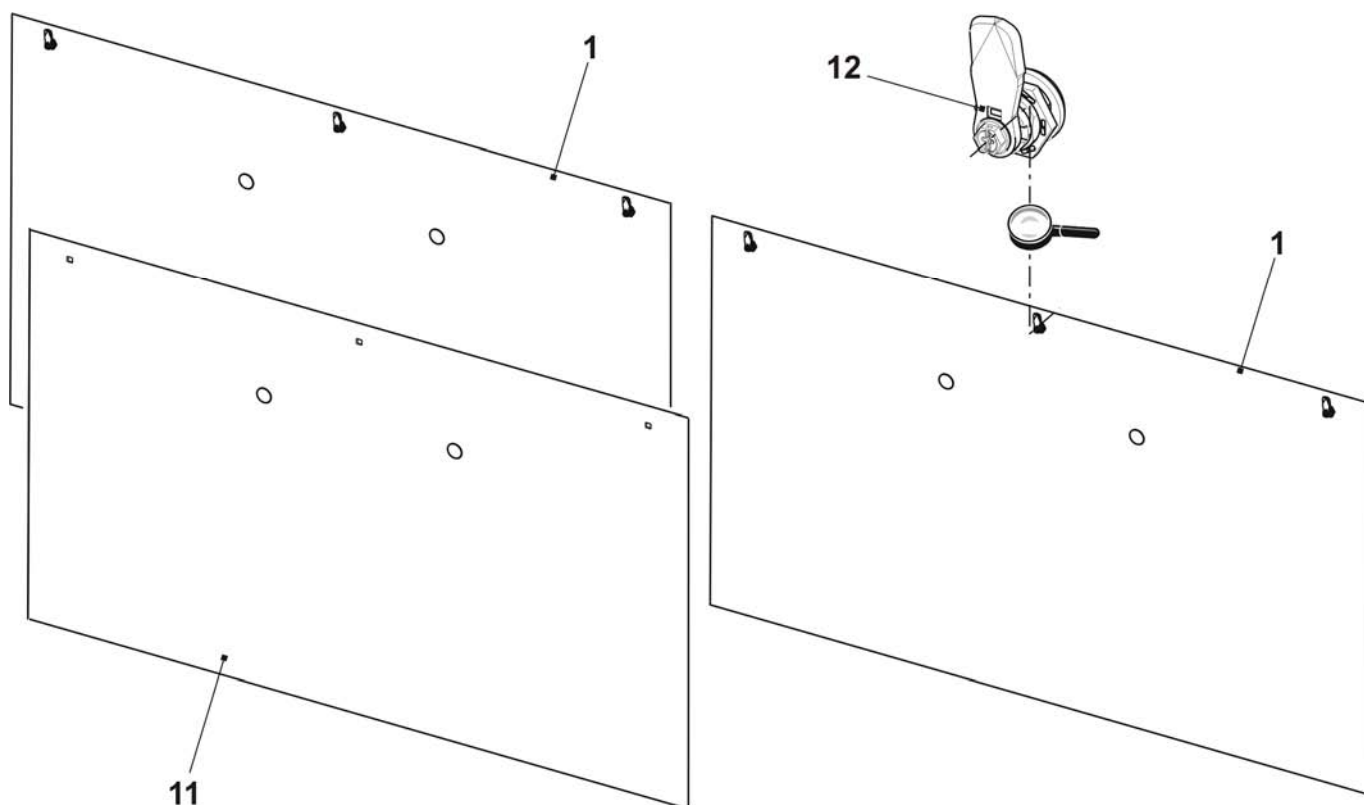

Electrical equipment

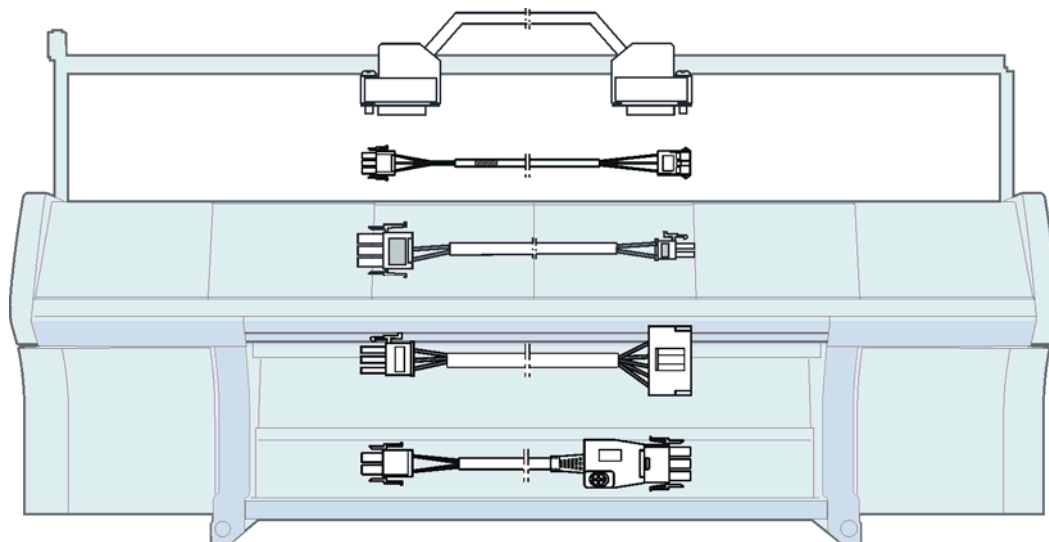


Fuses

	<i>Designation</i>	<i>Ident no.</i>
	Fuse 1.0A F 5x20	008 748
	Fuse 3.15A T/440V 6.3x32	025 261
	Fuse 10A T/440V 6.3x32	025 258
	Fuse 2.5A T/440V 6.3x32	217 465
	Fuse 1.6A T/440V 6.3x32	236 229
	Fuse 6.3A T/440V 6.3x32	026 809
	Fuse 8A T/440V 6.3x32	241 866
	Fuse 12.5A T/440V 6.3x32	232 367





Circuit diagram as PDF

Designation	Ident no.	Identification
Circuit diagram 219 German	243 991	DE
Circuit diagram 219 English	243 991	GB
Circuit diagram 219 Chinese	243 991	CN


You will find the circuit diagram 219 on the CMS documentation DVD with the identification number 242283

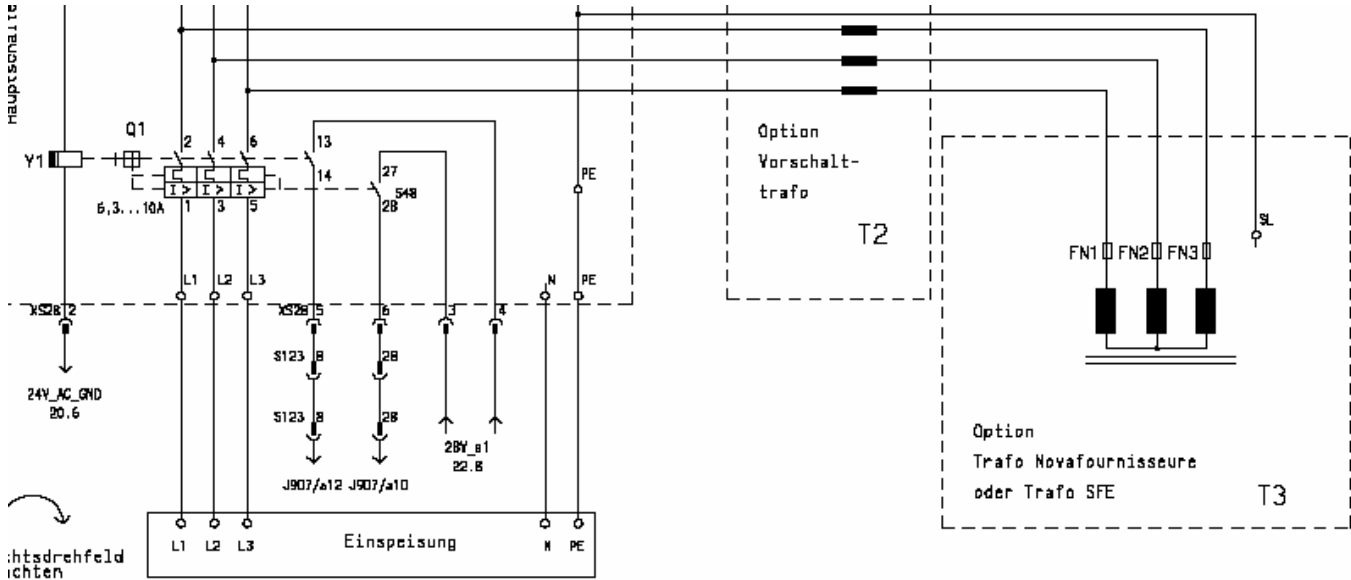


Trailing cable

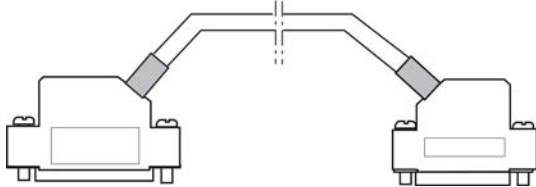
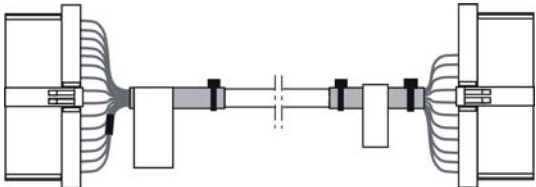
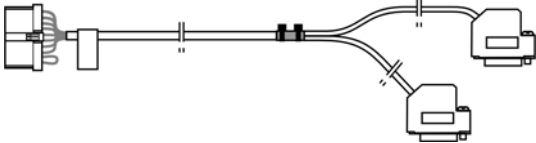
Designation	Ident no.	Designation	Ident no.
Trailing cable set 830C OKC	244 222		
Cable impulse giver at the rear on the right XL136, 822 OKC	242 285	Cable SM at the rear XL325, 830C OKC	244 225
Cable impulse giver at the front on the right XL137, 933 OKC	242 706	Cable SM at the front XL327,830C OKC	244 229
			
Cable yarn carrier 830C OKC	244 224	Cable signal at the rear XL326, 830C OKC	244 226
		Cable signal at the front XL328 830C OKC	244 230
Cable holding-down jack control 830C OKC	244 231		

Cable set installation






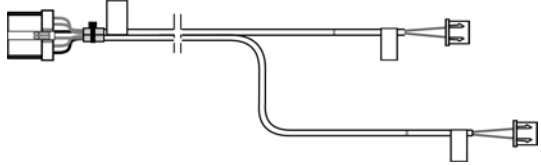
Designation		Ident no.	Designation		Ident no.
Σ	Cable set installation 8XX OKC	242 224			
1	Loom of cables base 1 OKC	240 256	4	Loom of cables comb OKC	240 259
2	Loom of cables base 2 OKC	240 257	8	Cable piezo needle bed OKC	240 518
3	Loom of cables 84" OKC	242 225			

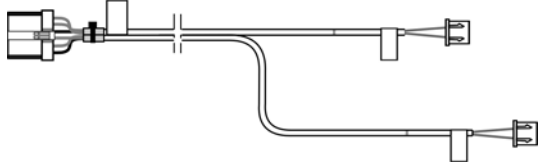











Loom of cables base 1 OKC

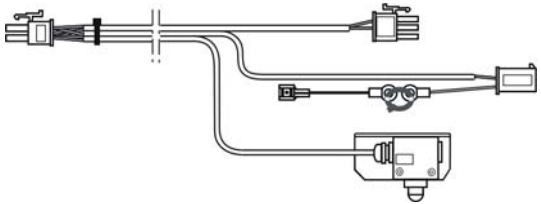Designation	Ident no.	Designation	Ident no.
Loom of cables base 1 OKC	240 256		
Cable engaging OKC 3XX	240 289	Cable mains supply FKE lamp OKC	240 290
			
Cable protective unit on the left OKC	238 705		
			






Loom of cables base 2 OKC

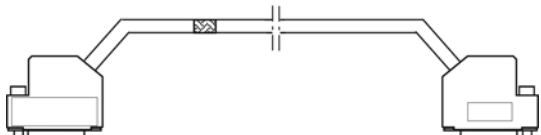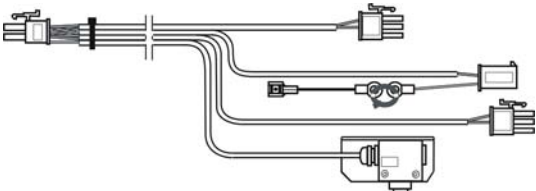Designation	Ident no.	Designation	Ident no.
Loom of cables base 2 OKC	240 257		
Cable motor HAAB OKC	240 291	Cable racking limit switch OKC	240 292
			
Cable ventilator drive OKC	240 293	Cable feed wheel on the right OKC	240 294
			
Cable drive motor OKC	240 295	Cable resolver drive OKC	240 296
Cable racking motor OKC	240 297	Cable resolver racking OKC	240 298
			
Cable protective unit on the right OKC	238 706		
			

Loom of cables 84"

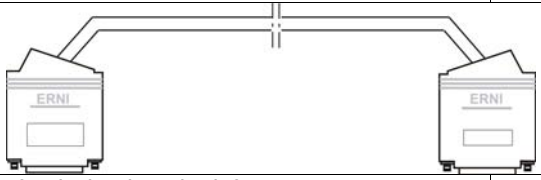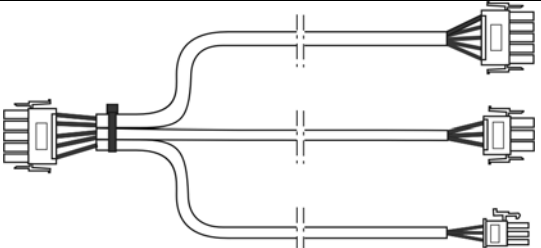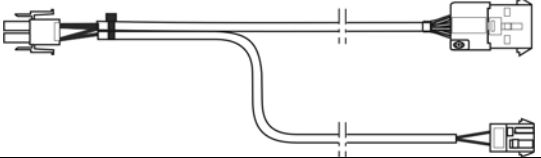Designation	Ident no.	Designation	Ident no.
Loom of cables 84" OKC	242 225		
Cable CAN 84"	240 461	Cable electro 84" OKC	240 463
			
Cable feed wheel on the left 84" OKC	240 466	Cable motor HIAB 84" OKC	242 226
			
Cable switch HIAB 84" OKC	242 227	Cable power supply WAZ/F 84" OKC	240 471
			
Cable power supply Servo 84"	240 504	Cable power supply of mains supply OKC	240 505
			
Cable power supply lighting 84" OKC	240 507	Cable motor HAAB OEF/S 84" OKC	242 228
			
Cable switch HAOS 84" OKC	242 229	Cable switch HIAB pressure motor OKC	240 593
			
Cable HIAB pressure motor OKC	240 592	Cable power supply FLENT 84" OKC	251 243
			

Loom of cables comb

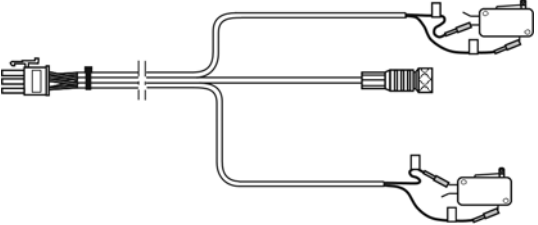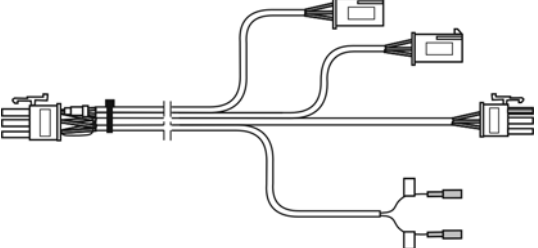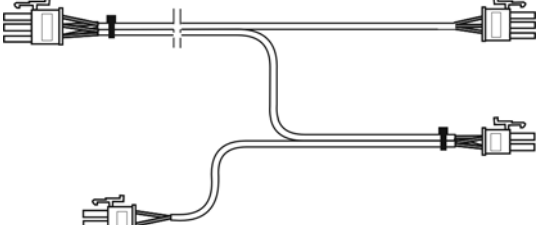
Designation	Ident no.	Designation	Ident no.
Loom of cables comb OKC	240 259		
Cable motor comb hook OKC	240 308	Cable switch KAHA OKC	240 309
			
Cable motor comb OKC	240 310	Cable switch comb OKC	240 311
			
Cable switch HAAB OKC	240 312		
			

Control electronics




Left control cabinet

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Control unit on the left co. 830C OKC	241 312			
1	Control unit on the left without equipment	238 751	5	Card YC final stages short circuit proof	300 939
2	Battery plug-in unit	300 924	6	Card amplifier 4SM 7TE	300 943
3	Power supply CG54	300 923	7	Card N-CPU 432	300 965
31	Ventilator power supply	239 305	8	Card power CPU1	300 966
32	Filter mat CG54	239 350	9	Card IPC P8X OKC	300 976
4	Card battery OKC	300 951	10	Adhesive label of card equipment	244 168

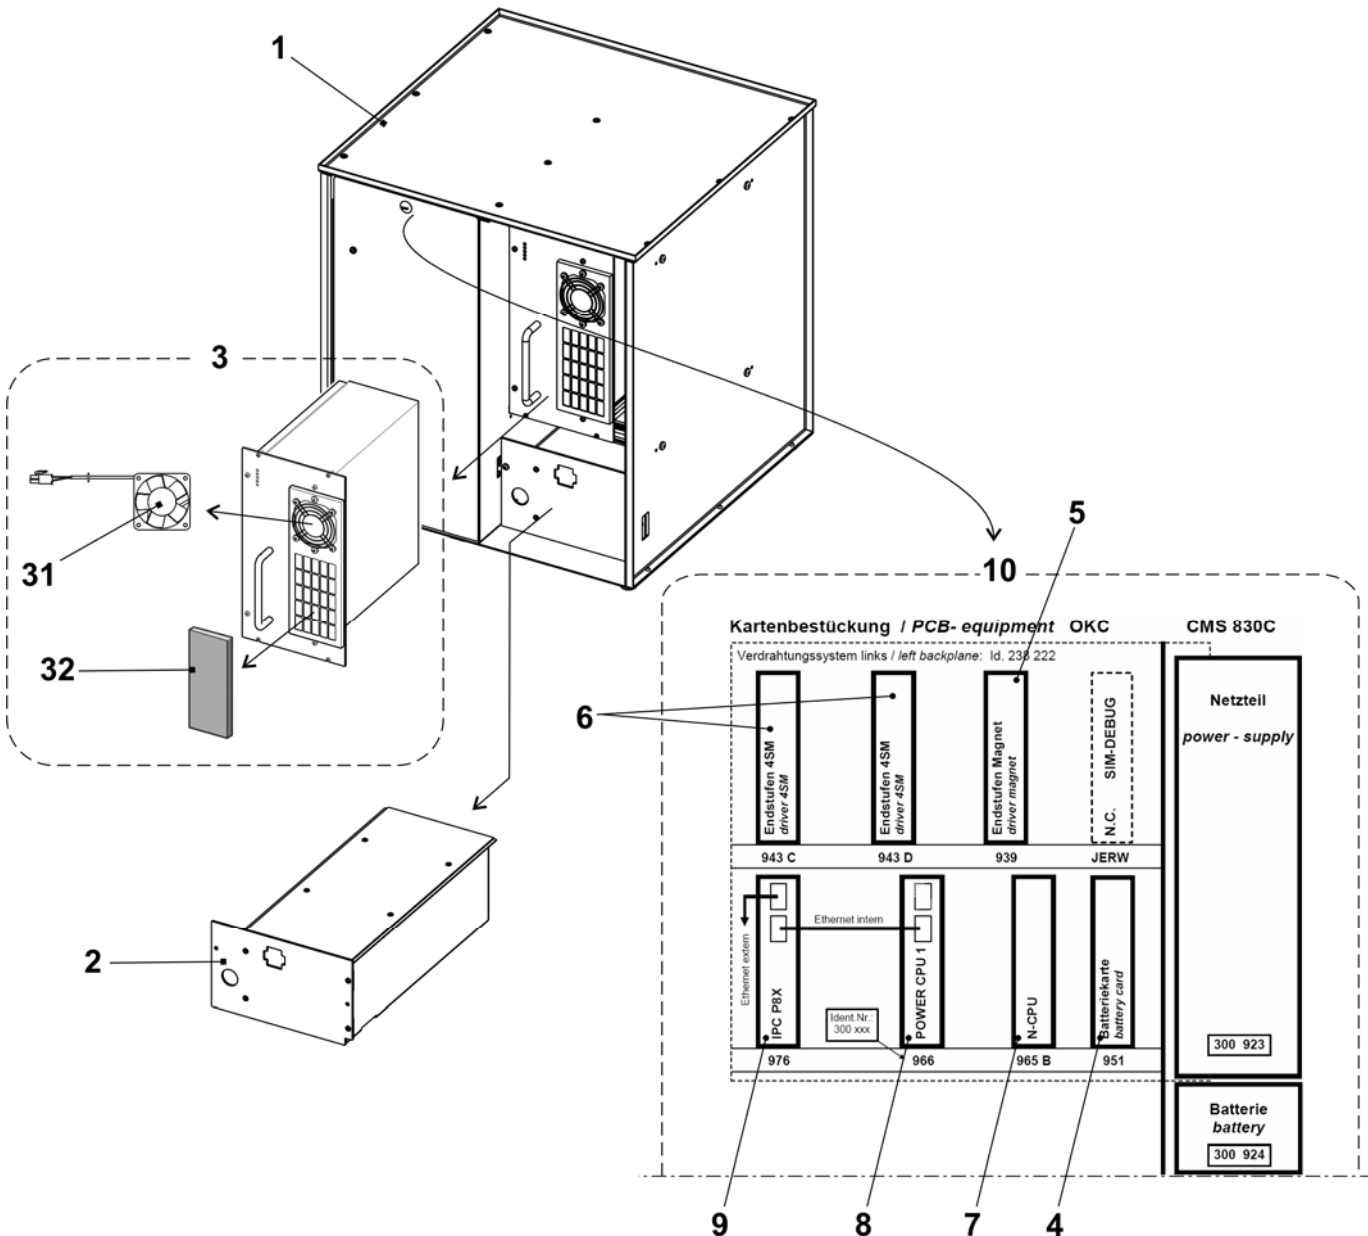


Right control cabinet

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Control unit on the right co. 2A 72" okc	238 738			
1	Control unit on the right without equipment	238 737	3	Card relay OKC	300 953
1a	Axial ventilator Servo05	229 059	4	Card CWAZ	300 929
2	Card Servo6 okc	301 000	5	Card CWAZ capacitor	300 936

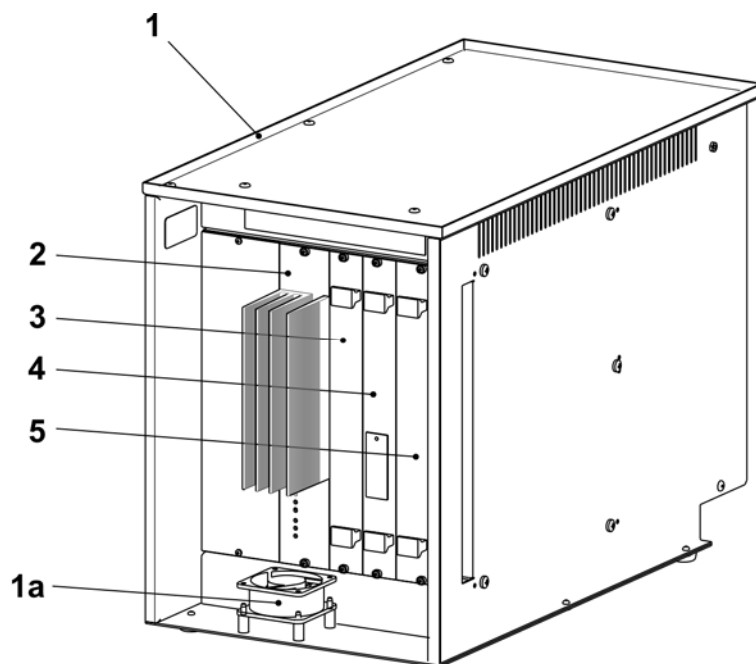

Deliverable accessories

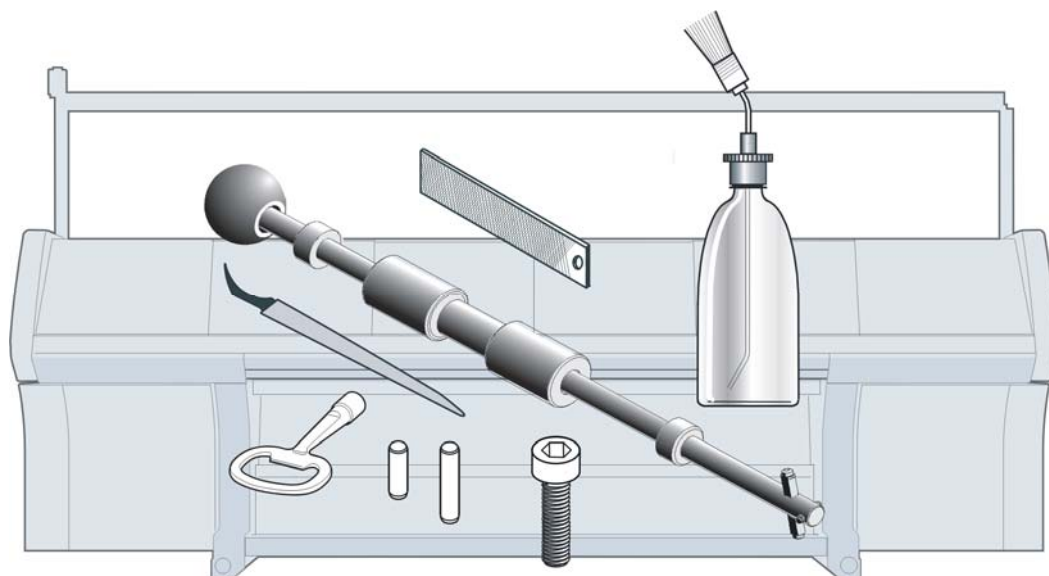


You can order the following tools, lubricants and expendables.

The following list is not conformed with the scope of supply of the knitting machine.


Tool

Pos	Designation	Ident no.	Pos	Designation	Ident no.
1	Channel support E4	062 309	6	Groove file 1.33 mm E3-4	006 169
	Channel support E5, E2,5.2	062 310		Groove file 1.25 mm E5-8, E3,5.2	006 170
	Channel support E7, E3,5.2	062 312		Groove file 0.90 mm E10-12, E5.2 + 6.2	006 175
	Channel support E8	062 313		Groove file 0.73 mm E14, E7.2	006 173
	Channel support E10, E5.2	062 314		Groove file 0.45 mm E16-18, E9.2	006 179
	Channel support E12, E6.2	062 315			
	Channel support E14, E7.2	218 069	7	Key of switch cabinet	009 346
	Channel support E16, E8.2	230 188	8	Groove cleaner E4	031 232
	Channel support E18, E9.2	230 189		Groove cleaner E5	031 233
	Channel support E20	230 190		Groove cleaner E6	031 234
2	Channel chisel E14-20 (E5-14)	062 316		Groove cleaner E7, E3,5.2	031 235
	Channel chisel E4-8 (E3,5.2)	062 317		Groove cleaner E8	031 236
	Channel chisel E10-14	062 318		Groove cleaner E10 (E5.2)	031 238
3	Yarn guide on the left	227 071		Groove cleaner E12 (E6.2)	031 240
	Yarn guide on the right	227 070		Groove cleaner E14 (E7.2)	031 242
4	Working hook	227 249		Groove cleaner E16	225 111
	Extraction hook	232 027		Groove cleaner E18 (E9.2)	225 112
5	5a Small pin	202 843		Groove cleaner E20	225 113
	5b Pin	232 022	9	Measuring tape L=150 cm	228 180
			10	Tool kit	209 527

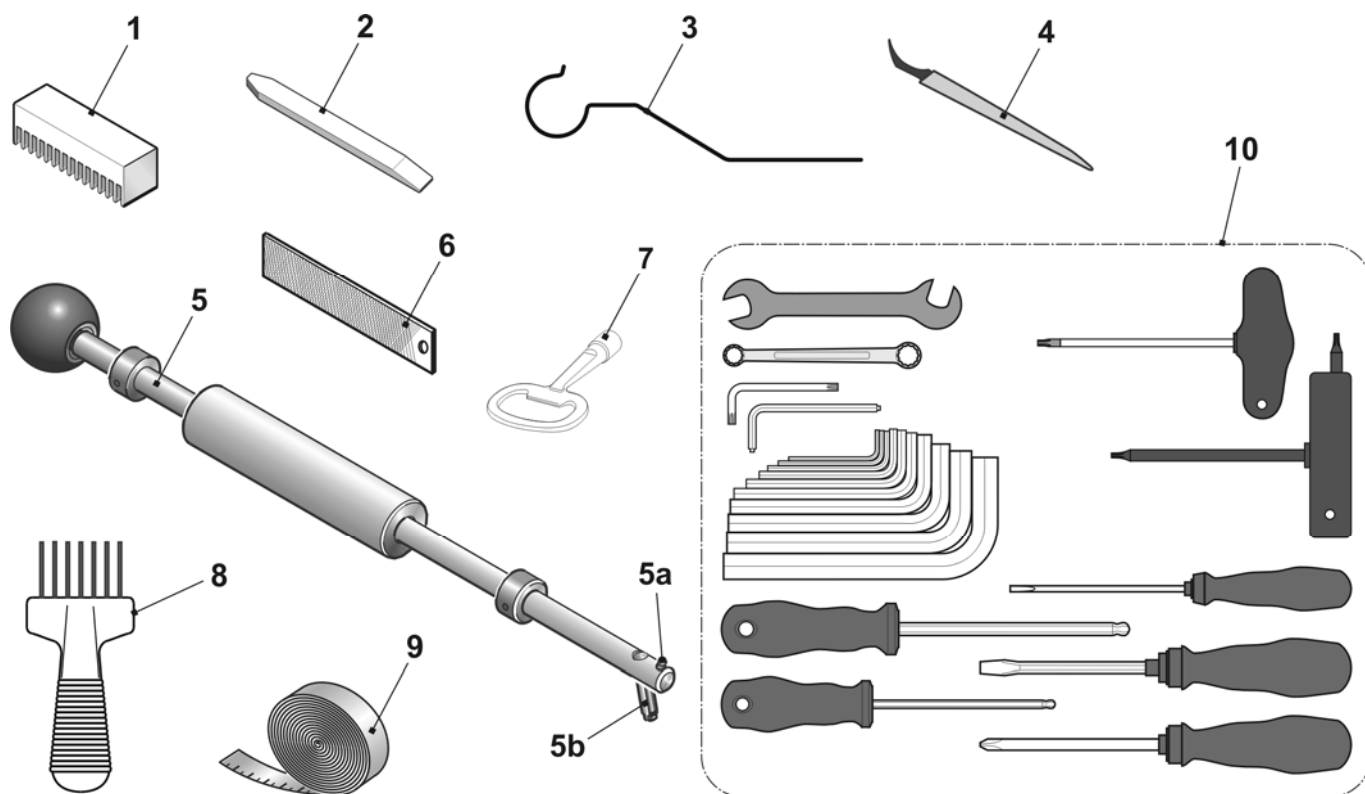


Lubricating stuff

Pos	Designation	Ident no.	Pos	Designation	Ident no.
1	Textile machines oil T46, 1l	230 614	4	Oil combifix no. 8/10 group 10	216 732
2	Grease OKS 475, 1kg	009 200	5	White grease paste OKS270	229 372
3	Grease OKS 475, 150g	005 351	6	Grease Staburags NBU 12/300KP	231 191

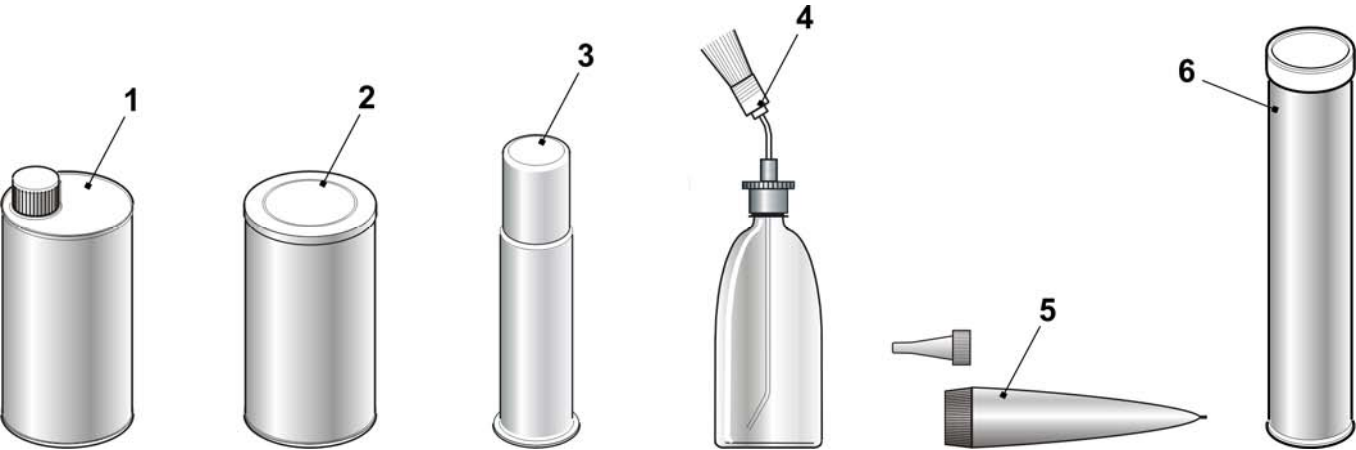


Mechanical parts

Pos	Designation	Ident no.	Pos	Designation	Ident no.
1	Cap screw M4x8	020 091	11	Cable binder 203x3.6 mm	025 815
2	Countersunk screw ISO 2009 - M3x6	020 286		Cable binder T50L	026 294
3	Cap screw DIN 912 - M5x16	022 726		Cable binder	008 379
4	Cap screw DIN 912 - M6x14	022 658		Cable binder 302x4.8 mm	008 642
5	Set screw DIN 914 - M16x50-45H	023 235		Cable binder 92x2.4mm	008 378
6	Setting pin 3x7	020 643	12	Reusable tie ABV 232 320 mm	026 557
7	Setting pin 3x10	020 645			
8	Setting pin 3x12	020 647			
9	Setting pin 5x12	021 988			
10	Setting pin 5x18	022 622			

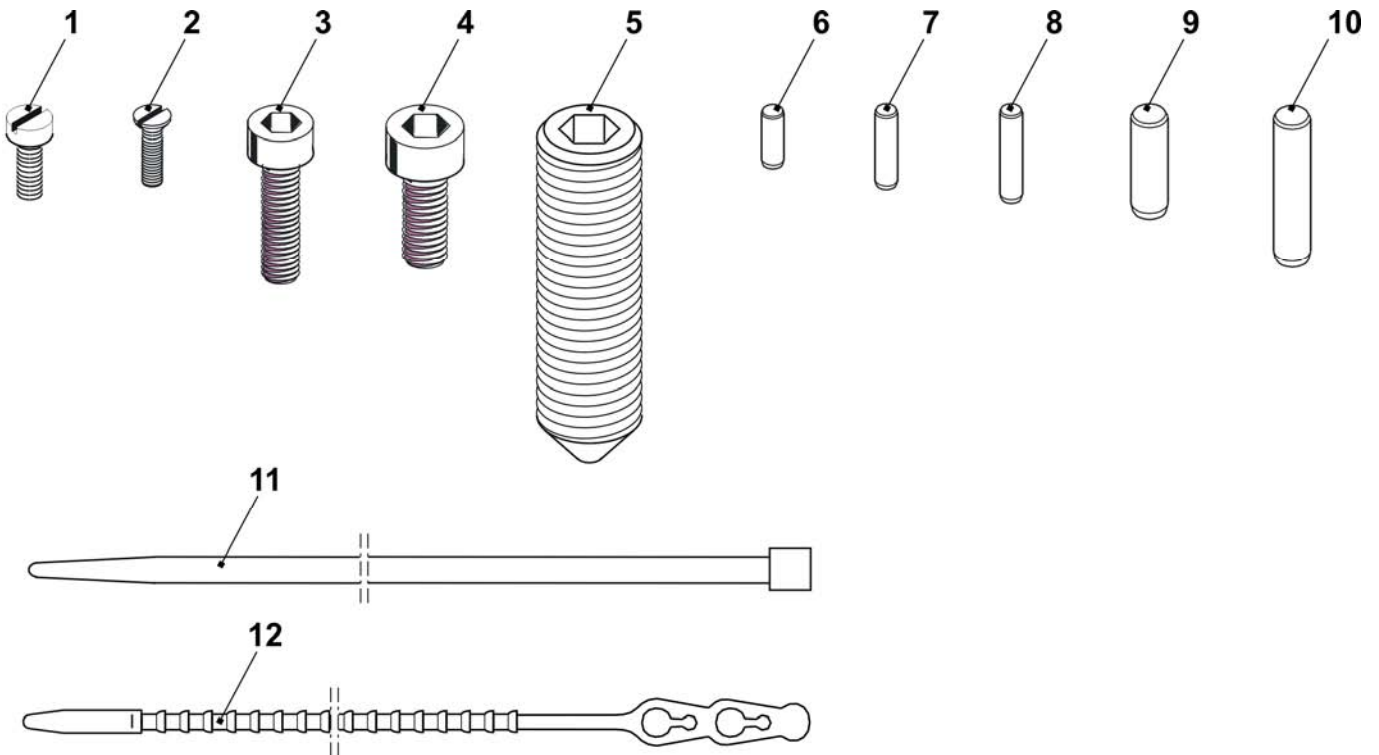


Special equipment

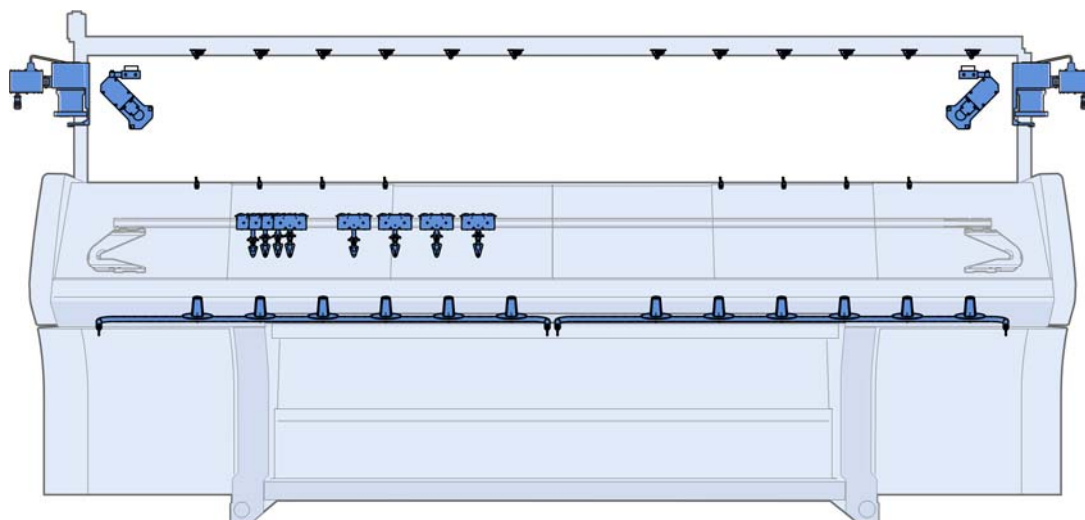




Complete intarsia yarn carriers

Pos	Designation	Ident no.	Pos	Designation	Ident no.
1	Intarsia YC carriage 1+8 complete	213 773	3	Intarsia YC carriage 3+6 complete	213 775
2	Intarsia YC carriage 2+7 complete	213 774	4	Intarsia YC carriage 4+5 complete	213 776

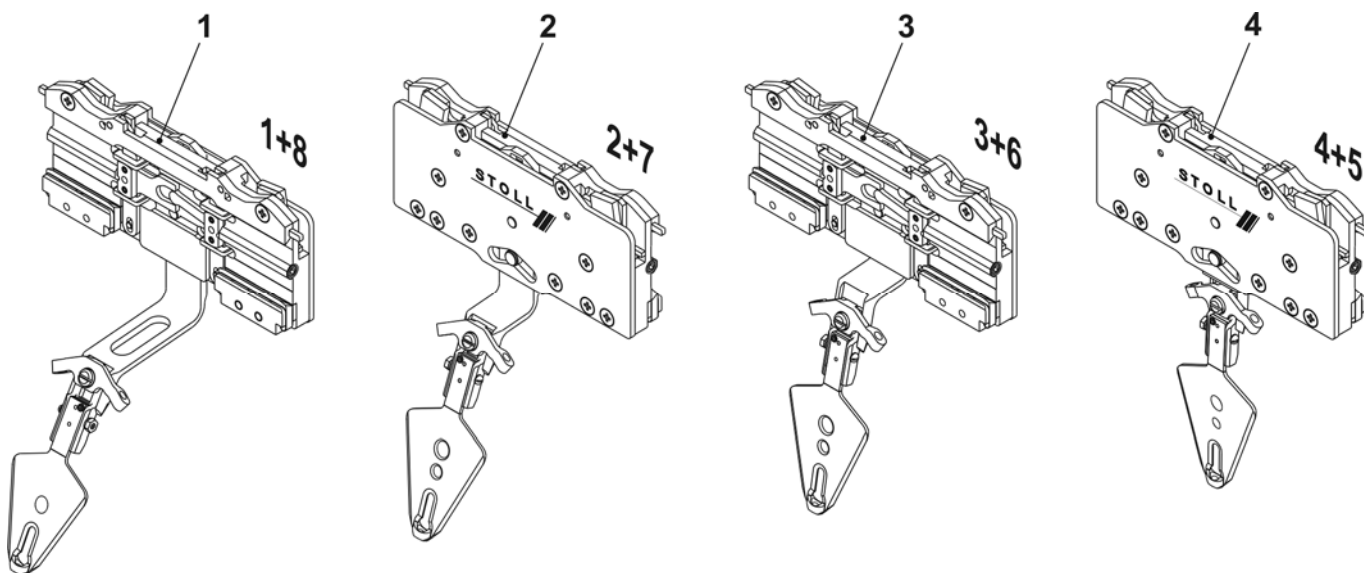


Carriage IYC

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Intarsia YC carriage 1+8 complete	213 773			
	Intarsia YC carriage 2+7 complete	213 774	11	Cover	213 392
	Intarsia YC carriage 3+6 complete	213 775	12	Clamping lever on the right	216 100
	Intarsia YC carriage 4+5 complete	213 776	13	Clamping lever on the left	216 101
1	Basic plate complete	213 408	14	Pressure plate 2,04	201 654
2	Slider	217 188		Pressure plate 2,06	208 924
3	Locking plunger	212 508	16	Spring pin	201 677
4	Sliding block	213 807	17	Lifter	212 547
7	Locating pin 3.3 (2+7/3+6)	212 504	18	Sliding part	213 391
	Locating pin 3.4 (1+8/2+7/3+6/4+5)	212 505	21	Threaded bolt	213 399
8	Locating pin 3,3 (2+7/3+6/4+5)	212 504	500	Countersunk head screw M4x6	022 994
	Locating pin 3.4 (2+7/3+6/4+5)	212 505	502	Countersunk head screw M4x12.5	022 979
	Locating pin 3.5 (1+8)	212 506	506	Compression spring 4.0x0.7x25	022 969
9	Thrust piece	212 773	508	Compression spring 2.8x0.35x19	023 394
10	Pressure roller	212 774			

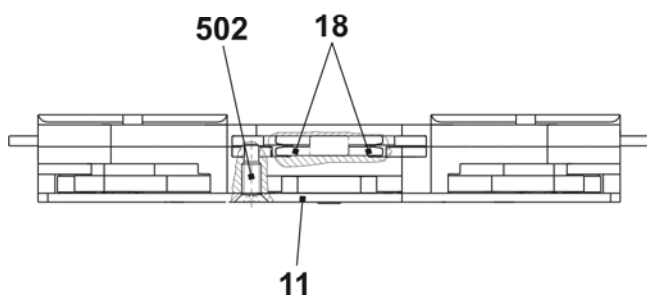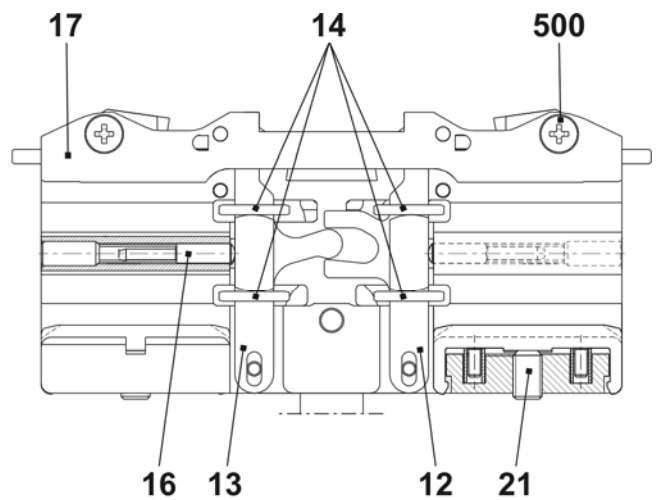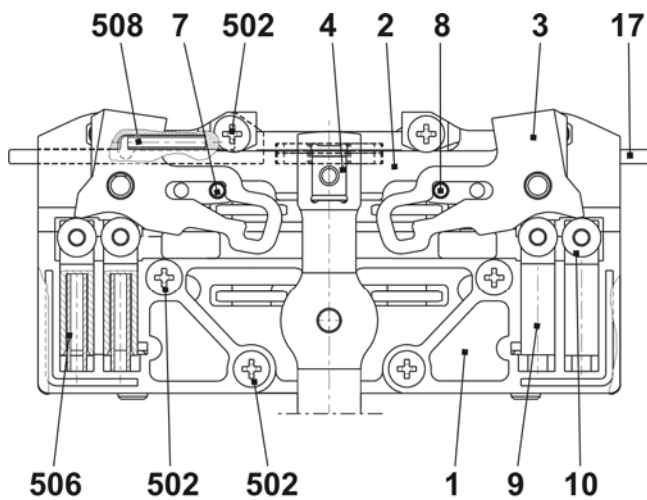


Bow and head IYC

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Intarsia YC carriage 1+8 complete	213 773			
	Intarsia YC carriage 2+7 complete	213 774	5	YC head 1+8 complete	216 352
	Intarsia YC carriage 3+6 complete	213 775	6	YC head 2+7 complete	216 353
	Intarsia YC carriage 4+5 complete	213 776	7	YC head 3+6 complete	216 354
1	YC bow 1+8 complete	213 768	8	YC head 4+5 complete	216 535
2	YC bow 2+7 complete	213 769	a	Yarn guide angle	201 672
3	YC bow 3+6 complete	213 770	500	Cap screw M4x8	022 977
4	YC bow 4+5 complete	213 771	501	Circlip S4-FST	022 774

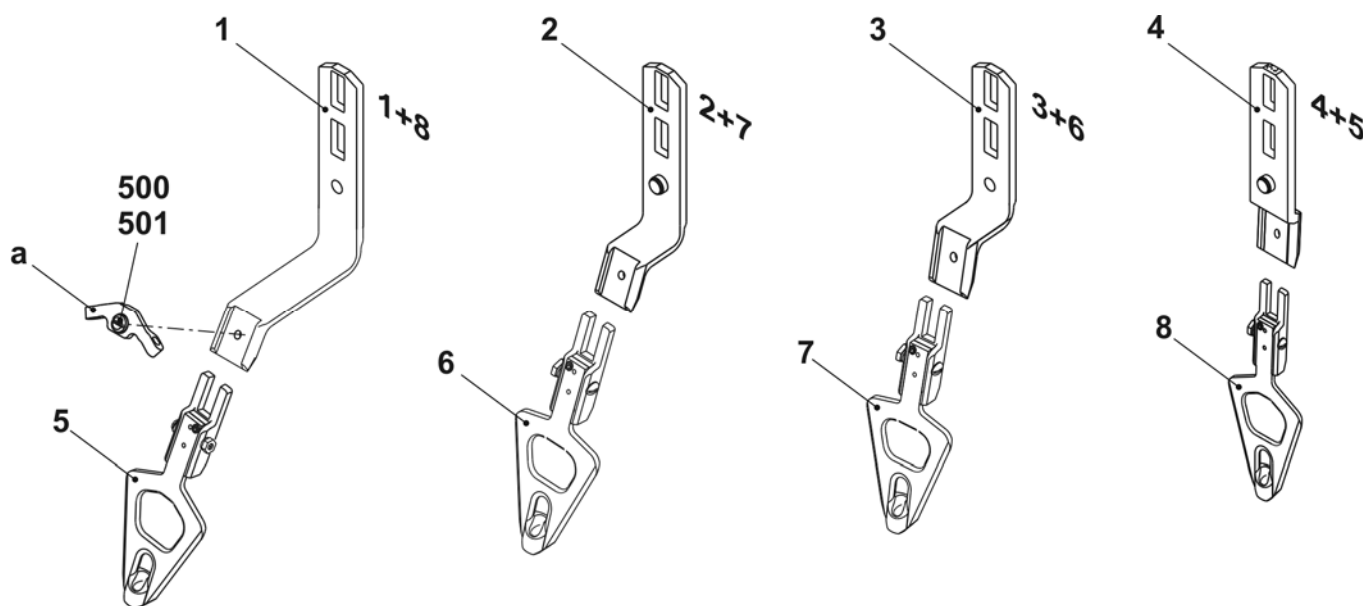


Carriage of plating yarn carrier

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ1	Carriage of plating YC co. 3+6 E3-4	217 658	Σ2	Carriage of plating YC co. 4+5 E3-4	217 660
1	Plating YC bow 3+6 complete E3	214 590	2	Plating YC bow 4+5 complete E3	214 591
a	Shim	213 035	a	Shim	213 035
b	YC carriage complete	241 887	b	YC carriage complete	241 887
500	Hexagon screw M5x10	020 351	500	Hexagon screw M5x10	020 351

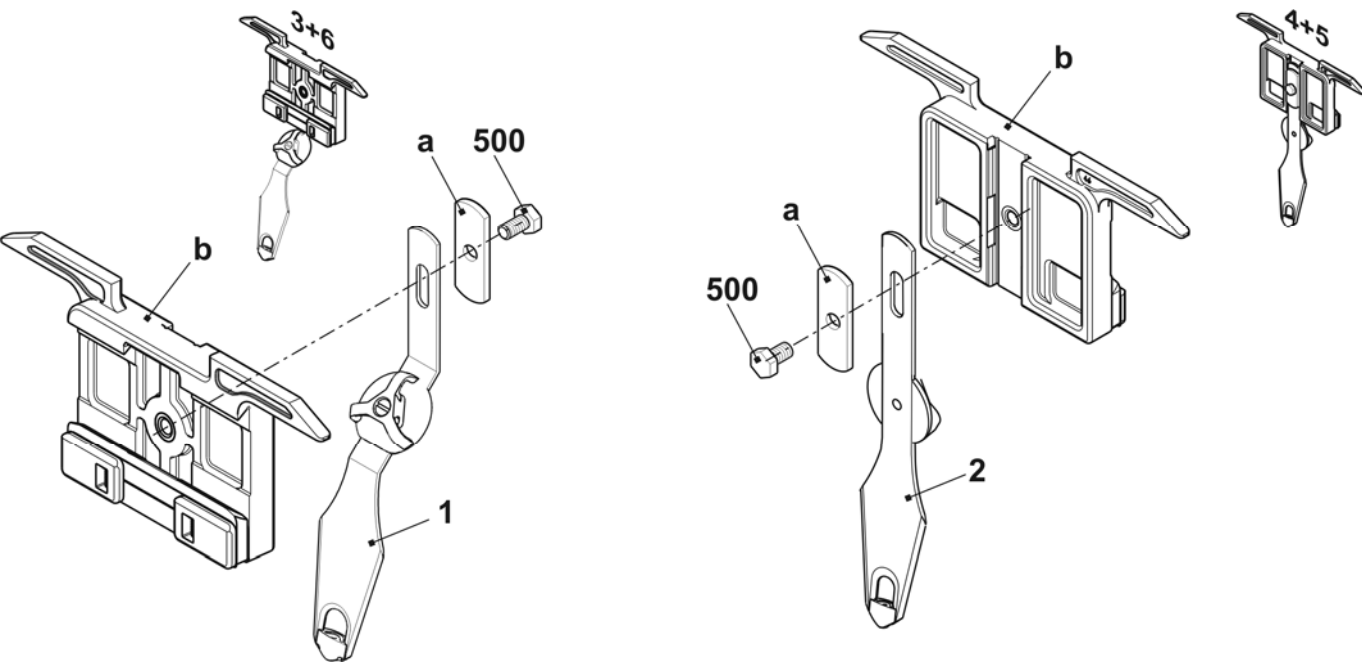


Yarn length measuring device

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Yarn length measuring device co.	228 943	10	Yarn length measuring device 3	236 275
20	Cable length measuring	236 718	11	Card FLM CPU	300 934
30	Support	223 029	12	Sensor	211 354
40	Clamp	228 583	13	Sensor complete	212 406
50	Setting weight	212 241	13a	Rubber running ring	212 390
80	Threaded bar	200 223	16	Ventilator complete	212 255
500	Countersunk screw M8x16	023 113	17	Threaded bar	211 801
501	Hammer head bolt M8x25	022 866	19	Yarn guide rod	211 352
503	Hexagon nut M8-6	020 838	510	Countersunk screw M5x10	023 247
504	Washer 8,4	023 248	511	Spring nut M5	022 873
			512	Countersunk screw M5x6	023 246
			513	Sheet metal screw ST3.5x13	022 940
			514	Spring washer A5	022 454
			515	Oval head screw with washer M3x10	023 380
			516	Cap screw M5x22	023 193

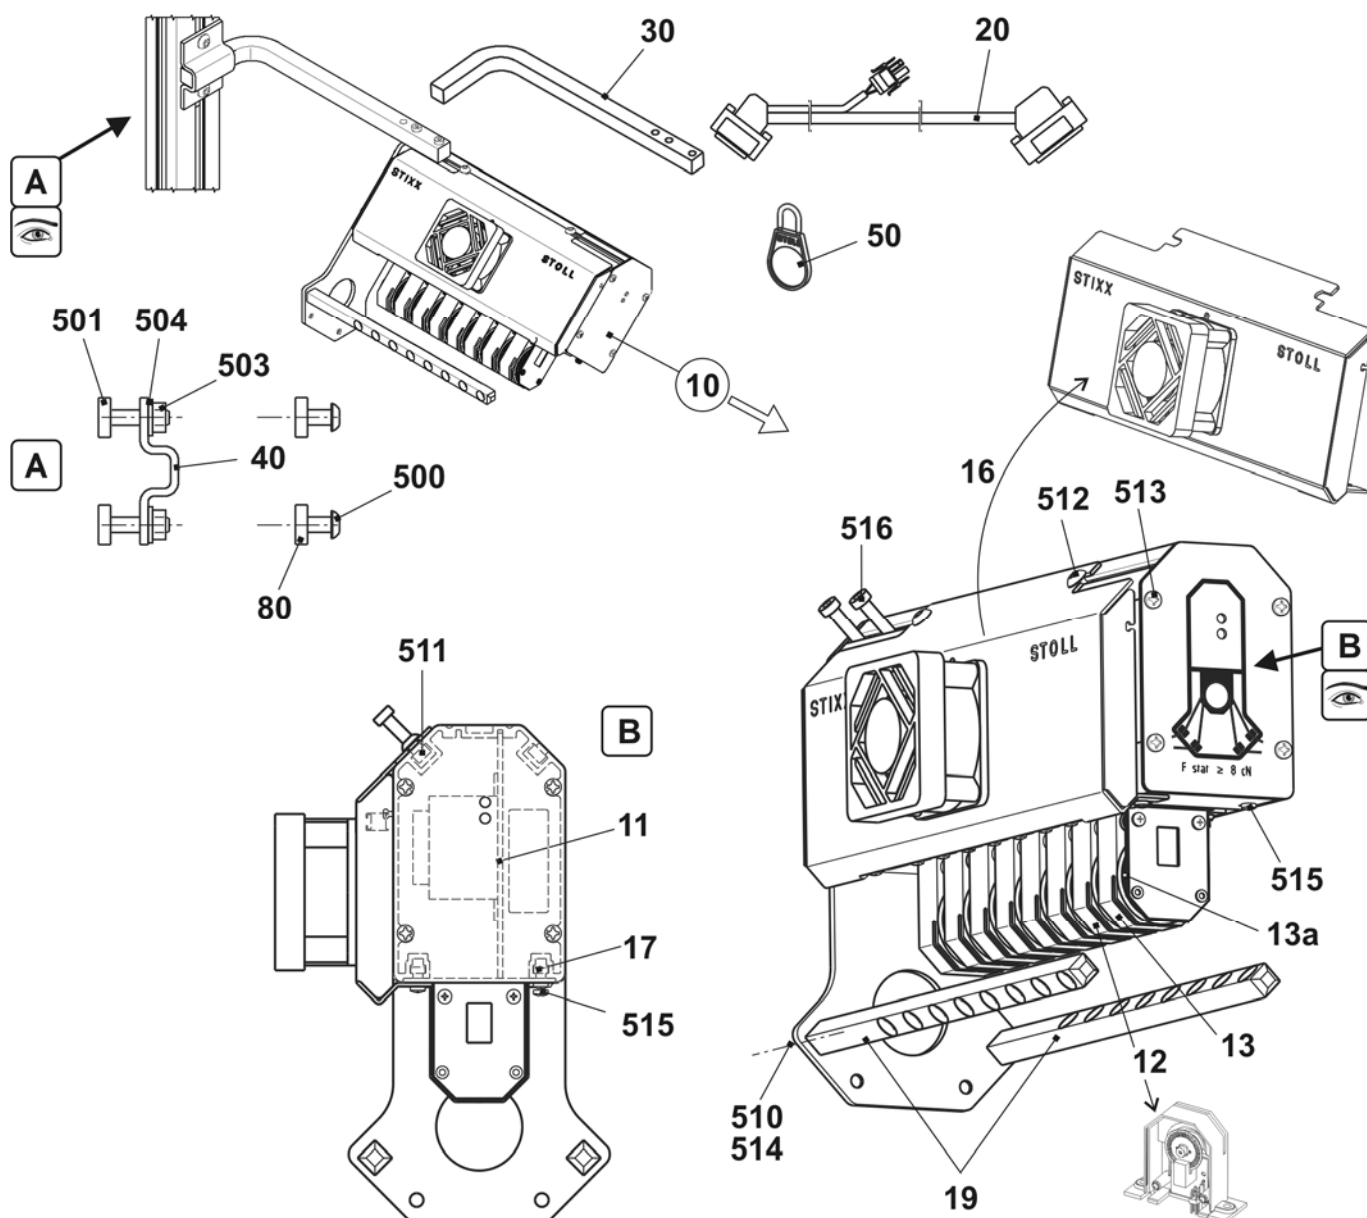

Feed wheel SFE

Pos	Designation	Ident no.	Note
Σ	Mounted set storage feed wheel SFE	231 427	Please order the SFE spare parts at: MEMMINGER-IRO GMBH Jakob-Mutz-Strasse 7 D-72280 Dornstetten Phone: +49 (0)7443 281-0 Fax: +49 (0)7443 281-101 The item no. and the designation for the SFE spare parts can be found in the enclosed assembling instructions of the company MEMMINGER-IRO.
1	Mounted set SFE without transformer	231 980	
2	Transfo with cable	231 979	

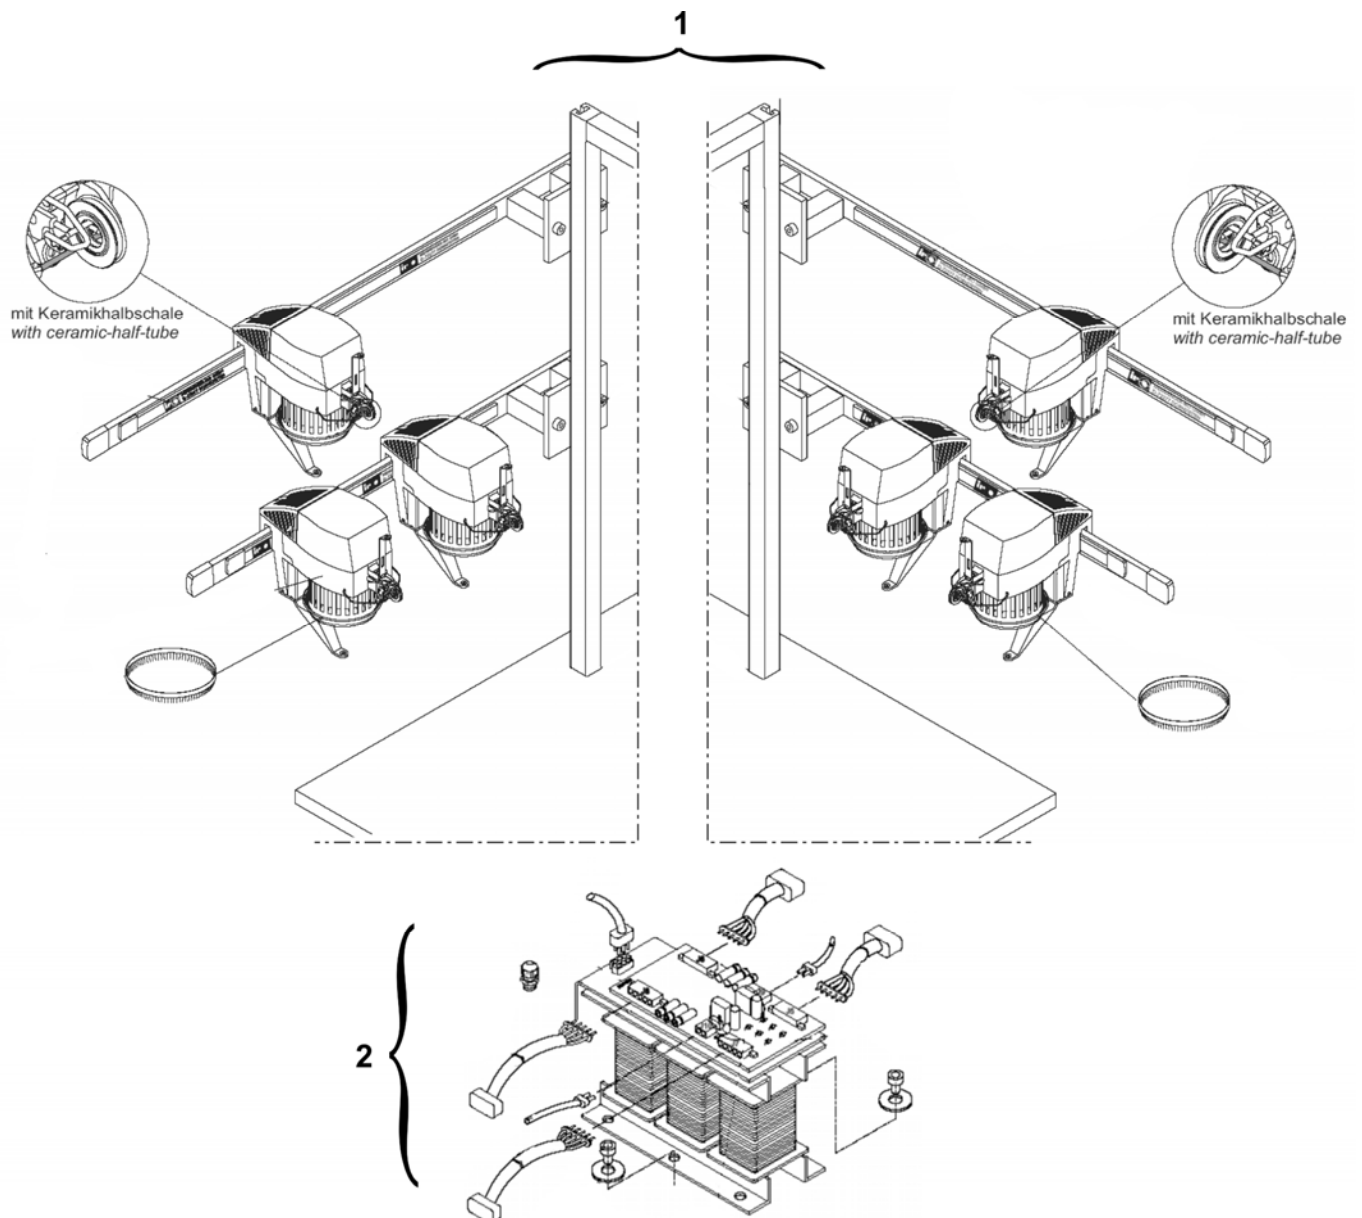

Additional board at the bottom

Pos	Designation	Ident no.	Pos	Designation	Ident no.
Σ	Additional board	253 646			
1	Additional board welded	253 472	8	Yarn guide	243 765
2	Positioning pin	202 777	9	Yarn guide	241 581
3	Disc D=130	062 385	500	Countersunk screw M4x30	023 681
4	Bobbin support	200 363	501	Washer 5.3x30x1.25	023 556

