


CMS 922 (Type 770)

Component Type 004

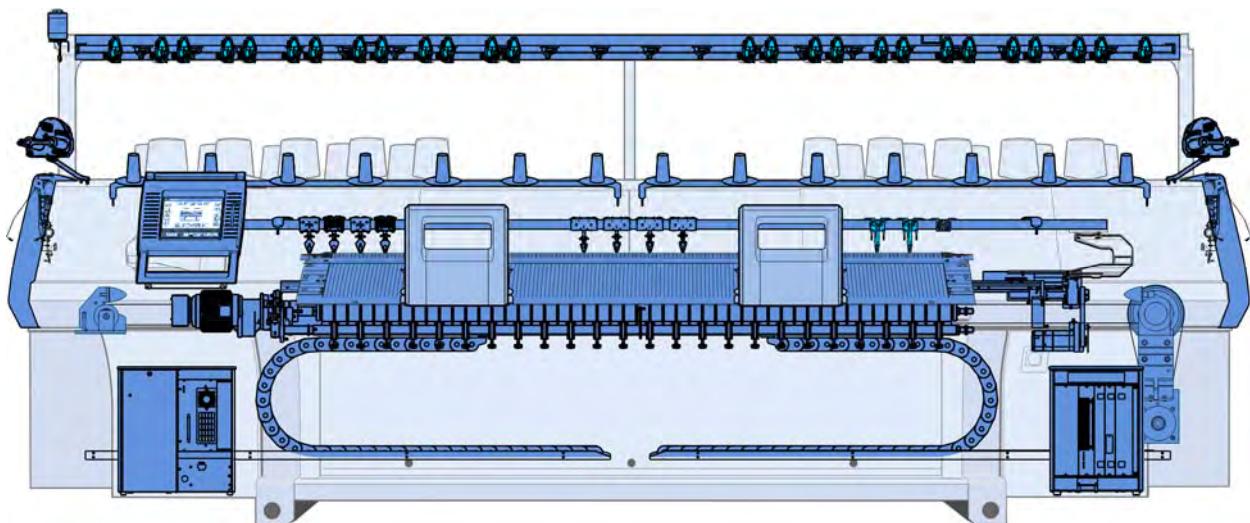

Issue 04/2009

Document-No. 243962_07_GB

Introduction

Notes for the order

This catalog serves to order spare parts.

It can only be applied to the machine type recorded on the title page.

When ordering spare parts we imperatively ask for the following indications as otherwise a delivery of spare parts is not possible:

1. Type of machine, gauge, no. of machine.
2. Page no., designation, ID, quantity.

Please use the order form!

Only genuine STOLL spare parts may be used for repairs.

Order form

Telefon +49 (7121) 313-289
 Telefax +49 (7121) 313-347
 email: spareparts@stoll.com

H. Stoll GmbH & Co. KG
 PO box 2544

D-72715 Reutlingen

Company	<hr/>
Name	<hr/>
Street	<hr/>
Postal code town	<hr/>
Phone	<hr/>
Fax	<hr/>
Customer no.	<hr/>
Shipping mode	<hr/>
Date of order	<hr/>
Maschine type	<hr/>
Gauge	<hr/>
Masch.-Nr.	<hr/>
Sirix-Nr.	<hr/>

Spare parts order




Page no.	Designation	Ident no.	Piece no.	Comment

Date

Signature

Search help

In order to make the search of the spare parts easier, the following elements will be used in the spare parts catalog:

Symbol	Meaning
Σ	Indicates an assembly
	Position indicator with the position number (X).
	Indicates an element of another assembly.
	Indicates an assembly which is represented more detailed beside.
	Indicates an assembly which is represented on another page more detailed.
	Screw torques (z) deviating from the preferential row.
	Detail, represented enlarged in the direction of the arrow.
	Explosion representation, single elements enlarged.
	Indicates a group of parts.
	Indicates the left-hand side or view.
	Indicates the right-hand side or view.
	Indicates a section or a view in the viewing direction.

Torques

Drehmomente Torques Couples Coppias Momentos de rotación		Festigkeitsklassen Property class Classes de résistance Classi di resistenza Clasas de resistencia		
[Nm] ± 10 % (für $\mu_{ges} = 0,12$)		4,8	8,8	12,9
Regelgewinde Coarse-pitch thread Filetage à pas gros Filetto regolatore Filete regolador	M3	0,6	1,2	2,5
	M4	1,2	2,5	5
	M5	2,5	5	9
	M6	5	9	18
	M8		18	40
	M10		40	
	M12		80	

Preferential row of screw torques

- Torques are **valid for:**

Connection steel-steel, black, phosphatized, galvanized, rolled or cut thread as well as only for plain (head) supports.

- Torques are **not valid for:**

They are also not used for self-grooving threads, protected screws with: lock washers, rib heads, coated and clamping screws and nuts. They are also not used for self-grooving threads.

- Torques differing from this preferential row of torques must be taken from the corresponding location in the drawings.

Table of contents

Introduction.....	2
Search help	4
Torques	5
Carriage drive.....	12
Drive.....	13
Drive unit	14
Tension bearing	15
Energy chain and carriage driver.....	16
Racking	17
Racking drive.....	18
Needle beds	19
Needle bed E5.....	20
Continuation needle bed E5	21
Needle bed E7.....	22
Continuation needle bed E7	23
Needle bed E8.....	24
Continuation needle bed E8	25
Needle bed E10.....	26
Continuation needle bed E10	27
Needle bed E12.....	28
Continuation needle bed E12	29
Needle bed E14.....	30
Continuation needle bed E14	31
Needle bed E16.....	32
Continuation needle bed E16	33
Needle bed E5m.4	34
Continuation needle bed E5m.4	35
Needle bed E7m.5	36
Continuation needle bed E7m.5	37
Needle bed E7m.8	38
Continuation needle bed E7m.8	39
Needle bed E8m.7	40
Continuation needle bed E8m.7	41
Needle bed E10m.12	42
Continuation needle bed E10m.12	43
Needle bed E12m.10	44


Continuation needle bed E12m.10	45
Needle bed E3,5.2	46
Continuation needle bed E3,5.2	47
Needle bed E5.2	48
Continuation needle bed E5.2	49
Needle bed E6.2	50
Continuation needle bed E6.2	51
Needle bed E7.2	52
Continuation needle bed E7.2	53
Needle bed E8.2	54
Continuation needle bed E8.2	55
Cover on the left and on the right	56
Thread clamps	57
Tandem carriage	58
Overview of carriage	59
Overview of carriage, continuation	60
Carriage	61
Carriage guide	62
Carriage cover	63
Carriage coupling	64
Spare parts package carriage guide bar	65
Yarn carrier driving without guiding part	66
Yarn carrier driving with guiding part	67
Holding-down jack control	68
Needle detector	69
Brush holder	70
Cam box E5 + E5m.4 + E7m.5 + E3,5.2 + E5.2	71
Cams E5 + E5m.4 + E7m.5 + E3,5.2 + E5.2	72
Cams for narrow coupling E5 + E5m.4 + E7m.5 + E3,5.2 + E5.2	73
Cam box E7 + E8 + E7m.8 + E8m.7	74
Cams E7-8 + E7m.8 + E8m.7	75
Cam box E10	76
Cams E10	77
Cams for narrow coupling E10 + E12 + E14 + E16 + E10m.12 + E12m.10 + E6.2 + E7.2 + E8.2	78
Cam box E12	79
Cams E12	80
Cam box E14	81
Cams E14	82
Cam box E16	83
Cams E16	84
Cam box E10m.12	85
Cams E10m.12	86
Cam box E12m.10	87
Cams E12m.10	88
Cam box E6.2	89
Cams E6.2	90
Cam box E7.2	91
Cams E7.2	92
Cam box E8.2	93
Cams E8.2	94
Main take-down	95
Main take-down	96

Take-down roller	97
Contact shaft	98
Take-down gear assembly	99
Take-down motor with block.....	100
Fabric stripper.....	101
Auxiliary take-down	102
Auxiliary take-down.....	103
Main bearing.....	104
Motor on the left.....	105
Take-down roller.....	106
Gear	107
Motor on the right.....	108
Yarn delivery device	109
Yarn guide system from 22 up to 26 FKE	110
Yarn guide system with 32 FKE	111
Yarn control unit.....	112
Left yarn guide.....	113
Left yarn tensioner	114
Left tension axle.....	115
Yarn brake and yarn deflector	116
Deflector	117
Right yarn guide.....	118
Right yarn tensioner	119
Right tension axle	120
Bobbin board	121
Yarn carrier and guide rails	122
Complete yarn carriers.....	123
Fluff absorption	124
Fluff absorption	125
Set of tubes on the left and right.....	126
Lint container	127
Suction tube.....	128
Central lubrication	129
Central lubrication	130
Lubricating unit at the front complete.....	131
Distributor complete	132
Lubricating unit at the rear complete	133
Operation and control.....	134
Input unit.....	135
Starting unit	136
Bearing of the engaging rod	137
Signal light.....	138
Shock stop motion (up to E14)	139
Shock stop motion E16-18	140
Measuring device E5 + 8.....	141

Measuring device E10 + 16.....	142
Protective device	143
Lateral safety covers.....	144
Rear panel.....	145
Panelling	146
Electrical equipment.....	147
Fuses	148
Circuit diagram as PDF.....	149
Trailing cable	150
Loom of cables 1	151
Loom of cables 2	152
Loom of cables 3	153
Control electronics.....	154
Left control cabinet	155
Right control cabinet.....	156
Deliverable accessories	157
Tool.....	158
Lubricating stuff	159
Mechanical parts	160
Special attachments	161
Plating yarn carrier 3+6.....	162
Plating yarn carrier 4+5.....	163
Carriage of plating yarn carrier.....	164
Carriage of plating yarn carrier (adjustable).....	165
Complete intarsia yarn carriers type 1	166
Carriage IYC.....	167
Bow and head IYC.....	168
STIXX device.....	169
Feed wheel SFE	170
Friction feed wheel on the left and on the right co.....	171
Left friction feed wheel	172
Right friction feed wheel.....	173
Bobbin holder on the left	174
Bobbin holder on the right.....	175
Additional bobbin board	176
Additional board at the bottom	177
Conversion kit 32 IYC	178
Overview of conversion kit E5.....	179
Overview of conversion kit E7-8.....	180
Overview of conversion kit E10-18.....	181


Parts for the yarn guide system.....	182
Yarn tensioner on the left.....	183
Yarn tensioner on the right.....	184
Tension axle	185
Driving in the middle	186
Driving outside.....	187
Friction feed wheel on the left and on the right co.....	188
Friction feed wheel on the left.....	189
Friction feed wheel on the right	191
Additional bobbin board	192
Yarn guide complete E5 IYC	193
Yarn guide complete E7-8 IYC	194
Yarn guide complete E10-14 IYC	195
Yarn guide complete E16-18 IYC	196

Carriage drive

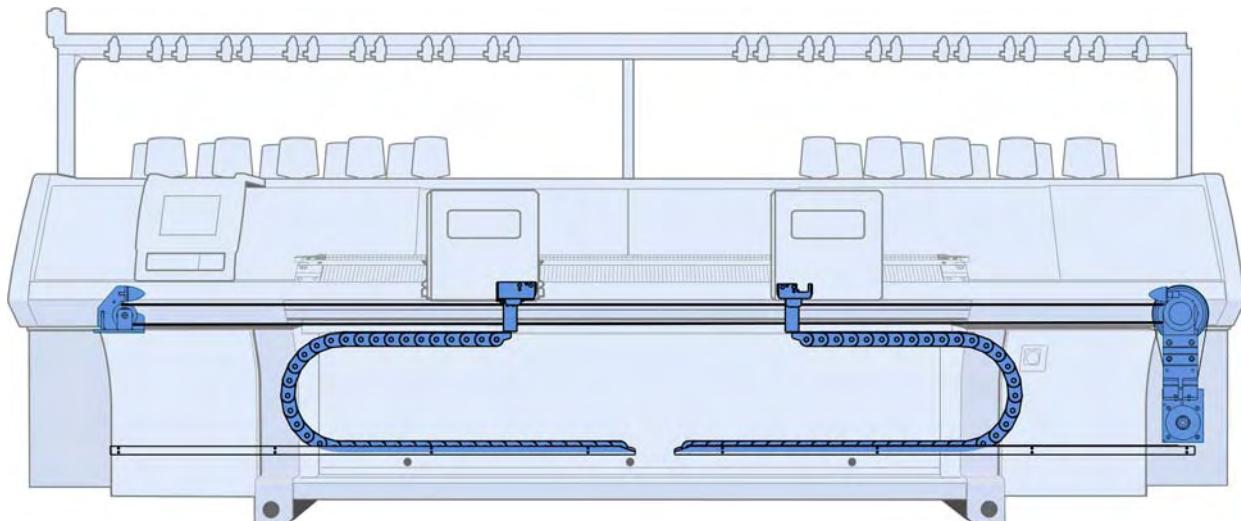


Drive

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Drive		537	Cap screw M8x12	023 138
1	Drive unit complete	242 380	29	Ventilator complete	242 413
2	Tension bearing complete	253 614	29a	Ventilator plate drive motor	241 823
9	Toothed belt 75AT10/8280	253 885	29b	Ventilator complete 512	213 722
27	Support buffer	220 713	529	Screw M5x8	
28	Parabolic spring	200 661	905	Slide nut M10x2	023 471
536	Cap screw M10x35	020 159	907	Cap screw M10X25	020 157

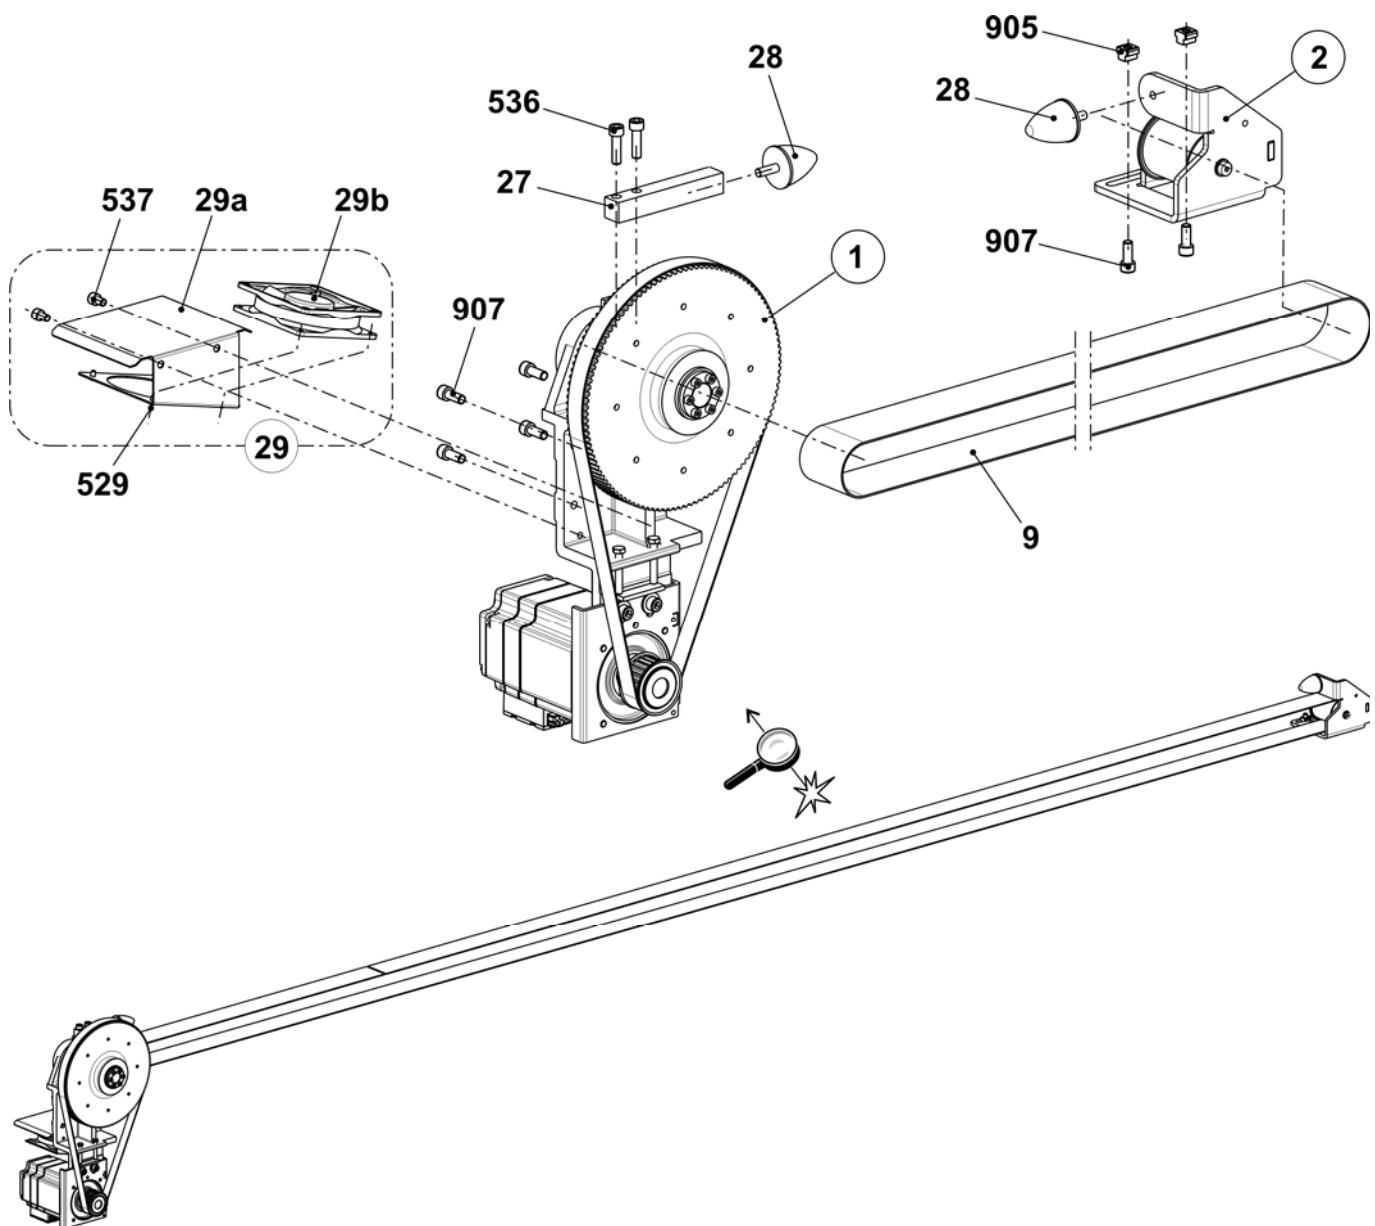


Drive unit

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Drive unit complete	242 380	2	Drive bearing	242 378
1	Drive unit	242 379	21	Housing drive bearing	242 344
11	Three phase servo motor drive complete	242 377	22	Timing belt pulley 115 S8M 250	240 639
12	Motor plate	227 662	23	Pinion AT10 Z=20	216 587
13	Toothed belt 250 HP-S8M 1312	240 646	520	Hexagon screw M8x50	020 364
510	Cap screw M8x16	023 629	521	Locking ring 80x2.5	023 461
500	Cap screw M10x25	020 157	522	Grooved ball bearing 6307-2RS	023 462
501	Disc 10,5X25X2,5	022 178	523	Tension set 30X55	023 208

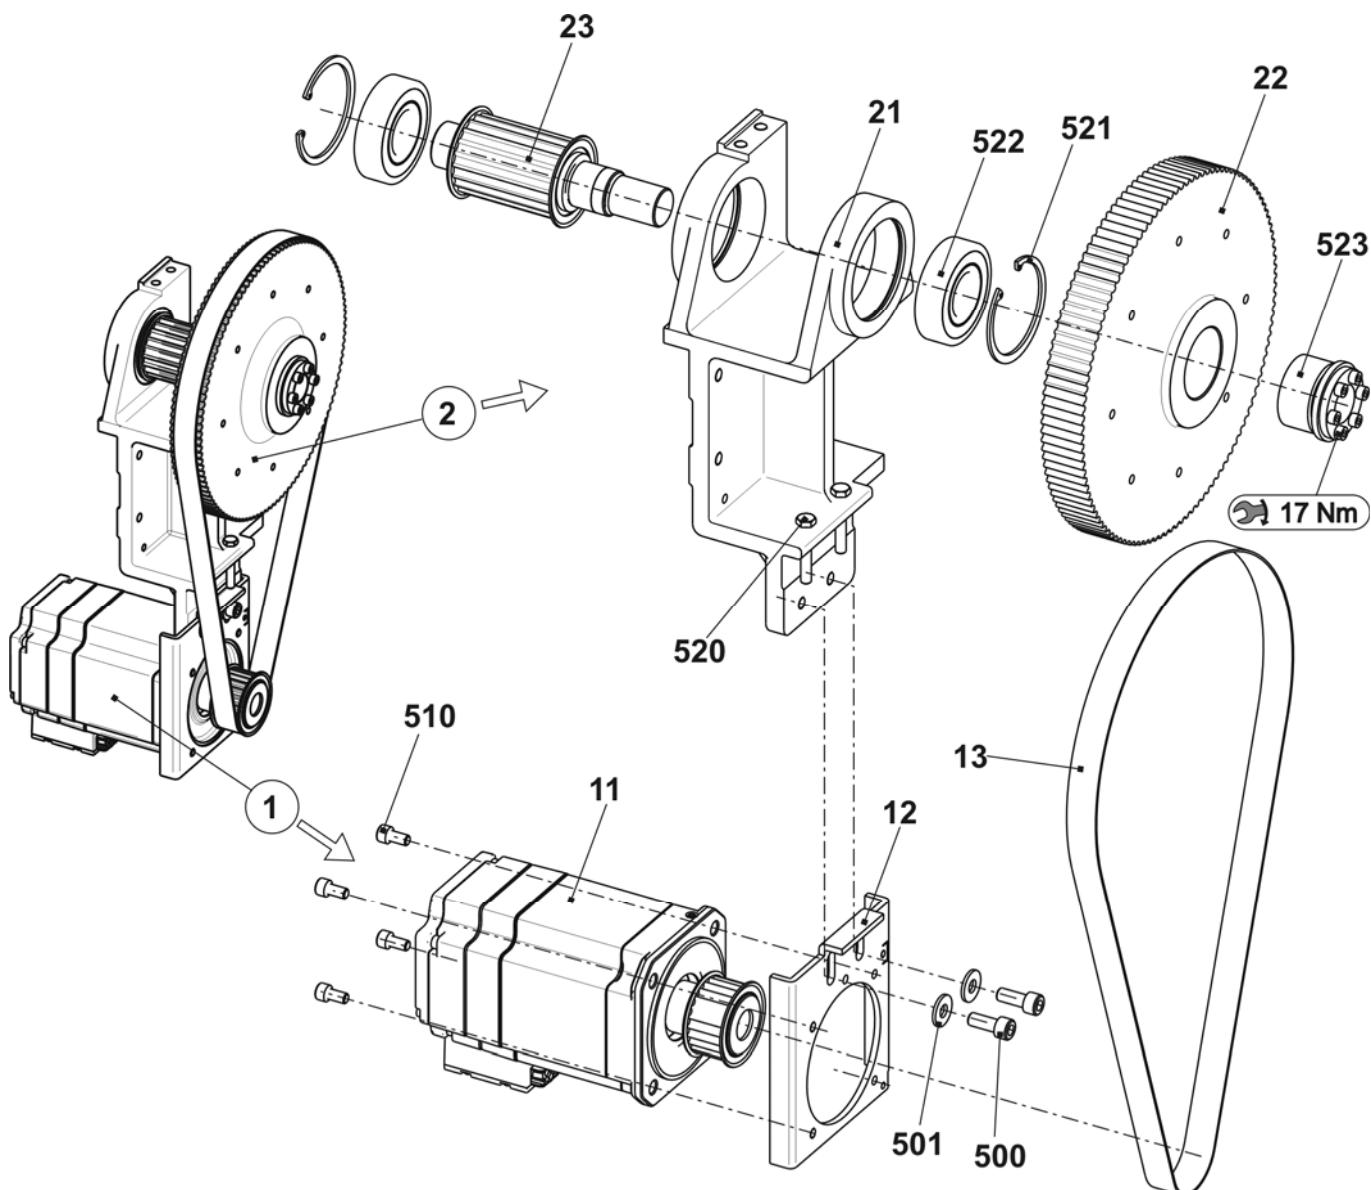


Tension bearing

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Tension bearing complete	253 614	500	Grooved ball bearing 6205-2RS	023 559
1	Tension bearing	253 611	501	Cap screw M10x25	023 751
2	Axle	253 613	502	U-washer 10	020 874
3	Tension roller	253 612	503	Locking ring 25x1,2	251 617

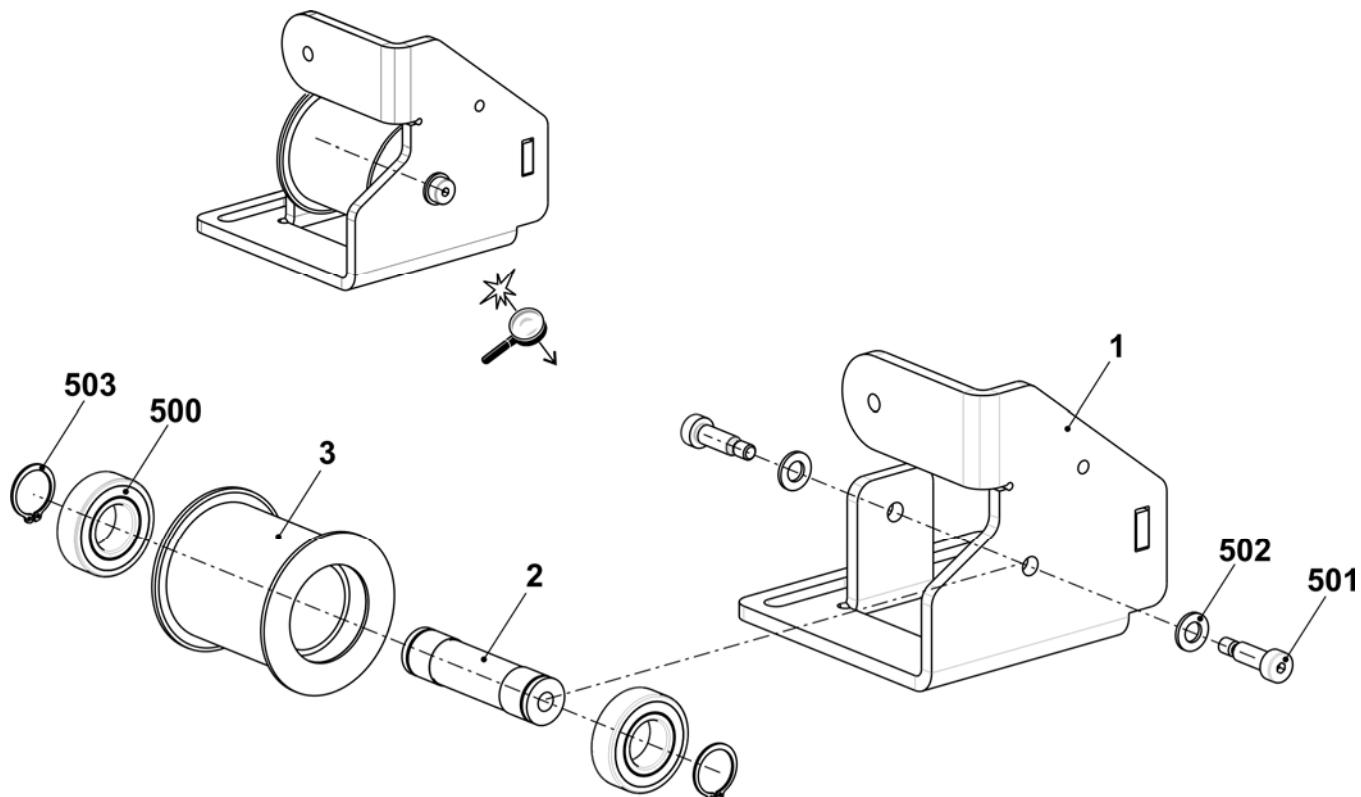


Energy chain and carriage driver

Pos	Designation	ID No.	Pos	Designation	ID No.
1	Energy chain 43 links	221 728	10	Carriage driver complete	242 837
500	Cap screw M6x8	023 411	10a	Carriage driver	242 832
5	Stop point complete	242 774	10b	Cable driver	242 730
A5	Stop point	242 753	10c	Clamping plate	232 493
5b	Cable driver	242 730	510	Cap screw M8X20	020 141
550	Cap screw M8X20	020 141	511	Countersunk screw M5x6	023 284
551	Fixing element	026 489	512	Fixing element	026 489
552	Countersunk screw M5x6	023 284	504	Cap screw M6x12	020 134

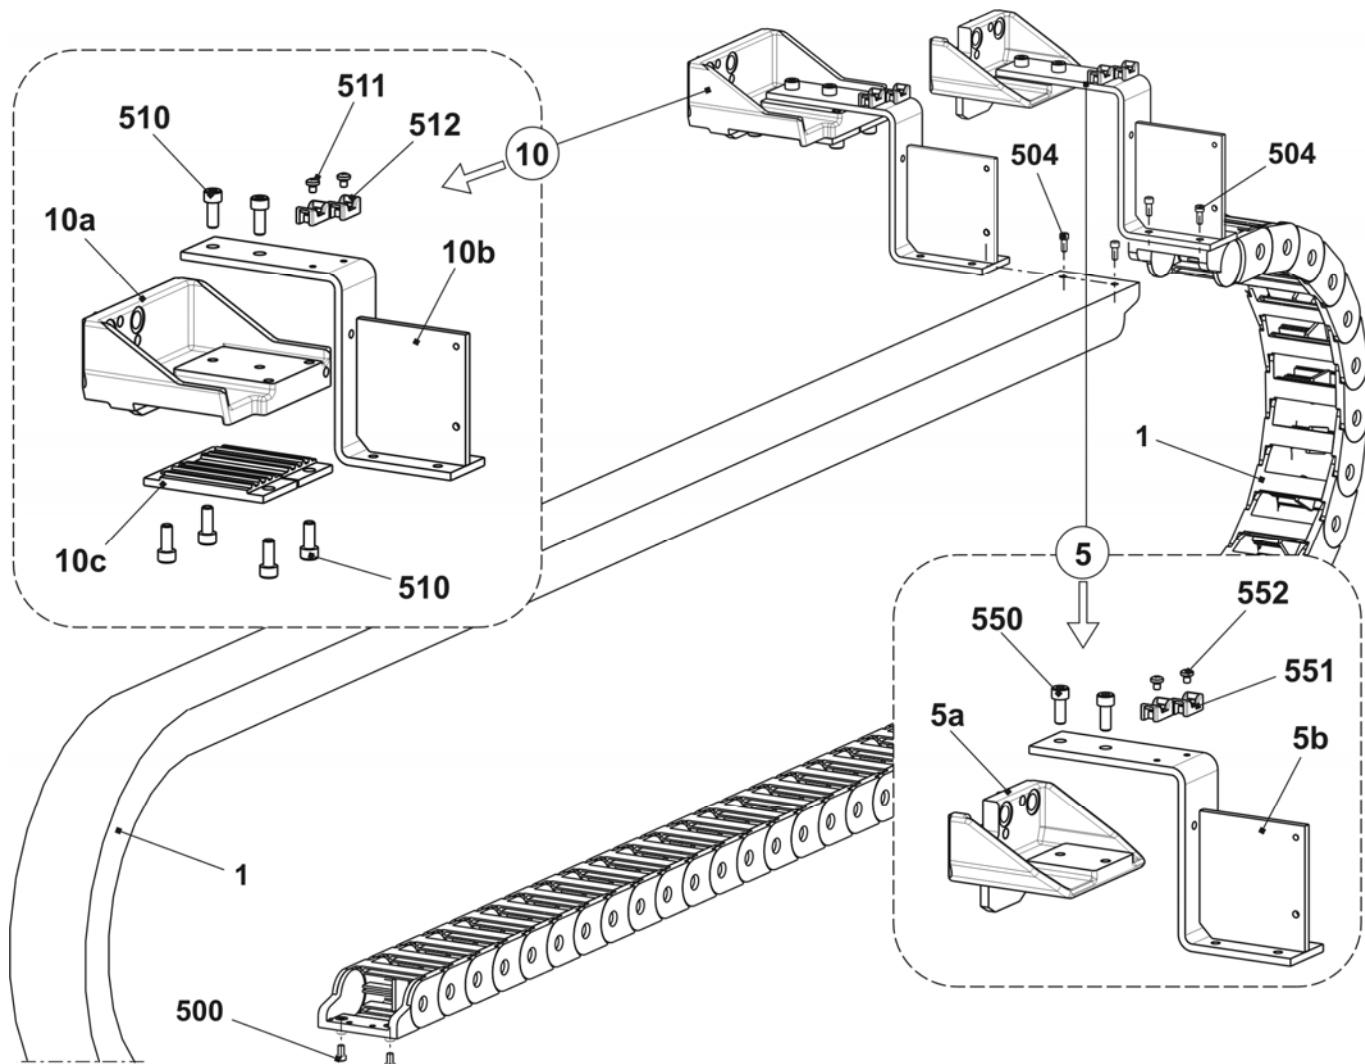


Racking

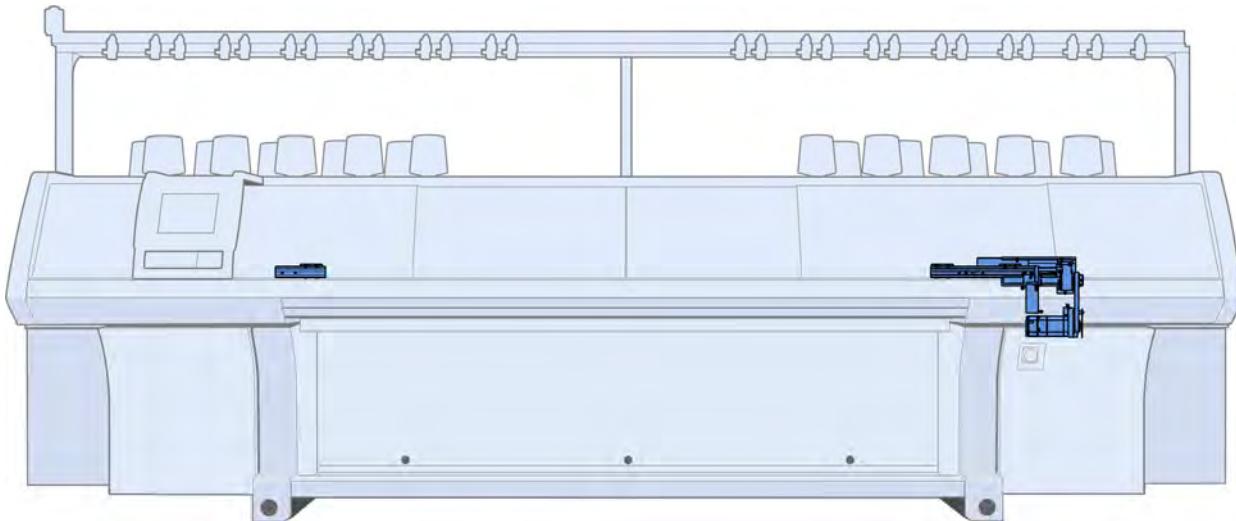


Racking drive

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
Σ	Racking		25	Distance bolt	232 543
7	Racking cover plate	242 314	500	Cap screw M4x4	022 767
8	Racking cover plate movable	242 312	505	Cap screw M6x16	023 116
10	Three-phase servo motor racking complete	241 454	507	Cap screw M5x12	020 132
11	Racking strip	242 311	518	Shim 0,03x15x85	023 162
12	Racking strip on the left	211 022	519	Shim 0,05x15x85	023 163
13	Toothed belt 150 S 5M 490	229 281	520	Shim 0,1x15x85	023 164
14	Spindle bearing	253 262	521	Shim 0,2x15x85	023 170
15	Bearing	227 604	522	Shim 0,03x11x80	023 286
18	Guide strip	206 382	523	Shim 0,05x11x80	023 287
20	Stop screw	218 783	530	Countersunk screw M6x10	023 183
21	Card racking limit switch	229 396	900	Cap screw M6x12	022 795
22	Shim	229 715	901	Countersunk screw M6x10	023 183
23	Switching metal plate	240 722	903	Cap screw M8X25	020 142
24	Cover plate	232 544	910	Countersunk screw M6x16	023 124

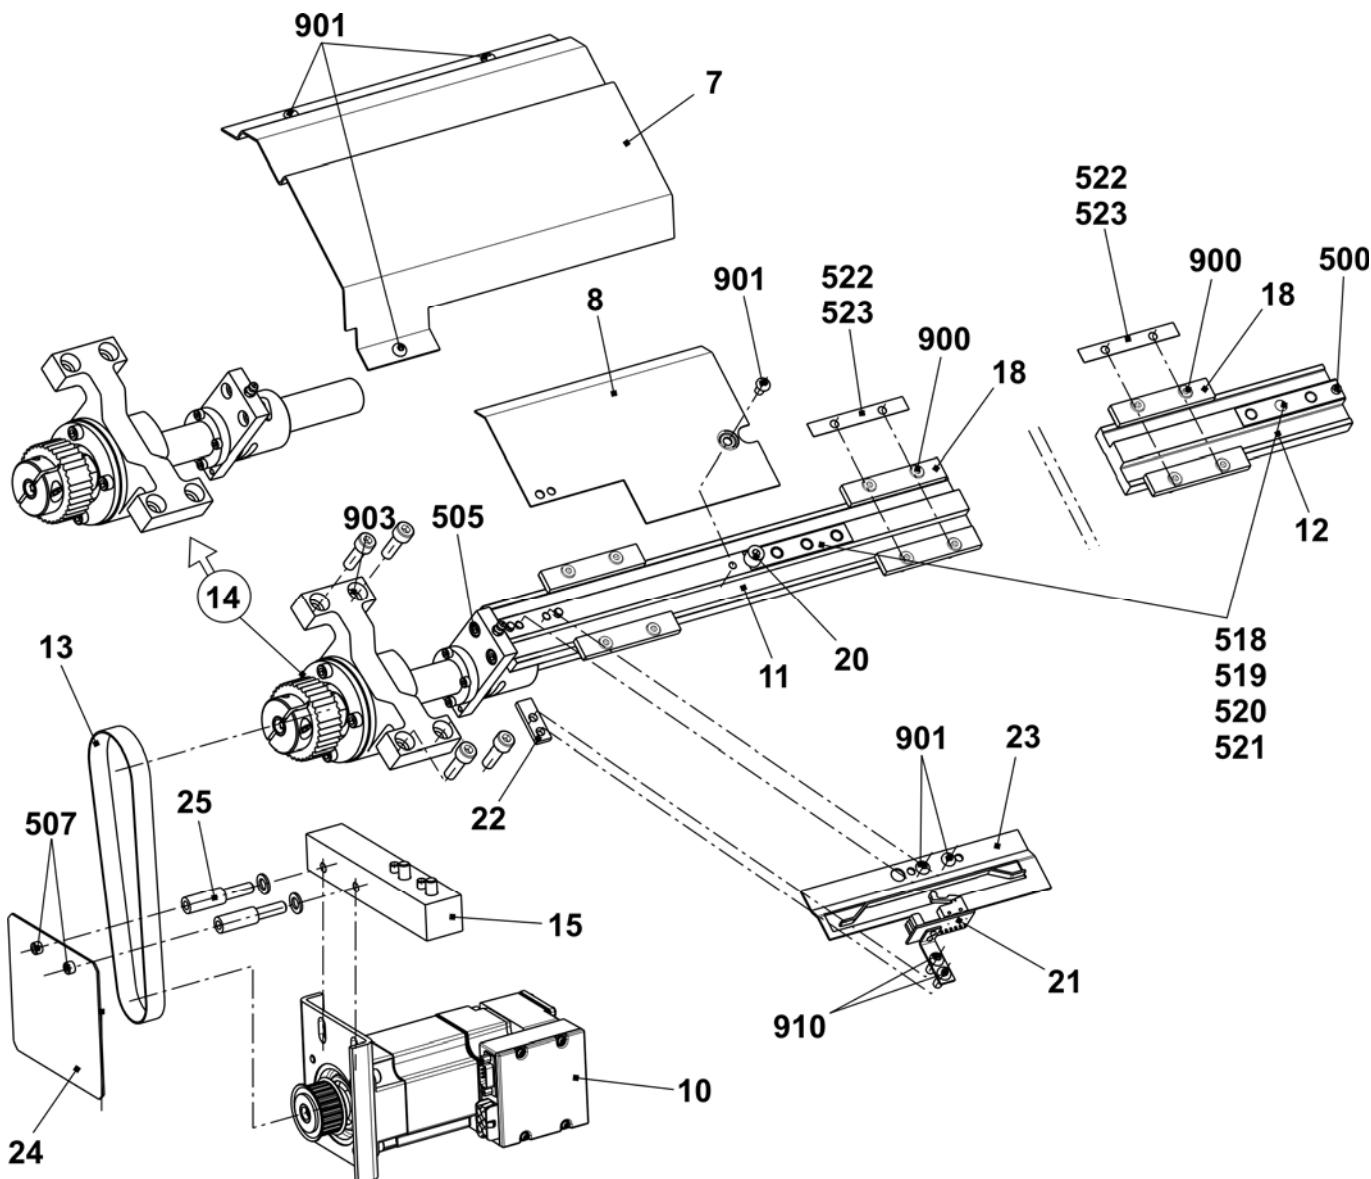


Needle beds

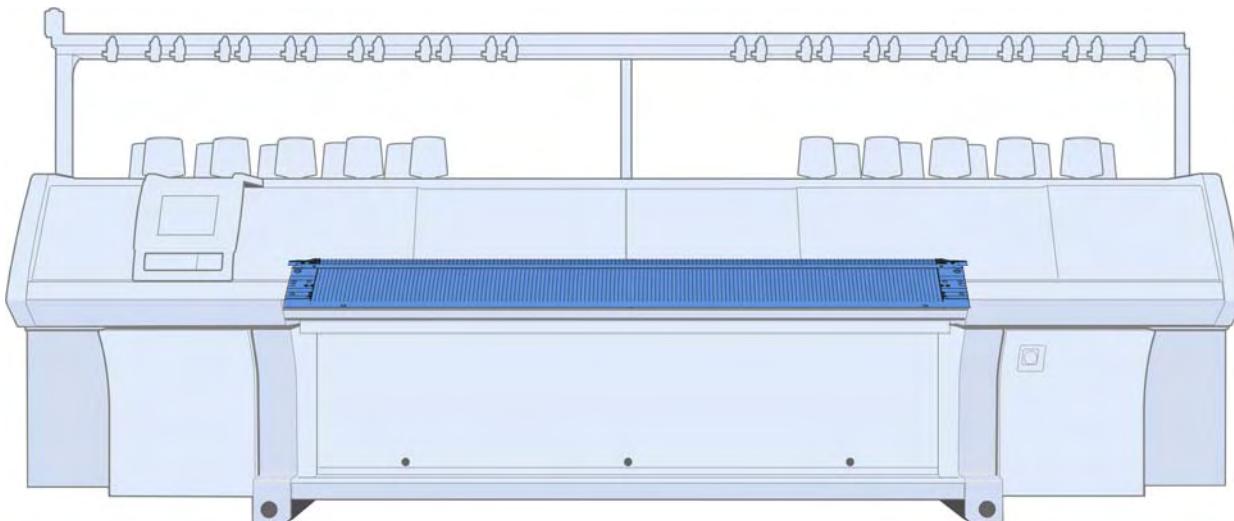


Needle bed E5

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E5	210 427	15	Support	206 352
1	Needle bed at the front + rear E5	210 991	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E5	211 038	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E5	211 045	502	Cap screw M6x25	020 137
6	Limiter on the left E4-E8	205 343	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E4-E8	205 344	504	Cap screw M5x22	023 193
8	Coupling part	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E5	210 982	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

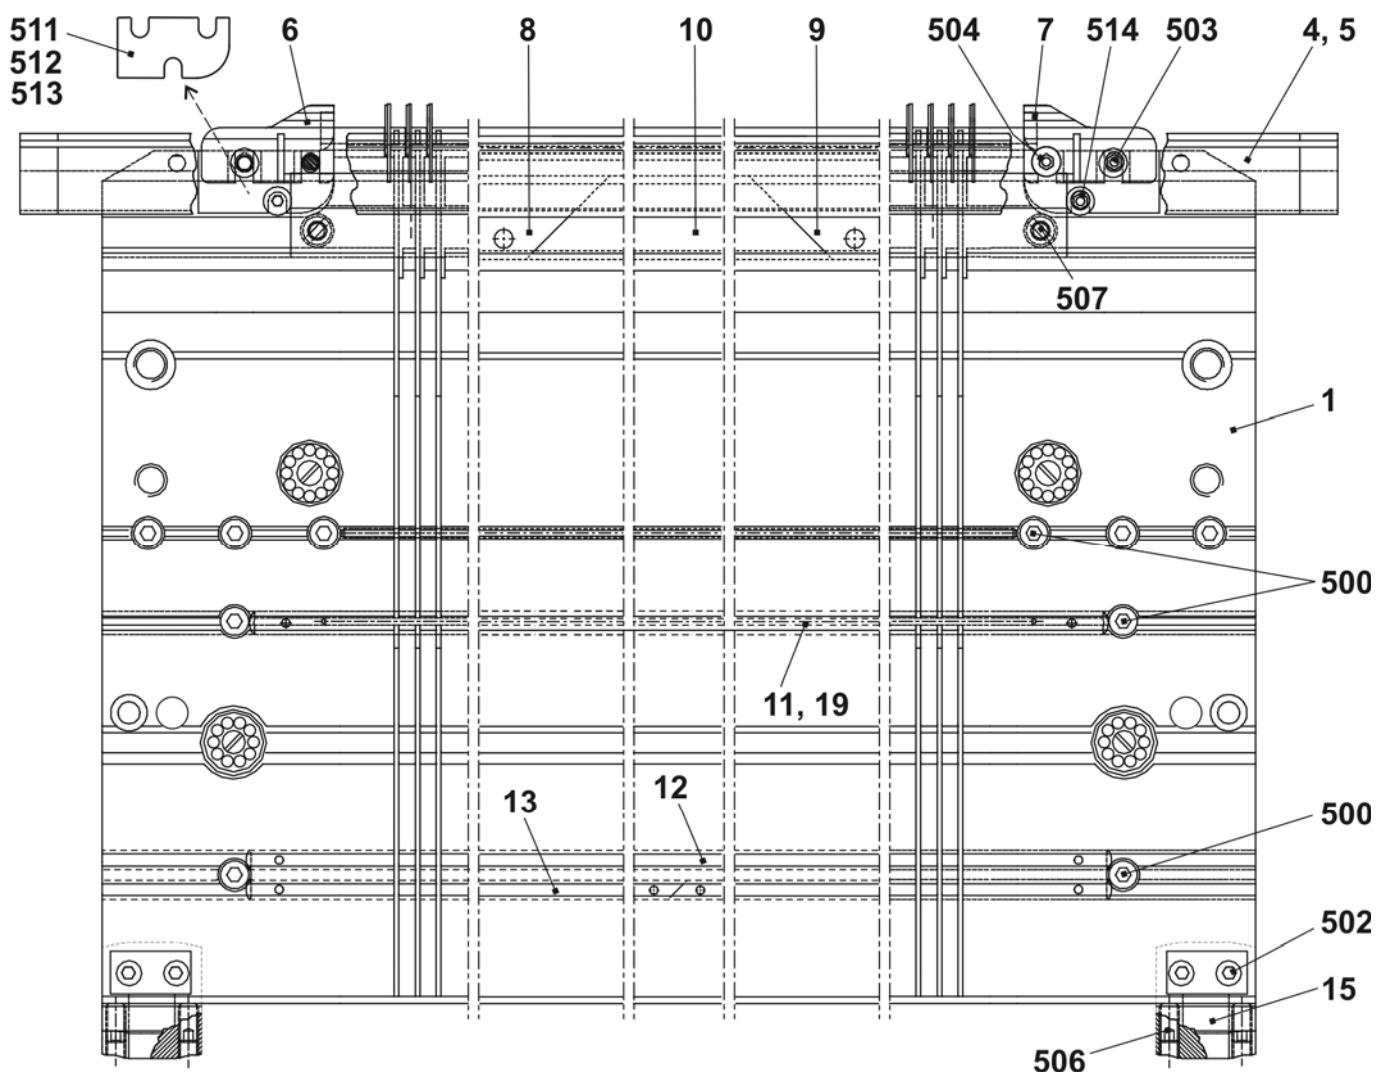


Continuation needle bed E5

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E5	210 427	9	Holding-down jack E5	205 031
2	Spring steel wire ø1.0	210 971	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire ø2.8	212 173
A4	Needle E5-6 with round hook	205 396	30*	Adjusting piece	206 375
4b	Coupling part E4-8	200 682	31*	Set screw complete	207 712
6	Intermediate slider with brake E5-E8	237 323	40*	Disk brush	235 612
A7	Selection jack E4-8	200 687	42*	Disk brush	202 600
7b	Selector spring E4-8	200 690	520*	Cap screw M5x12	020 032
8	Knock-over bit E5	204 996	521*	Adjusting washer P6x12x03	023 540

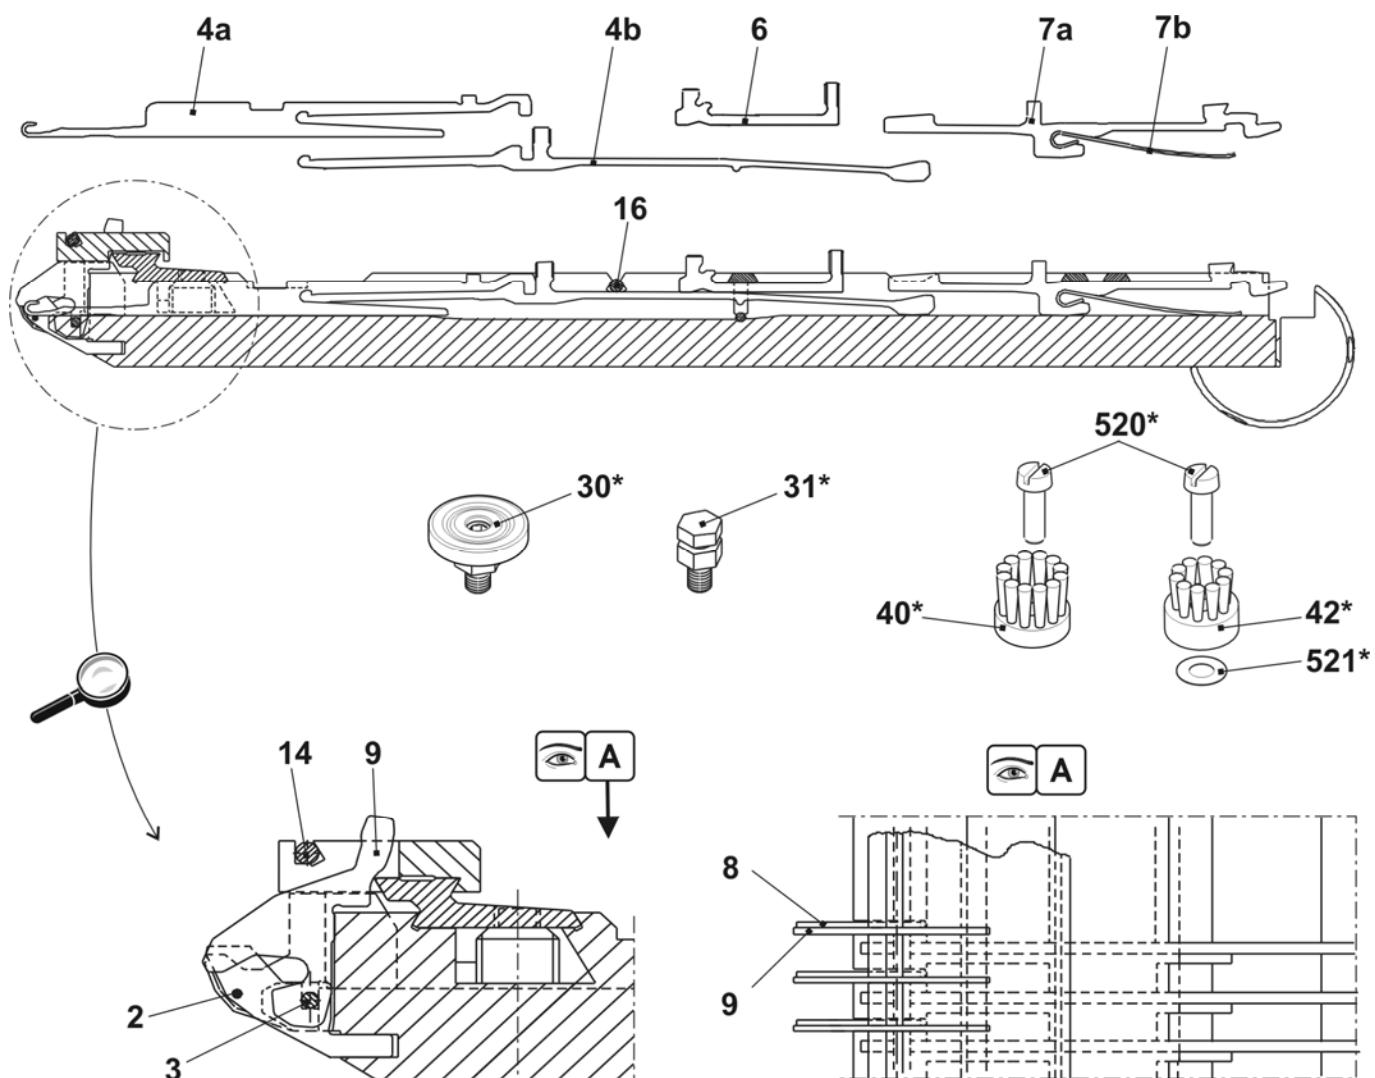


Needle bed E7

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E7	210 428	15	Support	206 352
1	Needle bed at the front + rear E7	210 992	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E7	211 039	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E7	211 046	502	Cap screw M6x25	020 137
6	Limiter on the left E4-E8	205 343	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E4-8	205 344	504	Cap screw M5x22	023 193
8	Coupling part	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E7	210 983	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

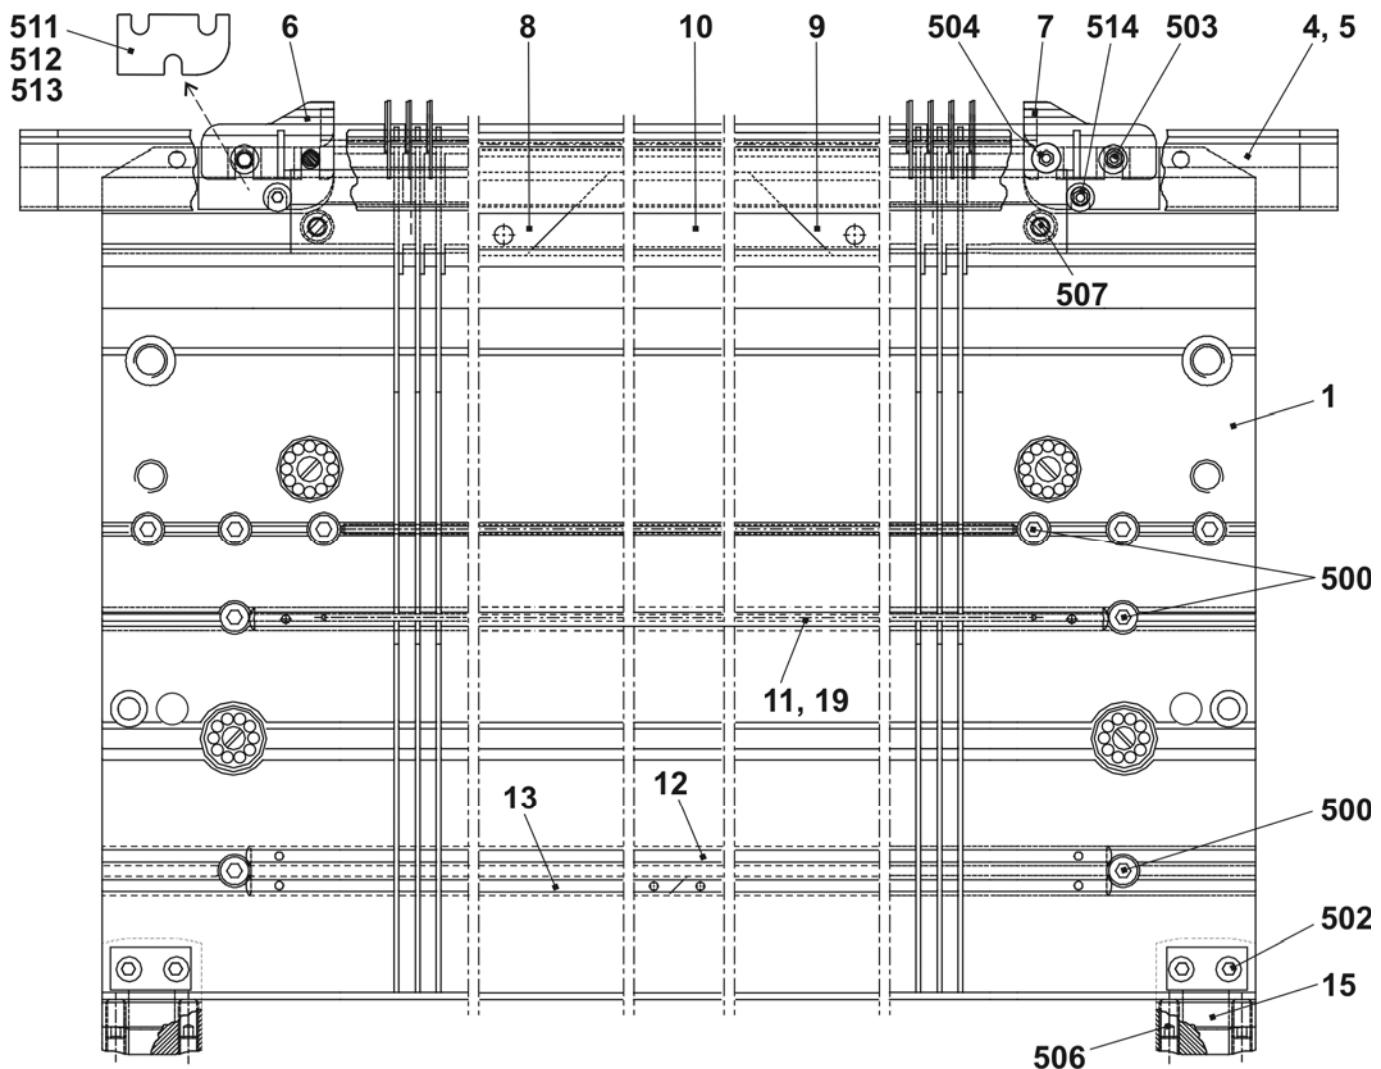


Continuation needle bed E7

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E7	210 428	9	Holding-down jack E7	205 032
2	Spring steel wire ø1.0	210 971	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire ø2.8	212 173
A4	Needle E7 with round hook	205 397	30*	Adjusting piece	206 375
4b	Coupling part E4-8	200 682	31*	Set screw complete	207 712
6	Intermediate slider with brake E5-E8	237 323	40*	Disk brush	235 612
A7	Selection jack E4-8	200 687	42*	Disk brush	202 600
7b	Selector spring E4-8	200 690	520*	Cap screw M5x12	020 032
8	Knock-over bit E7	207 055	521*	Adjusting washer P6x12x03	023 540

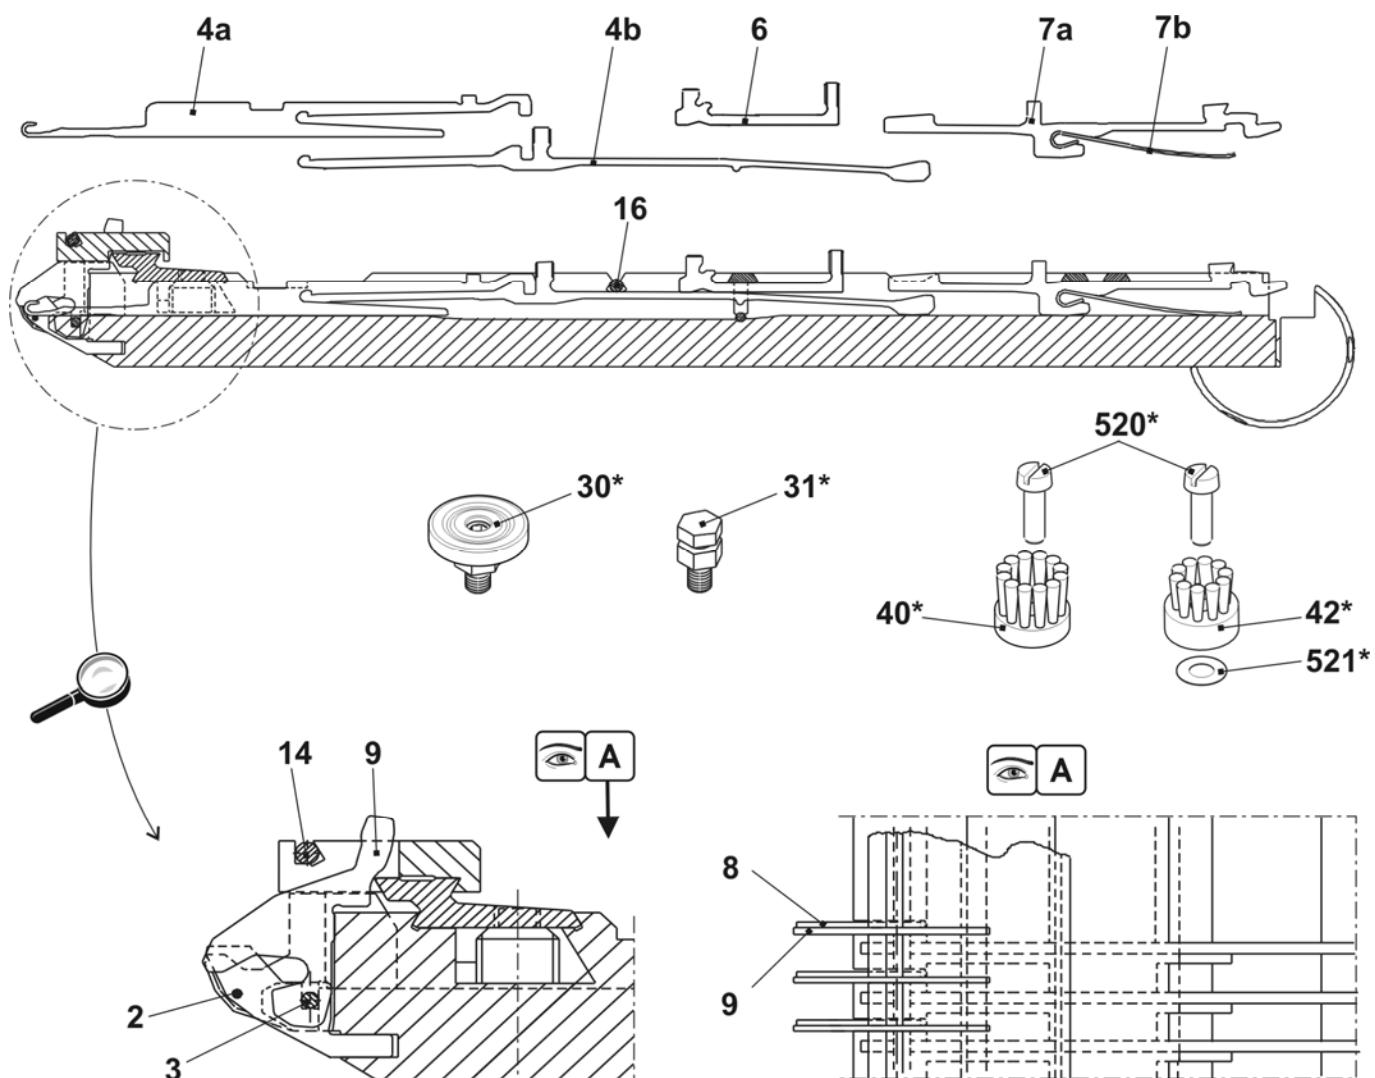


Needle bed E8

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E8	210 429	15	Support	206 352
1	Needle bed at the front + rear E8	210 993	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E8	211 040	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E8	211 047	502	Cap screw M6x25	020 137
6	Limiter on the left E4-E8	205 343	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E4-8	205 344	504	Cap screw M5x22	023 193
8	Coupling part	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E8	210 984	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

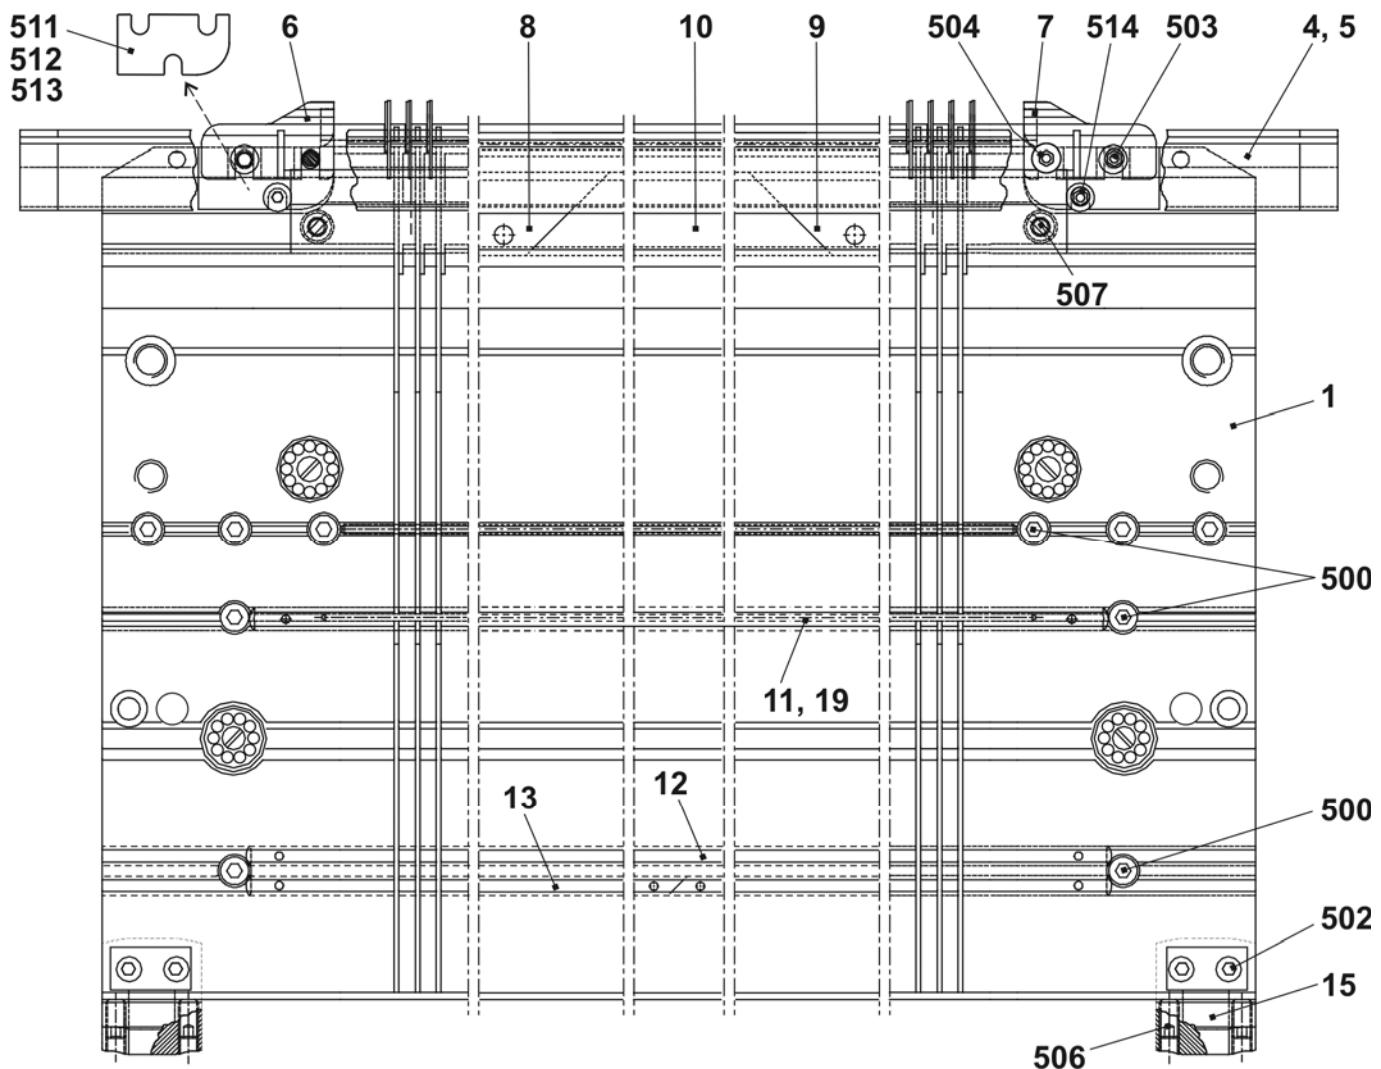


Continuation needle bed E8

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E8	210 429	9	Holding-down jack E8	205 028
2	Spring steel wire ø1.0	210 971	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire ø2.8	212 173
A4	Needle E8 with round hook	208 745	30*	Adjusting piece	206 375
4b	Coupling part E4-8	200 682	31*	Set screw complete	207 712
6	Intermediate slider with brake E5-E8	237 323	40*	Disk brush	235 612
A7	Selection jack E4-8	200 687	42*	Disk brush	202 600
7b	Selector spring E4-8	200 690	520*	Cap screw M5x12	020 032
8	Knock-over bit E8	207 054	521*	Adjusting washer P6x12x03	023 540

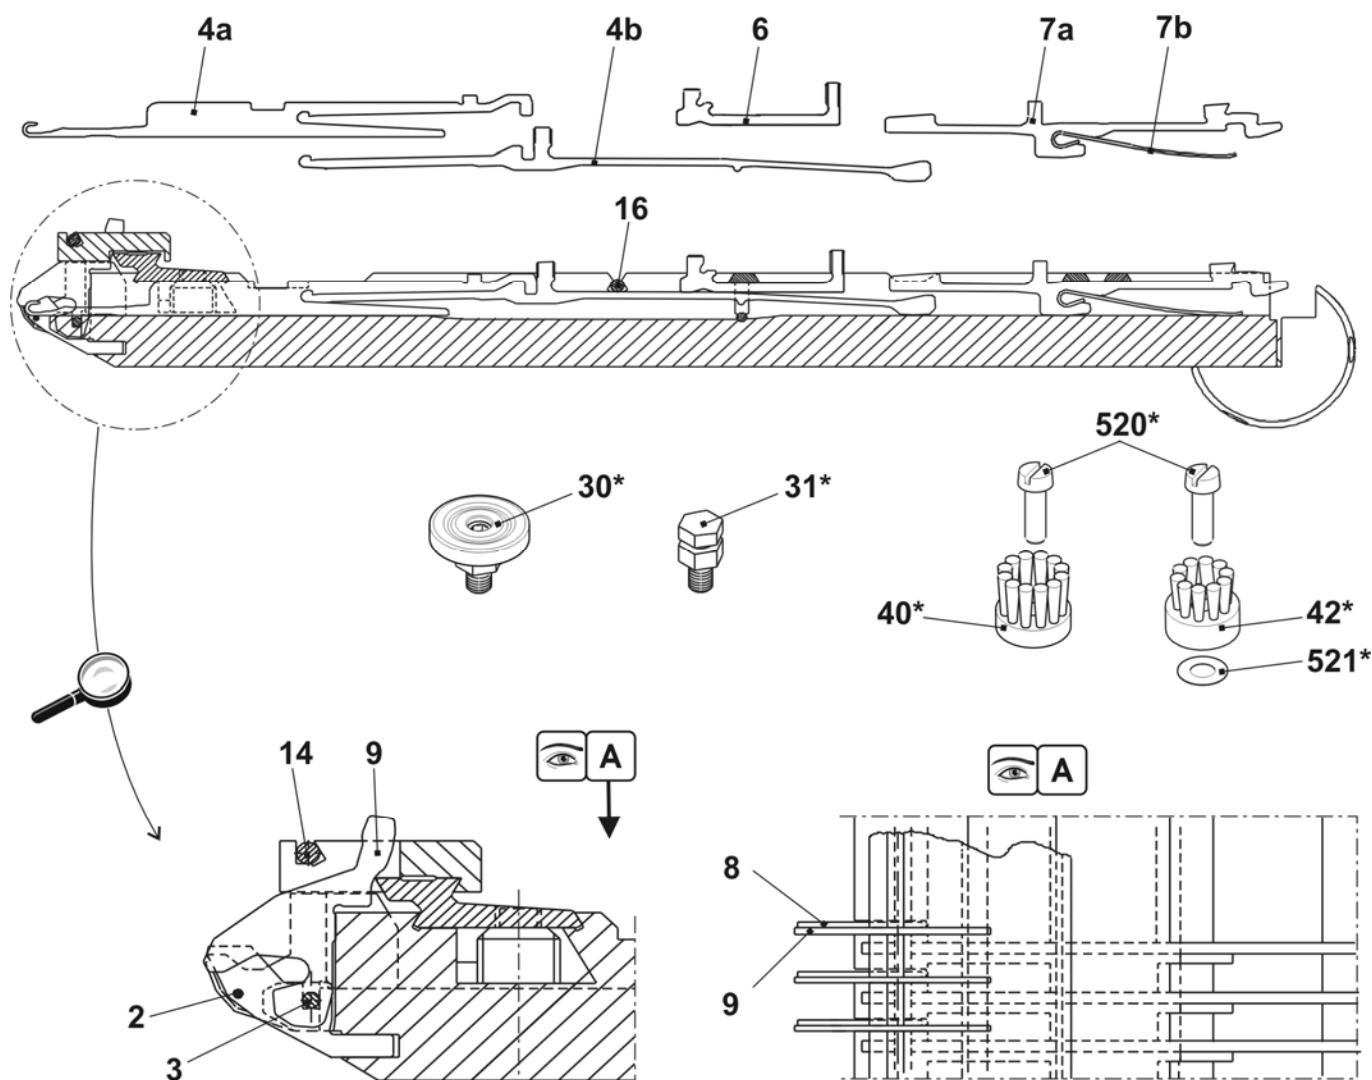


Needle bed E10

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E10	241 661	15	Support	206 352
1	Needle bed at the front + rear E10	241 648	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E10	211 041	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E10	211 048	502	Cap screw M6x25	020 137
6	Limiter on the left E10-14	205 764	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E10-14	205 765	504	Cap screw M5x22	023 193
8	Needle rail on the left	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E10	210 985	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

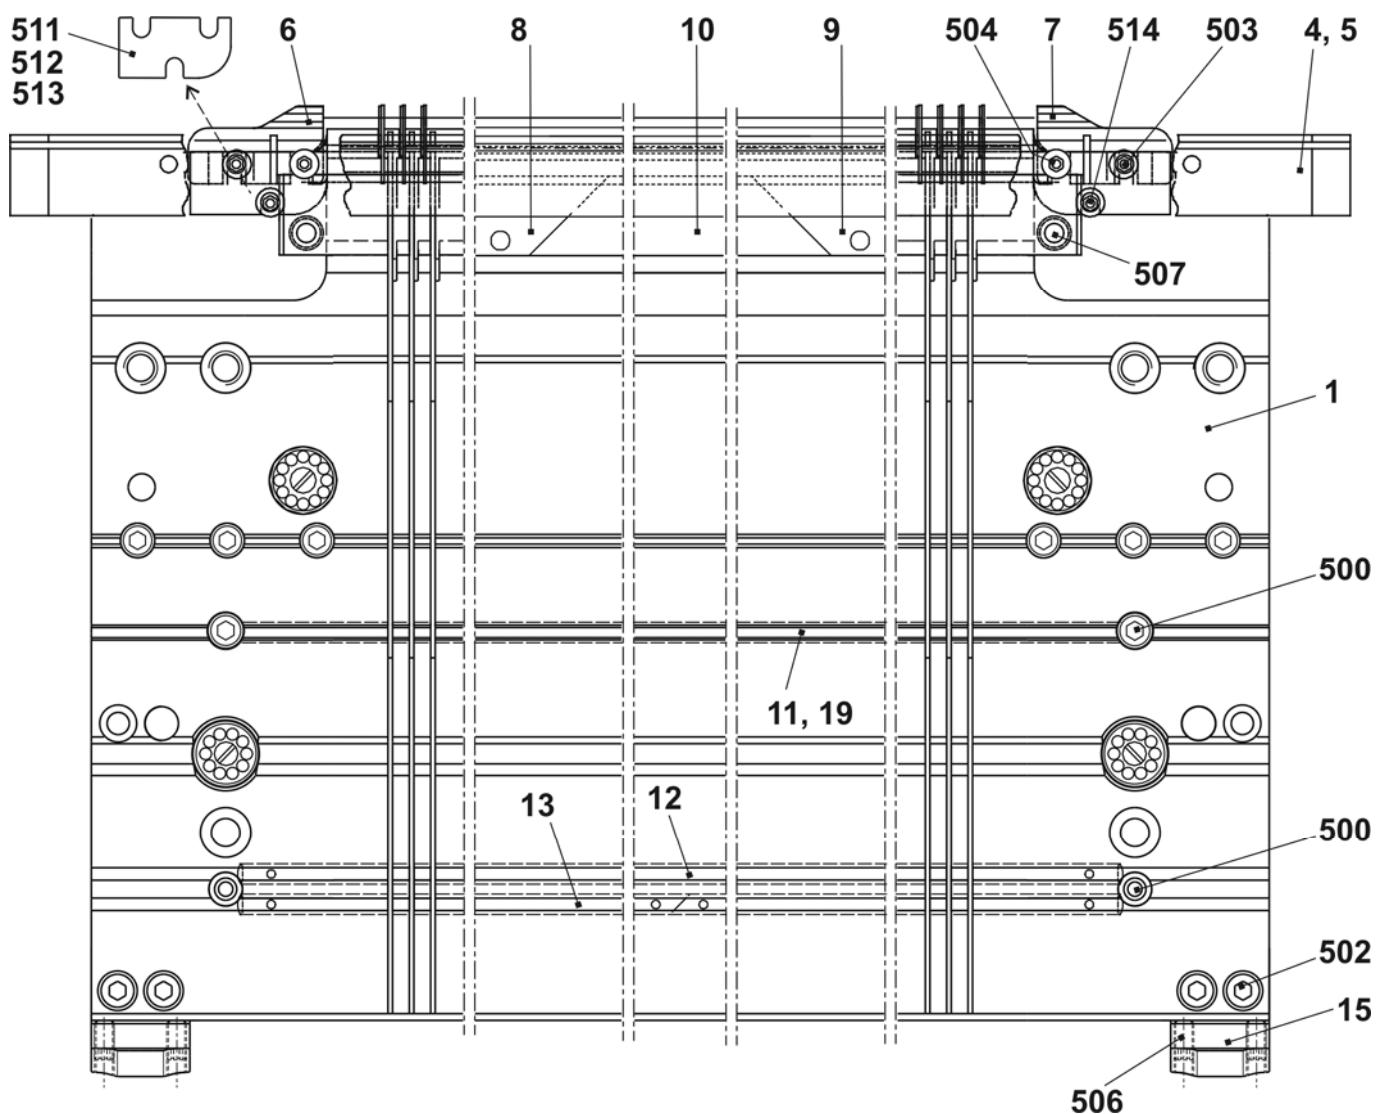


Continuation needle bed E10

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E10	241 661	8	Holding-down jack trick wall E10	239 815
2	Spring steel wire Ø0.8	210 970	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire Ø2.8	212 173
A4	Needle E10 with round hook	205 398	30*	Adjusting piece	206 375
4b	Coupling part E10-12	200 683	31*	Set screw complete	207 712
5	Intermediate slider with brake E10	237 324	40*	Disk brush	235 612
A6	Selection jack E10-12	200 688	42*	Disk brush	202 600
6b	Selector spring E10-12	200 691	520*	Cap screw M5x12	020 032
7	Knock-over bit E10	239 756	521*	Adjusting washer P6x12x03	023 540

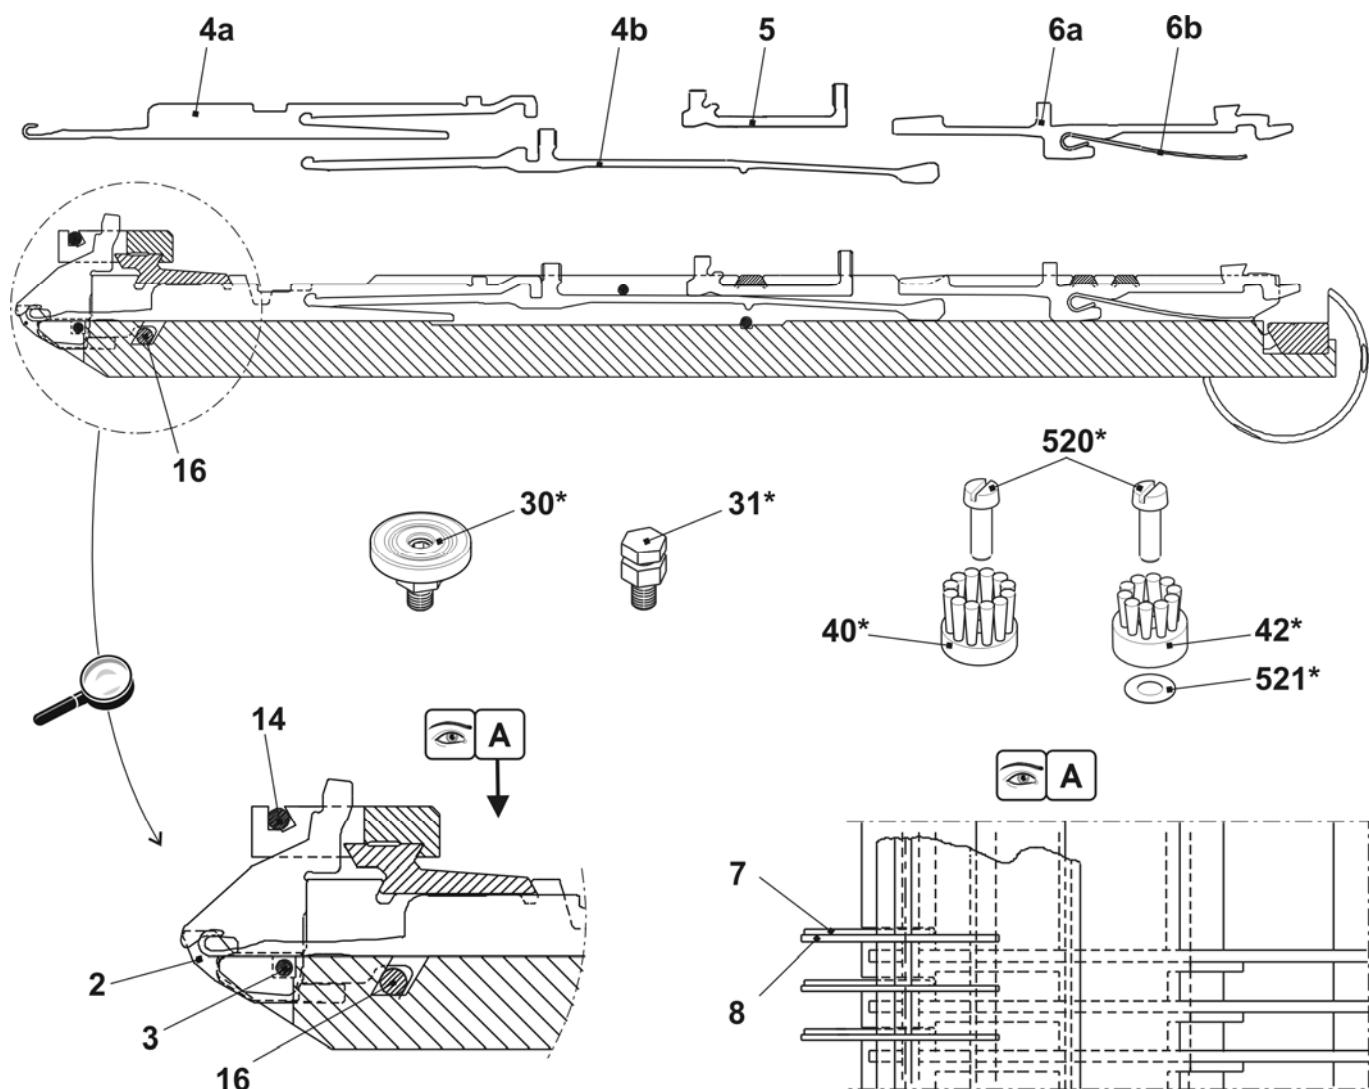


Needle bed E12

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E12	253 743			
1	Needle bed at the front + rear E12	253 741	29	Cap screw 5x12	209 484
4	Pressure bar	211 009	31	Cover rail at the rear	210 979
6	Spring steel wire Ø2.0	251 095	32	Spring steel wire Ø2.0	210 973
11	Holding-down jack bed at the front E12	211 042	502	Cap screw M5x12	020 132
12	Holding-down jack bed at the rear E12	211 049	503	Cap screw M6X14	022 658
15	Limiter on the left E10-14	205 764	505	Cap screw M5x8	023 379
16	Limiter on the right E10-14	205 765	506	Cap screw M5x12-8.8	022 943
17	Needle rail on the left	205 311	507	Cap screw M5x22	023 193
18	Needle rail on the right	205 312	509	Set screw ISO 4766-M3.5x3-1	020 512
19	Coupling part	210 977	511	Set screw ISO 4026-M6x12-45	022 400
20	Cover rail at the front E12	210 986	512	Cap screw M5x8-8.8 M	023 154
21	Cover rail	210 978	513	Sprung thrust piece B-M10	023 177
22	Cover rail	210 980	514	Shim 0.05x18.5x34	023 196
26	Support	206 352	515	Shim 0.1x18.5x34	023 197
27	Bush	206 090	516	Shim 0.2x18.5x34	023 253

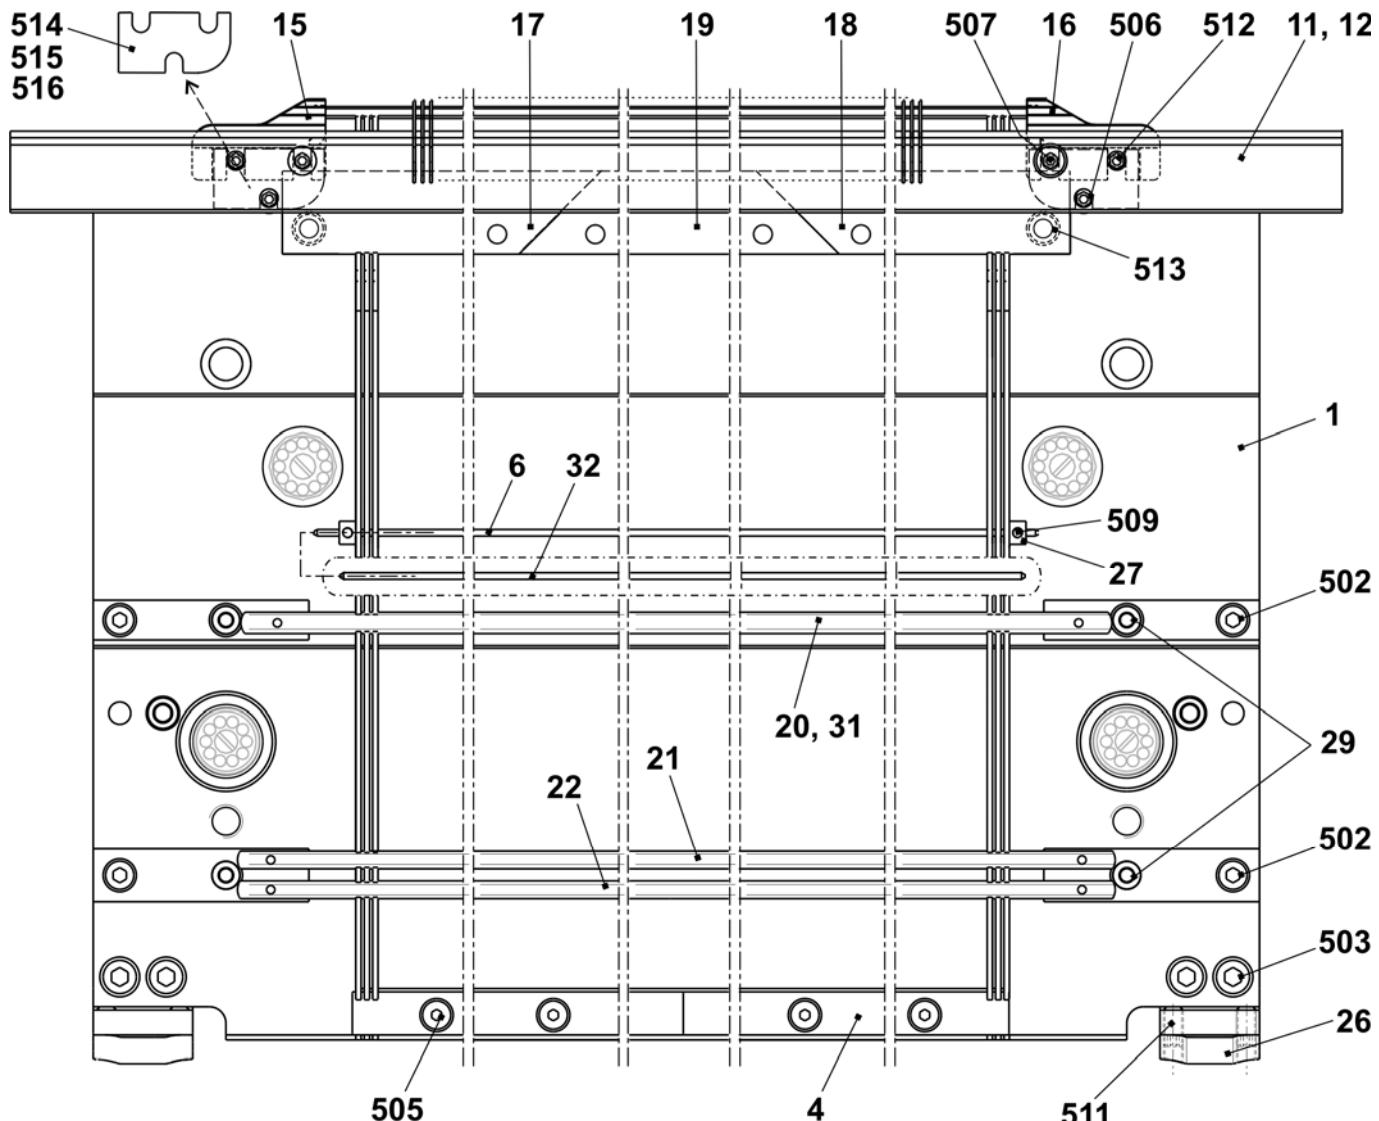


Continuation needle bed E12

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E12	253 743			
2	Fixed wire ø3.4	210 975	14	Holding-down jack trick wall E12	227 821
3	Main trick wall E12	252 628	25	Fixed wire Ø2.8	210 974
5	Spring steel wire Ø0.6	210 969	32	Spring steel wire Ø2.0	210 973
6	Spring steel wire Ø2.0	251 095	30*	Adjusting piece	206 375
A7	Needle E12	204 009	31*	Set screw complete	207 712
7b	Coupling part E10-12	200 683	40*	Disk brush	235 612
9	Intermediate slider with brake E10-12	237 324	41*	Container disk brush	233 012
10a	Selection jack E10-12	200 688	42*	Disk brush	202 600
10b	Selector spring E10-12	200 691	520*	Cap screw M5x12	020 032
13	Knock-over bit E12	205 013	521*	Adjusting washer P6x12x03	023 540

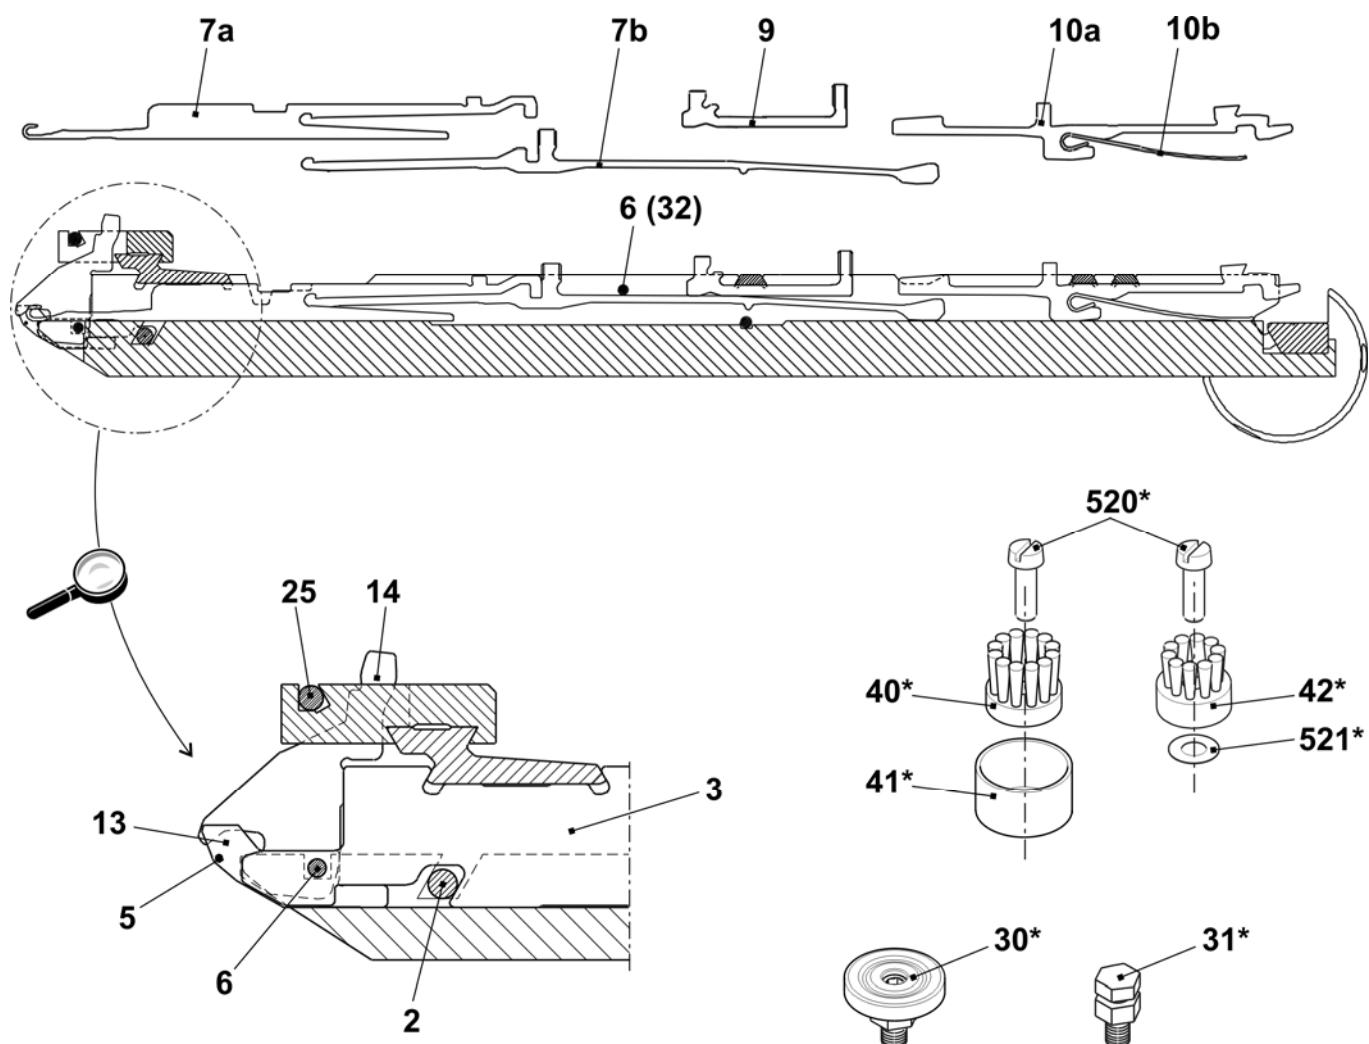


Needle bed E14

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E14	253 744			
1	Needle bed at the front + rear E14	253 742	29	Cap screw 5x12	209 484
4	Pressure bar	211 009	31	Cover rail at the rear	210 979
6	Spring steel wire Ø2.0	251 095	32	Spring steel wire Ø2.0	210 973
11	Holding-down jack bed at the front E14	211 043	502	Cap screw M5x12	020 132
12	Holding-down jack bed at the rear E14	211 050	503	Cap screw M6X14	022 658
15	Limiter on the left E10-14	205 764	505	Cap screw M5x8	023 379
16	Limiter on the right E10-14	205 765	506	Cap screw M5x12-8.8	022 943
17	Needle rail on the left	205 311	507	Cap screw M5x22	023 193
18	Needle rail on the right	205 312	509	Setscrew M3.5x3-1	020 512
19	Coupling part	210 977	511	Set screw I6x12-45	022 400
20	Cover rail at the front E14	210 987	512	Cap screw M5x8-8.8 M	023 154
21	Cover rail	210 978	513	Sprung thrust piece B-M10	023 177
22	Cover rail	210 980	514	Shim 0.05x18.5x34	023 196
26	Support	206 352	515	Shim 0.1x18.5x34	023 197
27	Bush	206 090	516	Shim 0.2x18.5x34	023 253
			517	Shim 0.2x18.5x34	023 253

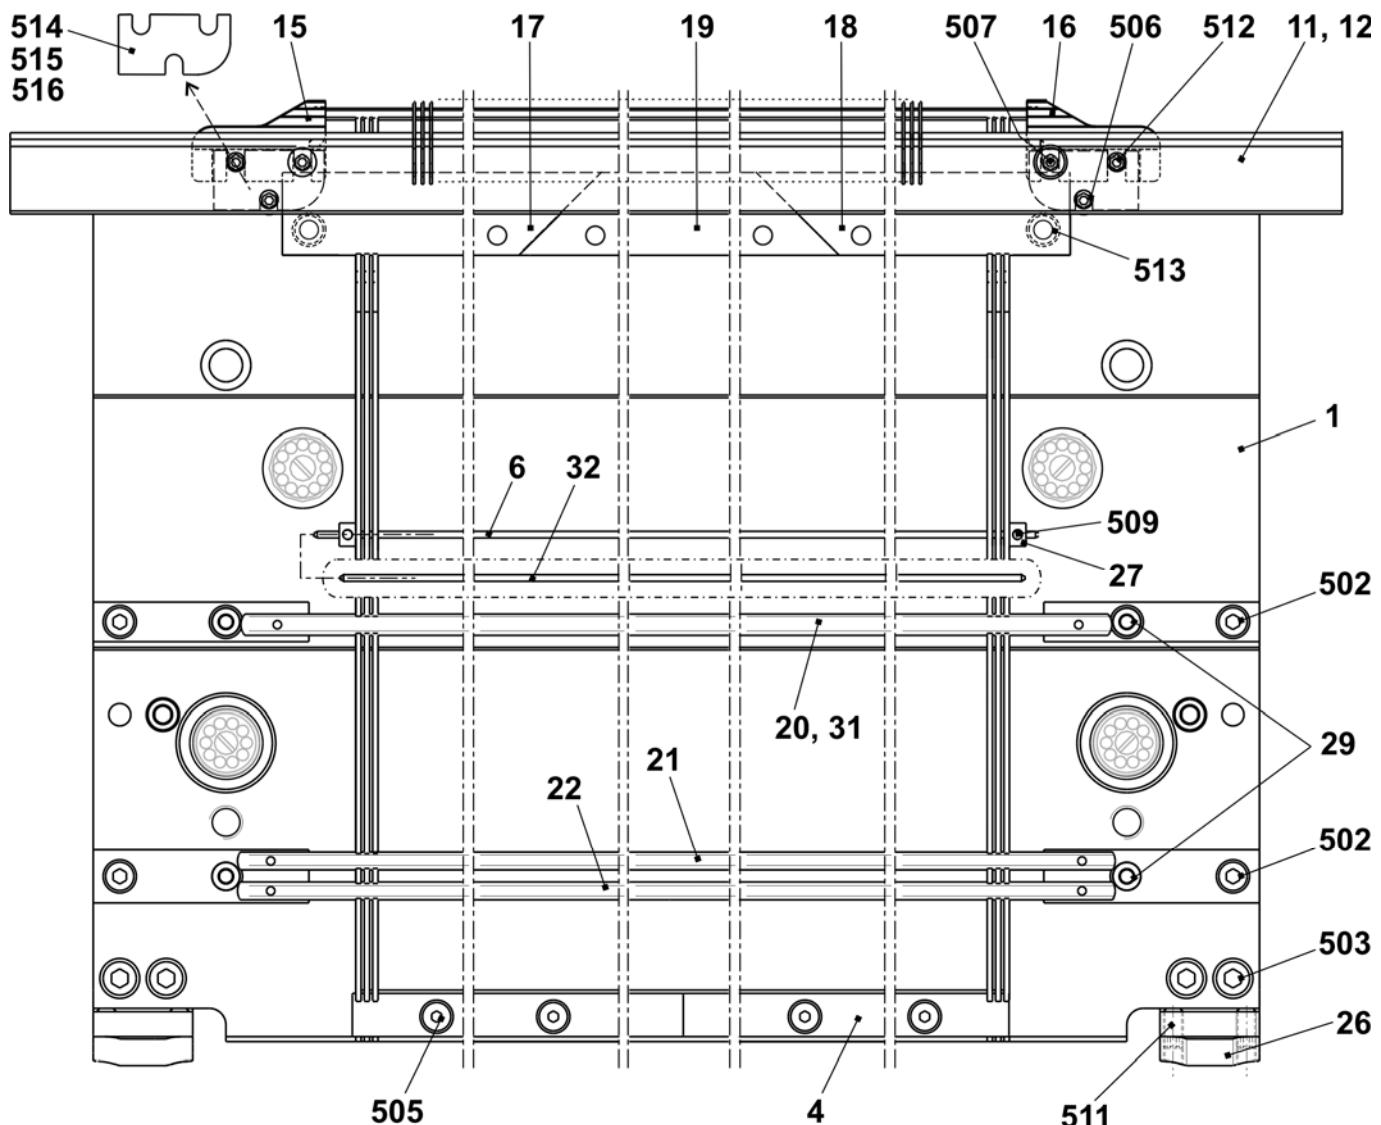


Continuation needle bed E14

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear	253 744			
2	Fixed wire Ø3.4	210 975	25	Fixed wire Ø2.8	210 974
3	Main trick wall E14	252 629	32	Spring steel wire Ø2.0	210 973
5	Spring steel wire Ø0.6	210 969	30*	Adjusting piece	206 375
A7	Needle E12	209 614	31*	Set screw complete	207 712
7b	Coupling part E14	209 633	40*	Disk brush	235 612
9	Intermediate slider with brake E14	237 373	41*	Container disk brush	233 012
10	Selection jack with spring E14	224 725	42*	Disk brush	202 600
13	Knock-over bit E12	209 649	520*	Cap screw M5x12	020 032
14	Holding-down jack trick wall E14	235 262	521*	Adjusting washer P6x12x03	023 540

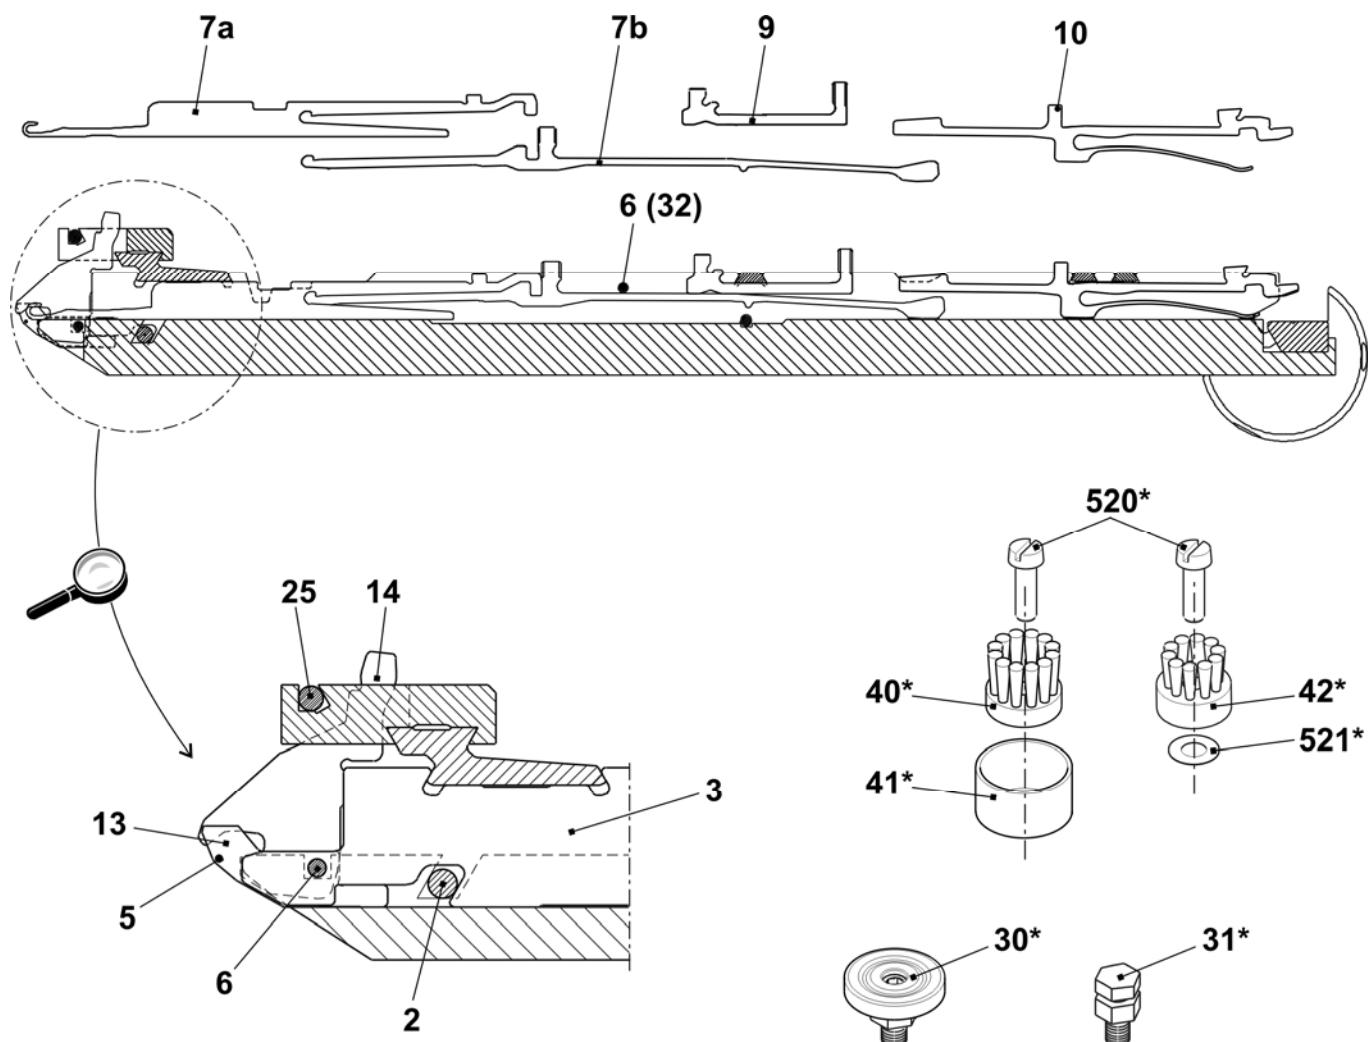


Needle bed E16

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E16	251 123			
1	Needle bed at the front rear E16	251 087	27	Bush	206 090
4	Pressure bar	211 009	29	Cap screw 5x12	209 484
6	Spring steel wire Ø2.0	251 095	31	Cover rail at the rear	210 979
11	Holding-down jack bed at the front E16	244 566	502	Cap screw M5x12	020 132
12	Holding-down jack bed at the rear E16	244 568	503	Cap screw M6X14	022 658
15	Limiter on the left E16-E20	220 821	505	Cap screw M5x8	023 379
16	Limiter on the right E16-E20	220 822	506	Cap screw M5x12	022 943
17	Needle rail on the left	205 311	507	Cap screw M5x22	023 193
18	Needle rail on the right	205 312	509	Setscrew M3.5x3	020 512
19	Coupling part	210 977	511	Set screw M6x12	022 400
20	Cover rail at the front E16	244 597	513	Sprung thrust piece B-M10	023 177
21	Cover rail	210 978	514	Shim 0.05x18.5x34	023 196
22	Cover rail	210 980	515	Shim 0.1x18.5x34	023 197
26	Support	206 352	516	Shim 0.2x18.5x34	023 253

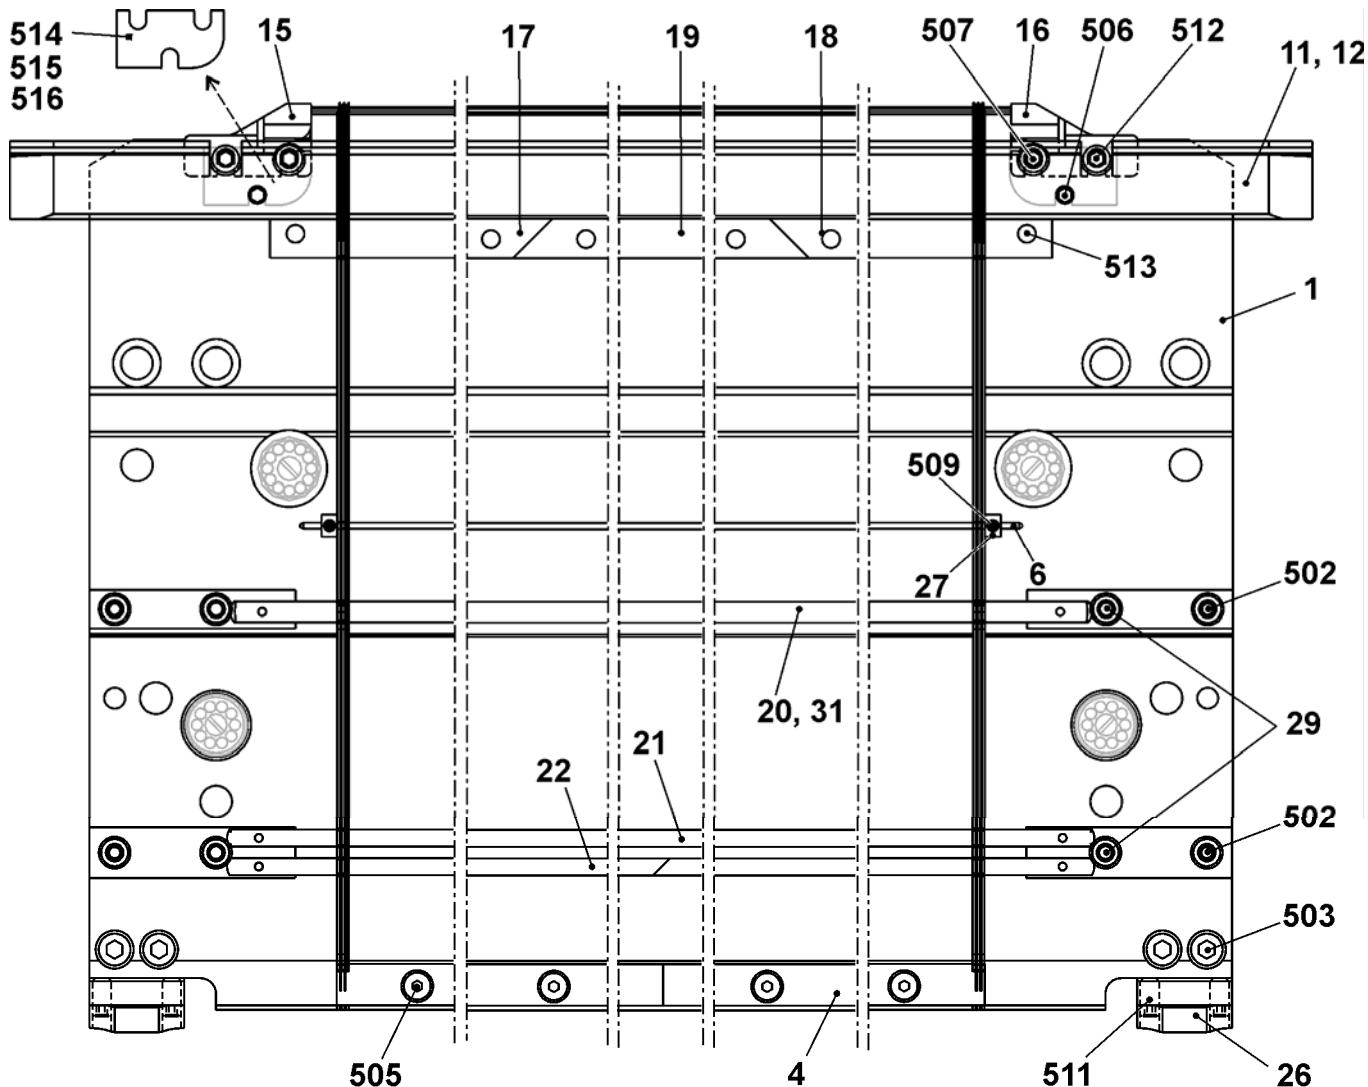


Continuation needle bed E16

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E16	251 123			
2	Fixed wire Ø3.4	210 975	25	Fixed wire Ø2.8 E16-18	244 587
3	Main trick wall E16	245 319	32	Spring steel wire Ø2.0	210 973
5	Spring steel wire Ø0.5	244 585	30*	Adjusting piece	206 375
A7	Needle E16	232 243	31*	Set screw complete	207 712
7b	Coupling part E16-20	220 382	40*	Disk brush	235 612
9	Intermediate slider complete E16	239 271	41*	Container disk brush	233 012
10	Selection jack with spring E16	224 326	42*	Plate brush Ø12	202 600
13	Knock-over bit E16	222 503	520*	Cap screw M5x12	020 032
14	Holding-down jack E16	222 504	521*	Adjusting washer P6x12x0.3	023 540

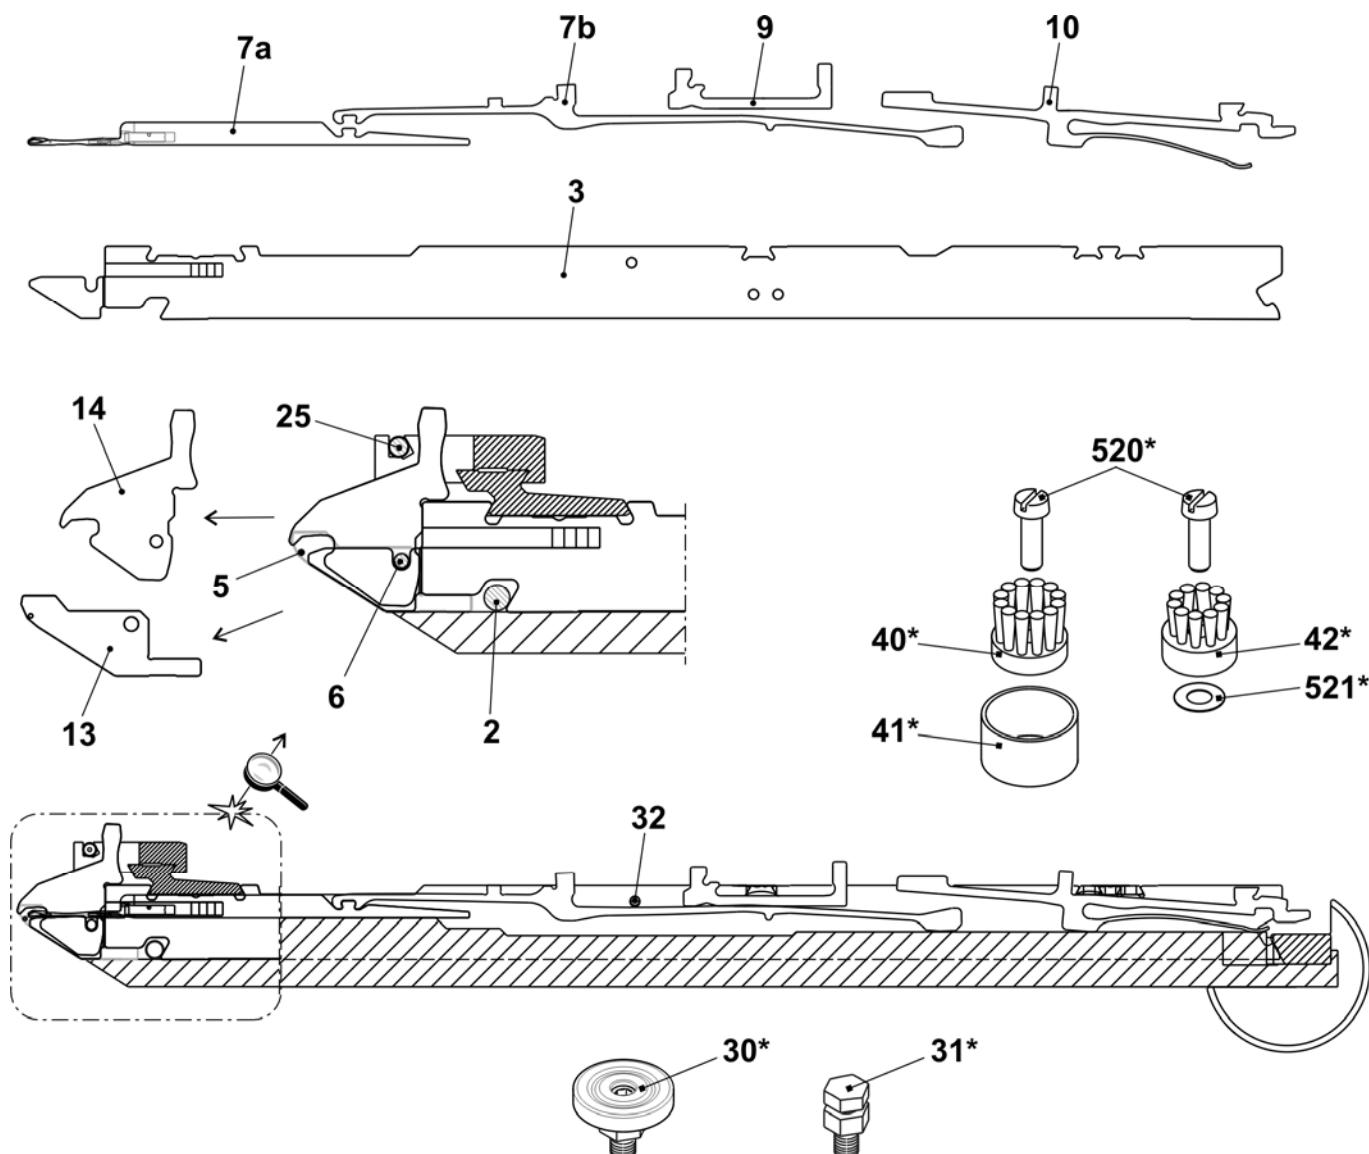


Needle bed E5m.4

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E5m.4	211 968	15	Support	206 352
1	Needle bed at the front + rear E5	210 991	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E5	211 038	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E5	211 045	502	Cap screw M6x25	020 137
6	Limiter on the left E4-E8	205 343	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E4-8	205 344	504	Cap screw M5x22	023 193
8	Coupling part	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E5	210 982	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

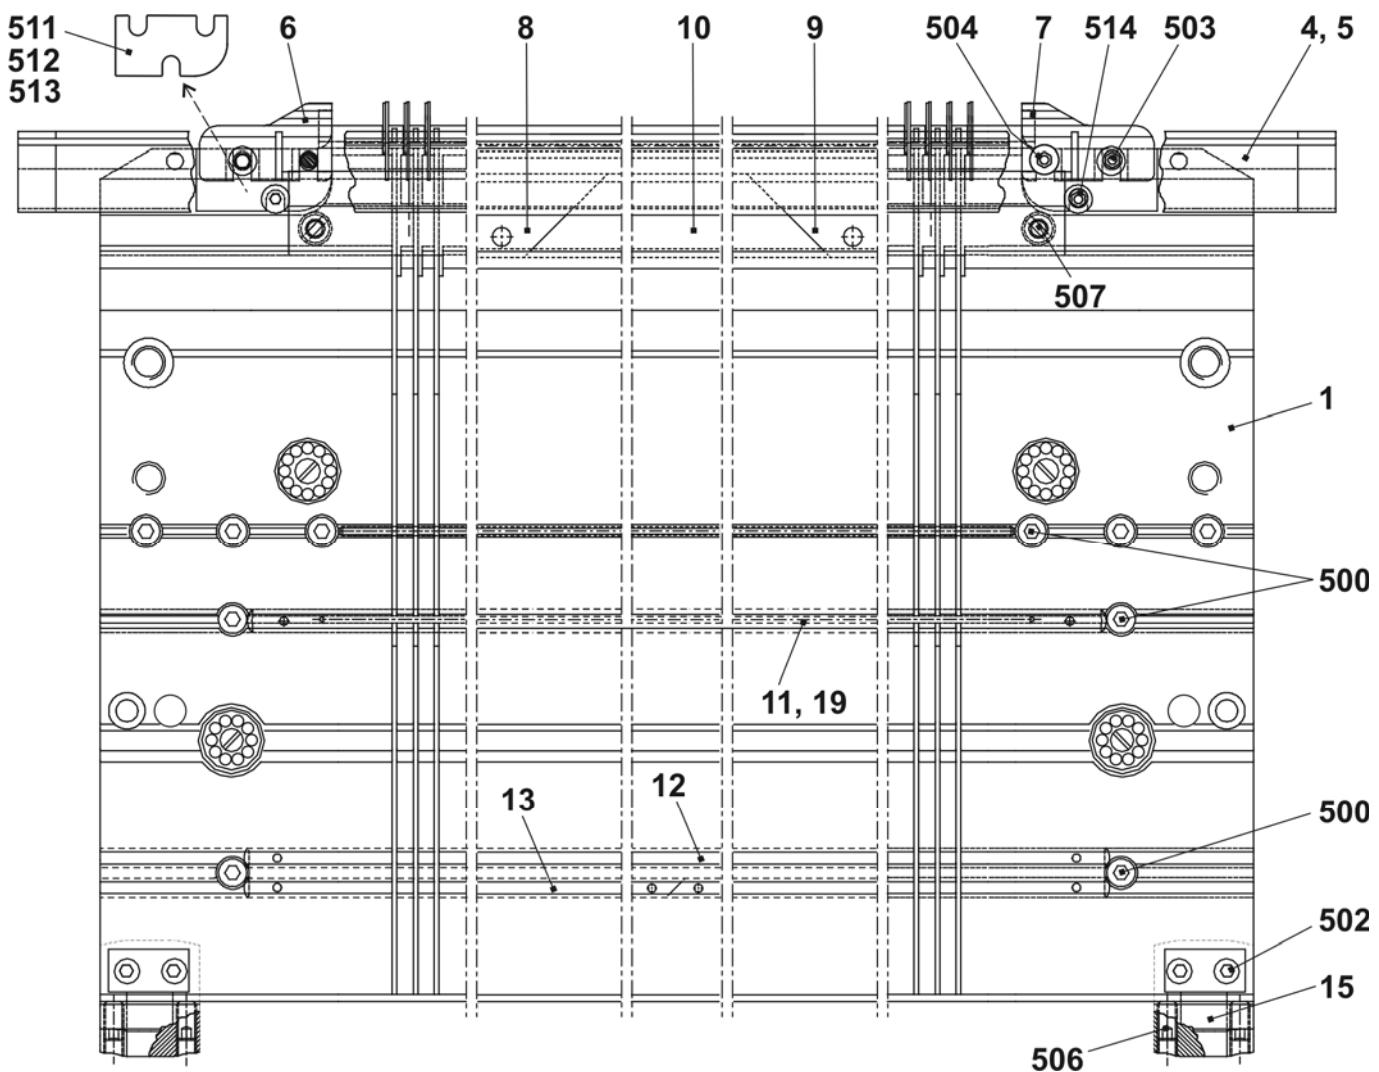


Continuation needle bed E5m.4

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E5m.4	211 968	9	Holding-down jack E5	205 031
2	Spring steel wire ø1.0	210 971	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire ø2.8	212 173
A4	Needle E2,5.2 + E3,5.2	232 581	30*	Adjusting piece	206 375
4b	Coupling part E4-8	200 682	31*	Set screw complete	207 712
6	Intermediate slider with brake E5-E8	237 323	40*	Disk brush	235 612
A7	Selection jack E4-8	200 687	42*	Disk brush	202 600
7b	Selector spring E4-8	200 690	520*	Cap screw M5x12	020 032
8	Knock-over bit E5	204 996	521*	Adjusting washer P6x12x03	023 540

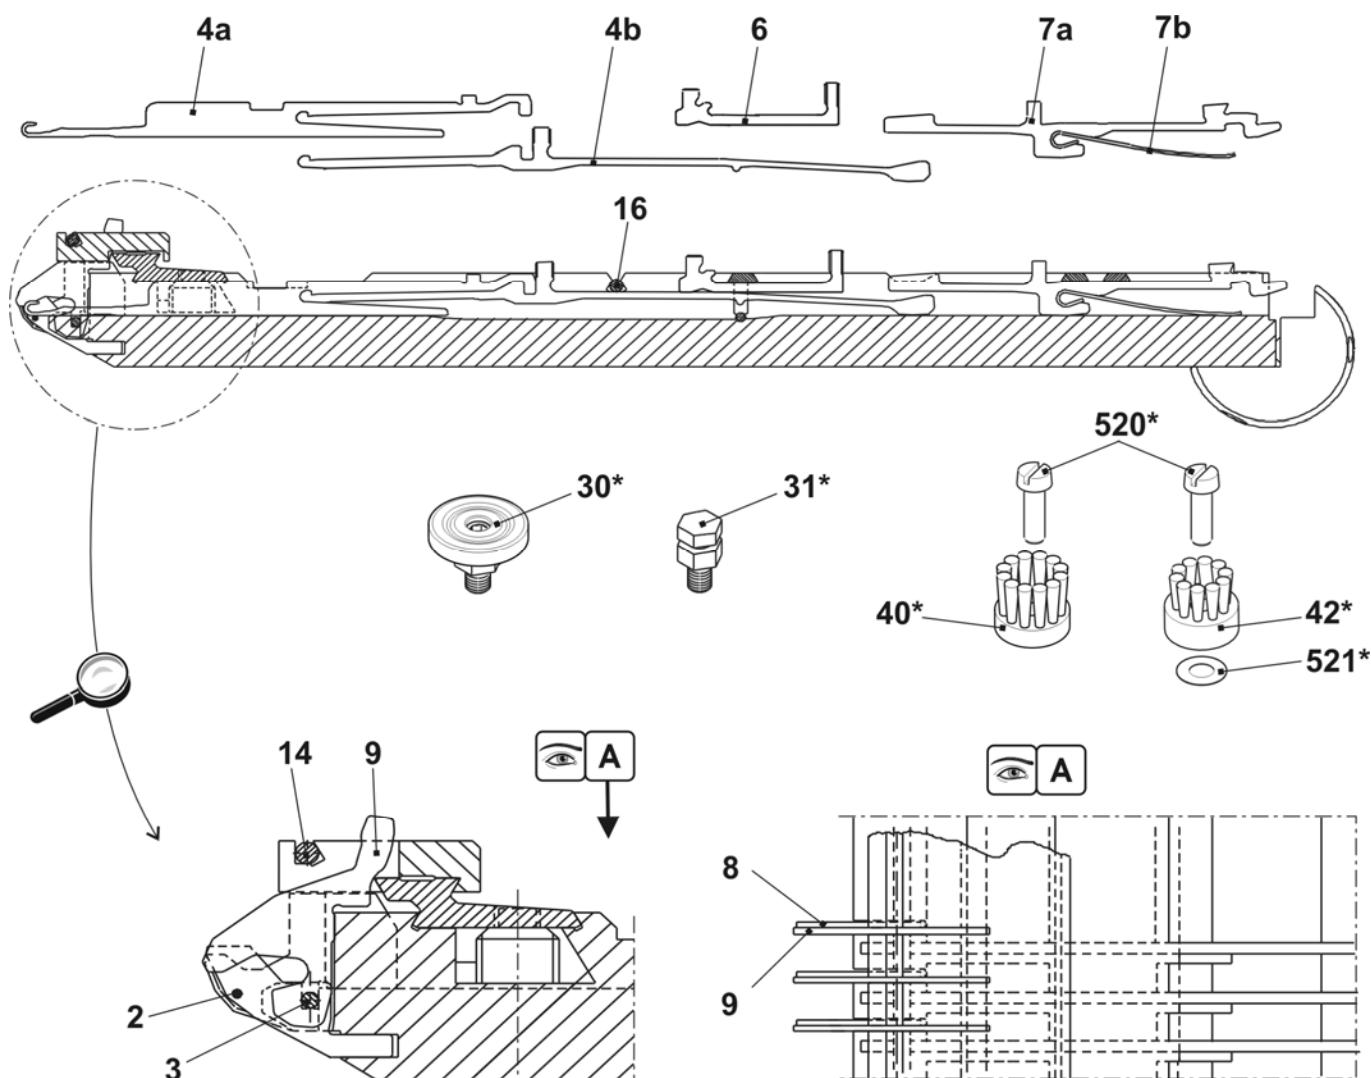


Needle bed E7m.5

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front + rear E7m.5	210 433	15	Support	206 352
1	Needle bed at the front + rear E7	210 992	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E7	211 039	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E7	211 046	502	Cap screw M6x25	020 137
6	Limiter on the left E4-E8	205 343	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E4-8	205 344	504	Cap screw M5x22	023 193
8	Coupling part	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E7	210 983	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

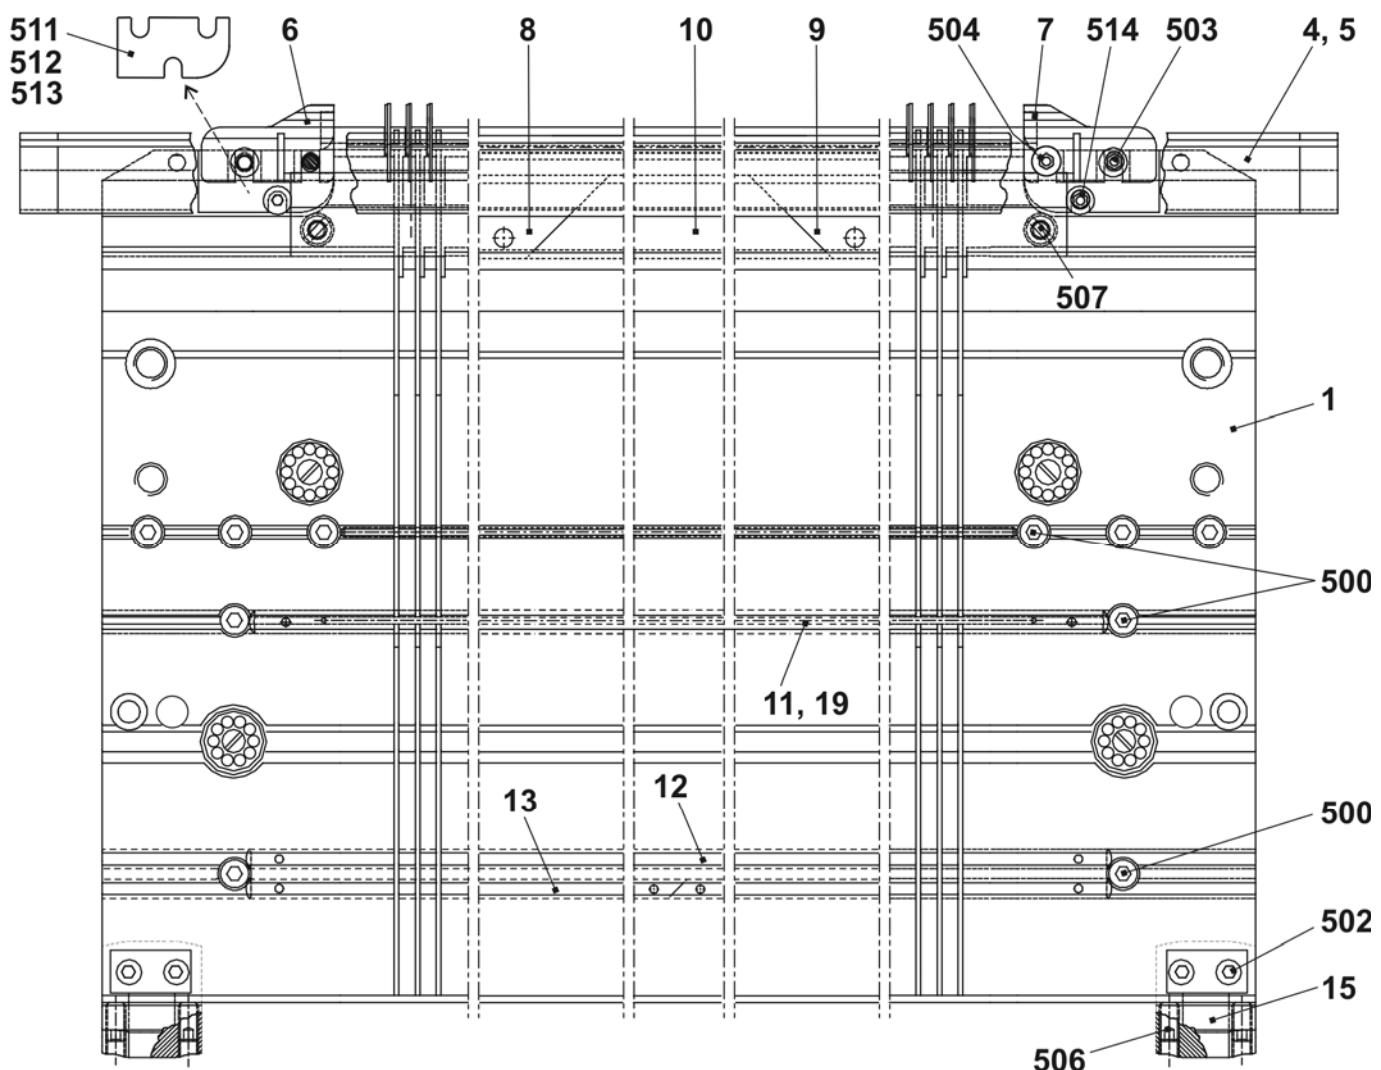


Continuation needle bed E7m.5

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front + rear E7m.5	210 433	9	Holding-down jack E7	205 032
2	Spring steel wire ø0.8	210 970	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire ø2.8	212 173
A4	Needle E5-6 with round hook	205 396	30*	Adjusting piece	206 375
4b	Coupling part E4-8	200 682	31*	Set screw complete	207 712
6	Intermediate slider with brake E5-E8	237 323	40*	Disk brush	235 612
A7	Selection jack E4-8	200 687	42*	Disk brush	202 600
7b	Selector spring E4-8	200 690	520*	Cap screw M5x12	020 032
8	Knock-over bit E7	207 055	521*	Adjusting washer P6x12x03	023 540

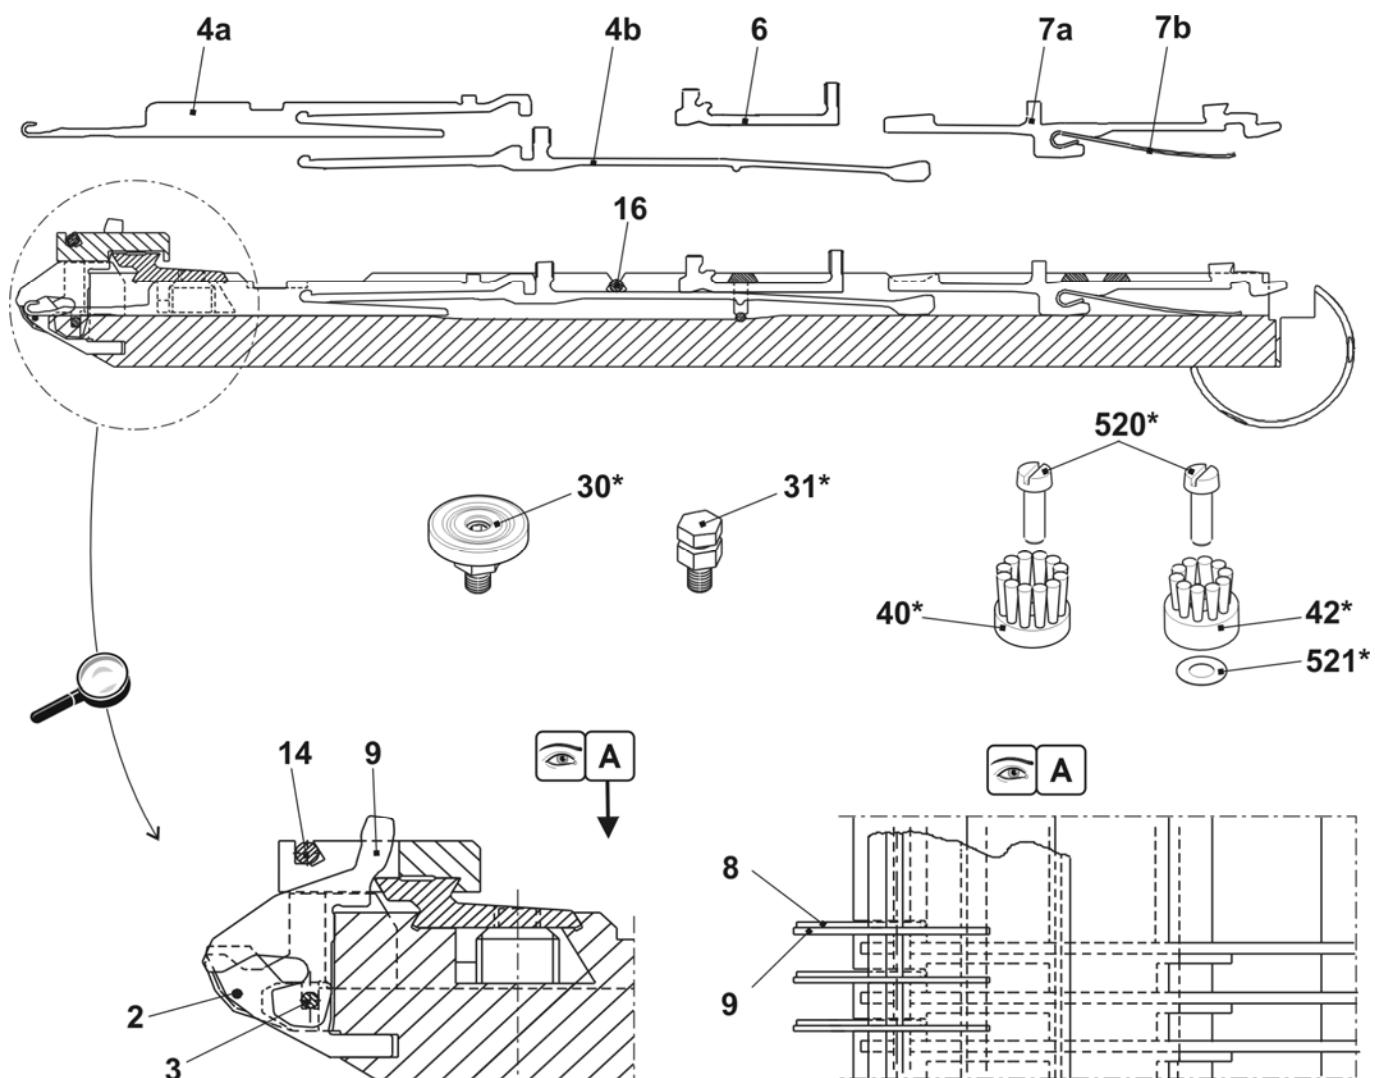


Needle bed E7m.8

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front + rear E7m.8	210 434	15	Support	206 352
1	Needle bed at the front + rear E7	210 992	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E7	211 039	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E7	211 046	502	Cap screw M6x25	020 137
6	Limiter on the left E4-E8	205 343	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E4-8	205 344	504	Cap screw M5x22	023 193
8	Coupling part	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E7	210 983	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

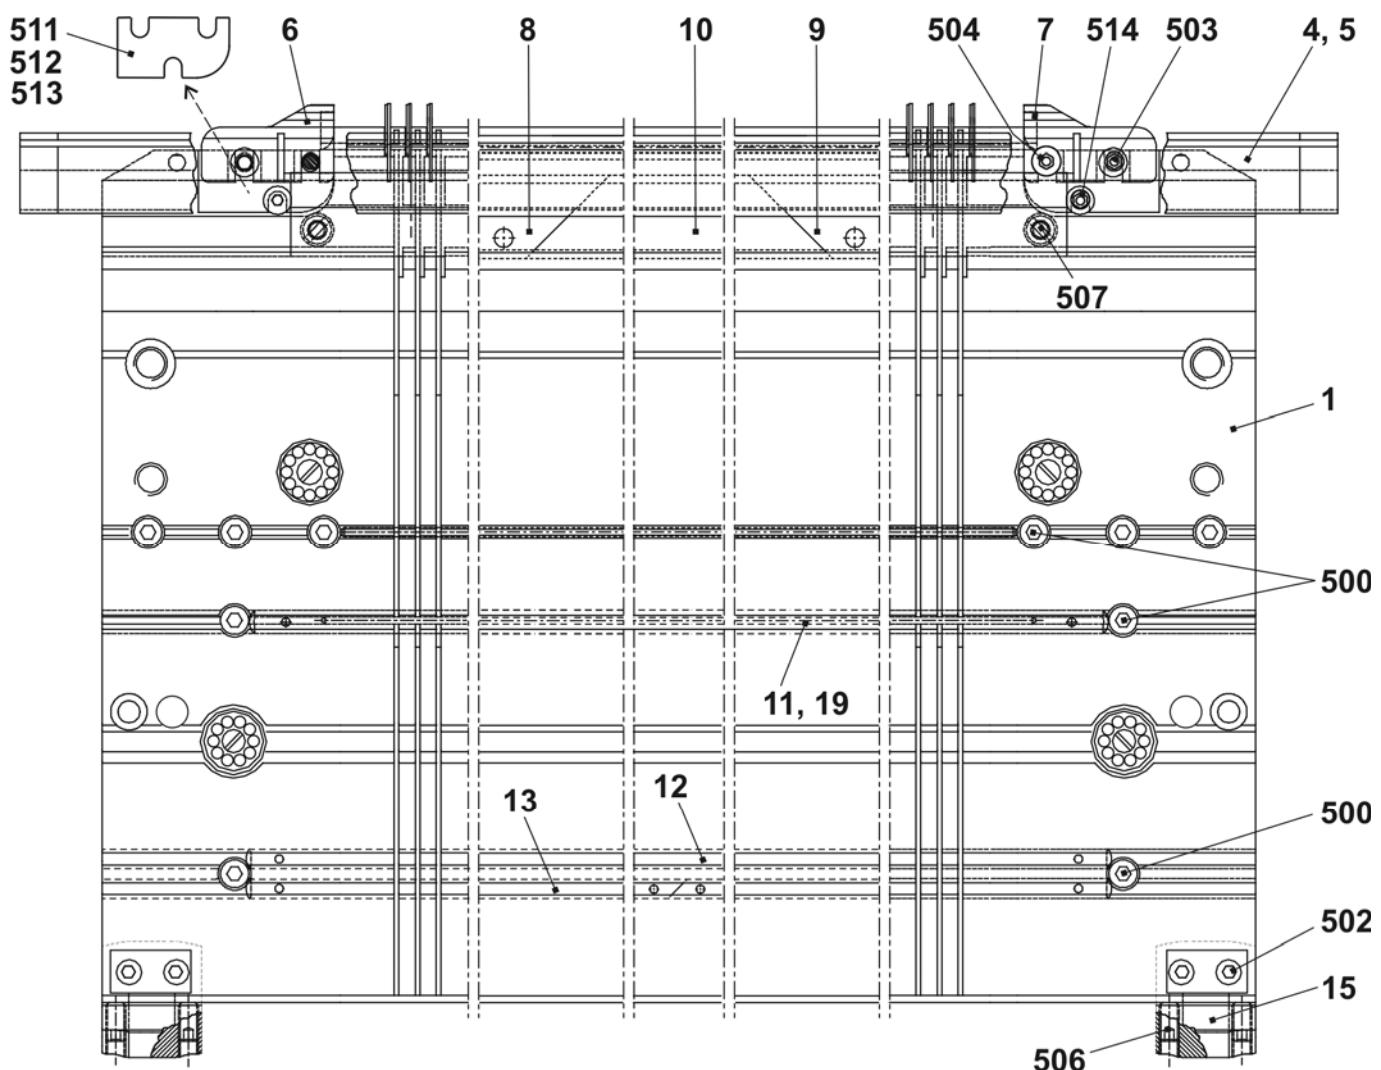


Continuation needle bed E7m.8

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front + rear E7m.8	210 434	9	Holding-down jack E7	205 032
2	Spring steel wire ø0.8	210 97	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire ø2.8	212 173
A4	Needle E8 with round hook	208 745	30*	Adjusting piece	206 375
4b	Coupling part E4-8	200 682	31*	Set screw complete	207 712
6	Intermediate slider with brake E5-E8	237 323	40*	Disk brush	235 612
A7	Selection jack E4-8	200 687	42*	Disk brush	202 600
7b	Selector spring E4-8	200 690	520*	Cap screw M5x12	020 032
8	Knock-over bit E7	207 055	521*	Adjusting washer P6x12x03	023 540

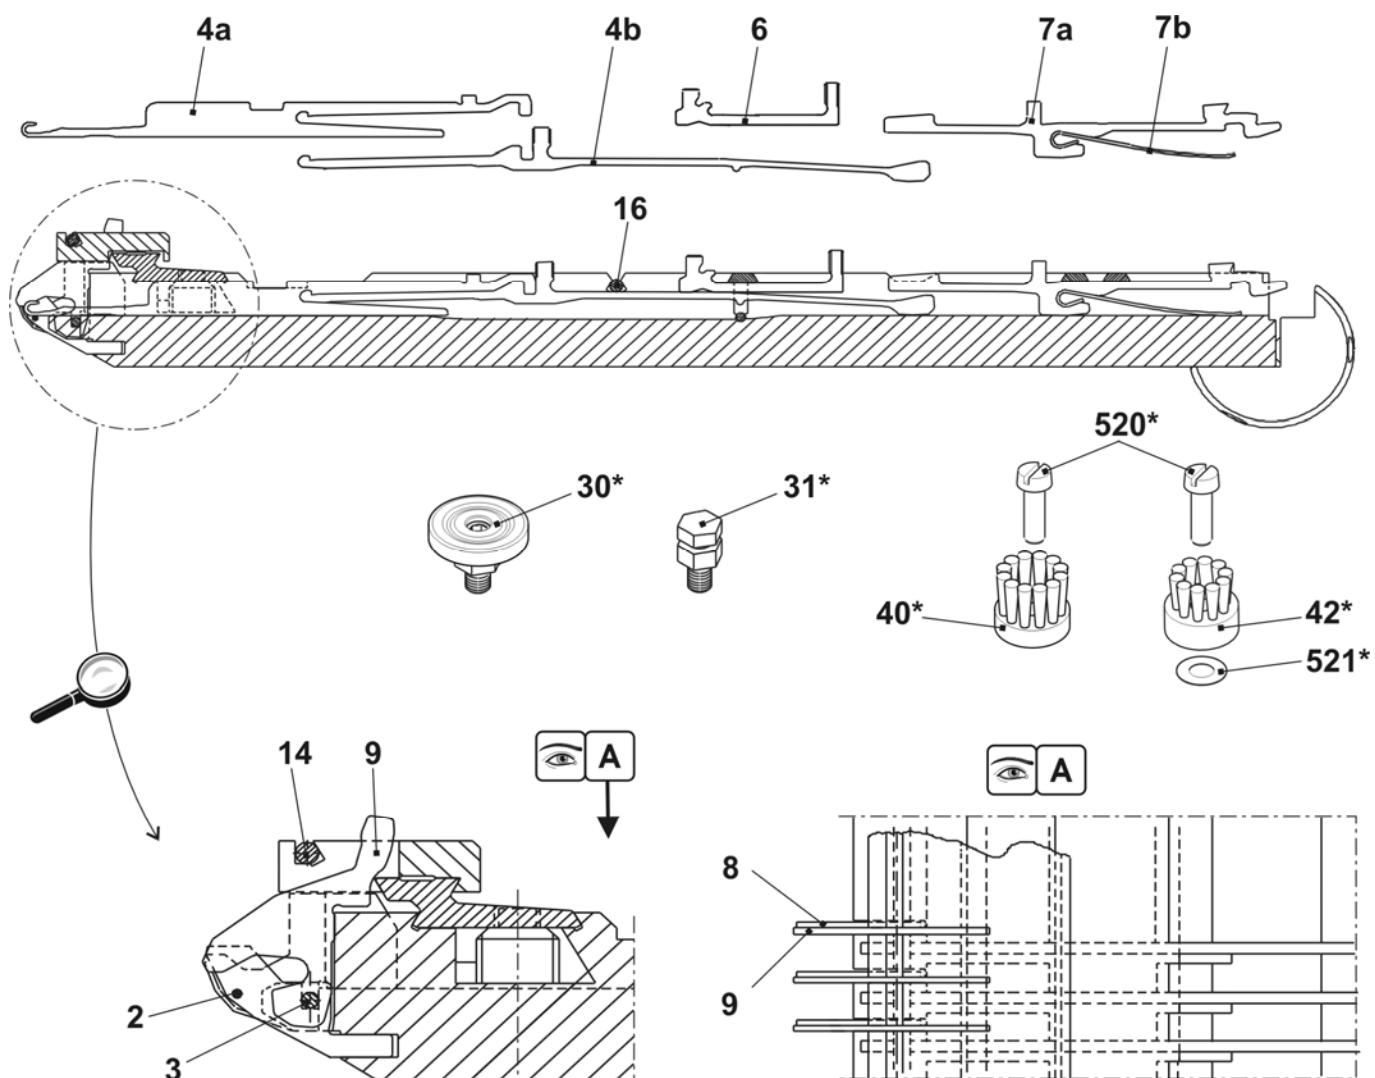


Needle bed E8m.7

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E8m.7	210 435	15	Support	206 352
1	Needle bed at the front + rear E8	210 993	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E8	211 040	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E8	211 047	502	Cap screw M6x25	020 137
6	Limiter on the left E4-E8	205 343	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E4-8	205 344	504	Cap screw M5x22	023 193
8	Coupling part	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E8	210 984	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

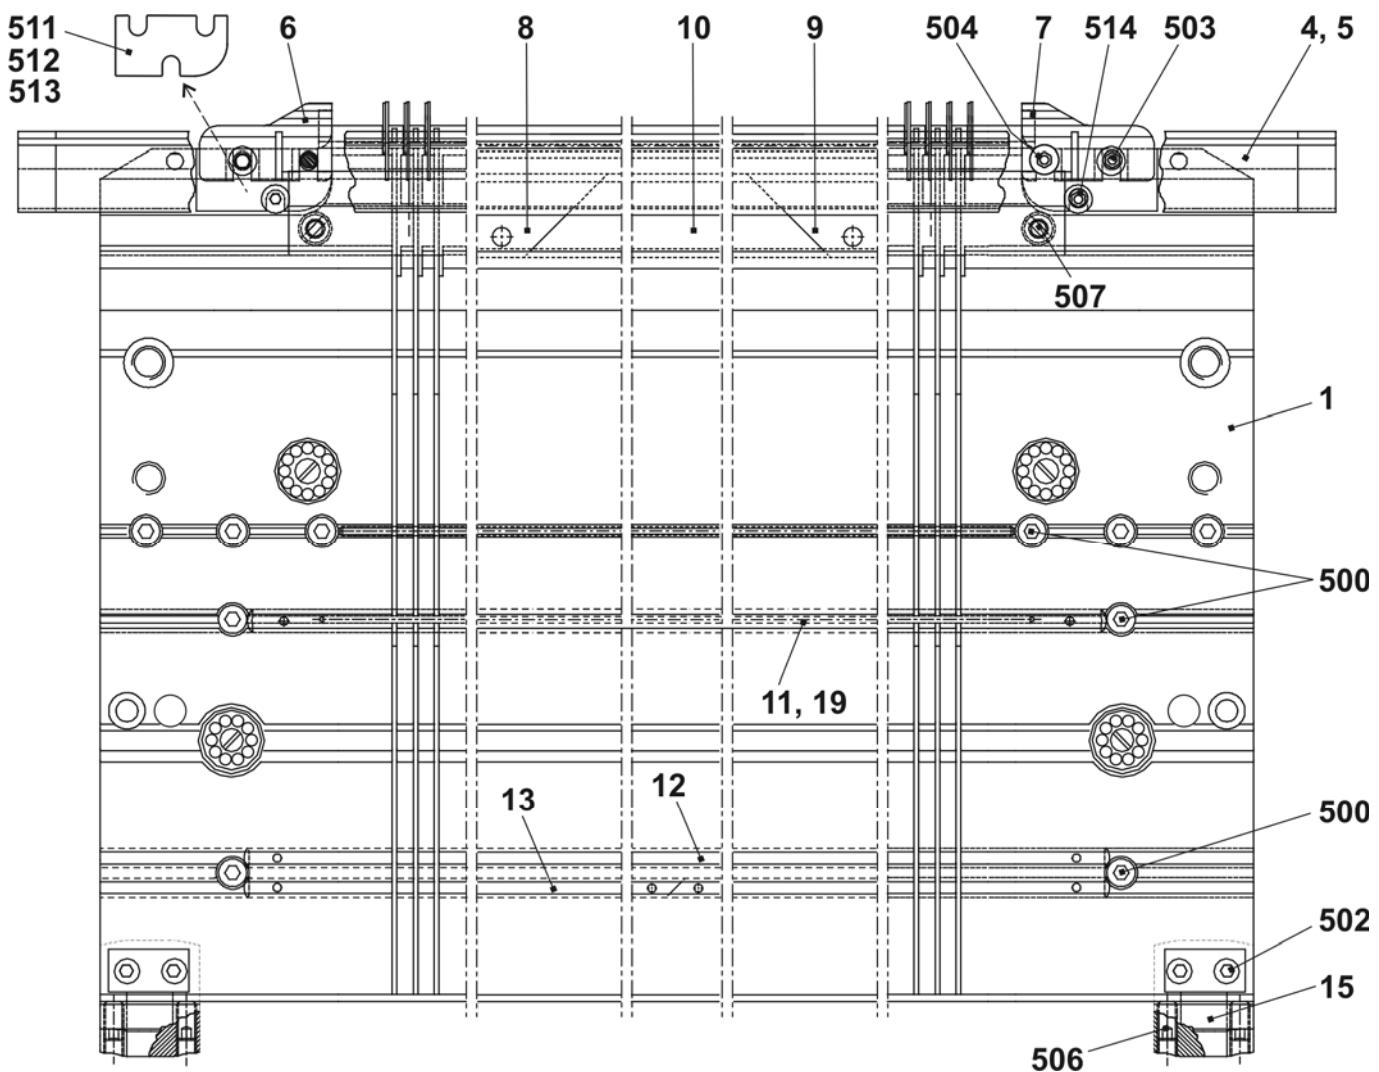


Continuation needle bed E8m.7

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E8m.7	210 435	9	Holding-down jack E8	205 028
2	Spring steel wire ø0.8	210 970	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire ø2.8	212 173
A4	Needle E7 with round hook	205 397	30*	Adjusting piece	206 375
4b	Coupling part E4-8	200 682	31*	Set screw complete	207 712
6	Intermediate slider with brake E5-E8	237 323	40*	Disk brush	235 612
A7	Selection jack E4-8	200 687	42*	Disk brush	202 600
7b	Selector spring E4-8	200 690	520*	Cap screw M5x12	020 032
8	Knock-over bit E8	207 054	521*	Adjusting washer P6x12x03	023 540

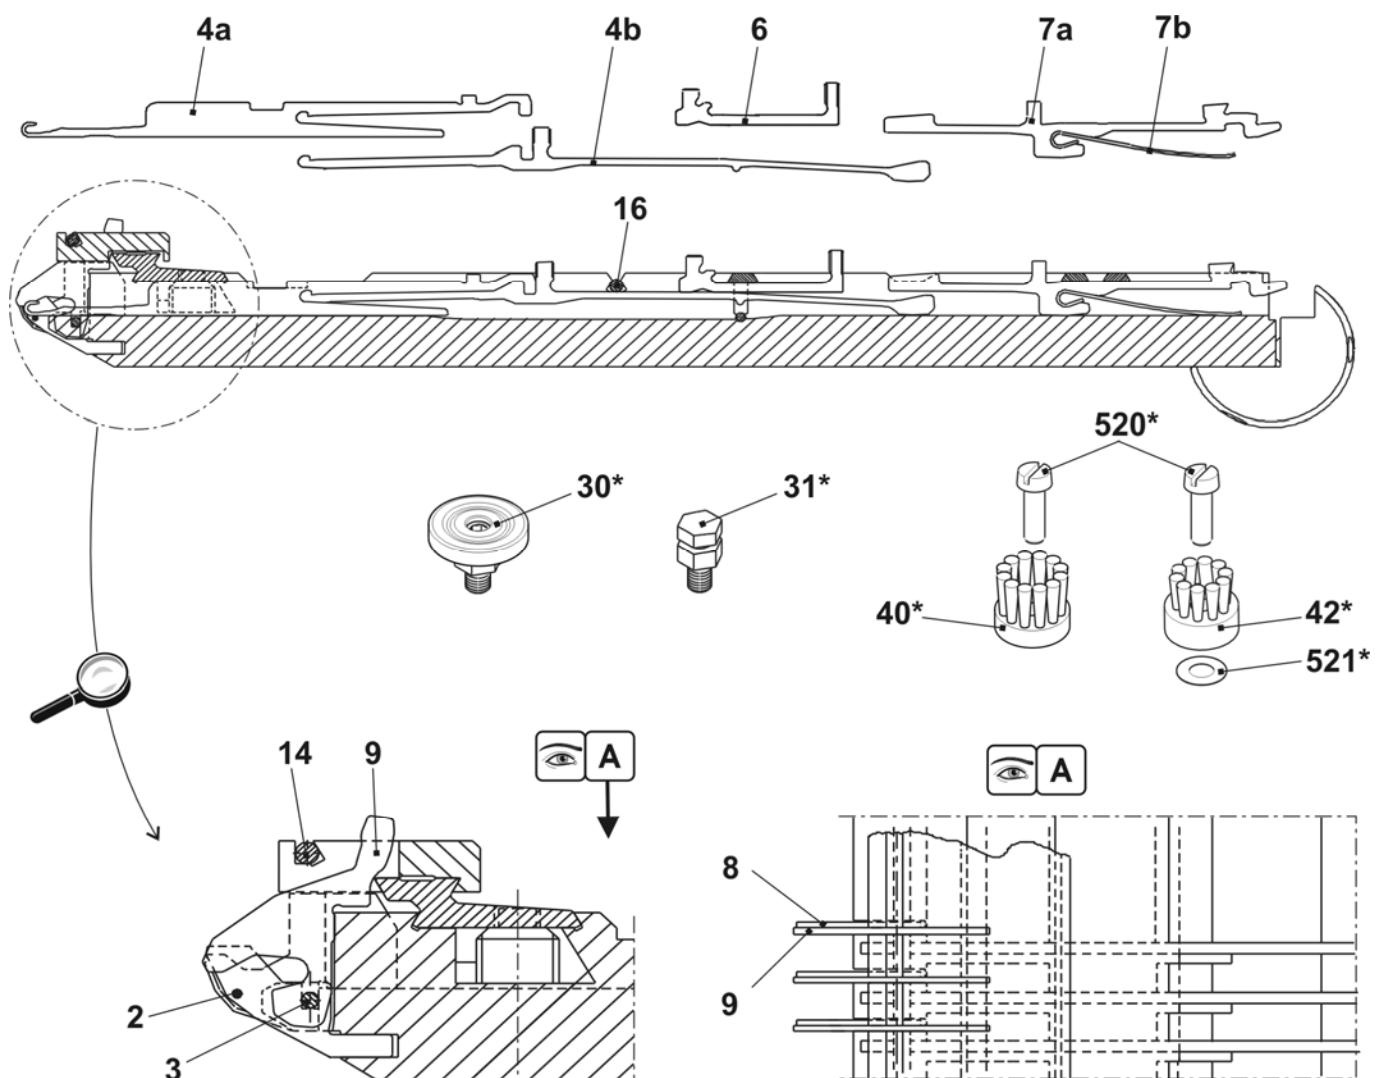


Needle bed E10m.12

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E10m.12	241 662	15	Support	206 352
1	Needle bed at the front + rear E10	241 648	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E10	211 041	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E10	211 048	502	Cap screw M6x25	020 137
6	Limiter on the left E10-14	205 764	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E10-14	205 765	504	Cap screw M5x22	023 193
8	Needle rail on the left	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E10	210 985	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

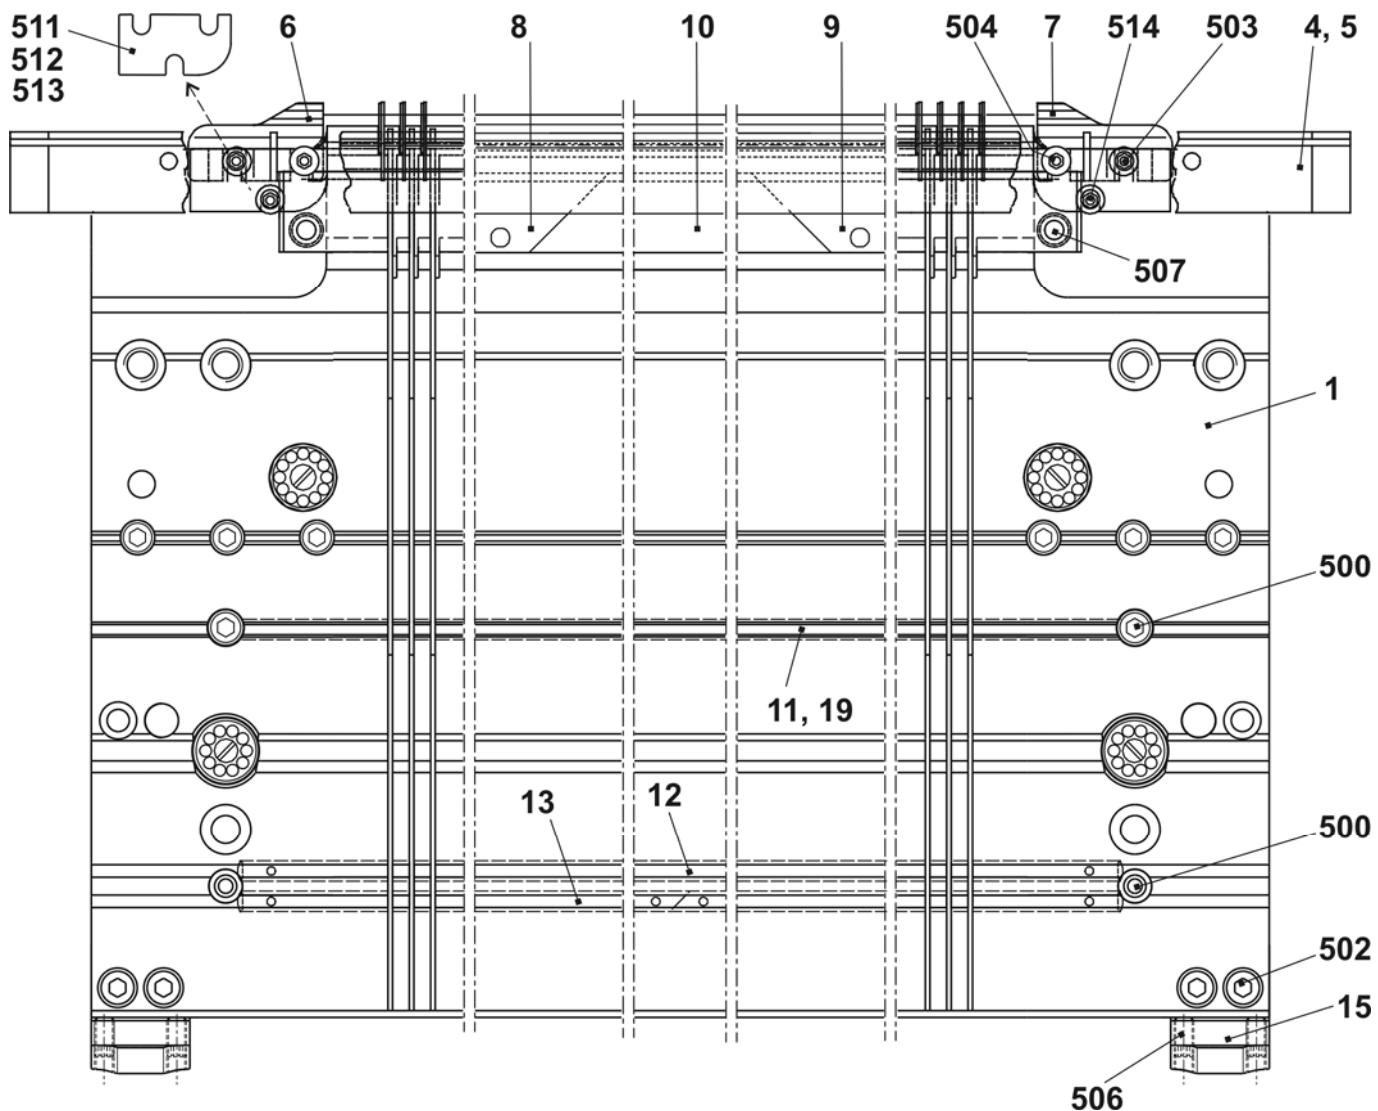


Continuation needle bed E10m.12

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E10m.12	241 662	8	Holding-down jack trick wall E10	239 815
2	Spring steel wire Ø0.6	210 969	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire Ø2.8	212 173
A4	Needle E12	204 009	30*	Adjusting piece	206 375
4b	Coupling part E10-12	200 683	31*	Set screw complete	207 712
5	Intermediate slider with brake E10	237 324	40*	Disk brush	235 612
A6	Selection jack E10-12	200 688	42*	Disk brush	202 600
6b	Selector spring E10-12	200 691	520*	Cap screw M5x12	020 032
7	Knock-over bit E10	239 756	521*	Adjusting washer P6x12x03	023 540

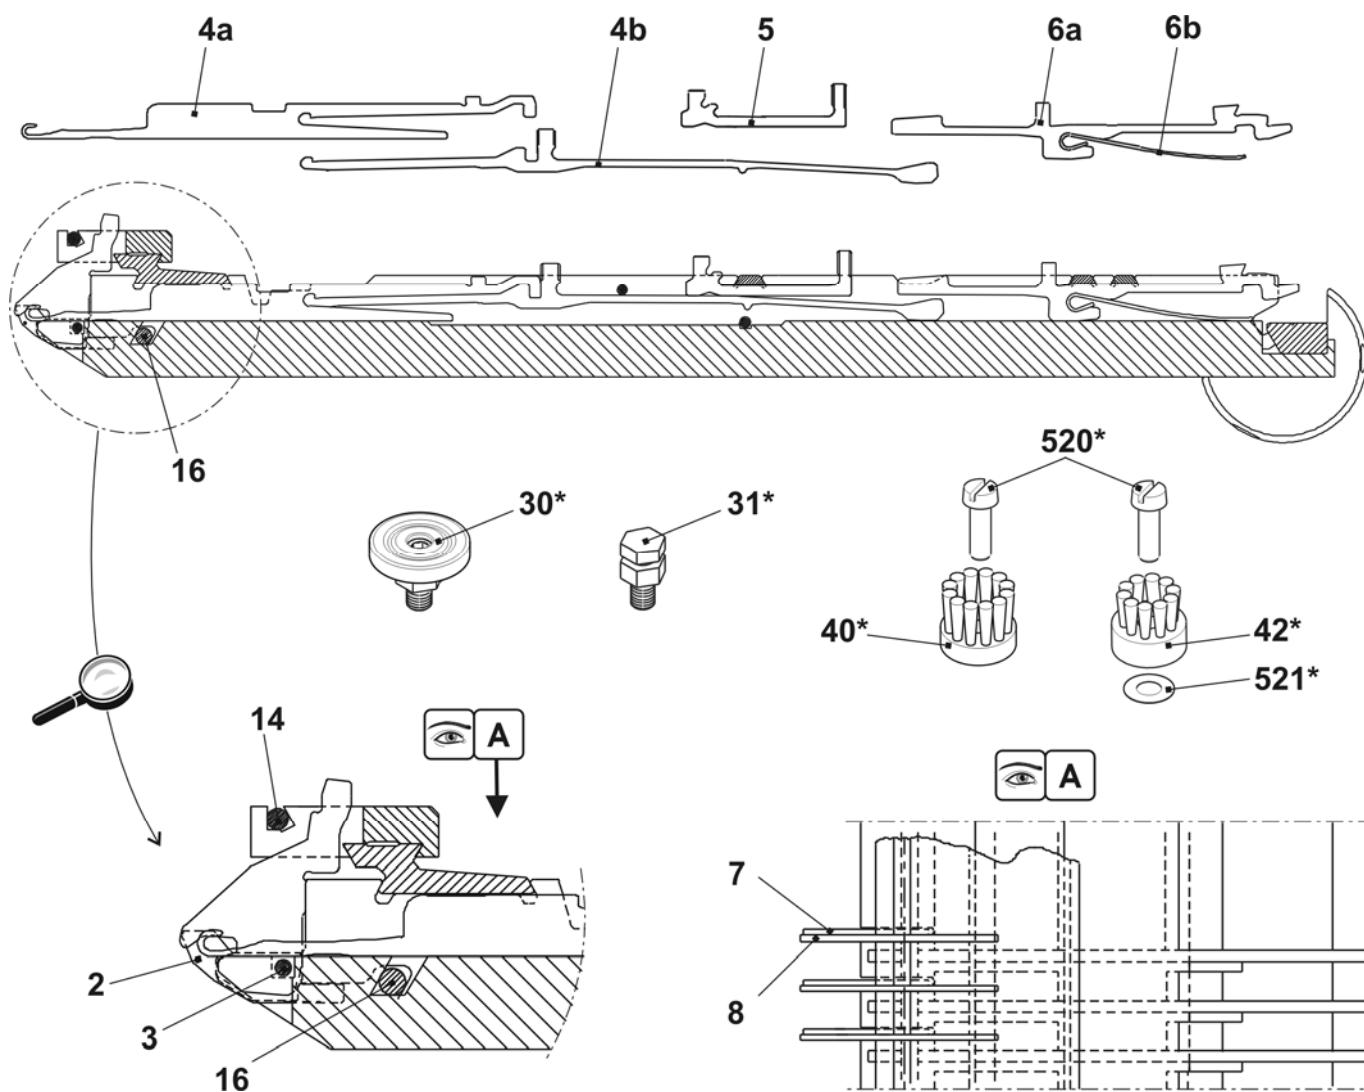


Needle bed E12m.10

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E12m.10	253 745			
1	Needle bed at the front + rear E12	253 741	29	Cap screw 5x12	209 484
4	Pressure bar	211 009	31	Cover rail at the rear	210 979
6	Spring steel wire Ø2.0	251 095	32	Spring steel wire Ø2.0	210 973
11	Holding-down jack bed at the front E12	211 042	502	Cap screw M5x12	020 132
12	Holding-down jack bed at the rear E12	211 049	503	Cap screw M6x14	022 658
15	Limiter on the left E10-14	205 764	505	Cap screw M5x8	023 379
16	Limiter on the right E10-14	205 765	506	Cap screw M5x12-8.8	022 943
17	Needle rail on the left	205 311	507	Cap screw M5x22	023 193
18	Needle rail on the right	205 312	509	Set screw 4766-M3,5x3-1	020 512
19	Coupling part	210 977	511	Set screw 4026-M6x12-45	022 400
20	Cover rail at the front E12	210 986	512	Cap screw M5x8-8.8 M	023 154
21	Cover rail	210 978	513	Sprung thrust piece B-M10	023 177
22	Cover rail	210 980	514	Shim 0.05x18.5x34	023 196
26	Support	206 352	515	Shim 0.1x18.5x34	023 197
27	Bush	206 090	516	Shim 0.2x18.5x34	023 253
			517	Shim 0.2x18.5x34	023 253

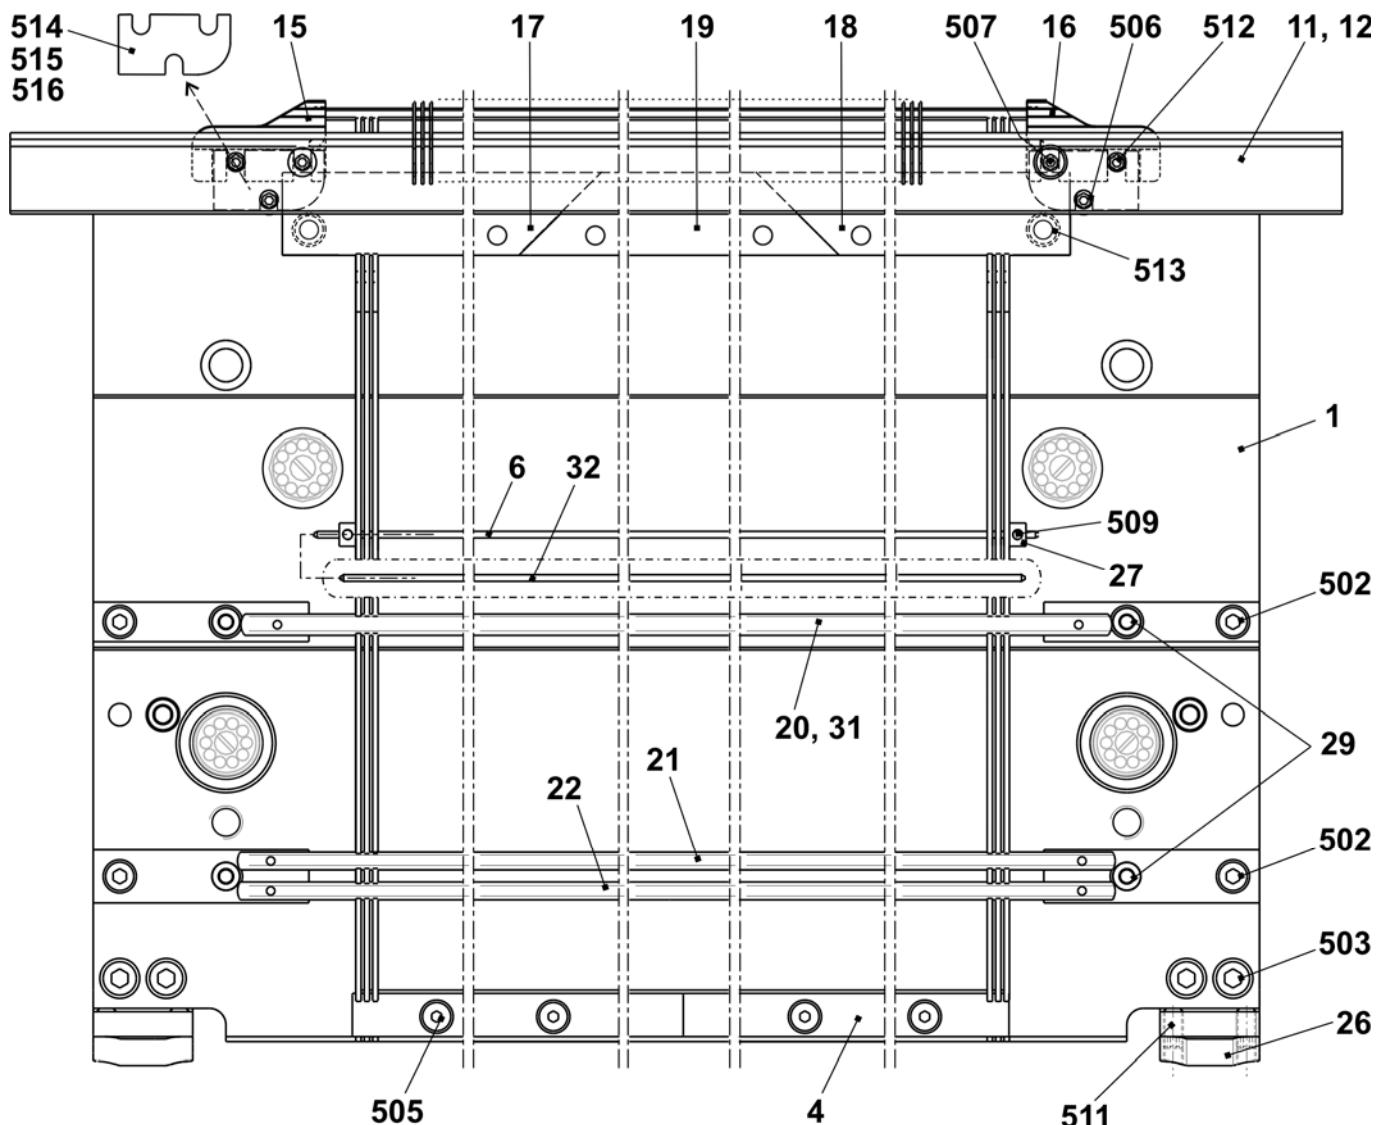


Continuation needle bed E12m.10

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E12m.10	253 745			
2	Fixed wire Ø3.4	210 975	25	Fixed wire Ø2.8	210 974
3	Main trick wall E12	252 628	32	Spring steel wire Ø2.0	210 973
5	Spring steel wire Ø0.6	210 969	33	Spring steel wire Ø2.0	210 973
A7	Needle E10 with round hook	205 398	30*	Adjusting piece	206 375
7b	Coupling part E10-12	200 683	31*	Set screw complete	207 712
9	Intermediate slider with brake E10-12	237 324	40*	Disk brush	235 612
10a	Selection jack E10-12	200 688	41*	Container disk brush	233 012
10b	Selector spring E10-12	200 691	42*	Disk brush	202 600
13	Knock-over bit E12	205 013	520*	Cap screw M5x12	020 032
14	Holding-down jack trick wall E12	227 821	521*	Adjusting washer P6x12x03	023 540

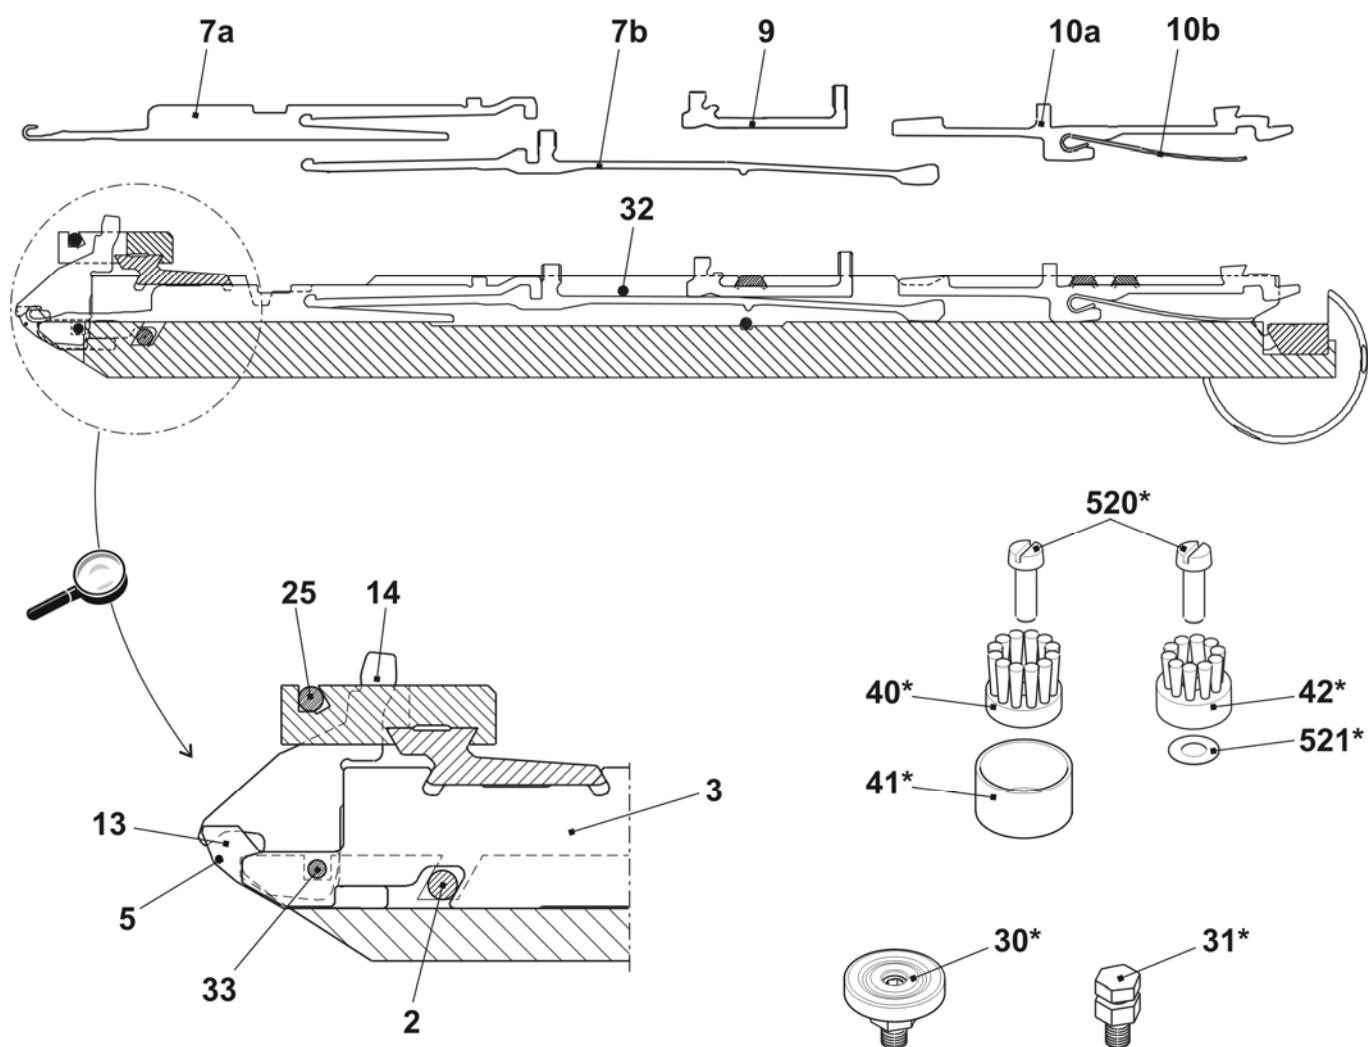


Needle bed E3,5.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E3,5.2	244 613	15	Support	206 352
1	Needle bed at the front + rear E7	210 992	19	Cover rail at the rear	210 979
4	Holding-down jack bed at the front E3,5.2 MG	240 174	500	Cap screw M5x10	022 918
5	Holding-down jack bed at the rear E3,5.2	240 175	502	Cap screw M6x25	020 137
6	Limiter on the left E4-E8	205 343	503	Cap screw M5x8-8.8	023 154
7	Limiter on the right E4-8	205 344	504	Cap screw M5x22	023 193
8	Coupling part	205 311	506	Set screw M6x12-45	022 400
9	Needle rail on the right	205 312	507	Sprung thrust piece B-M10	023 177
10	Coupling part	210 977	511	Shim 0.05x18.5x34	023 196
11	Cover rail at the front E7	210 983	512	Shim 0.1x18.5x34	023 197
12	Cover rail	210 978	513	Shim 0.2x18.5x34	023 253
13	Cover rail	210 980	514	Cap screw M5x8	023 379

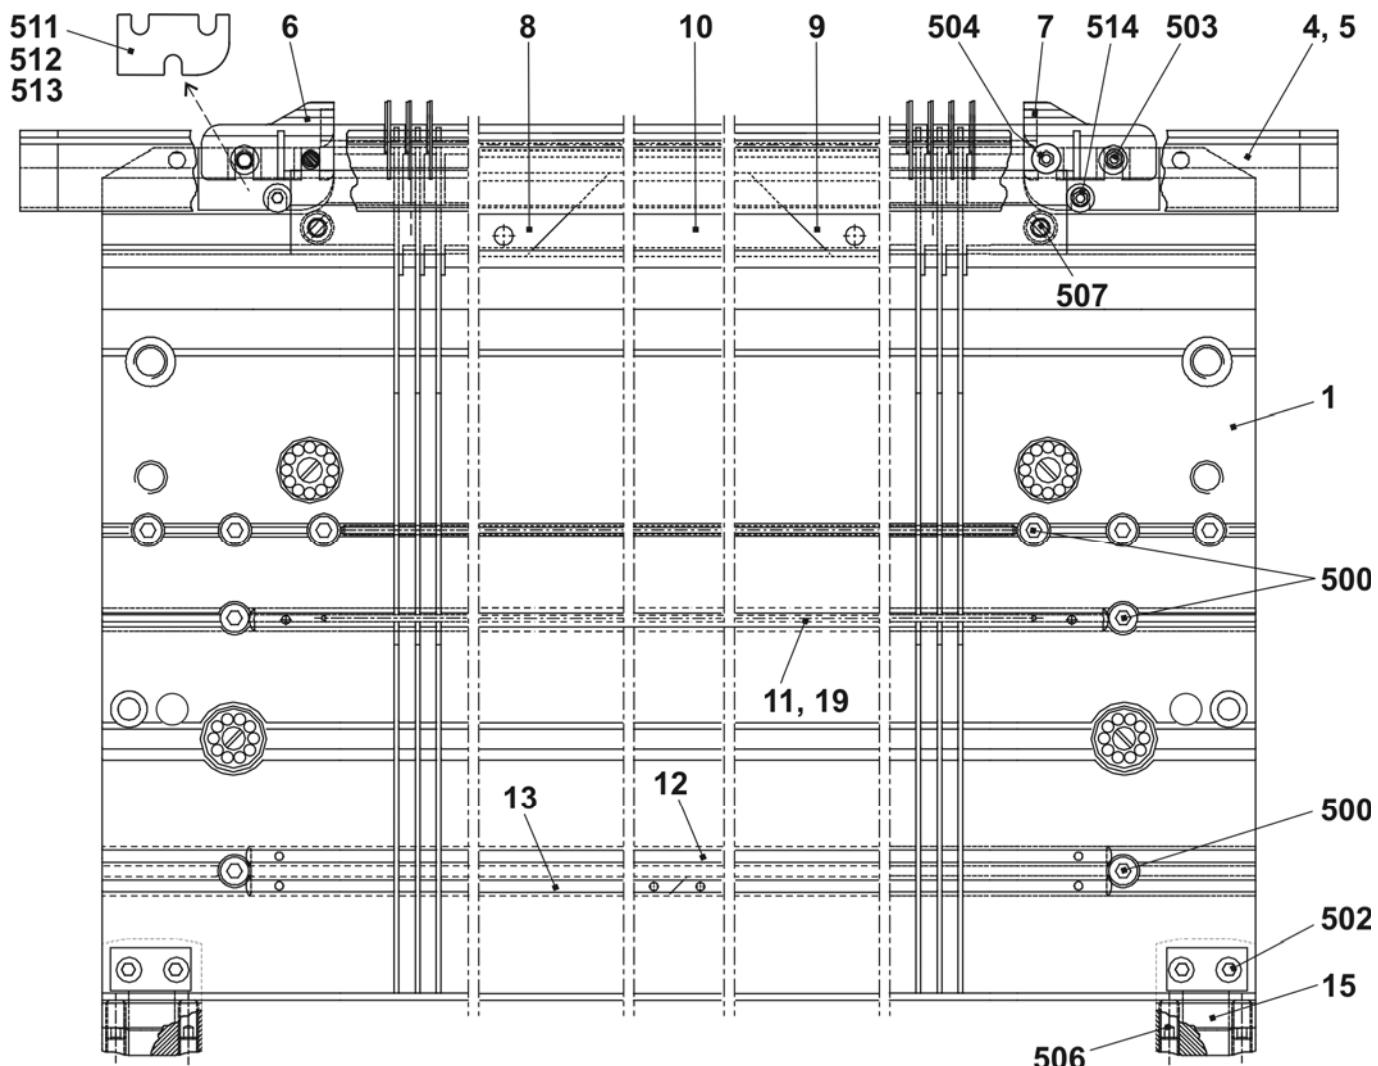


Continuation needle bed E3,5.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E7	244 613	9	Holding-down jack E7	205 032
2	Spring steel wire ø0.8	210 970	14	Fixed wire Ø2.8	210 974
3	Spring steel wire Ø2.0	210 972	16	Spring steel wire ø2.8	212 173
A4	Needle E2,5.2 + E3,5.2	232 581	30*	Adjusting piece	206 375
4b	Coupling part E4-8	200 682	31*	Set screw complete	207 712
6	Intermediate slider with brake E5-E8	237 323	40*	Disk brush	235 612
A7	Selection jack E4-8	200 687	42*	Disk brush	202 600
7b	Selector spring E4-8	200 690	520*	Cap screw M5x12	020 032
8	Knock-over bit E7	207 055	521*	Adjusting washer P6x12x03	023 540

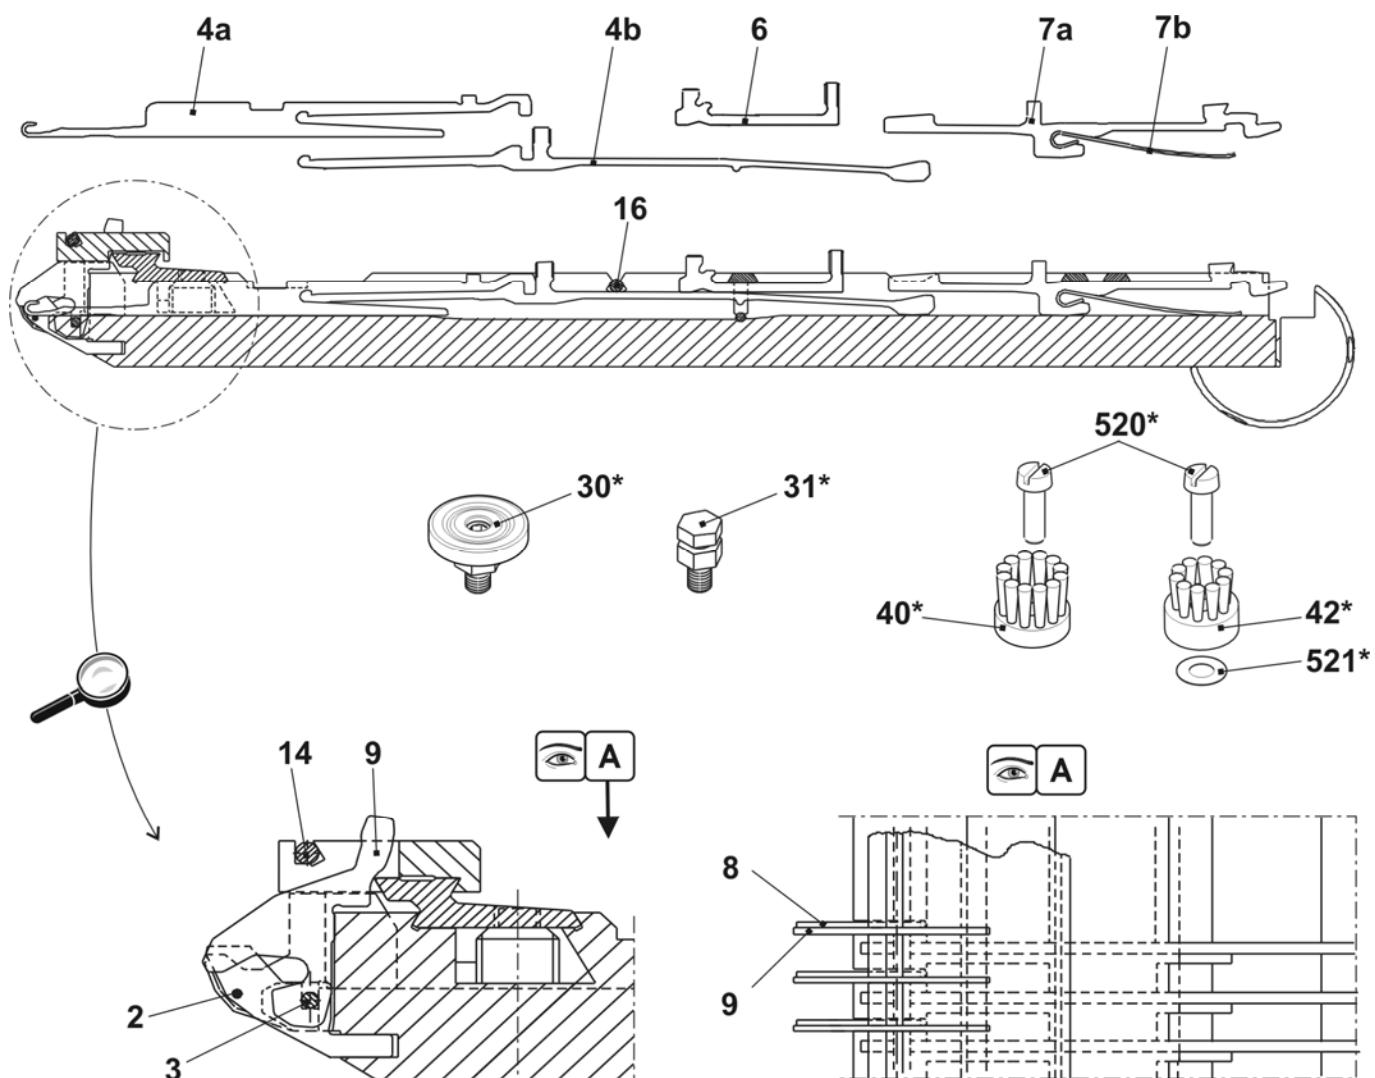


Needle bed E5.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E5.2	244 611	27	Bush	206 090
1	Needle bed at the front + rear E5.2	244 532	29	Cap screw 5x12	209 484
4	Pressure bar	211 009	31	Cover rail at the rear	210 979
6	Spring steel wire Ø2.0	210 972	502	Cap screw M5x12	020 132
11	Holding-down jack bed at the front E5.2	244 526	503	Cap screw M6X14	022 658
12	Holding-down jack bed at the rear E5.2	244 527	505	Cap screw M5x8	023 379
15	Limiter on the left E4-E8	205 343	506	Cap screw M5x12-8.8	022 943
16	Limiter on the right E4-8	205 344	507	Cap screw M5x22	023 193
17	Needle rail on the left	205 311	509	Setscrew M3.5x3-1	020 512
18	Needle rail on the right	205 312	511	Set screw M6x12-45	022 400
19	Coupling part	210 977	512	Cap screw M5x8-8.8 M	023 154
20	Cover rail at the front E10	210 985	513	Sprung thrust piece B-M10	023 177
21	Cover rail	210 978	514	Shim 0.05x18.5x34	023 196
22	Cover rail	210 980	515	Shim 0.1x18.5x34	023 197
26	Support	206 352	516	Shim 0.2x18.5x34	023 253

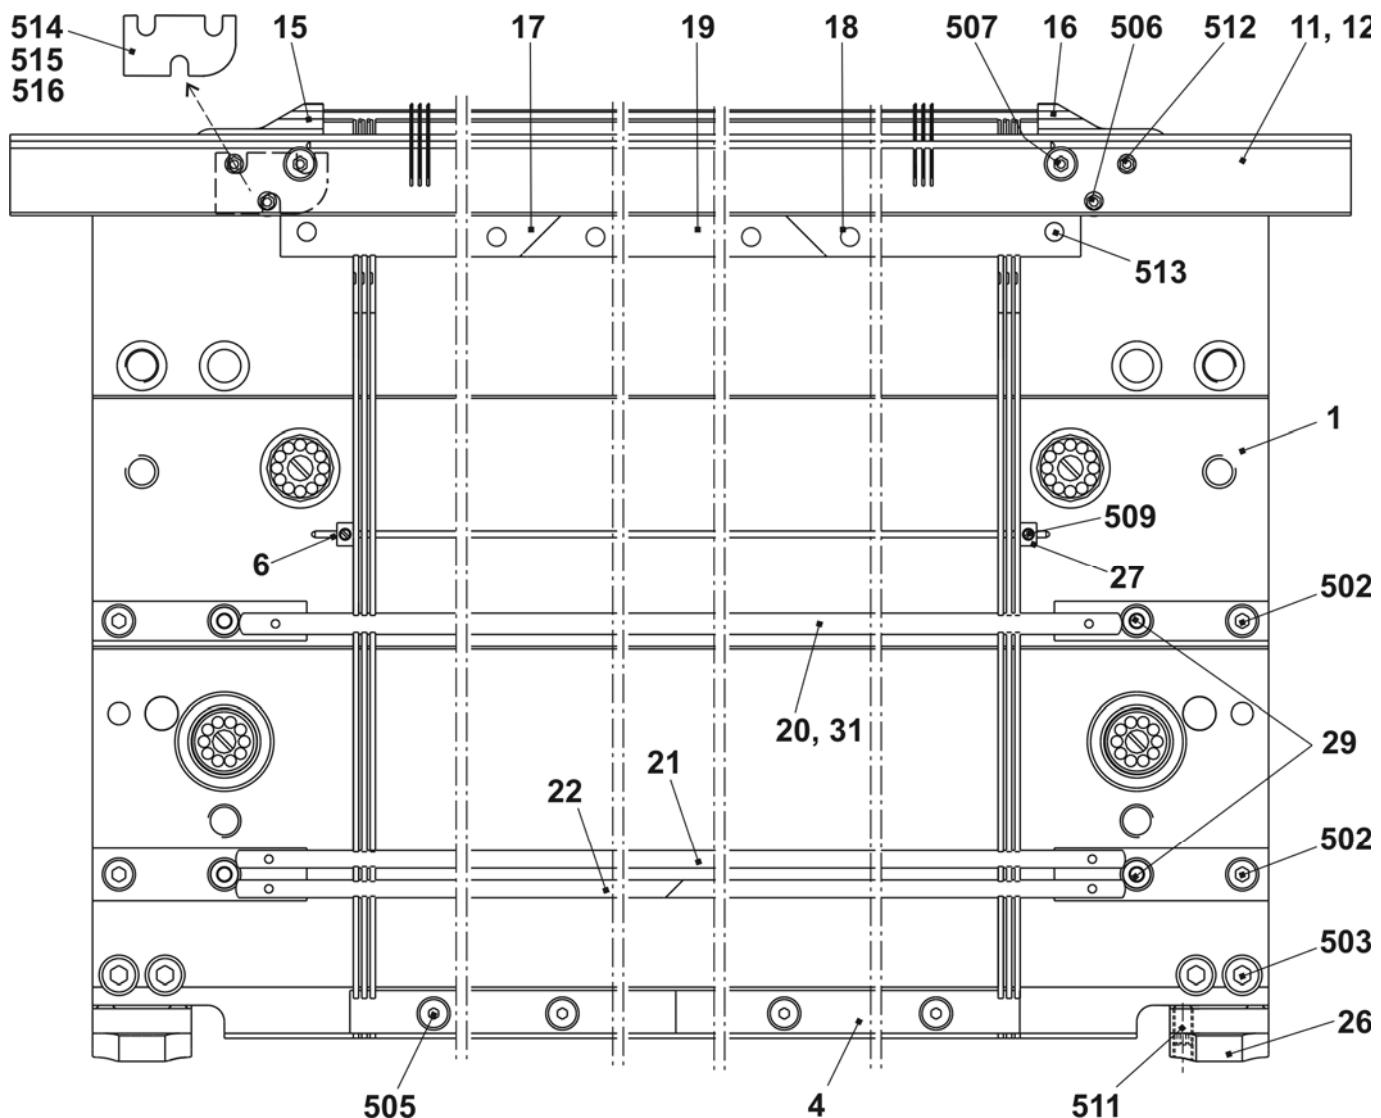


Continuation needle bed E5.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E5.2	244 611			
2	Fixed wire Ø3.4	210 975	25	Fixed wire Ø2.8	210 974
3	Main trick wall E5.2	219 171	32	Spring steel wire Ø2.0	210 973
5	Spring steel wire Ø1.0	210 971	33	Spring steel wire Ø1.95	212 184
A7	Needle E5.2	219 181	30*	Adjusting piece	206 375
7b	Coupling part E5.2	211 188	31*	Set screw complete	207 712
9	Intermediate slider with brake E5.2	236 030	40*	Disk brush	235 612
10a	Selection jack E5.2	219 214	41*	Container disk brush	233 012
10b	Selector spring E5.2	219 265	42*	Disk brush	202 600
13	Knock-over bit E5.2	221 367	520*	Cap screw M5x12	020 032
14	Holding-down jack trick wall	227 716	521*	Adjusting washer P6x12x03	023 540

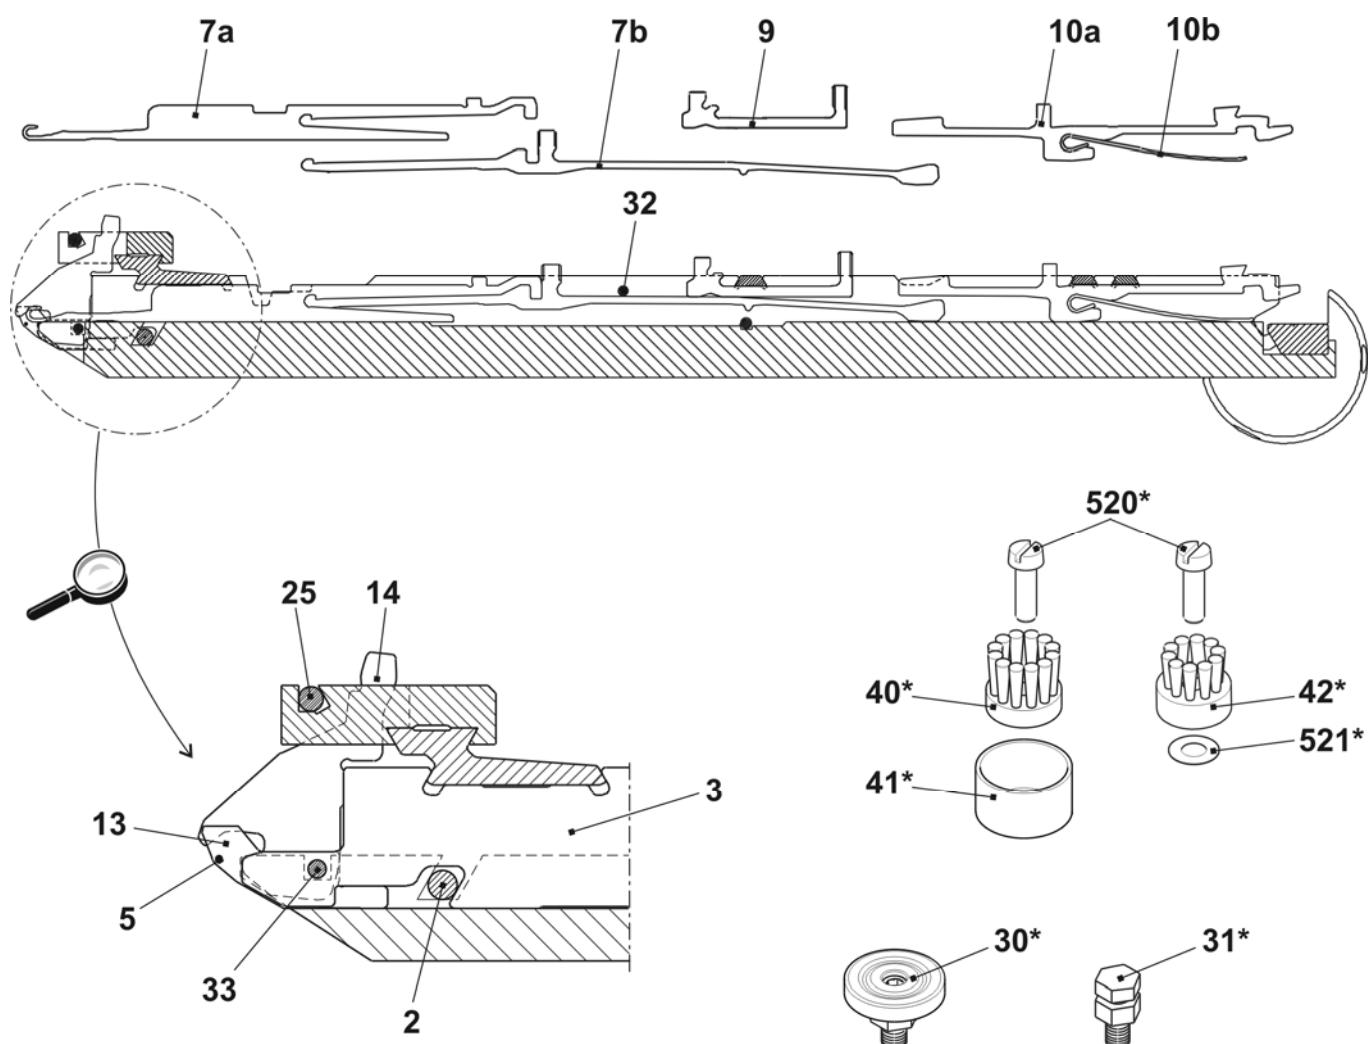


Needle bed E6.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E6.2	253 746	27	Bush	206 090
1	Needle bed at the front + rear E12	253 741	29	Cap screw 5x12	209 484
4	Pressure bar	211 009	31	Cover rail at the rear	210 979
6	Spring steel wire Ø2.0	251 095	502	Cap screw M5x12	020 132
11	Holding-down jack bed at the front E6.2	244 524	503	Cap screw M6X14	022 658
12	Holding-down jack bed at the rear E6.2	244 525	505	Cap screw M5x8	023 379
15	Limiter on the left E10-14	205 764	506	Cap screw M5x12-8.8	022 943
16	Limiter on the right E10-14	205 765	507	Cap screw M5x22	023 193
17	Needle rail on the left	205 311	509	Set screw 4766-M3,5x3-1	020 512
18	Needle rail on the right	205 312	511	Set screw 4026-M6x12-45	022 400
19	Coupling part	210 977	512	Cap screw M5x8-8.8 M	023 154
20	Cover rail at the front E12	210 986	513	Sprung thrust piece B-M10	023 177
21	Cover rail	210 978	514	Shim 0.05x18.5x34	023 196
22	Cover rail	210 980	515	Shim 0.1x18.5x34	023 197
26	Support	206 352	516	Shim 0.2x18.5x34	023 253

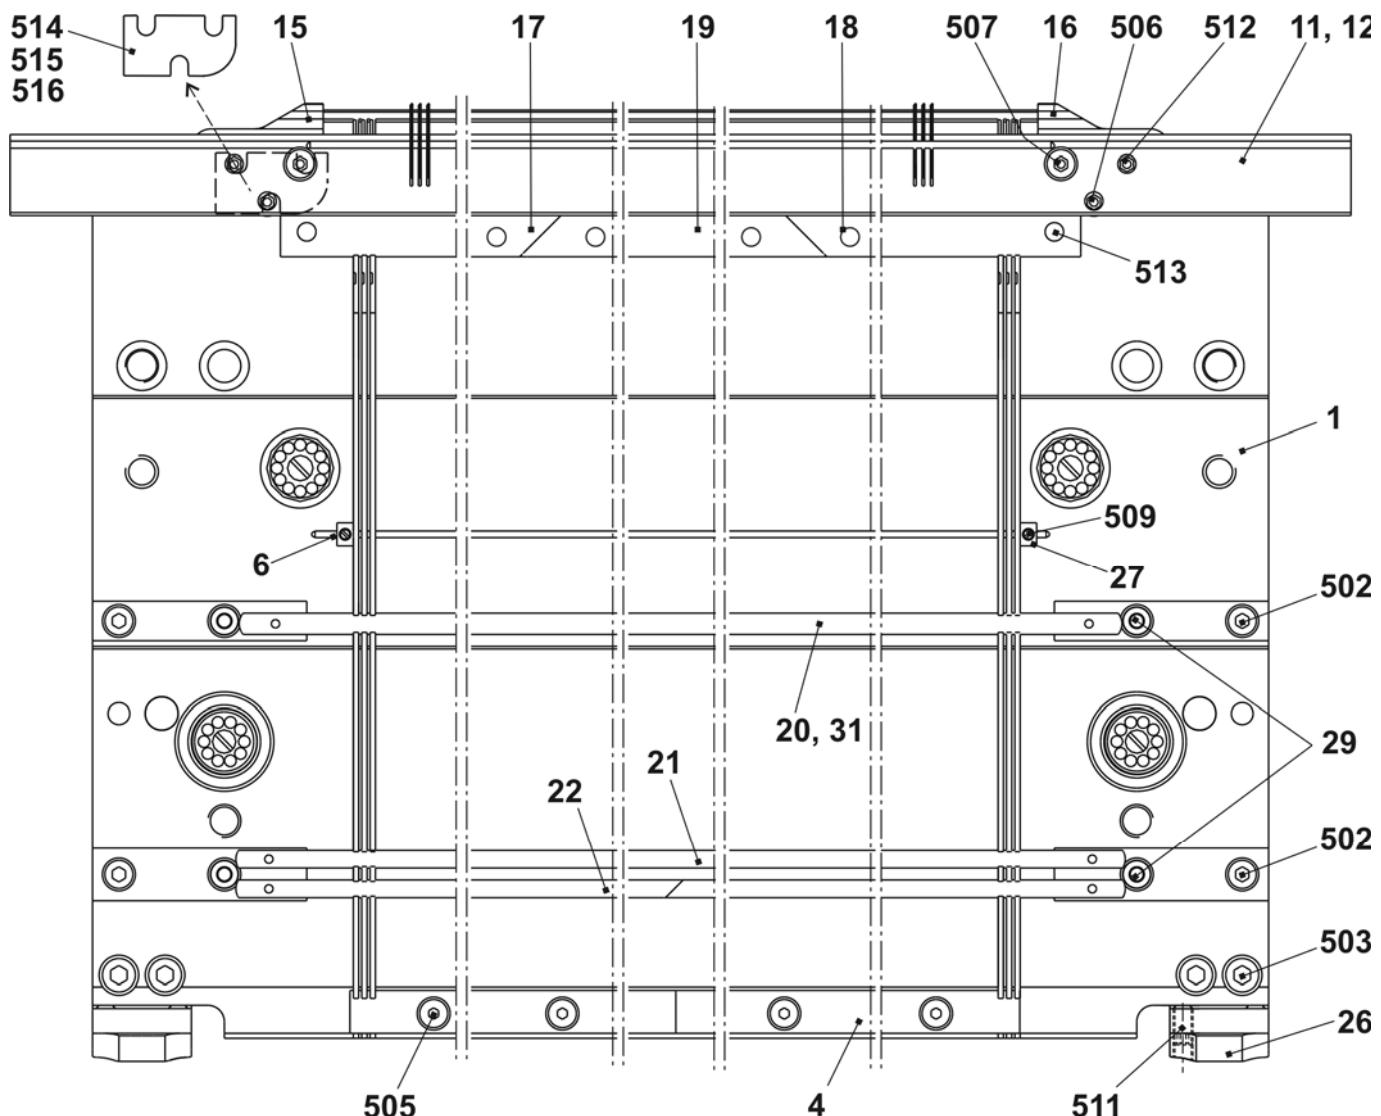


Continuation needle bed E6.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front + rear E6.2	253 746			
2	Fixed wire Ø3.4	210 975	14	Holding-down jack trick wall E12	227 821
3	Main trick wall E12	252 628	25	Fixed wire Ø2.8	210 974
5	Spring steel wire Ø0.6	210 969	32	Spring steel wire Ø2.0	210 973
6	Spring steel wire Ø2.0	251 095	30*	Adjusting piece	206 375
A7	Needle E6.2	207 349	31*	Set screw complete	207 712
7b	Coupling part E10-12	200 683	40*	Disk brush	235 612
9	Intermediate slider with brake E10-12	237 324	41*	Container disk brush	233 012
10a	Selection jack E10-12	200 688	42*	Disk brush	202 600
10b	Selector spring E10-12	200 691	520*	Cap screw M5x12	020 032
13	Knock-over bit E12	205 013	521*	Adjusting washer P6x12x03	023 540

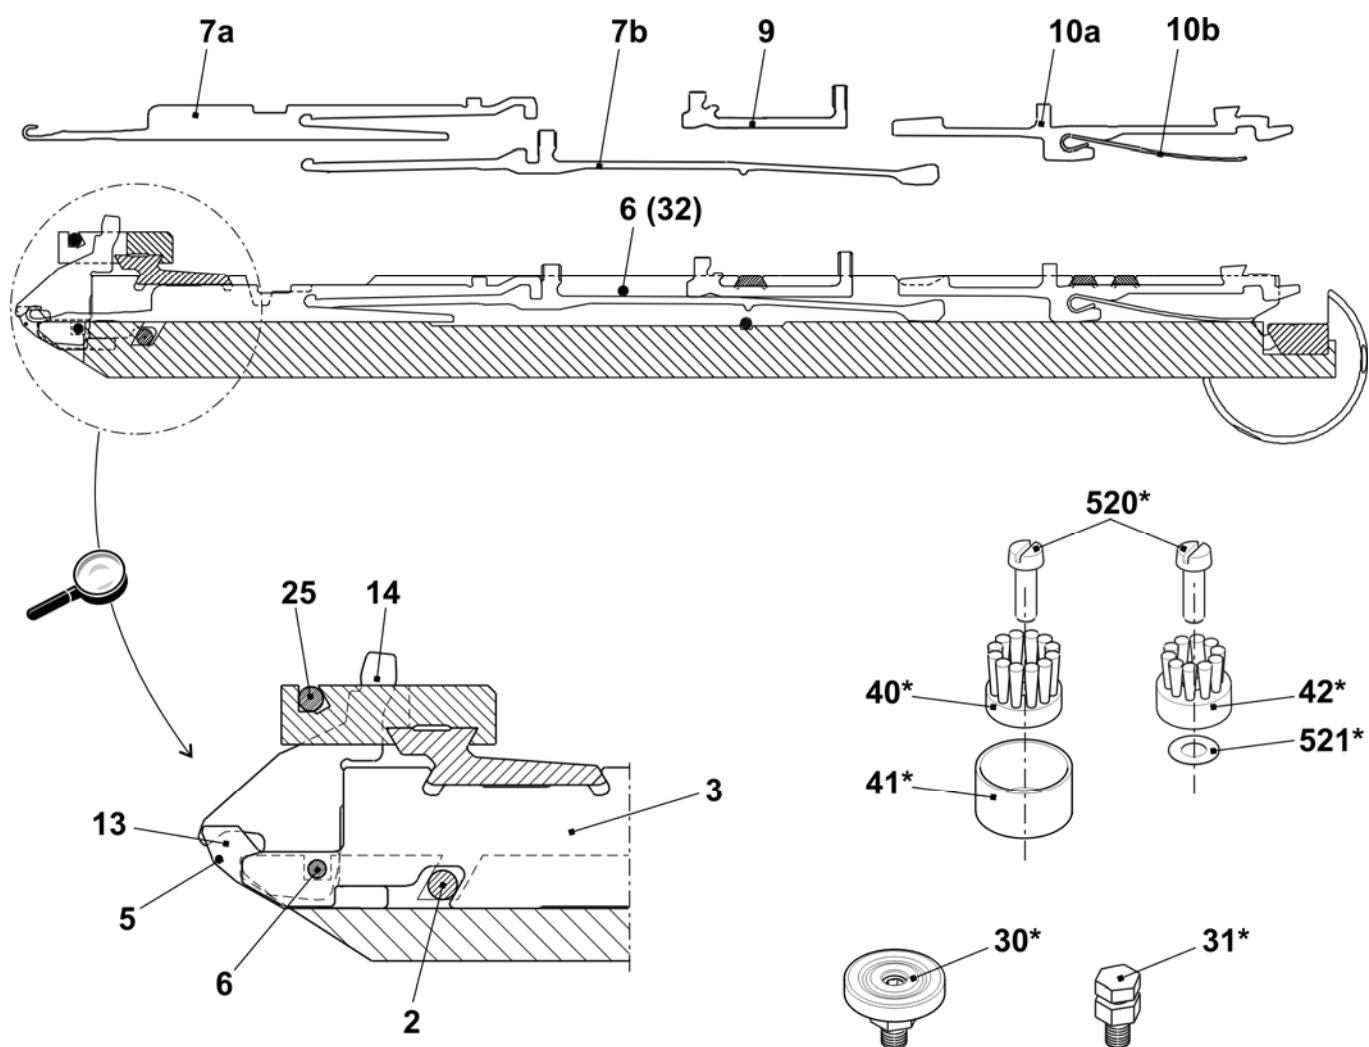


Needle bed E7.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front + rear E7.2	253 747			
1	Needle bed at the front + rear E14	253 742	29	Cap screw 5x12	209 484
4	Pressure bar	211 009	31	Cover rail at the rear	210 979
6	Spring steel wire Ø2.0	251 095	32	Spring steel wire Ø2.0	210 973
11	Holding-down jack bed at the front E7.2 MG	240 176	502	Cap screw M5x12	020 132
12	Holding-down jack bed at the rear E7.2 MG	240 177	503	Cap screw M6x14	022 658
15	Limiter on the left E10-14	205 764	505	Cap screw M5x8	023 379
16	Limiter on the right E10-14	205 765	506	Cap screw M5x12-8.8	022 943
17	Needle rail on the left	205 311	507	Cap screw M5x22	023 193
18	Needle rail on the right	205 312	509	Setscrew M3.5x3-1	020 512
19	Coupling part	210 977	511	Set screw I6x12-45	022 400
20	Cover rail at the front E14	210 987	512	Cap screw M5x8-8.8 M	023 154
21	Cover rail	210 978	513	Sprung thrust piece B-M10	023 177
22	Cover rail	210 980	514	Shim 0.05x18.5x34	023 196
26	Support	206 352	515	Shim 0.1x18.5x34	023 197
27	Bush	206 090	516	Shim 0.2x18.5x34	023 253

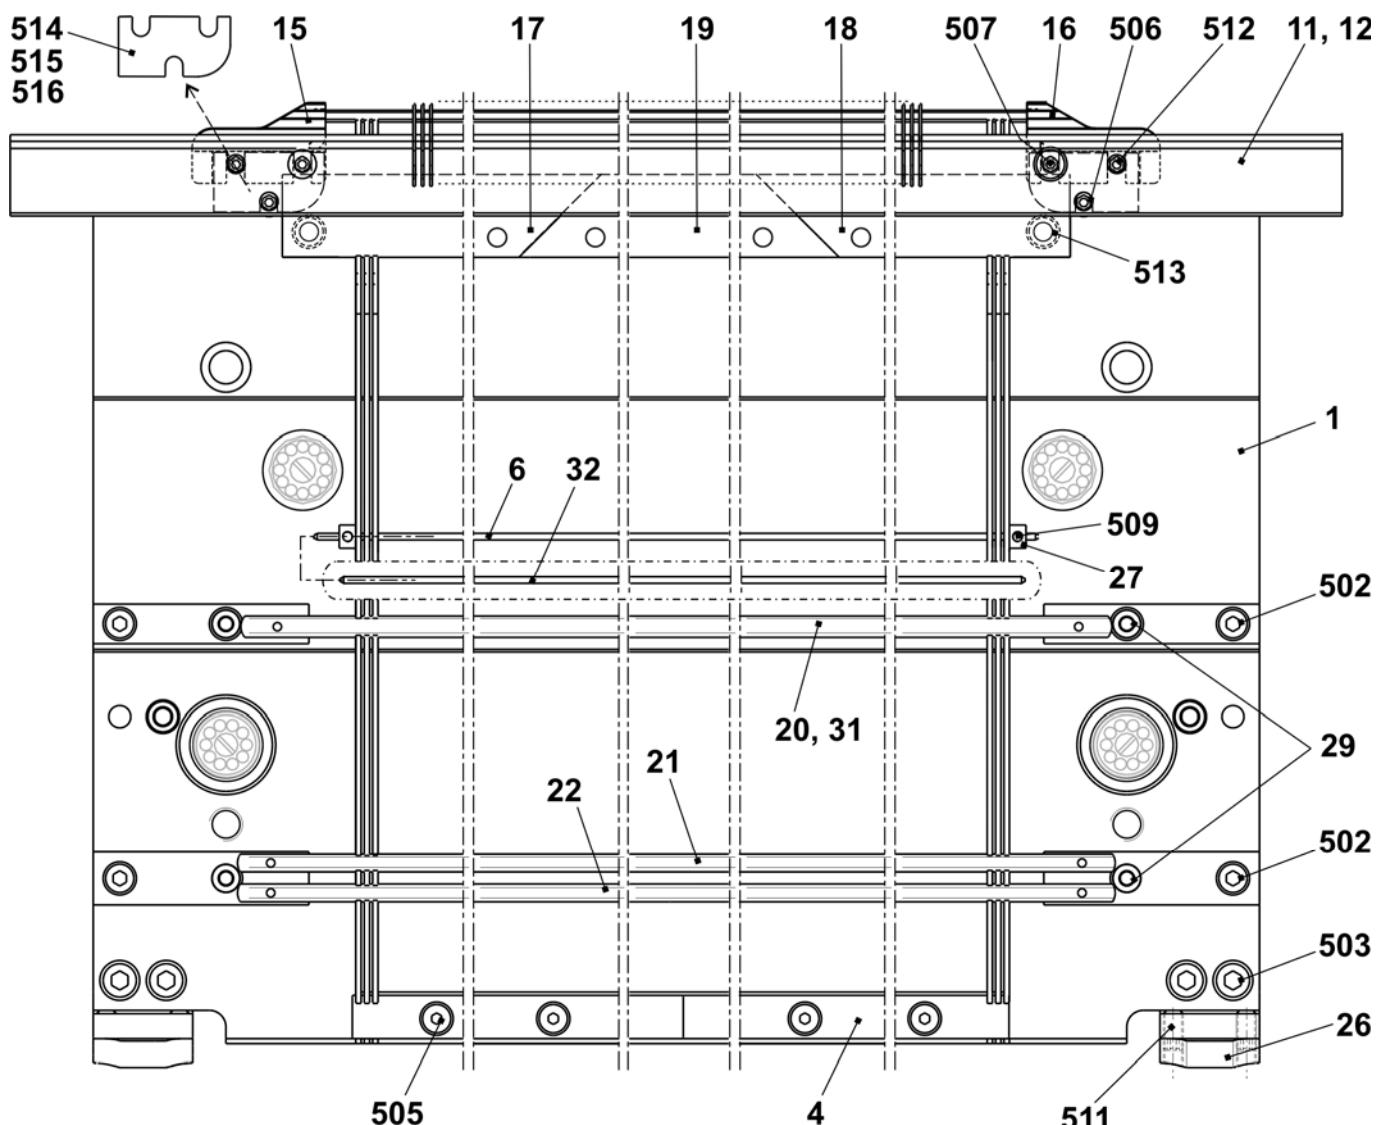


Continuation needle bed E7.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear	253 747	14	Holding-down jack trick wall E14	235 262
2	Fixed wire Ø3.4	210 975	25	Fixed wire Ø2.8	210 974
3	Main trick wall E14	252 629	32	Spring steel wire Ø2.0	210 973
5	Spring steel wire Ø0.6	210 969	30*	Adjusting piece	206 375
6	Spring steel wire Ø2.0	251 095	31*	Set screw complete	207 712
A7	Needle E7.2	225 230	40*	Disk brush	235 612
7b	Coupling part E14	209 633	41*	Container disk brush	233 012
9	Intermediate slider with brake E14	237 373	42*	Disk brush	202 600
10	Selection jack with spring E14	224 725	520*	Cap screw M5x12	020 032
13	Knock-over bit E14	209 649	521*	Adjusting washer P6x12x03	023 540

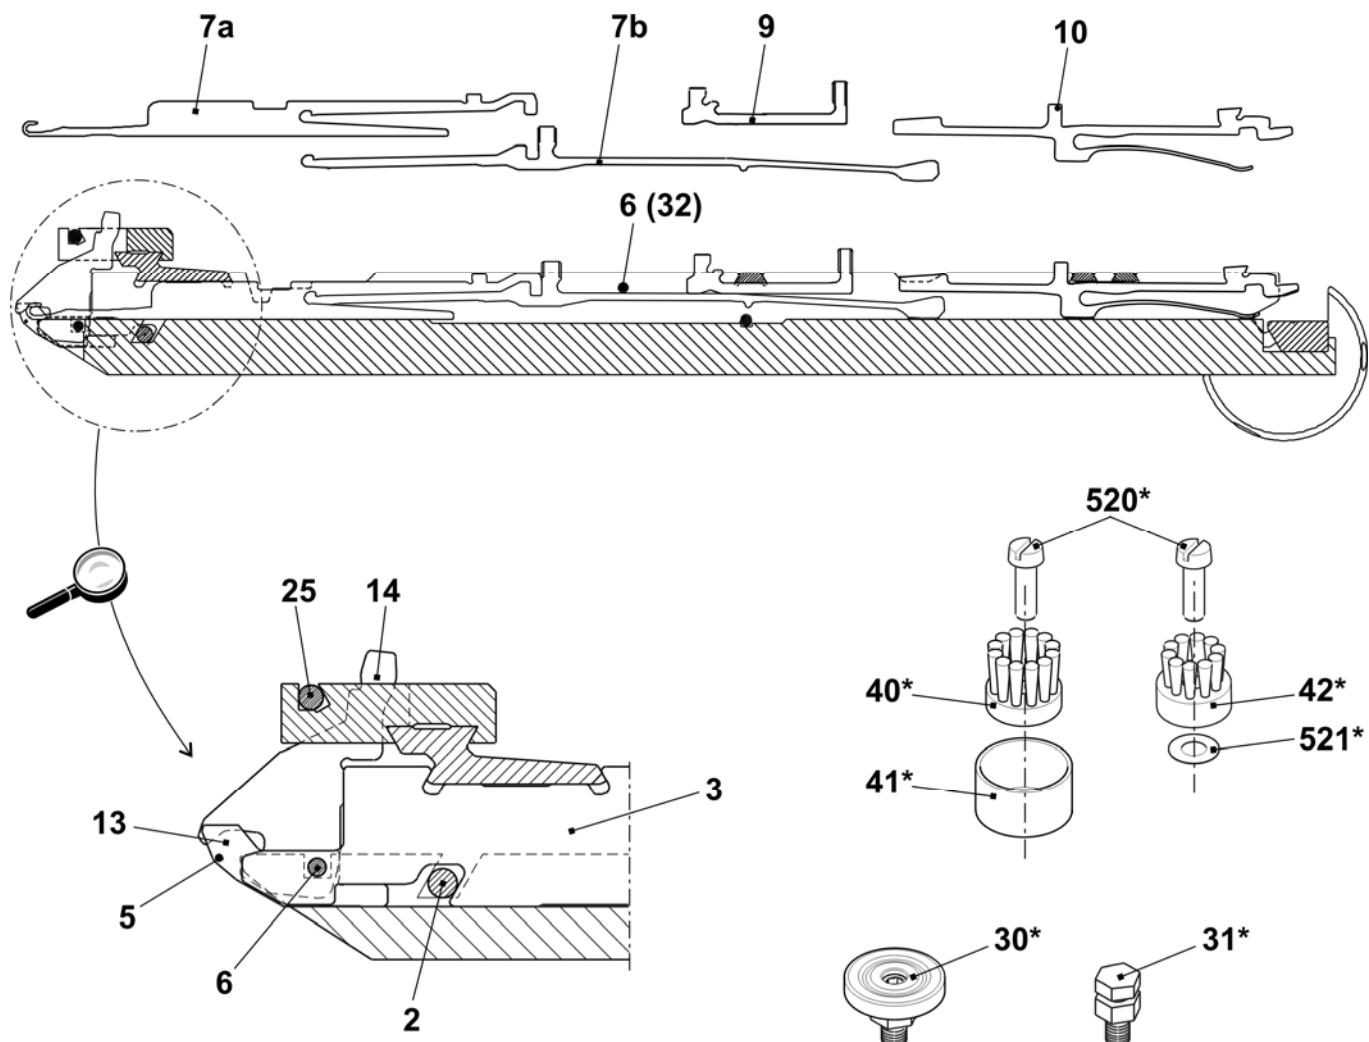


Needle bed E8.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E8.2	251 125			
1	Needle bed at the front rear E16	251 087	27	Bush	206 090
4	Pressure bar	211 009	29	Cap screw 5x12	209 484
6	Spring steel wire Ø2.0	251 095	31	Cover rail at the rear	210 979
11	Holding-down jack bed at the front E16	244 566	502	Cap screw M5x12	020 132
12	Holding-down jack bed at the rear E16	244 568	503	Cap screw M6X14	022 658
15	Limiter on the left E16-E20	220 821	505	Cap screw M5x8	023 379
16	Limiter on the right E16-E20	220 822	506	Cap screw M5x12	022 943
17	Needle rail on the left	205 311	507	Cap screw M5x22	023 193
18	Needle rail on the right	205 312	509	Setscrew M3.5x3	020 512
19	Coupling part	210 977	511	Set screw M6x12	022 400
20	Cover rail at the front E16	244 597	513	Sprung thrust piece B-M10	023 177
21	Cover rail	210 978	514	Shim 0.05x18.5x34	023 196
22	Cover rail	210 980	515	Shim 0.1x18.5x34	023 197
26	Support	206 352	516	Shim 0.2x18.5x34	023 253

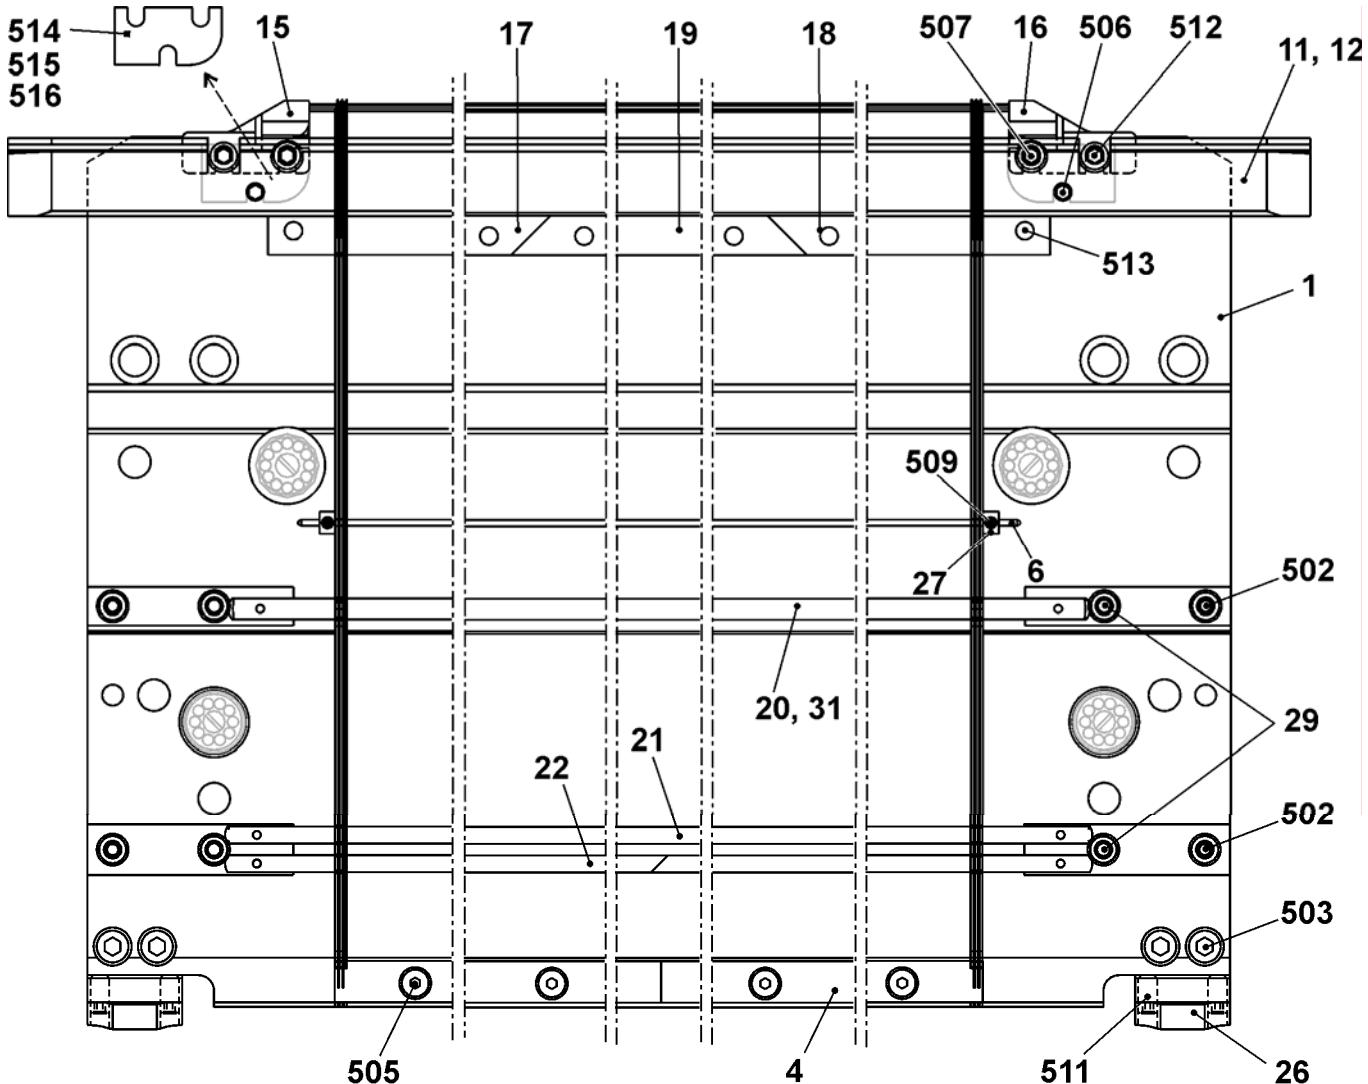


Continuation needle bed E8.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E8.2	251 125			
2	Fixed wire Ø3.4	210 975	25	Fixed wire Ø2.8 E16-18	244 587
3	Main trick wall E16	245 319	32	Spring steel wire Ø2.0	210 973
5	Spring steel wire Ø0.5	244 585	30*	Adjusting piece	206 375
A7	Needle E18/14	240 026	31*	Set screw complete	207 712
7b	Coupling part E16-20	220 382	40*	Disk brush	235 612
9	Intermediate slider complete E16	239 271	41*	Container disk brush	233 012
10	Selection jack with spring E16	224 326	42*	Plate brush Ø12	202 600
13	Knock-over bit E16	222 503	520*	Cap screw M5x12	020 032
14	Holding-down jack E16	222 504	521*	Adjusting washer P6x12x0.3	023 540

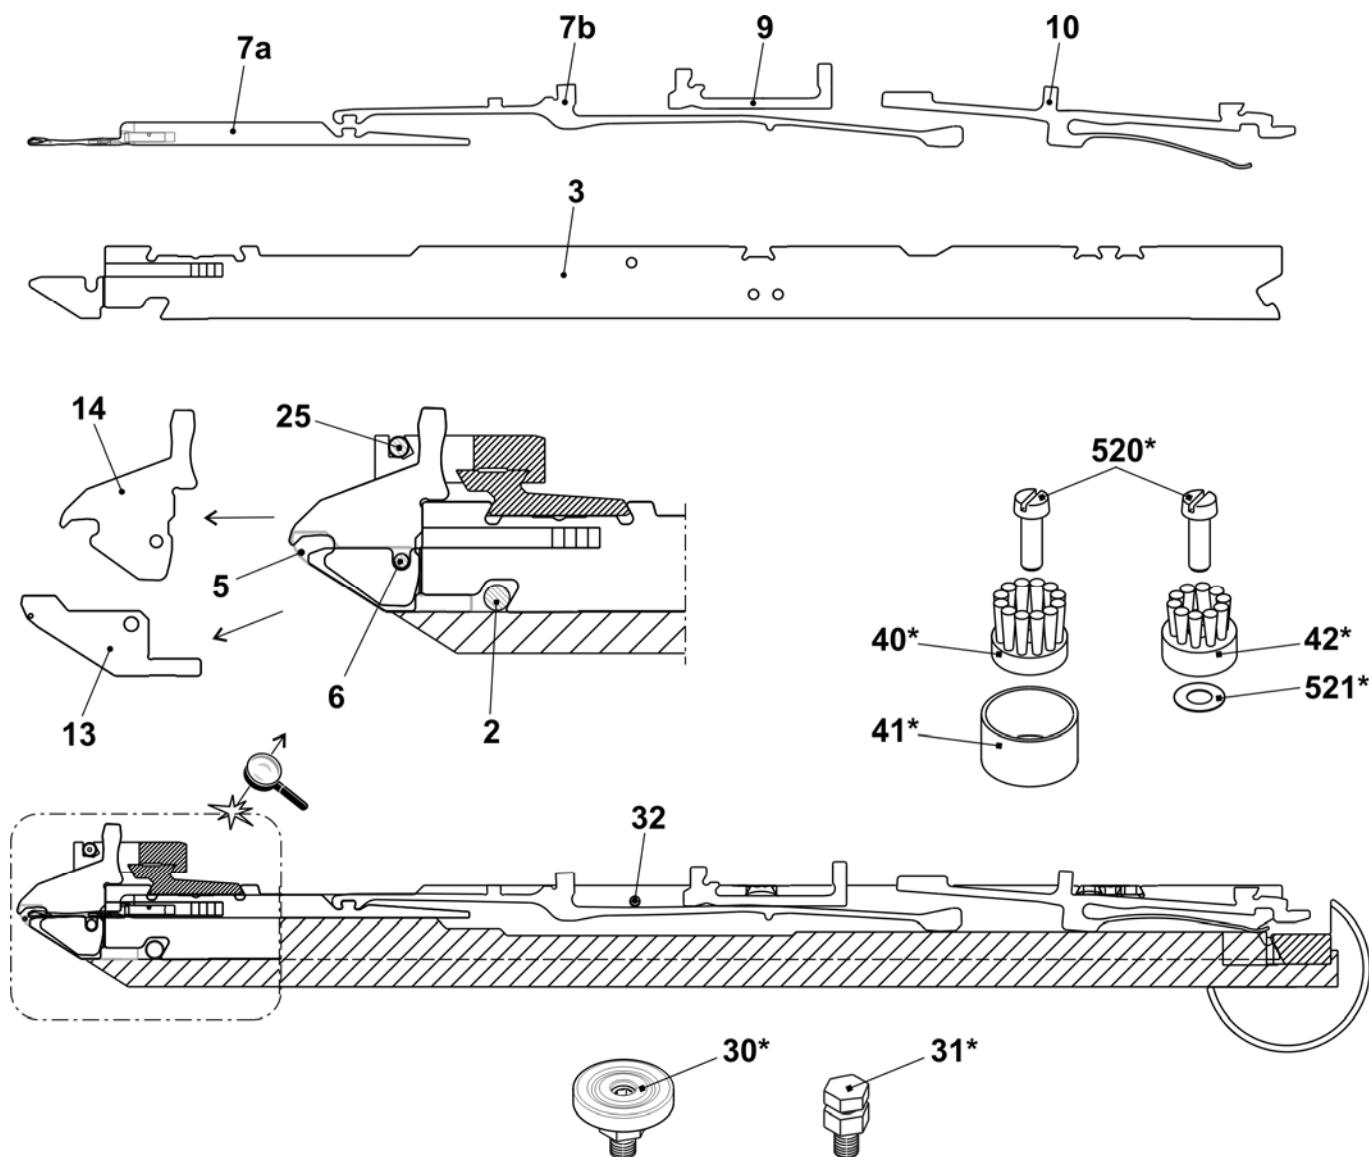


Cover on the left and on the right

Pos	Designation	ID No.	Pos	Designation	ID No.
1	Cover on the left	242 253	500	Countersunk screw M8x10	241 930
2	Cover on the right	242 254			

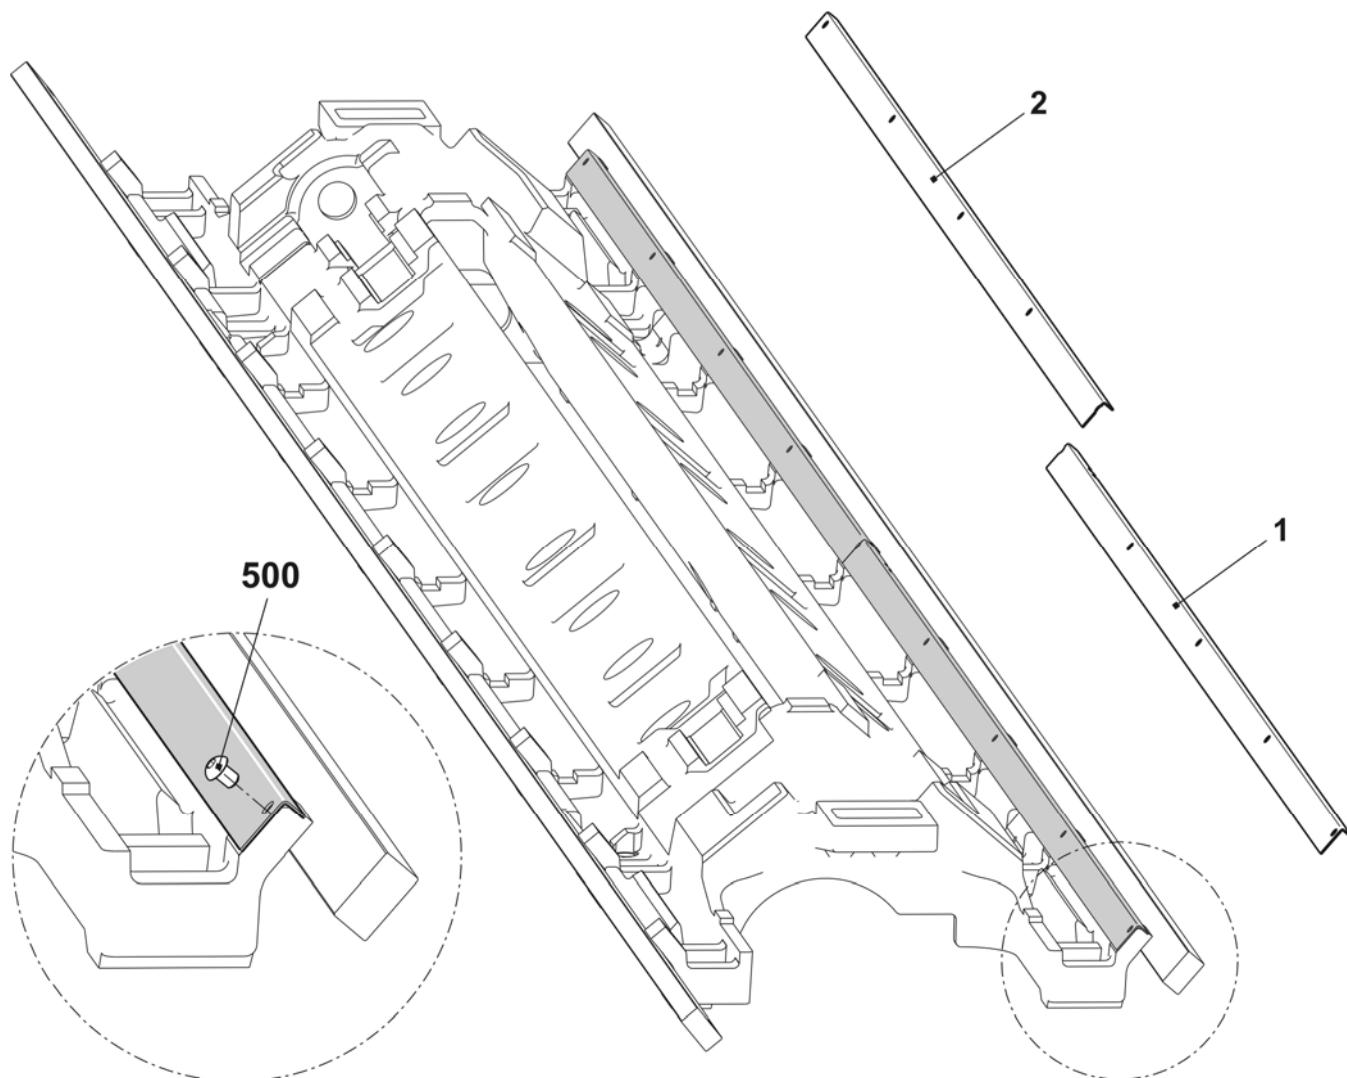


Thread clamps

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
ΣL	Thread clamp left complete	219 846	ΣL	Thread clamp right complete	219 847
503	Cap screw M6x16	020 134	503	Cap screw M6x16	020 134

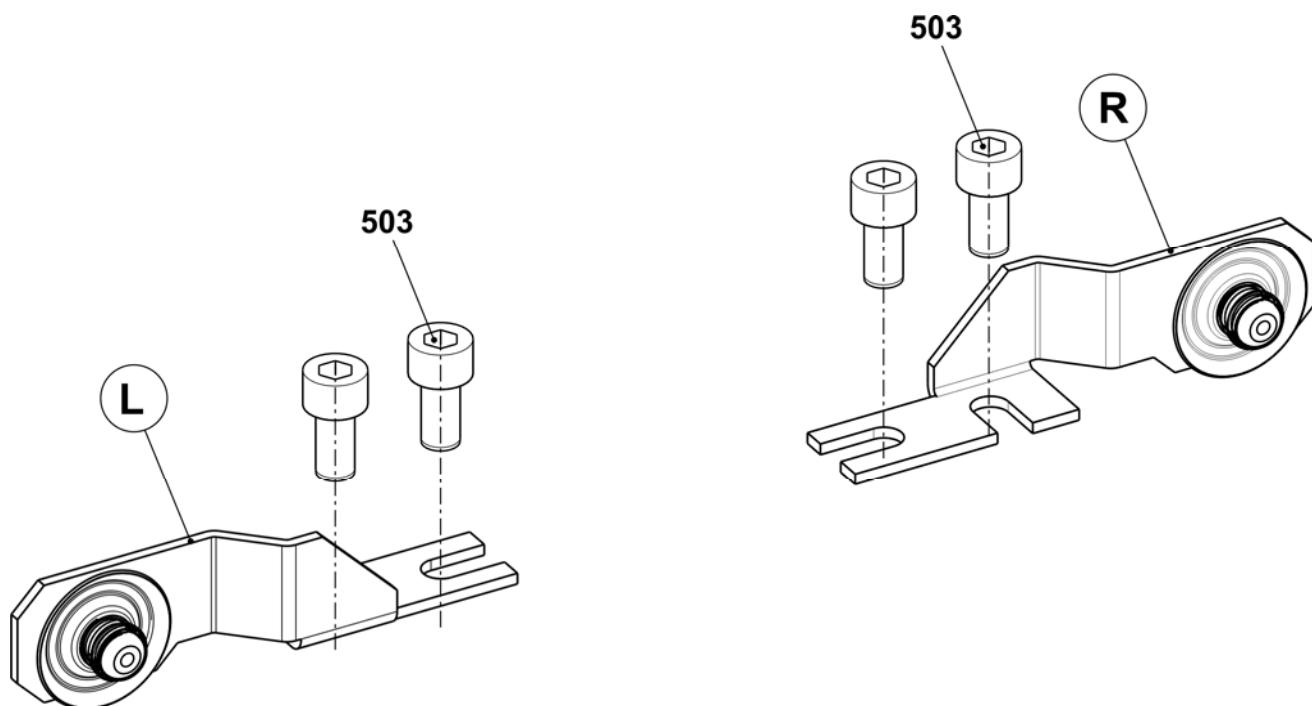


Tandem carriage

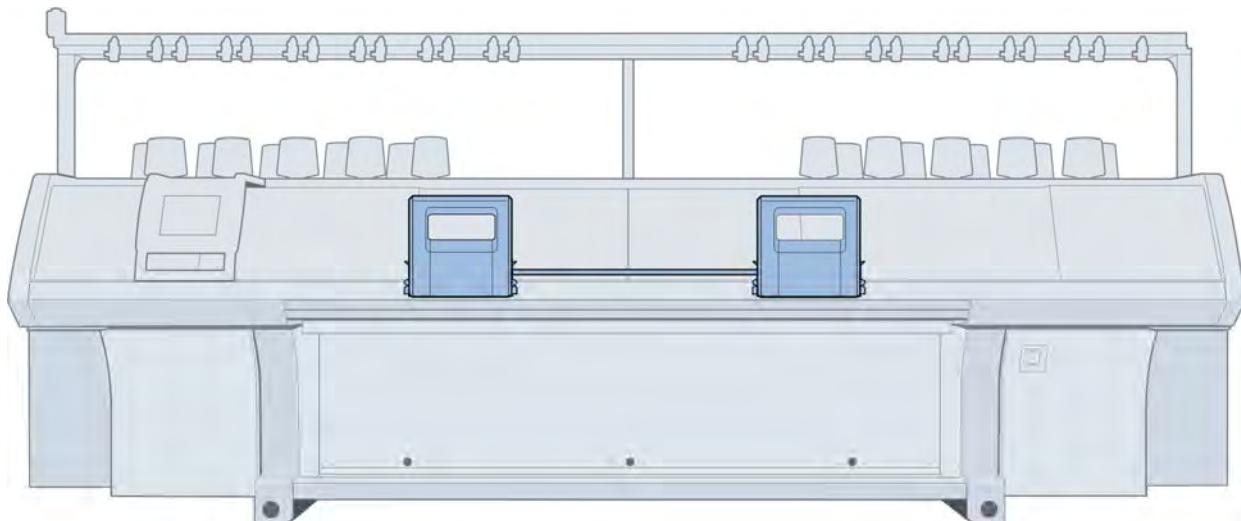


Overview of carriage

Pos	Designation	ID No.	Pos	Designation	ID No.
ΣL	Carriage complete		ΣR	Carriage complete	
	E5 + E5m.4 + E7m.5 + E3,5.2 left	244 468		E5 + E5m.4 + E7m.5 + E3,5.2 right	244 469
	E7 + E8 + E7m.8 + E8m.7 left	243 901		E7 + E8 + E7m.8 + E8m.7 right	243 902
	E10 on the left	244 358		E10 on the right	244 359
	E12 on the left	242 975		E12 on the right	242 976
	E14 on the left	244 335		E14 on the right	244 336
	E16 on the left	244 785		E16 on the right	244 786
	E10m.12 on the left	244 763		E10m.12 on the right	244 764
	E12m.10 on the left	244 765		E12m.10 on the right	244 766
	E5.2 on the left	244 797		E5.2 on the right	244 798
	E6.2 on the left	244 799		E6.2 on the right	244 800
	E7.2 on the left	244 801		E7.2 on the right	244 802
	E8.2 on the left	244 803		E8.2 on the right	244 804
2	Cam box set co. E5+E5m.4+E7m.5+E3,5.2+E5.2	244 470	2	Cam box set E6.2	244 616
	Cam box set co. E7 + E8 + E7m.8 + E8m.7	243 903		Cam box set complete E7.2	244 619
	Cam box set on the left co. E10	244 360		Cam box set complete E7.2	244 626
	Cam box set on the right co. E10	244 361	11	Bolt	212 392
	Cam box set on the left co. E12	242 983	12	Bolt	212 204
	Cam box set on the right co. E12	242 984	14	Cover plate on the right	240 735
	Cam box set complete E14	244 337	15	Cover plate on the left	240 734
	Cam box set complete E16	244 623	23	Guide plate at the rear on the left	245 323
	Cam box set on the left co. E10m.12	244 767	24	Guide plate at the rear on the right	245 324
	Cam box set on the right co. E10m.12	244 768	23R	Guide plate at the rear on the left	245 325
	Cam box set on the left co. E12m.10	244 769	24R	Guide plate at the rear on the right	245 326
	Cam box set on the right co. E12m.10	244 770			

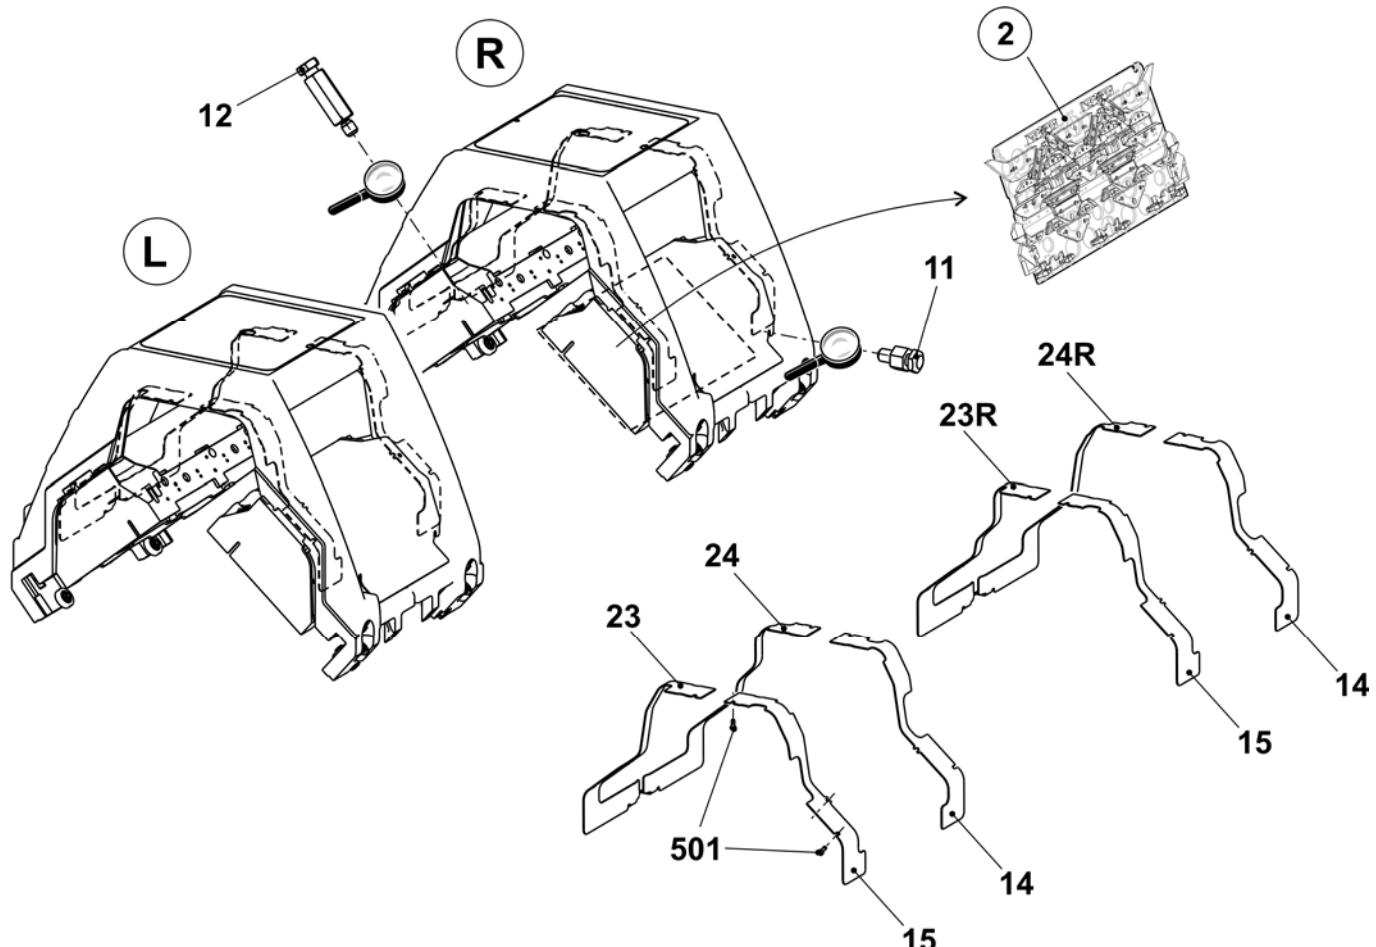


Overview of carriage, continuation

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Carriage complete		10	Wiping part	241 411
3	YC driving outside complete	241 080	16	Motor unit complete	211 017
4	YC driving in the middle complete	241 081	A16	Gear rack at the top	209 781
5	Holding-down jack control complete E5-E8 +E3.5.2+E5.2+E7m.8+E8m.7+ E5m.4+E7m.5	241 515	16b	Gear rack in the middle	209 782
	E10 + E10m.12	241 516	16c	Gear rack at the bottom	209 783
	E12 - E14+ E12m.10 + E6.2 + E7.2	241 517	516	Screw M4x12	023 367
	E16-18+E8.2	250 250	19	Distributor at the rear on the left 922 OKC	242 759
8	Carriage assembly 2 cam boxes complete	251 366	20	Distributor at the front on the left 922 OKC	242 760
9	Selection system complete E2-8+E5m.4+E7m.5+ E3.5.2+E7m.8+E8m.7	216 218	50*	Needle detector	221 238
	E10-12 + E5.2+E6.2+E10m.12+E12m.10	216 219	51*	Brush holder complete E5-E8 +E3.5.2+E5.2 E5m.4 + E7m.5 + E7m.8 + E8m.7	213 710
	E14 + E7.2	229 300		E10 - E14 + E6.2 - E7.2 + E10m.12 + E12m.10	213 711
	E16-20 + E8.2	220 114		E16-20 + E8.2	223 185

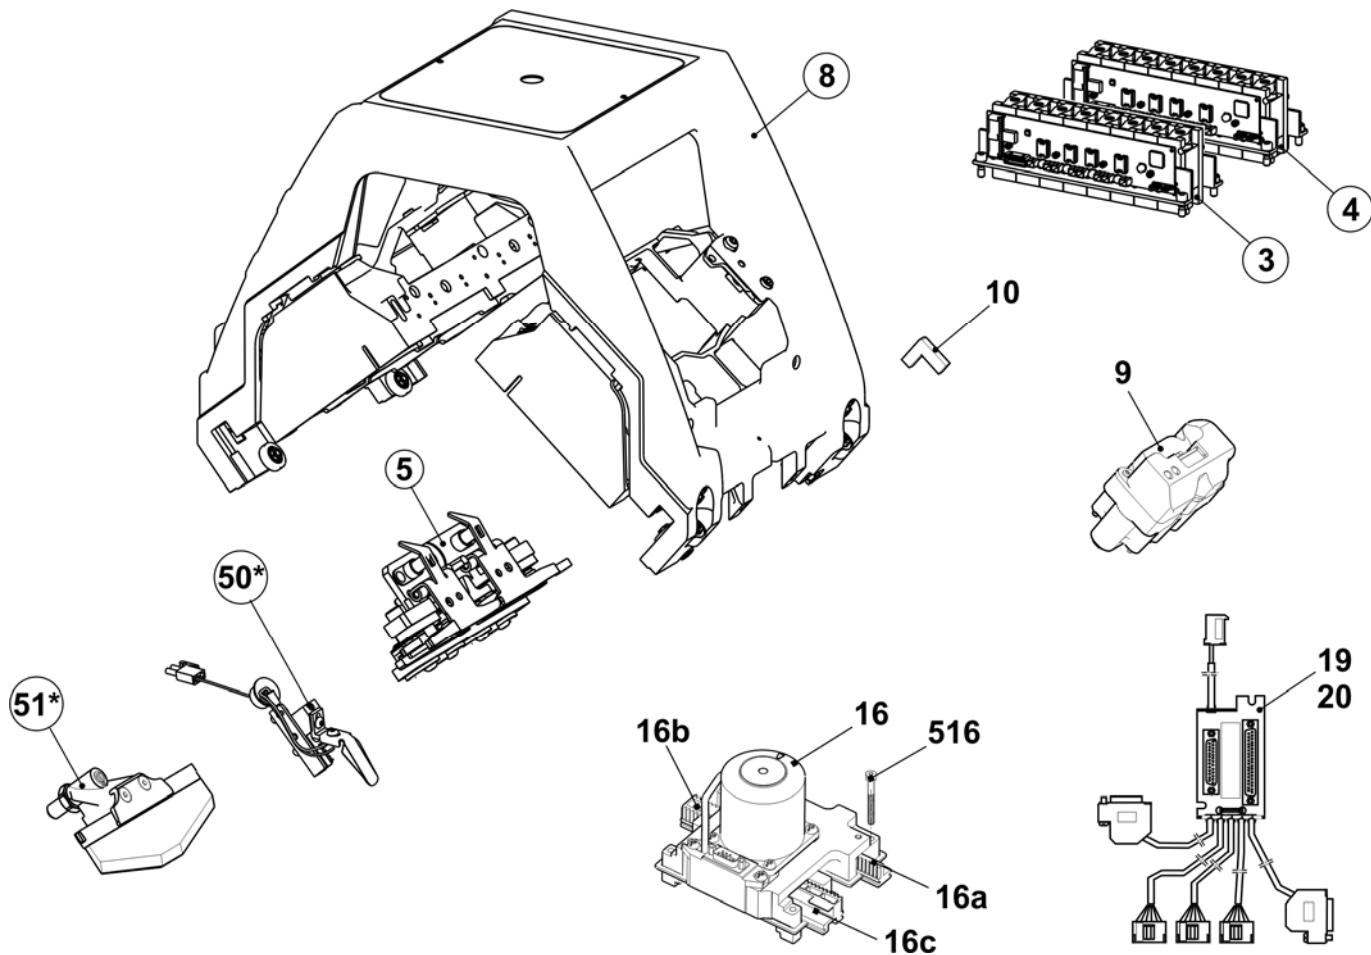


Carriage

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Carriage assembly 2 cam boxes	251 366	10	Bush	209 274
1	Carriage frame, 2 cam boxes	240 704	11	Eccentric	222 983
2	Carriage part, 2 cam boxes	240 572	13	Fixing bolt linking spot	244 179
3	Carriage cover at the top ECO2	252 616	500	Cap screw M8X30	020 143
4	Shim	225 312	503	Circlip	021022
5	Shoulder screw	211 750	513	Shoulder screw M6x10	255 207
8	Bush	207 546	515	Threaded bushing	041 863
9	Bush	209 275			

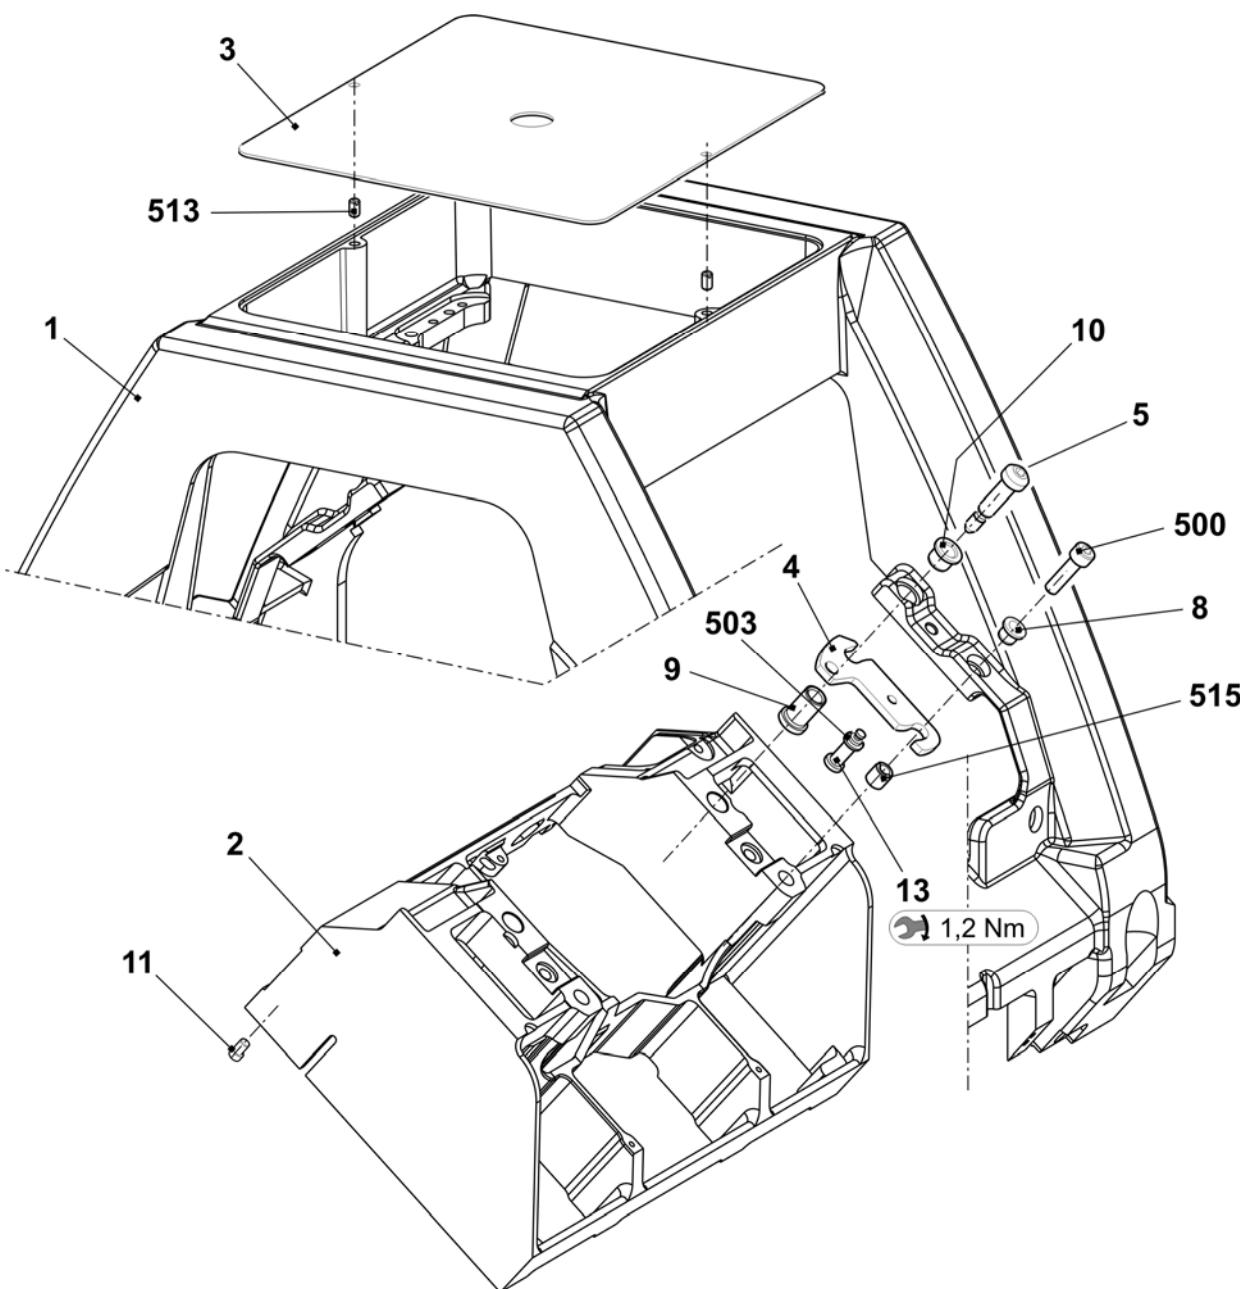


Carriage guide

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
6	Bearing bolt eccentric 0.5	242 060	510	Shim ring 12x18x1	023 315
7	Bearing bolt eccentric 0.5	240 624	511	Adjusting washer 10x16x1	023 260
12	Bolt complete with bearing	244 283	518	Grooved ball bearing 62201-2RS	241 408
508	Hexagon nut M10	023 316	519	Grooved ball bearing 62300-2RS1	242 070

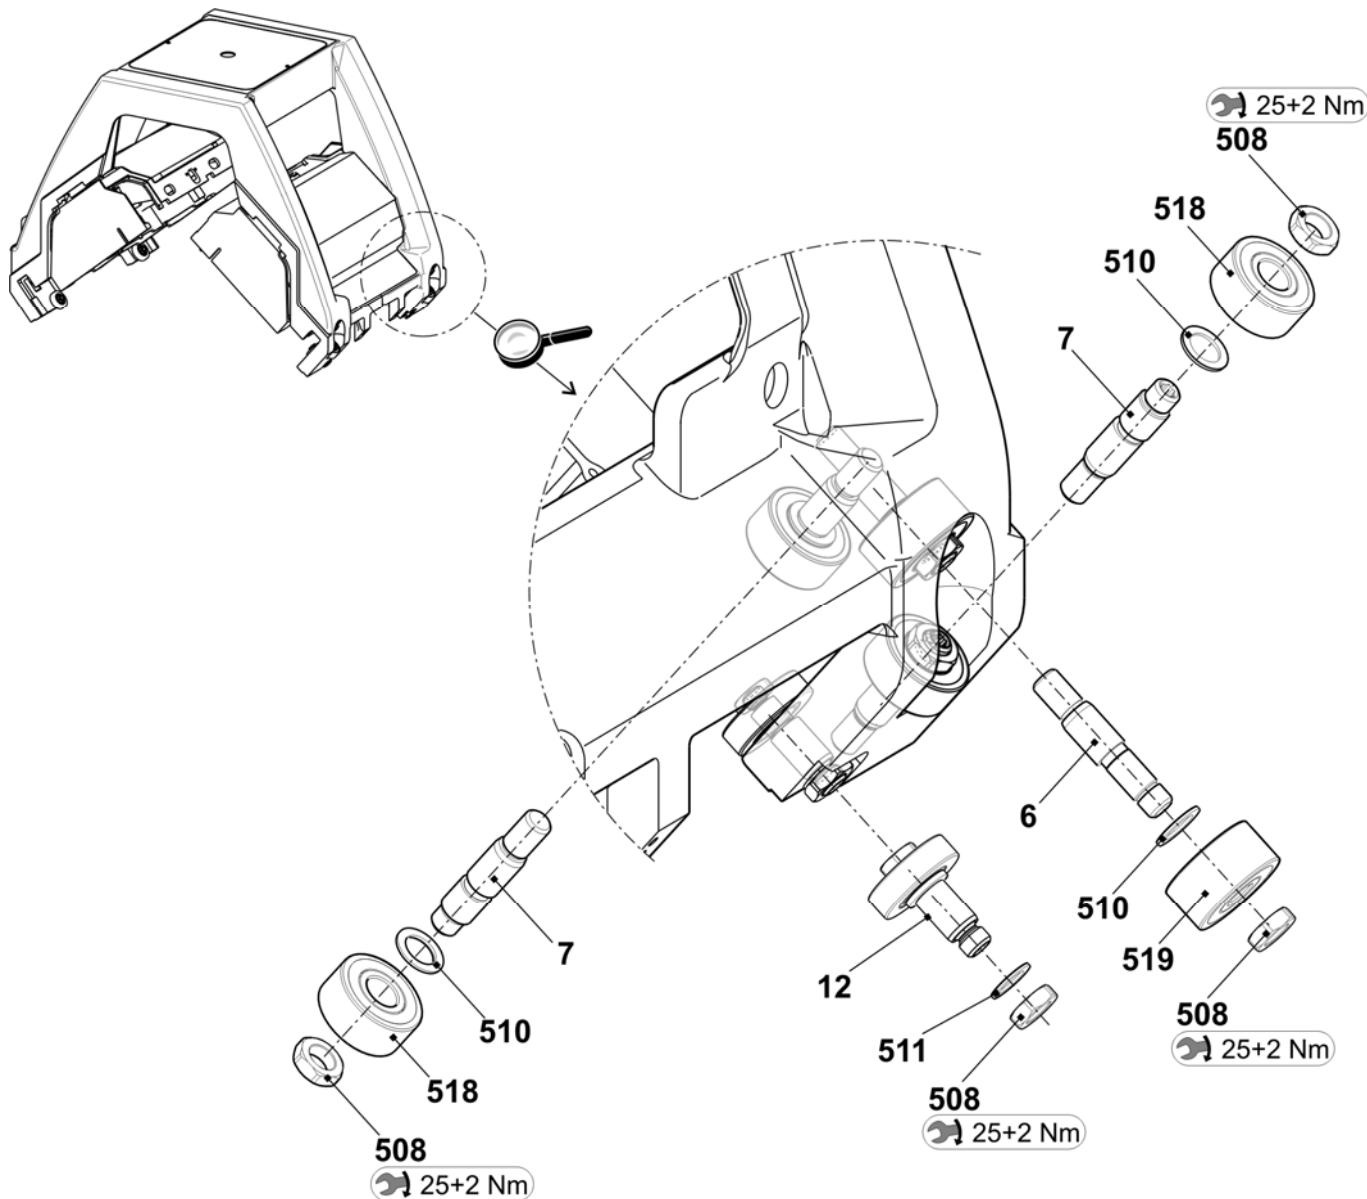


Carriage cover

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
2	Carriage cover at the front 420E	252 614	13	Fixing bolt	242 382
3	Carriage cover at the rear ECO2	252 615	501	Serrated lock washer 6.4	022 385
11	Bolt	212 392	502	Hexagon nut M6	022 899
12	Bolt	243 171	505	O-ring	242 420

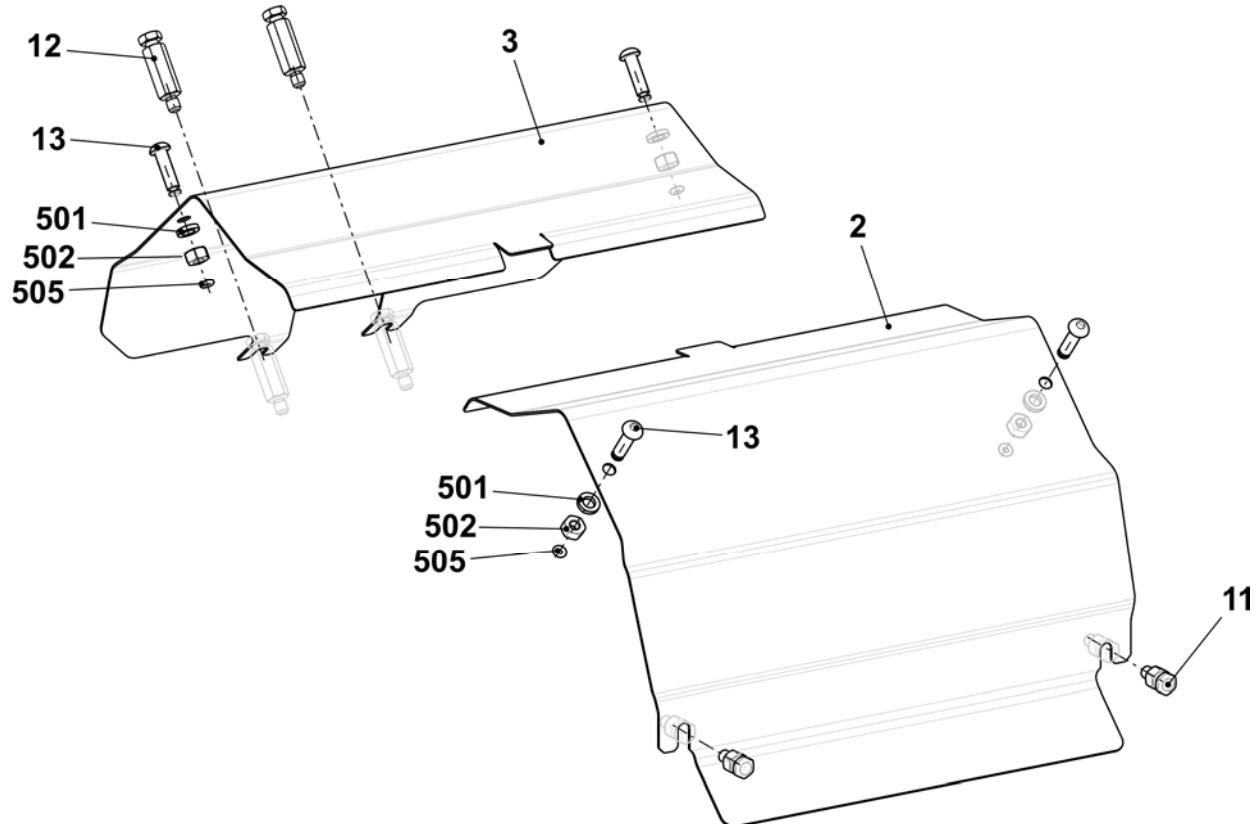


Carriage coupling

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
100	Connecting rod	242 890	120	Sleeve	225 600
110	Connecting rod short	242 891	506	Cap screw M16x45	023 366

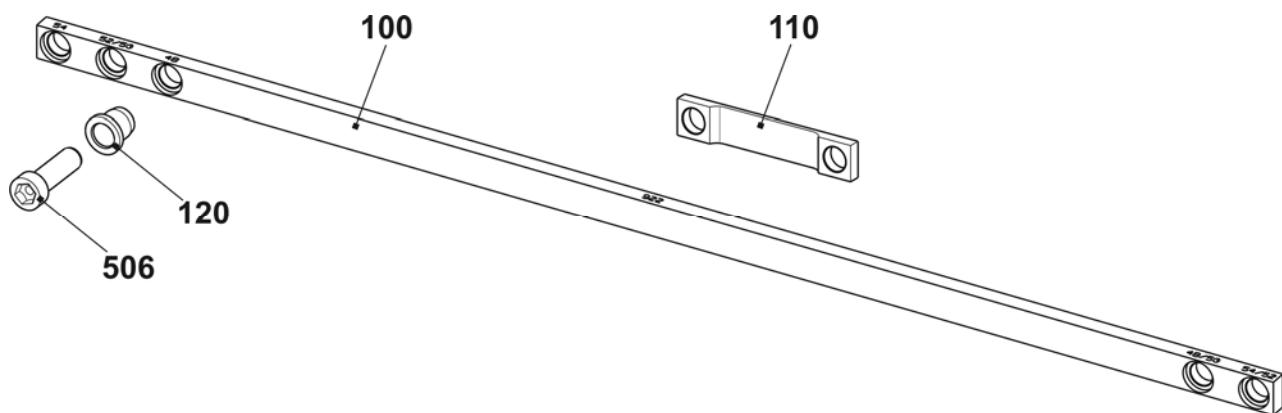


Spare parts package carriage guide bar

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Spare parts package carriage guide bar 922	252 991	501	Shim 0.05x22x42	243 291
1	Carriage guide rail	242 052	502	Shim 0.10x22x42	243 292
2	Adjusting eccentric	241 219	503	Shim 0.20x22x42	243 293
500	Shim 0.03x22x42	243 289	510*	Cap screw M8X20	020 141

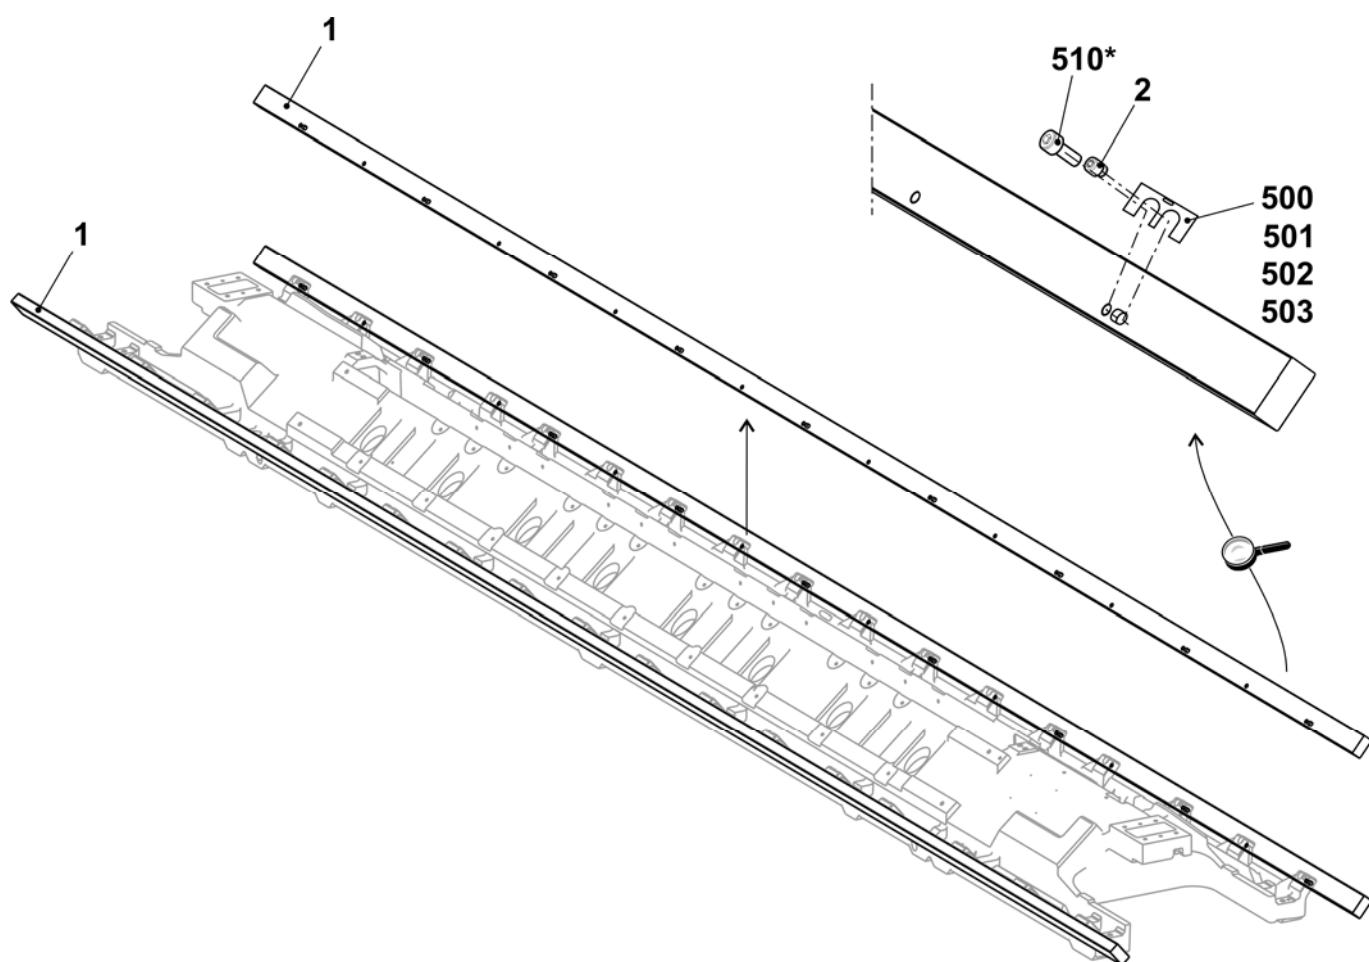


Yarn carrier driving without guiding part

Pos	Designation	ID	Pos	Designation	ID
Σ	YC driving outside complete	241 080			
1	Yarn carrier plunger complete	242 214	500	Cap screw M4x14-I-Torx	242 279
2	Support angle for jack	241 038	501	Cap screw M3x12-12.9	022 648
3	Card yarn carrier final stages OKC	300 960	900	Cap screw M6X14	022 658
4	Support angle for YC driving	242 903	901	Shoulder screw	231 899

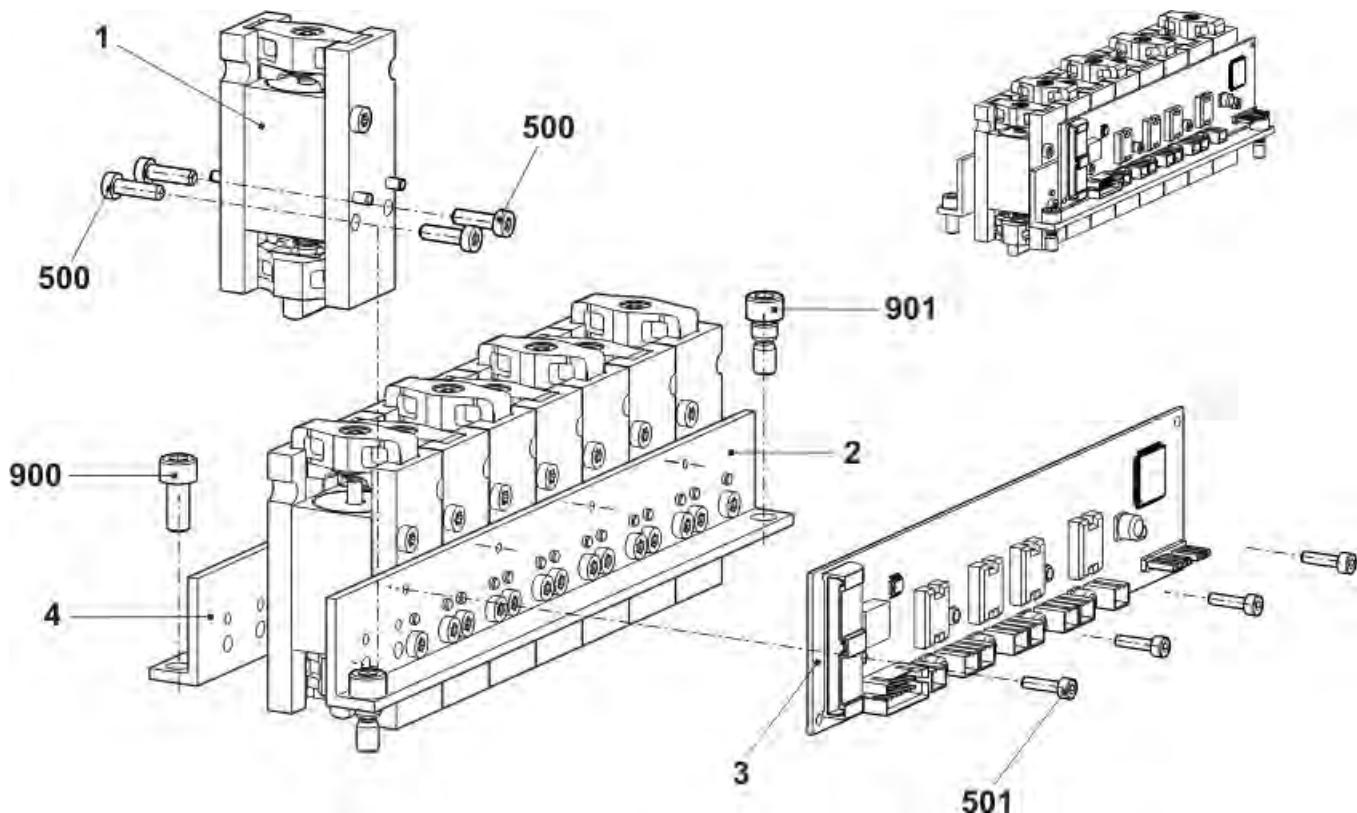


Yarn carrier driving with guiding part

Pos	Designation	ID	Pos	Designation	ID
Σ	YC driving in the middle complete	241 081			
1	Yarn carrier plunger complete	242 214	500	Cap screw M4x14-I-Torx	242 279
2	Support angle for jack	241 038	501	Cap screw M3x12-12.9	022 648
3	Support angle for YC driving	241 044	502	Screw KB 60x20	243 625
4	Card yarn carrier final stages OKC	300 960	900	Cap screw M6X14	022 658
5	Guiding part	239 972	901	Shoulder screw	231 899

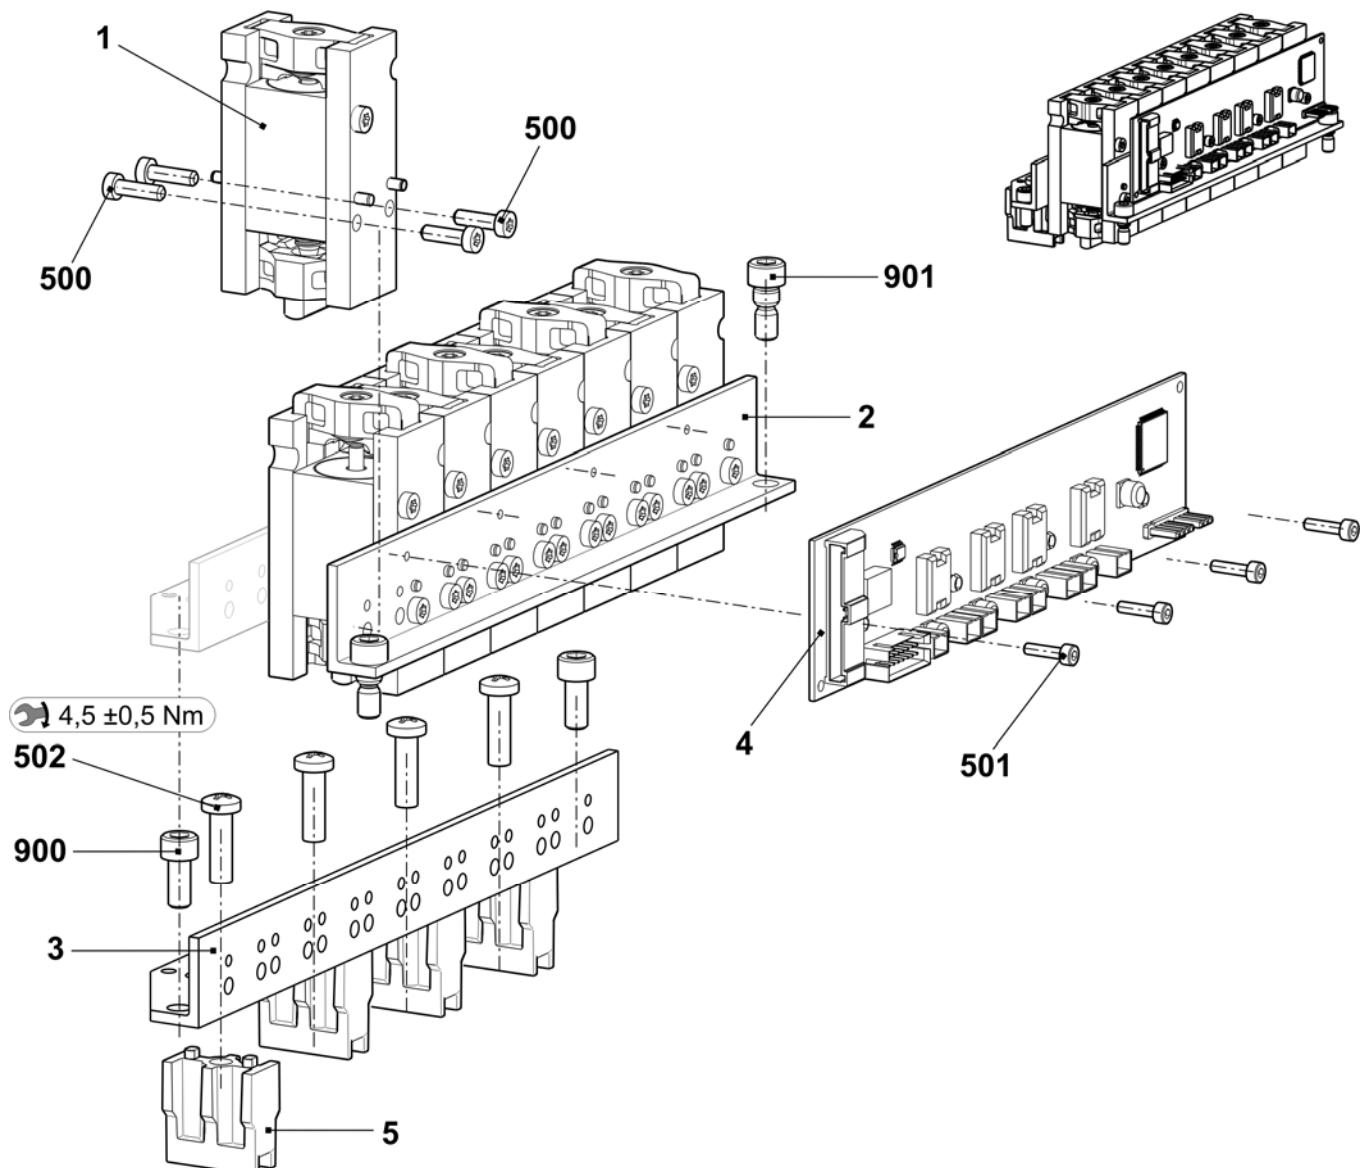


Holding-down jack control

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Holding-down jack control complete		23	Slider on the left complete	
	E5 + E7 + E8 + E3,5.2 + E5.2 + E7m.8 + E8m.7 + E5m.4 + E7m.5	241 515		E5 + E7 + E8 + E3,5.2 + E5.2 + E7m.8 + E8m.7 + E5m.4 + E7m.5	212 611
	E10 + E10m.12	241 516		E10 + E10m.12	213 053
	E12 + E14 + E6.2 + E7.2 + E.2(12m.10)	241 517		E12 + E14 + E6.2 + E7.2 + E.2(12m.10)	213 056
	E16 + E8.2	250 250		E16 + E8.2	250 139
2	Connection plate	241 326	24	Bolt	209 722
5	Adjusting plate	211 507	500	Countersunk screw M4x8	023 579
7	Plunger	210 559	504	Cap screw M5x12	020 132
10	Assembly plate	241 281	505	Cap screw M4x12-5.8	241 859
11	Set-out plate on the right	212 382	510	Setting pin 4x24	020 664
12	Set-out plate on the left	212 396	511	Setting pin 4x10	020 657
13	Eccentric	251 152	512	Compression spring 0.68x5.10x19.00	238 702
20	Holding-down cam plate	241 349	513	Dowel pin 6x18	020 678
21	Slider on the right complete		520	Adjusting washer 5x10x0.5	023 348
	E5 + E7 + E8 + E3,5.2 + E5.2 + E7m.8 + E8m.7 + E5m.4 + E7m.5	212 610	521	Locking ring 5x0.6	023 347
	E10 + E10m.12	212 943	522	Setting pin 3x10	020 645
	E12 + E14 + E6.2 + E7.2 + E.2(12m.10)	213 055			
	E16 + E8.2	250 140			

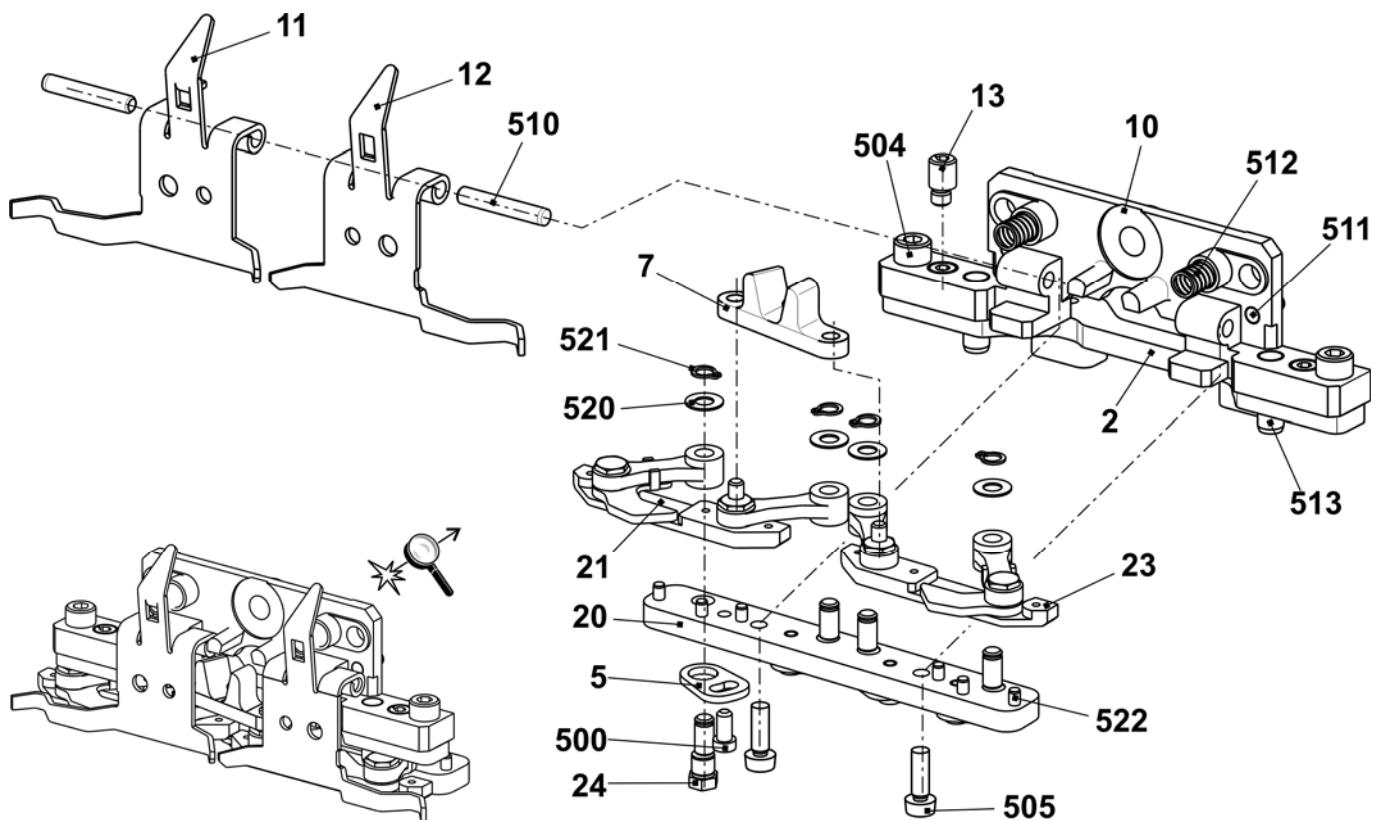


Needle detector

Pos	Designation	ID	Pos	Designation	ID
Σ	Needle detector E5 + E7 + E8 + E10 + E12 + E14 + E2.5.2 - E6.2 + E5.2 + E7.2 + E6.2(12m.10) + E5m.4 + E7m.5 + E7m.8 + E8m.7 + E10m.12 + E14/12	221 238	Σ	Needle detector E16 + E18 + E8.2 + E9.2	239 321
1	Needle detector pre-assembled	221 773	1	Needle detector pre-assembled E16-18	238 929
	500 Countersunk screw M4x6	023 427		500 Countersunk screw M4x6	023 427
	11 Cable of needle detector complete	221 207		11 ##NO_MATCH##. E16-18	239 319
	12 Retainer	220 464		12 Retainer E16-20	238 824
	14 Switch rocker	220 637		14 Switch rocker E16-20	238 823
	500 Countersunk screw M5x10	023 247		500 Countersunk screw M5x10	023 247
	502 Cap screw M2x8	022 954		502 Cap screw M2x8	022 954
	503 Set screw M5x20-45	023 526		503 Set screw M5x8-45H	022 809
	504 Compression spring 4.3x0.45x10	021 398		504 Compression spring 4.3x0.45x10	021 398
	505 Dowel pin 4x18	023 525		505 Dowel pin 4x20-A-St	239 316
2	Sensor pre-assembled	221 758	2	Sensor pre-assembled E16-18	239 324
	21 Sensor	220 839		21 Sensor E16-20	238 658
	22 Angle	221 175		22 Angle	221 175
	520 Countersunk screw M4x6	023 427		520 Countersunk screw M4x6	023 427

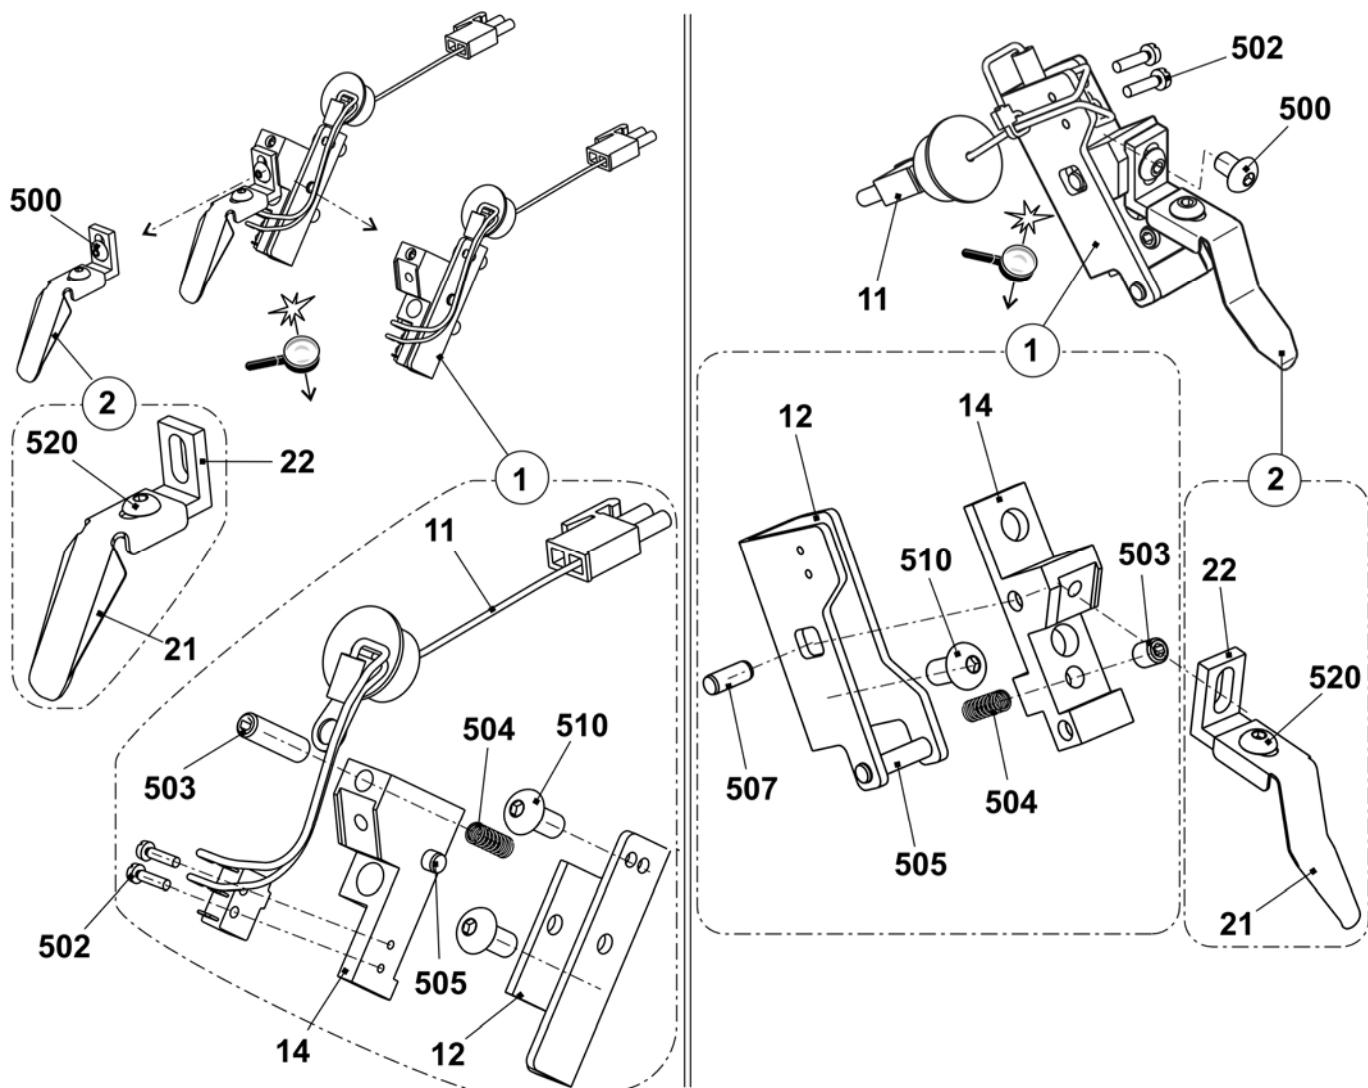


Brush holder

Pos	Designation	ID	Pos	Designation	ID
Σ	Brush holder complete		4	Brush	
	E5 + E7 + E8 (E2,5.2/3,5.2/5.2/5m.4/7m.5/7m.8/8m.7)	213 710		E5 + E7 + E8 (E2,5.2/3,5.2/5.2/5m.4/7m.5/7m.8/8m.7)	203 254
	E10 + E12 + E14 (E14/12/E6.2- 7.2/10m.12/6.2(E12m.10)	213 711		E10 + E12 + E14 (E14/12/E6.2- 7.2/10m.12/6.2(E12m.10)	212 854
	E16 + E18 (E8.2/9.2)	223 185		E16 - 18 (E8.2/9.2)	224 822
1	Brush holder	213 009	500	Countersunk head screw M4x12	023 062
2	Brush clamp	213 010	501	Hexagon nut M8x5	023 750
3	Threaded rod	209 740	502	Adjusting washer 5x10x0.5	023 348
			503	Locking ring 5x0.6	023 347

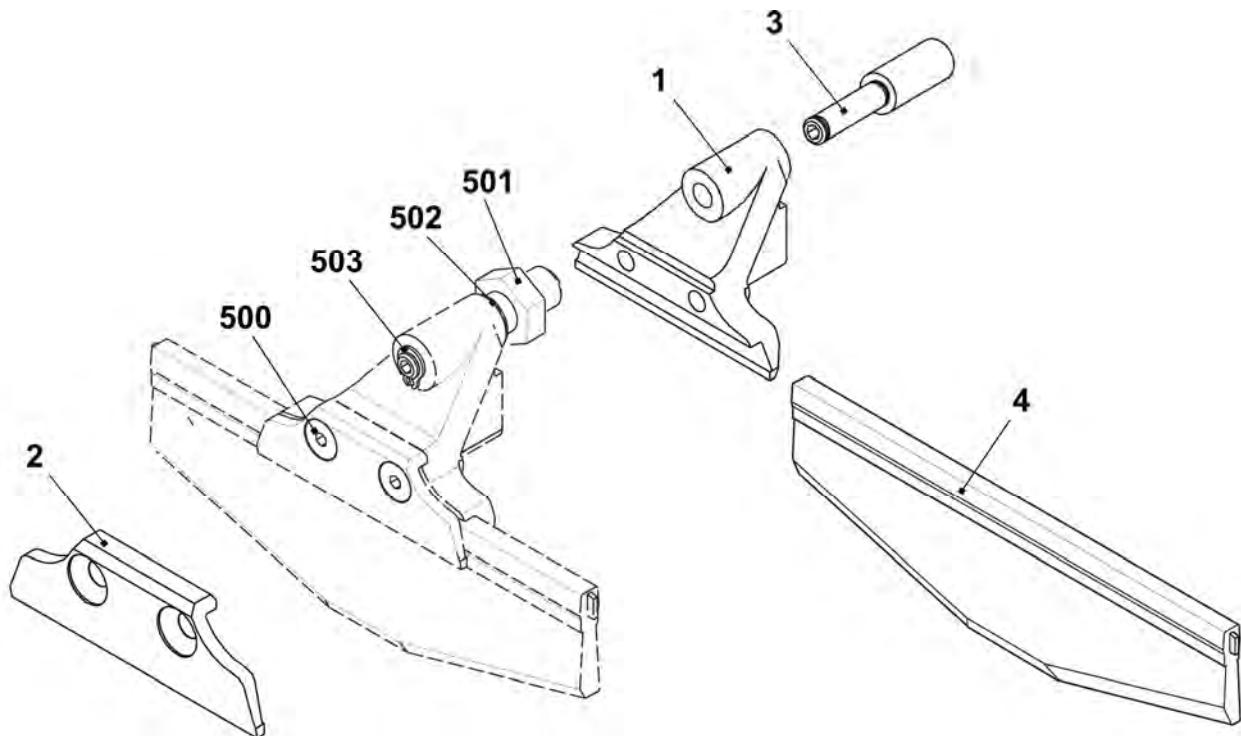


Cam box E5 + E5m.4 + E7m.5 + E3,5.2 + E5.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set complete E5	244 470			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E5-10	211 163	46	Shoulder screw	239 626
38	Stitch forming cam on the left complete E5-10	211 164	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
402	Spring rod	209 791	509	Countersunk screw M3x4	023 142
541	Washer 4.3x7x0.5	022 153			
542	Circlip 3.2	021 019			
543	Spring	023 344			

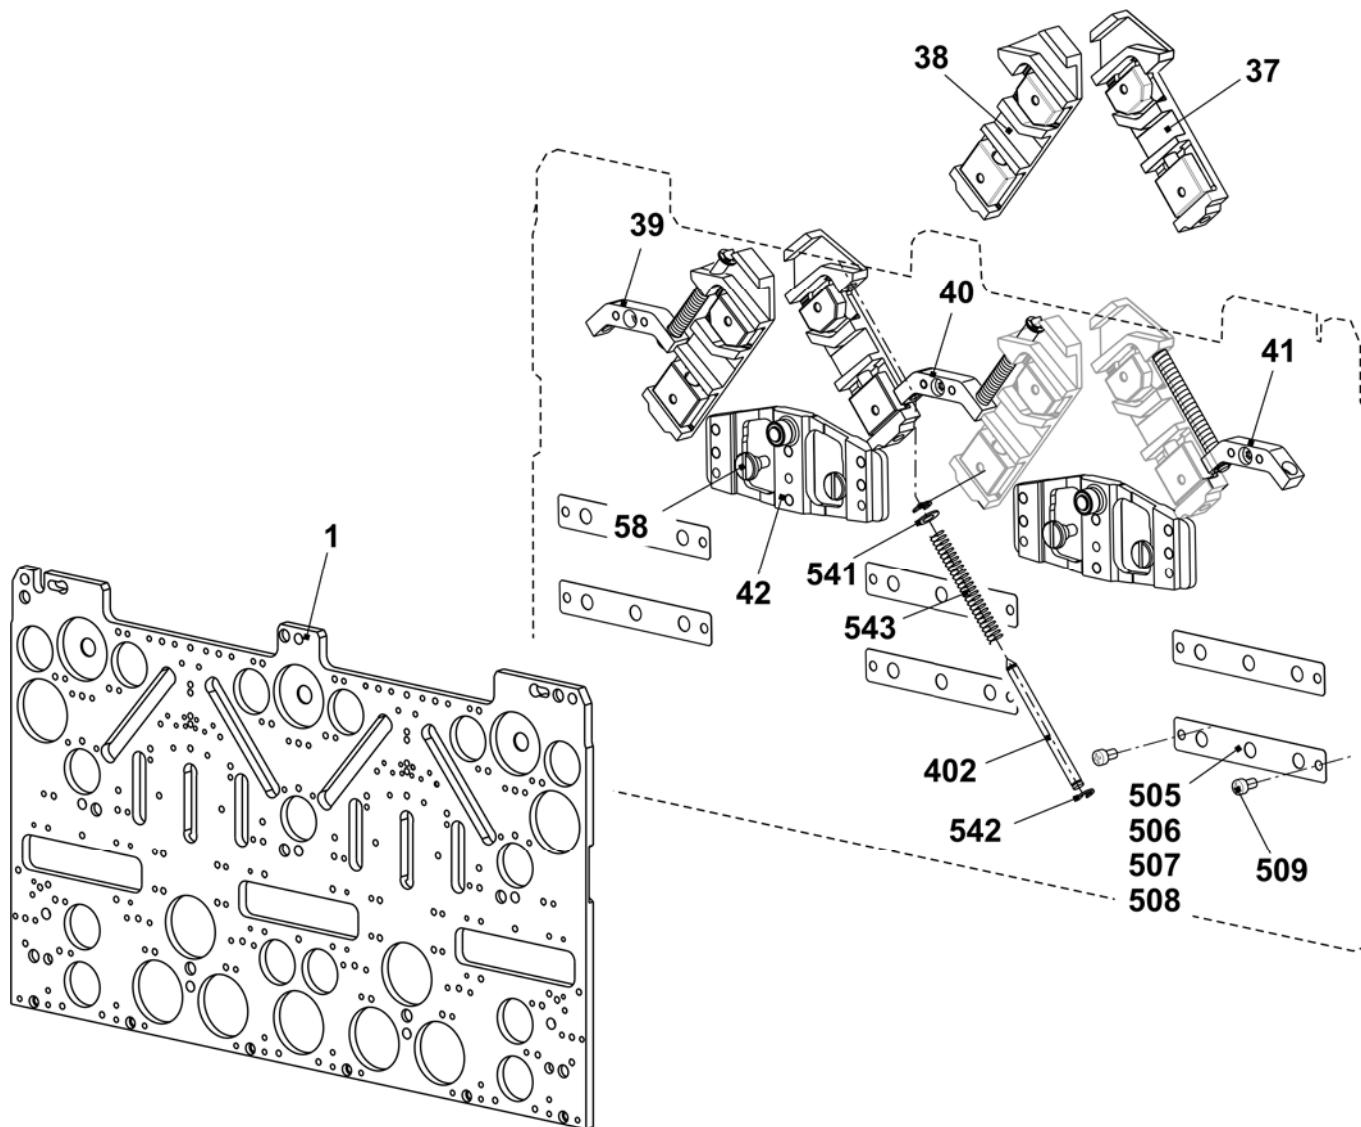


Cams E5 + E5m.4 + E7m.5 + E3,5.2 + E5.2

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
2	Entry cam on the left	213 304	23	Selector cam	212 946
3	Entry cam on the right	213 303	24	Pressure part take-over on the left	239 848
4	Entry cam at the top	210 285	25	Pressure part take-over on the right	239 849
5	Entry cam in the middle at the bottom E2,5.2 + E3,5.2	235 719	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam on the left E5	210 289
7	Plate in the middle	231 035	28	Limit cam on the right E5	210 290
8	Plate on the right	231 036	29	Pointer E2,5.2 + E3,5.2	229 505
9	Cam on the left	231 039	30	Screw	210 335
10	Cam on the right	231 041	31	Stitch cam on the left E2,5.2 + E3,5.2	235 712
11	Cam in the middle	231 040	32	Stitch cam on the right E2,5.2 + E3,5.2	235 713
12	Cam	227 923	33	Tuck limit cam E5	253 517
13	Cam	210 254	34	Raising cam plate E4-12	204 372
14	Cam on the left E5-14	212 265	35	Receiving cam E5	210 386
15	Cam on the right E5-14	212 266	36	Raising cam without split E5	253 516
16	Cam on the left	236 192		Raising cam with split E5	255 174
17	Cam on the right	236 193		Accessories	
18	Cam on the left E5-14	212 274	48	Cam on the right E5-14	212 275
19	Cam	210 252	49	Entry cam at the bottom on the left	235 718
20	Offering cam	210 185	50	Entry cam at the bottom on the right	235 720
21	Selector cam on the left	212 944	51	Shoulder screw	239 626
22	Selector cam on the right	212 947	500	Cap screw M4x8	020 091

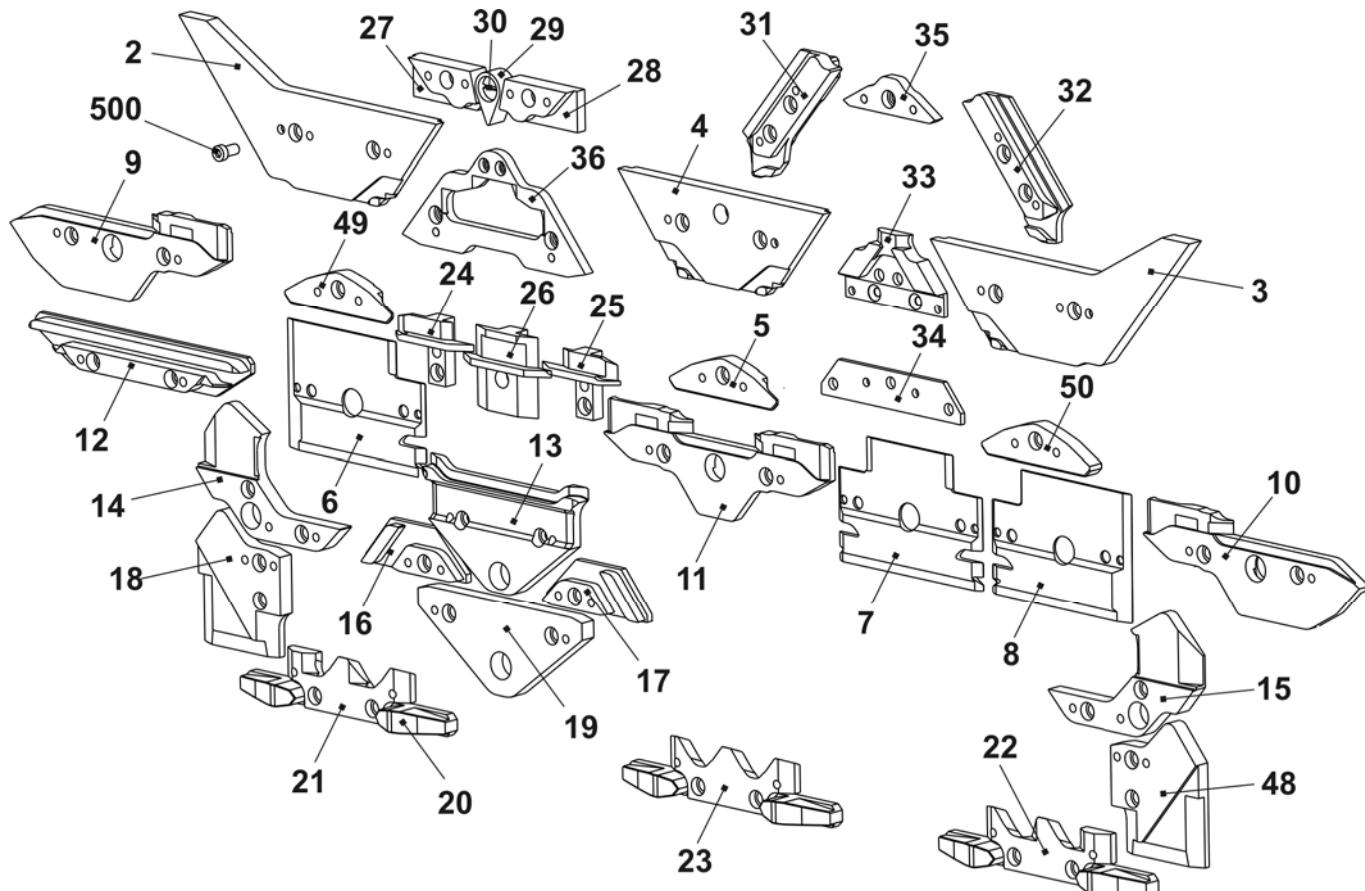


Cams for narrow coupling E5 + E5m.4 + E7m.5 + E3,5.2 + E5.2

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
2	Entry cam on the right E5-14	216 220	3	Entry cam on the left E5-14	216 221
14	Cam on the right E5-14	216 168	15	Cam on the left E5-14	216 167
18	Cam on the right	216 166	48	Cam on the left	216 165

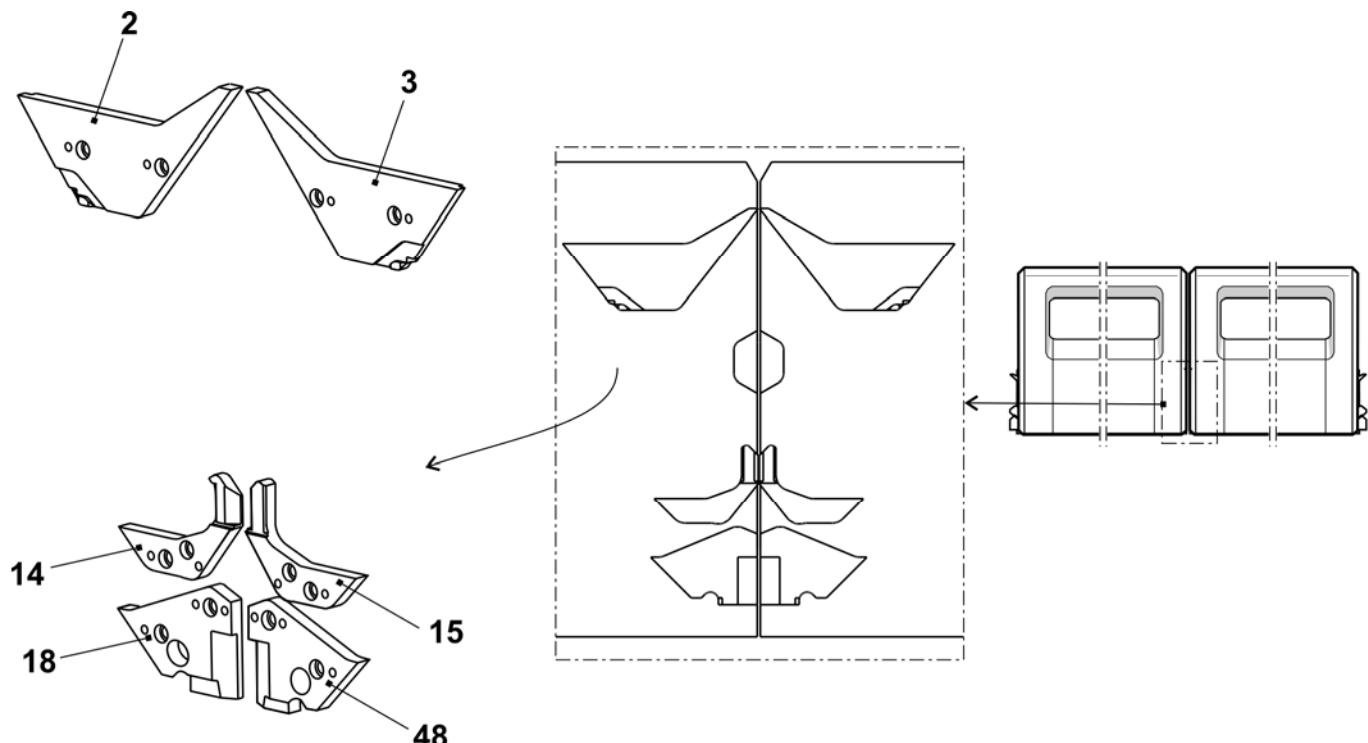


Cam box E7 + E8 + E7m.8 + E8m.7

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set complete E7- E8	243 903			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E5-10	211 163	46	Shoulder screw	239 626
38	Stitch forming cam on the left complete E5-10	211 164	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
402	Spring rod	209 791	509	Countersunk screw M3x4	023 142
541	Washer 4.3x7x0.5	022 153			
542	Circlip 3.2	021 019			
543	Spring	023 344			

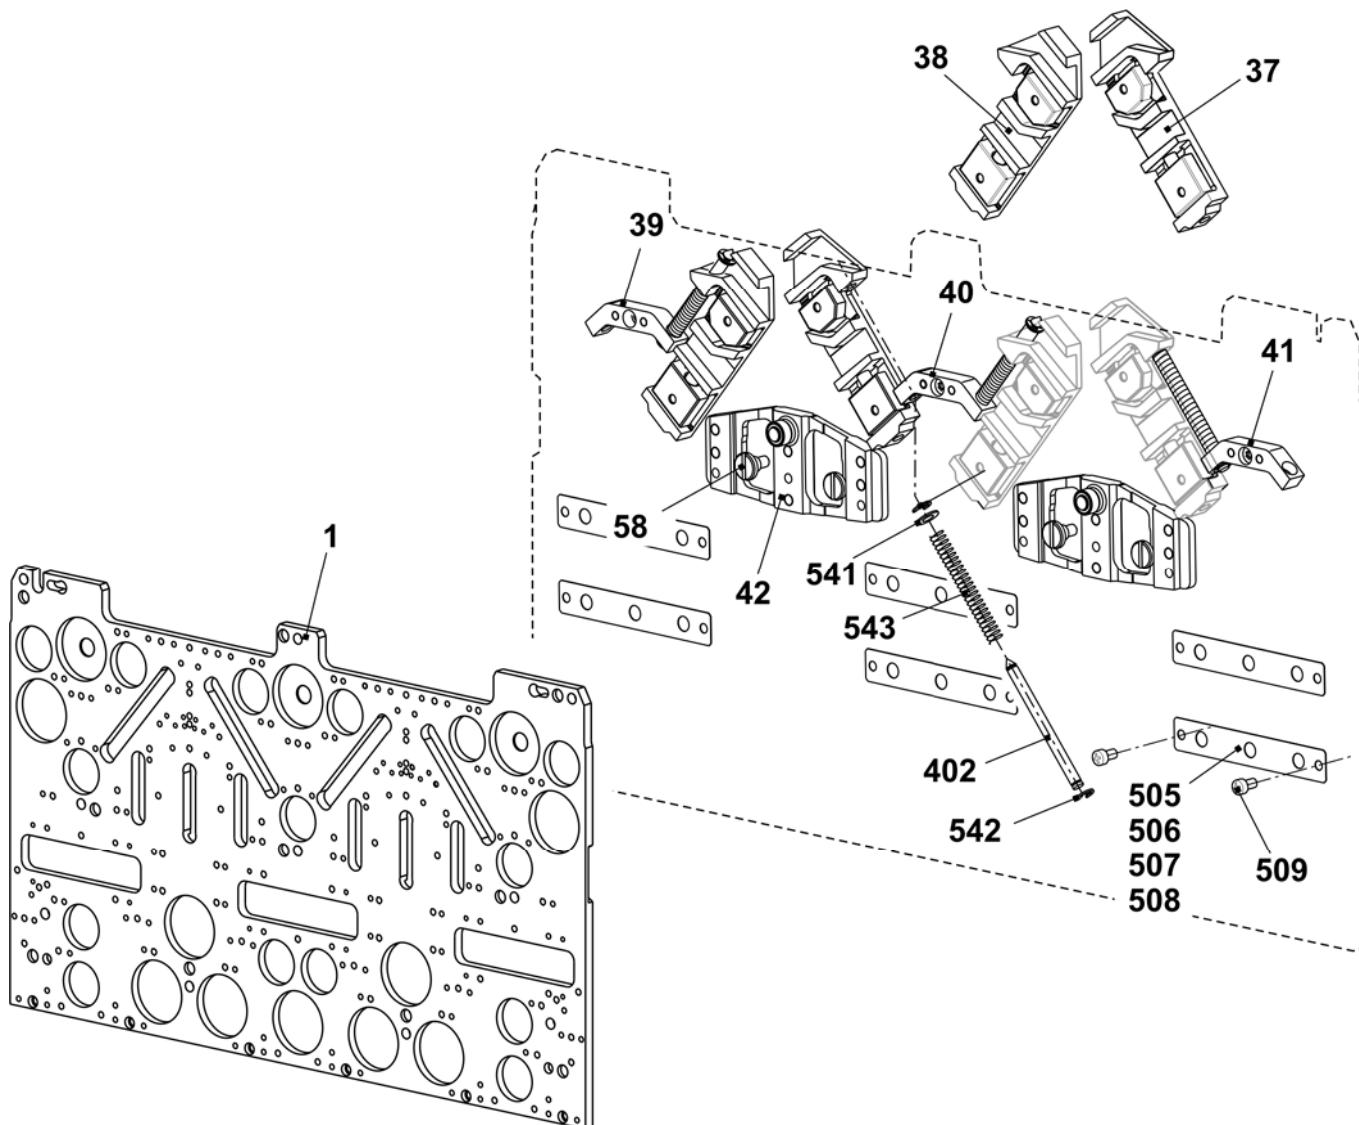


Cams E7-8 + E7m.8 + E8m.7

Pos	Designation	ID No.	Pos	Designation	ID No.
2	Entry cam on the left	213 304	23	Selector cam	212 946
3	Entry cam on the right	213 303	24	Pressure part take-over on the left	239 848
4	Entry cam at the top	210 285	25	Pressure part take-over on the right	239 849
5	Entry cam at the bottom E5-8	212 395	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam on the left E7-8	210 291
7	Plate in the middle	231 035	28	Limit cam on the right E7-8	210 292
8	Plate on the right	231 036	29	Pointer E5-8	210 336
9	Cam on the left	231 039	30	Screw	210 335
10	Cam on the right	231 041	31	Stitch cam on the left E7-8	210 324
11	Cam in the middle	231 040	32	Stitch cam on the right E7-8	210 323
12	Cam	227 923	33	Tuck limit cam E7-8	255 056
13	Cam	210 254	34	Raising cam plate E4-12	204 372
14	Cam on the left E5-14	212 265	35	Receiving cam E7-8	210 339
15	Cam on the right E5-14	212 266	36	Raising cam part without split E7-8	255 055
16	Cam on the left	236 192		Raising cam with split E7-8	255 192
17	Cam on the right	236 193		Accessories	
18	Cam on the left E5-14	212 274	48	Cam on the right E5-14	212 275
19	Cam	210 252	49	Entry cam on the left	213 161
20	Offering cam	210 185	50	Entry cam on the right	213 162
21	Selector cam on the left	212 944	51	Shoulder screw	239 626
22	Selector cam on the right	212 947	500	Cap screw M4x8	020 091

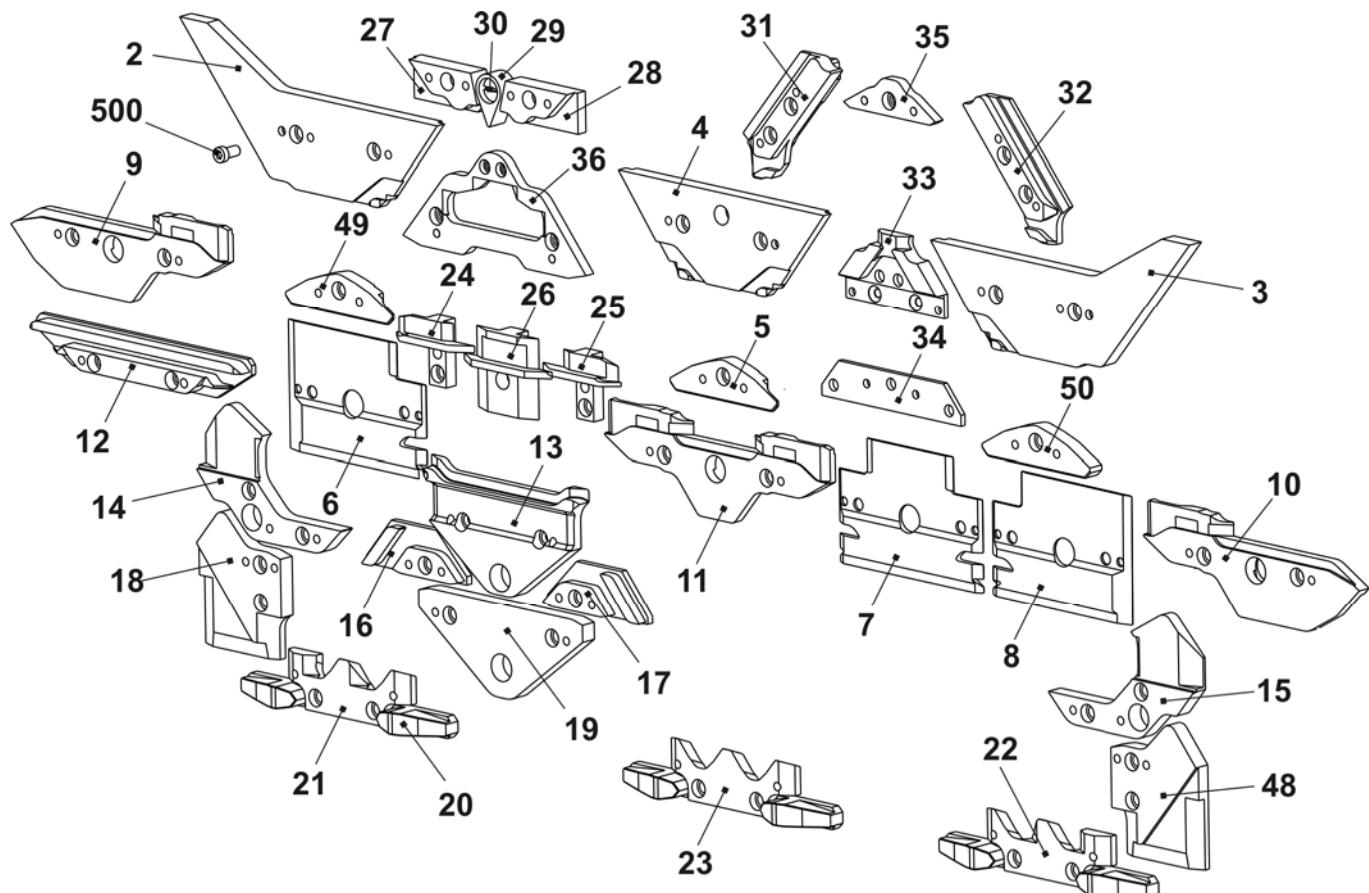


Cam box E10

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set on the left co. E10	244 360			
	Cam box set on the right co. E10	244 361			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E5-10	211 163	46	Shoulder screw	239 626
38	Stitch forming cam on the left complete E5-10	211 164	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
	402 Spring rod	209 791	509	Countersunk screw M3x4	023 142
	541 Washer 4.3x7x0.5	022 153			
	542 Circlip 3.2	021 019			
	543 Spring	023 344			

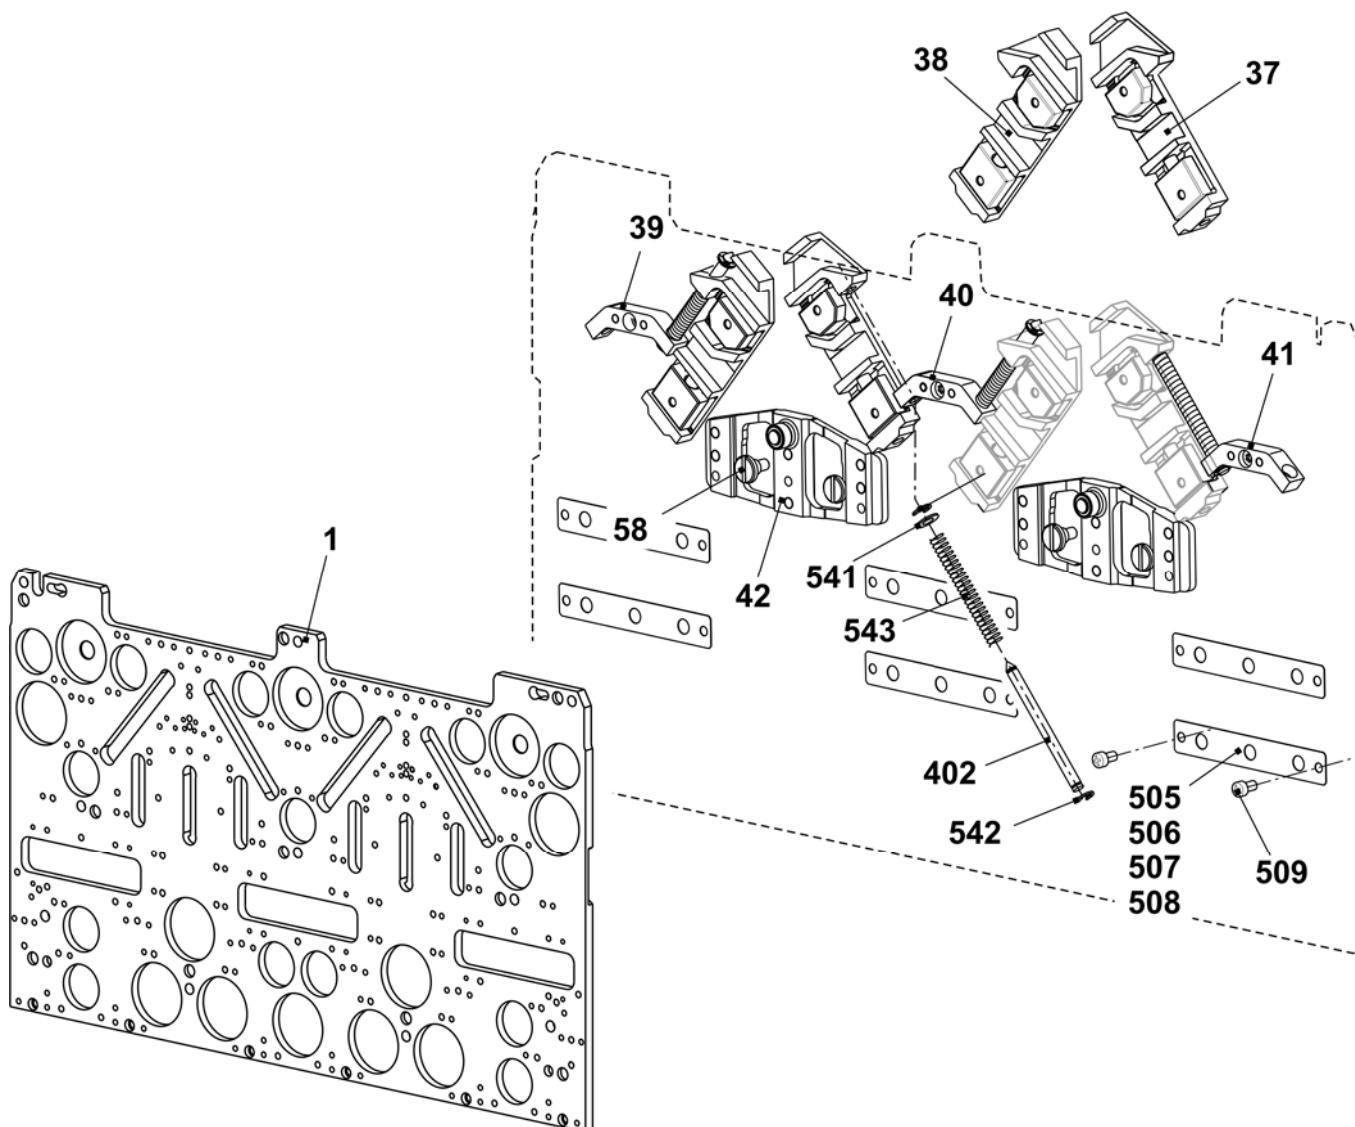


Cams E10

Pos	Designation	ID	Pos	Designation	ID
2	Entry cam on the left	243 595	23	Selector cam	212 946
3	Entry cam on the right	243 597	24	Pressure part take-over on the left	239 848
4	Entry cam in the middle	243 596	25	Pressure part take-over on the right	239 849
5	Entry cam at the bottom - 1.5 E10 - E14	216 328	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam E10	210 611
7	Plate in the middle	231 035	29	Pointer E10 - E14	210 349
8	Plate on the right	231 036	30	Screw	210 335
9	Cam on the left	231 039	31	Stitch cam on the left E10 - E14 + E7.2	236 318
10	Cam on the right	231 041	32	Stitch cam on the right E10-E14 + E7.2 (at the front)	236 319
11	Cam in the middle	231 040	33	Tuck limit cam E10 + E7.2	236 345
12	Cam	227 923	34	Raising cam plate E4-12	204 372
13	Cam	210 254	35	Receiving cam E10 - E12	210 595
14	Cam on the left E5-14	212 265	36	Raising cam without split E10 - E12 + E7.2	237 993
15	Cam on the right E5-14	212 266		Raising cam with split E10 - E12 + E7.2 Accessories	213 300
16	Cam on the left	236 192	48	Cam on the right E5-14	212 275
17	Cam on the right	236 193	49	Entry cam on the left -1.5 E10 - E14	216 329
18	Cam on the left E5-14	212 274	50	Entry cam on the right -1.5 E10 - E14	216 330
19	Cam	210 252	500	Cap screw M4x8	020 091
20	Offering cam	210 185	60	Stitch cam at the rear on the right E10 - E12	236 320
21	Selector cam on the left	212 944			
22	Selector cam on the right	212 947			

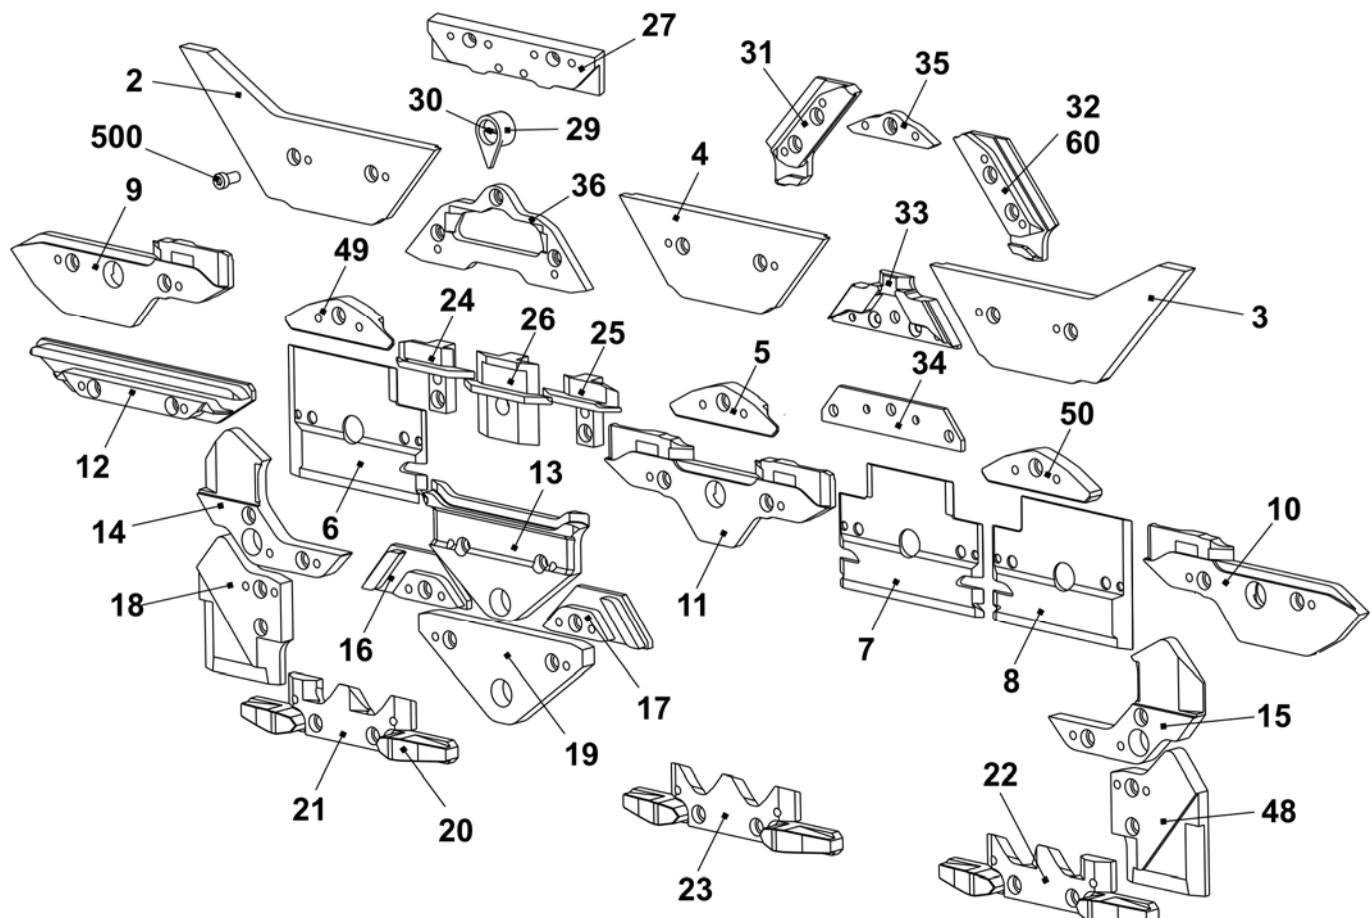


Cams for narrow coupling E10 + E12 + E14 + E16 + E10m.12 + E12m.10 + E6.2 + E7.2 + E8.2

Pos	Designation	ID No.	Pos	Designation	ID No.
48	Cam on the left E5-14	216 167	55	Entry cam on the right	243 858
49	Cam on the right E5-14	216 168		Cam on the left	216 165
54	Entry cam on the left	243 857		Cam on the right	216 166

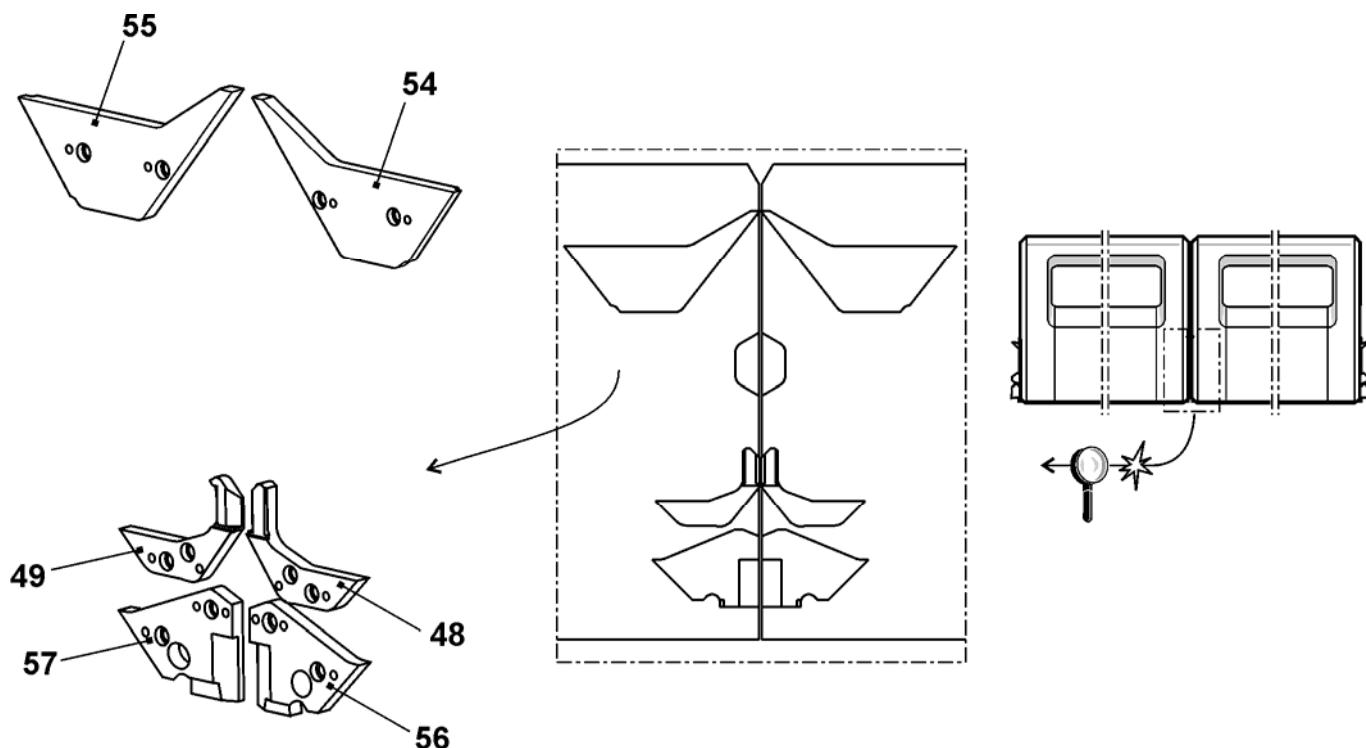


Cam box E12

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set on the left co. E12	242 983			
	Cam box set on the right co. E12	242 984			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E12 – E14	214 088	46	Shoulder screw	239 626
38	Stitch forming cam on the left complete E12 – E14	214 089	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
402	Spring rod	209 791	509	Countersunk screw M3x4	023 142
541	Washer 4.3x7x0.5	022 153			
542	Circlip 3.2	021 019			
543	Spring	023 344			

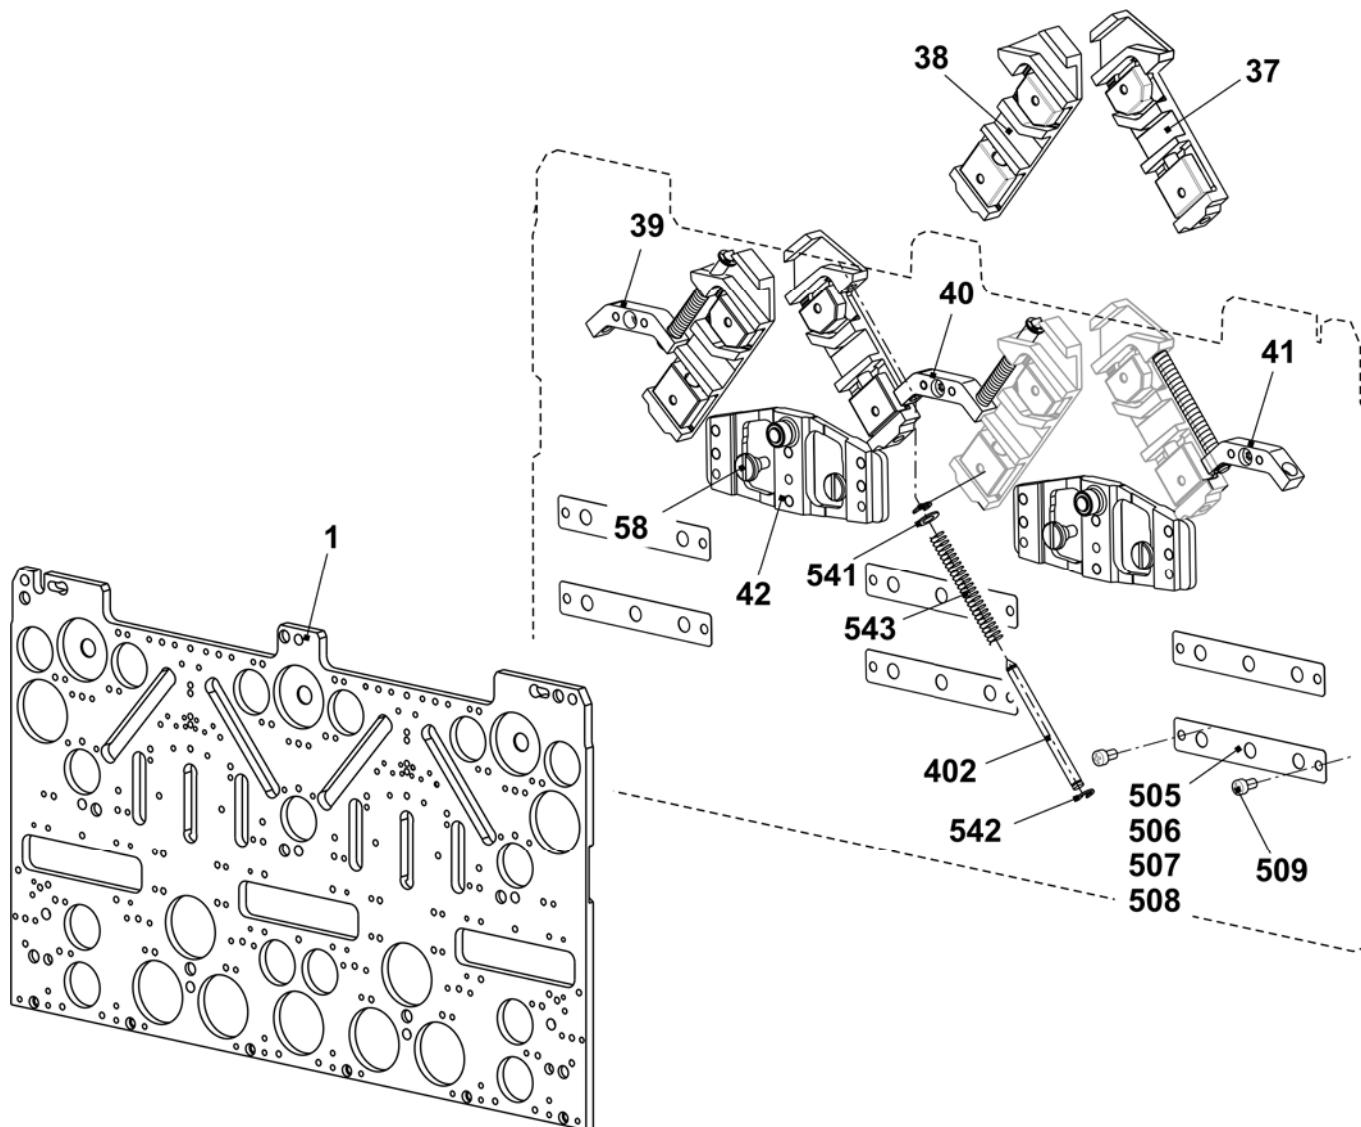


Cams E12

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
2	Entry cam on the left	243 595	23	Selector cam	212 946
3	Entry cam on the right	243 597	24	Pressure part take-over on the left	239 848
4	Entry cam in the middle	243 596	25	Pressure part take-over on the right	239 849
5	Entry cam at the bottom - 1.5 E10 - E14	216 328	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam E12 – E14	210 612
7	Plate in the middle	231 035	29	Pointer E10 – E14	210 349
8	Plate on the right	231 036	30	Screw	210 335
9	Cam on the left	231 039	31	Stitch cam on the left E10 - E14 + E7.2	236 318
10	Cam on the right	231 041	32	Stitch cam on the right E10 - E14 + E7.2	236 319
11	Cam in the middle	231 040	33	Tuck limit cam E12	236 403
12	Cam	227 923	34	Raising cam plate E4-12	204 372
13	Cam	210 254	35	Receiving cam E10 - E12	210 595
14	Cam on the left E5-14	212 265	36	Raising cam without split E10 – E12 + E7.2	237 993
15	Cam on the right E5-14	212 266		Raising cam with split E10 – E12 Accessory	213 300
16	Cam on the left	236 192	48	Cam on the right E5-14	212 275
17	Cam on the right	236 193	49	Entry cam on the left -1.5 E10 - E14	216 329
18	Cam on the left E5-14	212 274	50	Entry cam on the right -1.5 E10 - E14	216 330
19	Cam	210 252	500	Cap screw M4x8	020 091
20	Offering cam	210 185	60	Stitch cam at the rear on the right E10 - E12	236 320
21	Selector cam on the left	212 944			
22	Selector cam on the right	212 947			

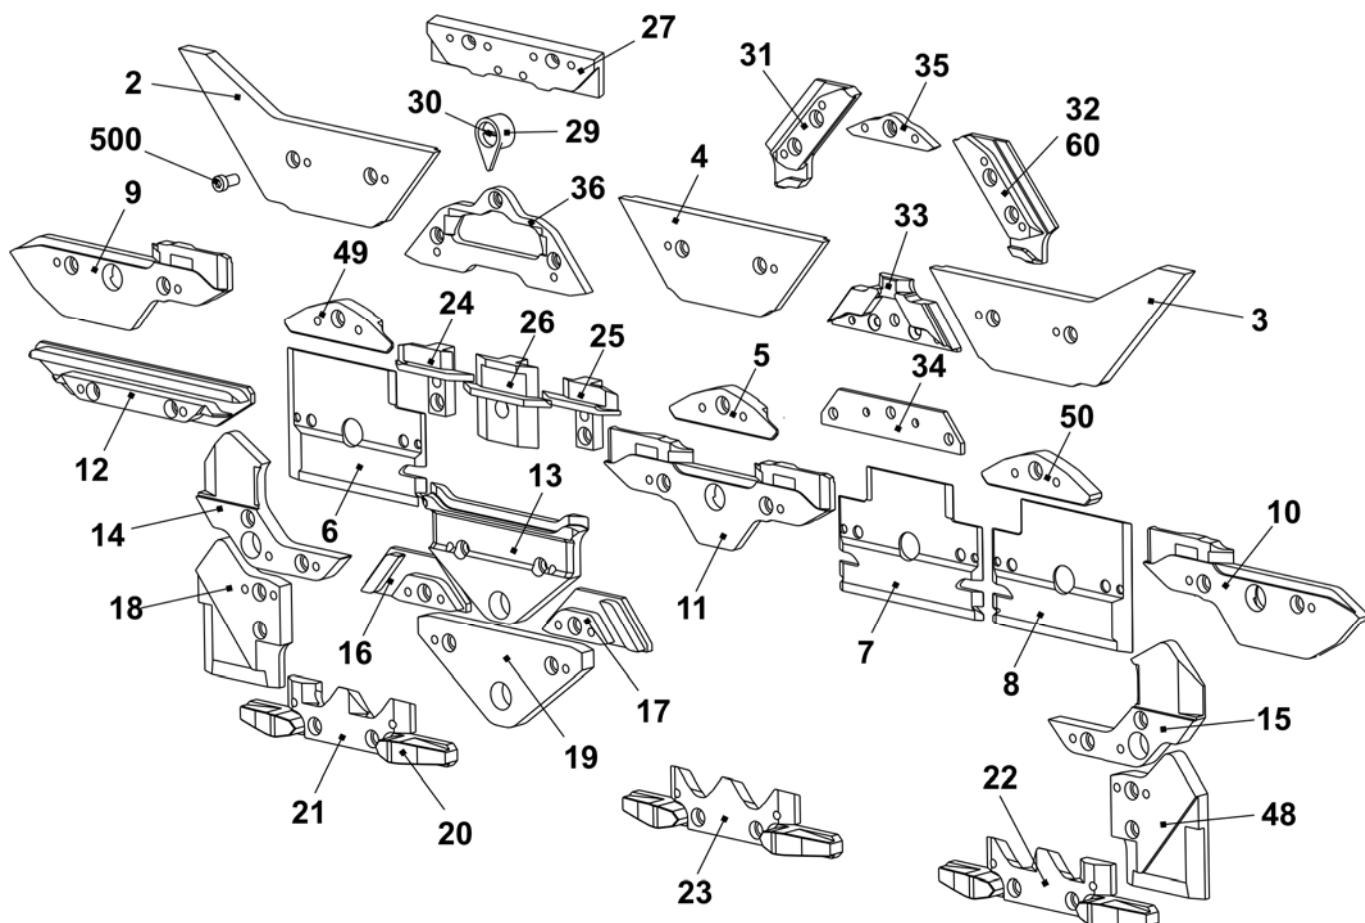


Cam box E14

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set complete E14	244 337			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E12 – E14	214 088	46	Shoulder screw	239 626
38	Stitch forming cam on the left complete E12 – E14	214 089	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
	402 Spring rod	209 791	509	Countersunk screw M3x4	023 142
	541 Washer 4.3x7x0.5	022 153			
	542 Circlip 3.2	021 019			
	543 Spring	023 344			

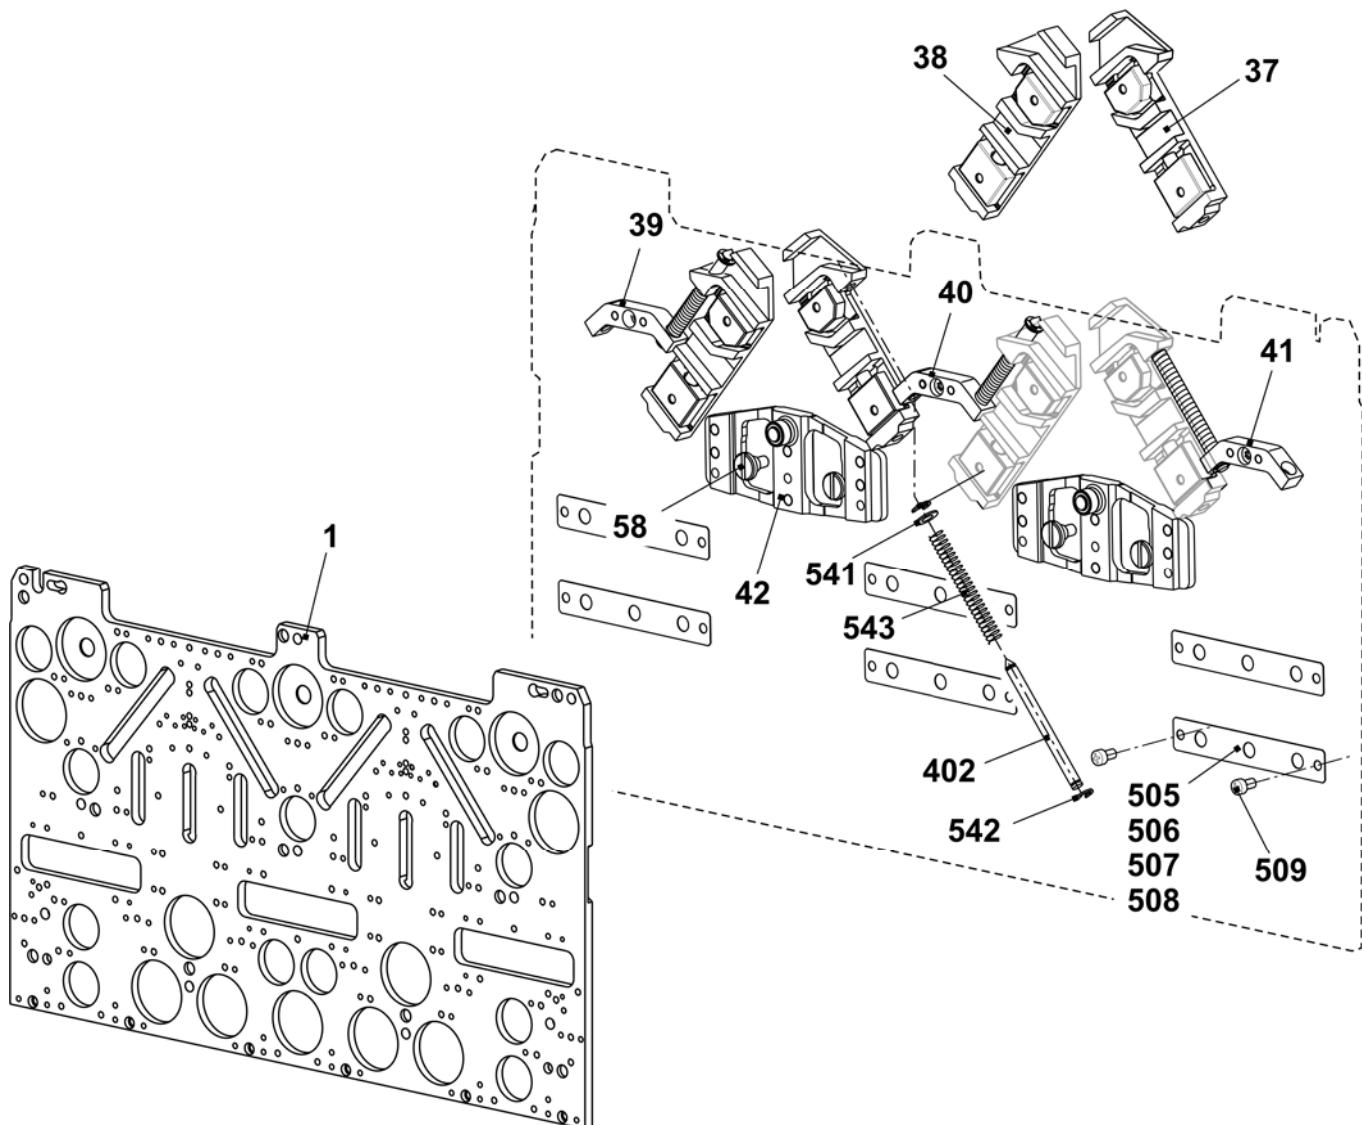


Cams E14

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
2	Entry cam on the left	243 595	23	Selector cam	212 946
3	Entry cam on the right	243 597	24	Pressure part take-over on the left	239 848
4	Entry cam at the top	243 596	25	Pressure part take-over on the right	239 849
5	Entry cam at the bottom - 1.5 E10 - E14	216 328	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam E12 – E14	210 612
7	Plate in the middle	231 035	29	Pointer E10 – E14	210 349
8	Plate on the right	231 036	30	Screw	210 335
9	Cam on the left	231 039	31	Stitch cam on the left E10 - E14 + E7.2	236 318
10	Cam on the right	231 041	32	Stitch cam on the right E10 - E14 + E7.2	236 319
11	Cam in the middle	231 040	33	Tuck limit cam E14	236 428
12	Cam	227 923	34	Raising cam plate E4-12	204 372
13	Cam	210 254	35	Receiving cam E14	236 944
14	Cam on the left E5-14	212 265	36	Raising cam without split E14	236 767
15	Cam on the right E5-14	212 266		Raising cam with split E14	214 212
16	Cam on the left	236 192		Accessories	
17	Cam on the right	236 193	48	Cam on the right E5-14	212 275
18	Cam on the left E5-14	212 274	49	Entry cam on the left - 1.5 E10 - E14	216 329
19	Cam	210 252	50	Entry cam on the right - 1.5 E10 - E14	216 330
20	Offering cam	210 185	500	Cap screw M4x8	020 091
21	Selector cam on the left	212 944			
22	Selector cam on the right	212 947			

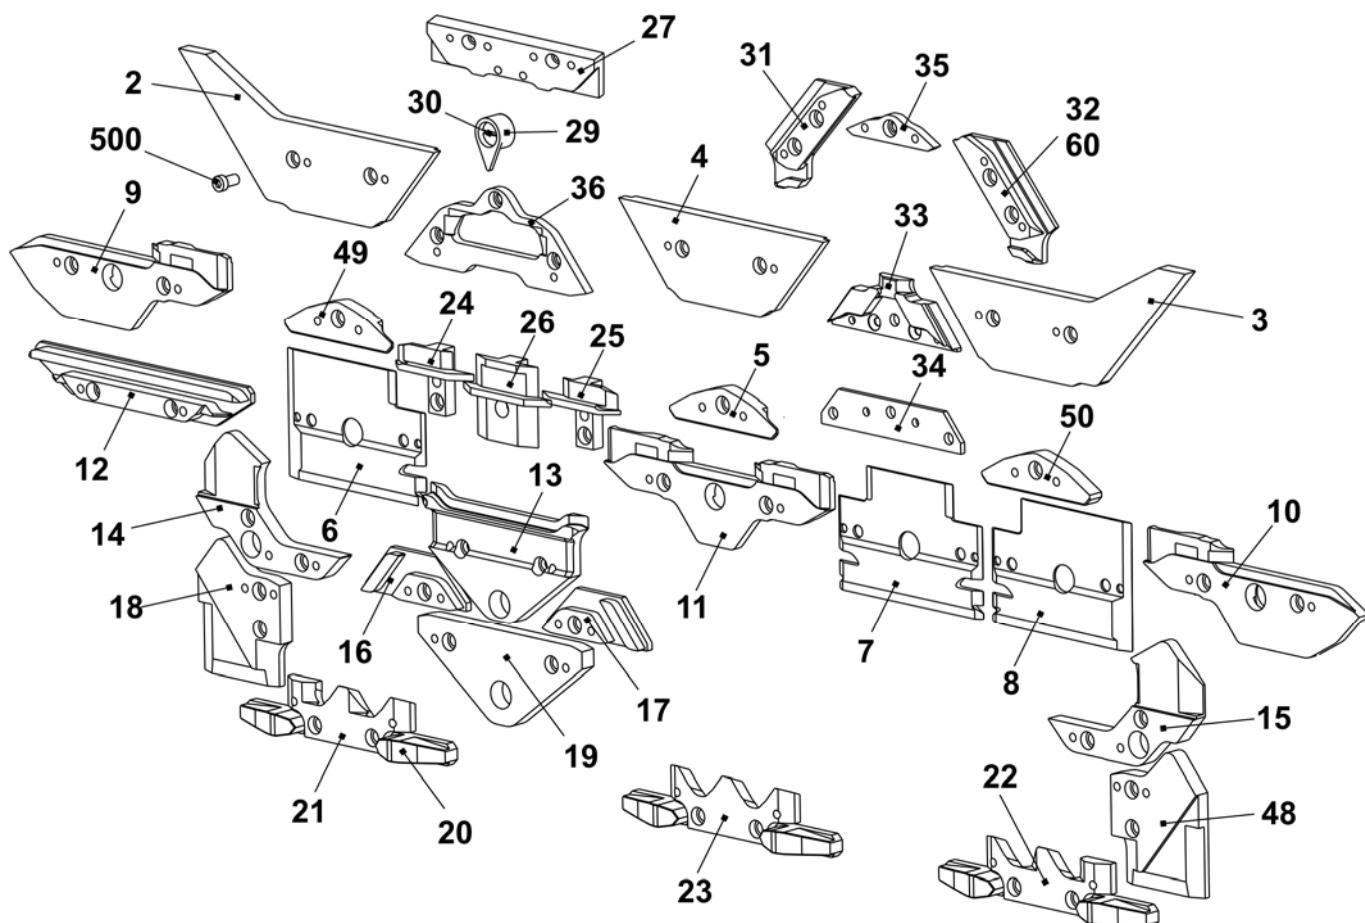


Cam box E16

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set complete E16	244 623			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E16 - E20	221 123	58	Shoulder screw	239 626
38	Stitch forming cam on the left complete E16 - E20	221 124	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
	402 Spring rod	209 791	509	Countersunk screw M3x4	023 142
	541 Washer 4.3x7x0.5	022 153			
	542 Circlip 3.2	021 019			
	543 Compression spring	023 344			

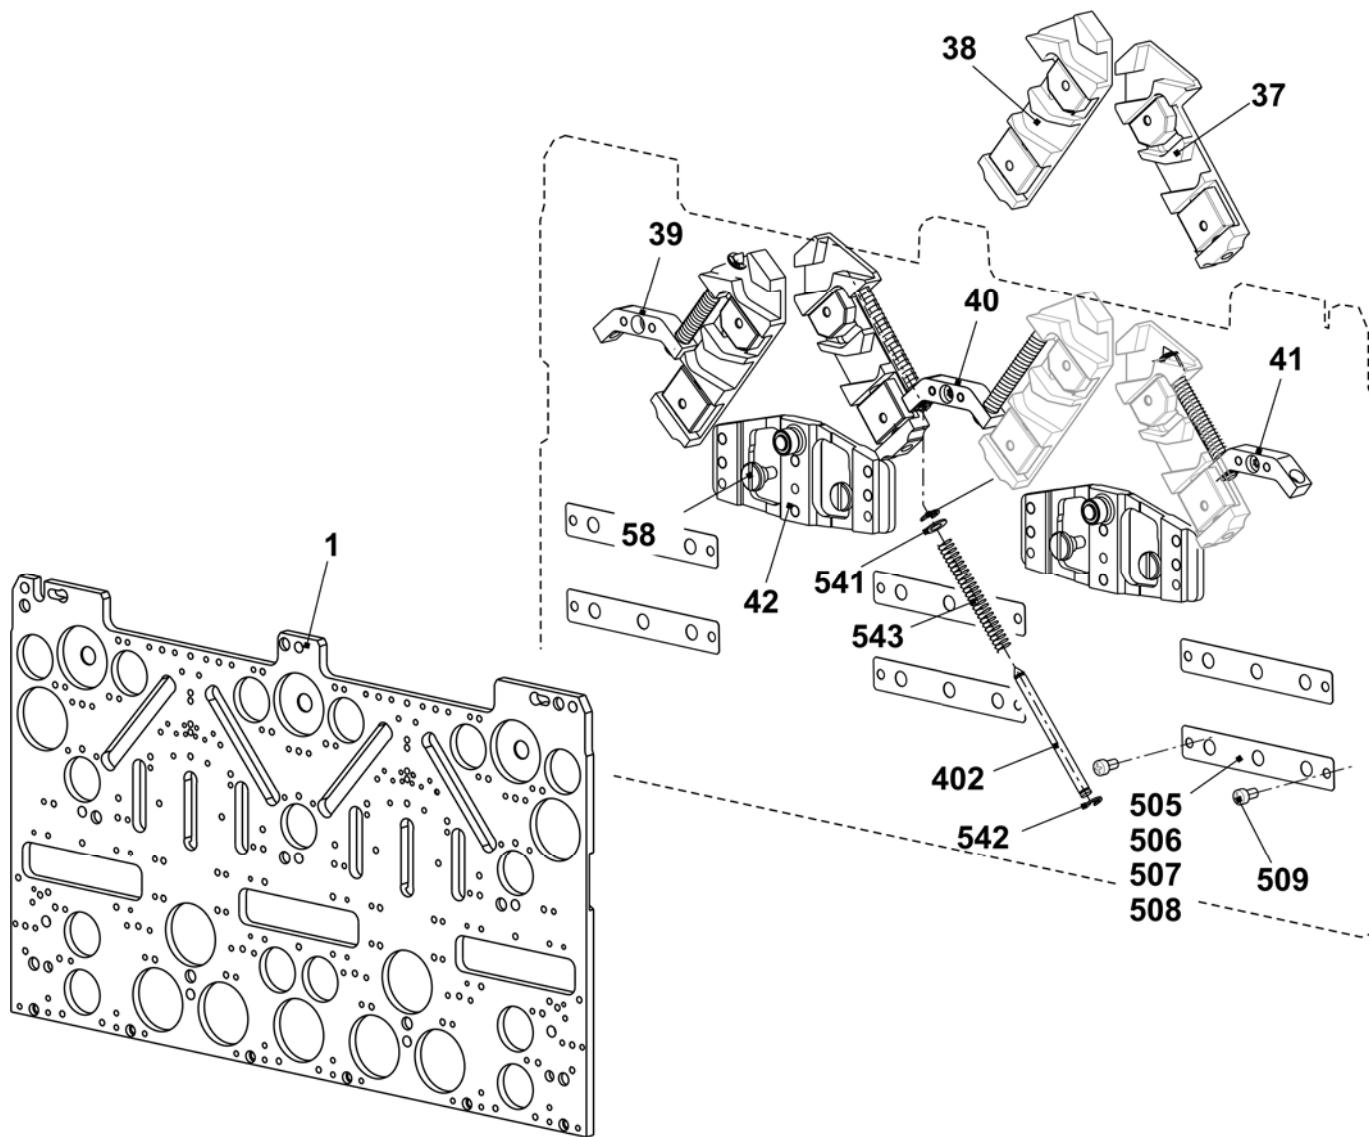


Cams E16

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
2	Entry cam on the left	243 595	24	Pressure part take-over on the left	239 848
3	Entry cam on the right	243 597	25	Pressure part take-over on the right	239 849
4	Entry cam in the middle	243 596	26	Tuck pressure part	239 621
5	Entry cam at the bottom E16 - E20	220 842	27	Limit cam E16 - E20	220 865
6	Plate on the left	230 988	29	Pointer E16 - E20	224 383
7	Plate in the middle	231 035	30	Screw	210 335
8	Plate on the right	231 036	31	Stitch cam on the left E16 - E20	220 870
9	Cam on the left	231 039	32	Stitch cam on the right E16 - E20	220 871
10	Cam on the right	231 041	33	Tuck limit cam E16 - E18	239 936
11	Cam in the middle	231 040	34	Raising cam plate E4-12	204 372
12	Cam	227 923	35	Receiving cam E16 - E20	220 863
13	Cam	210 254	36	Raising cam without split E16 - E18 + E9.2	239 457
14	Cam on the left E5-14	212 265		Raising cam with split E16 - E18 + E9.2	239 742
15	Cam on the right E5-14	212 266	50	Cam on the left E5-14	212 274
16	Cam on the left	236 192	51	Cam on the right E5-14	212 275
17	Cam on the right	236 193	52	Entry cam on the left E16 - E20	220 841
19	Cam	210 252	53	Entry cam on the right E16 - E20	220 843
20	Offering cam	210 185	500	Cap screw M4x8	020 091
21	Selector cam on the left	253 629			
22	Selector cam on the right	253 631			
23	Selector cam	253 630			

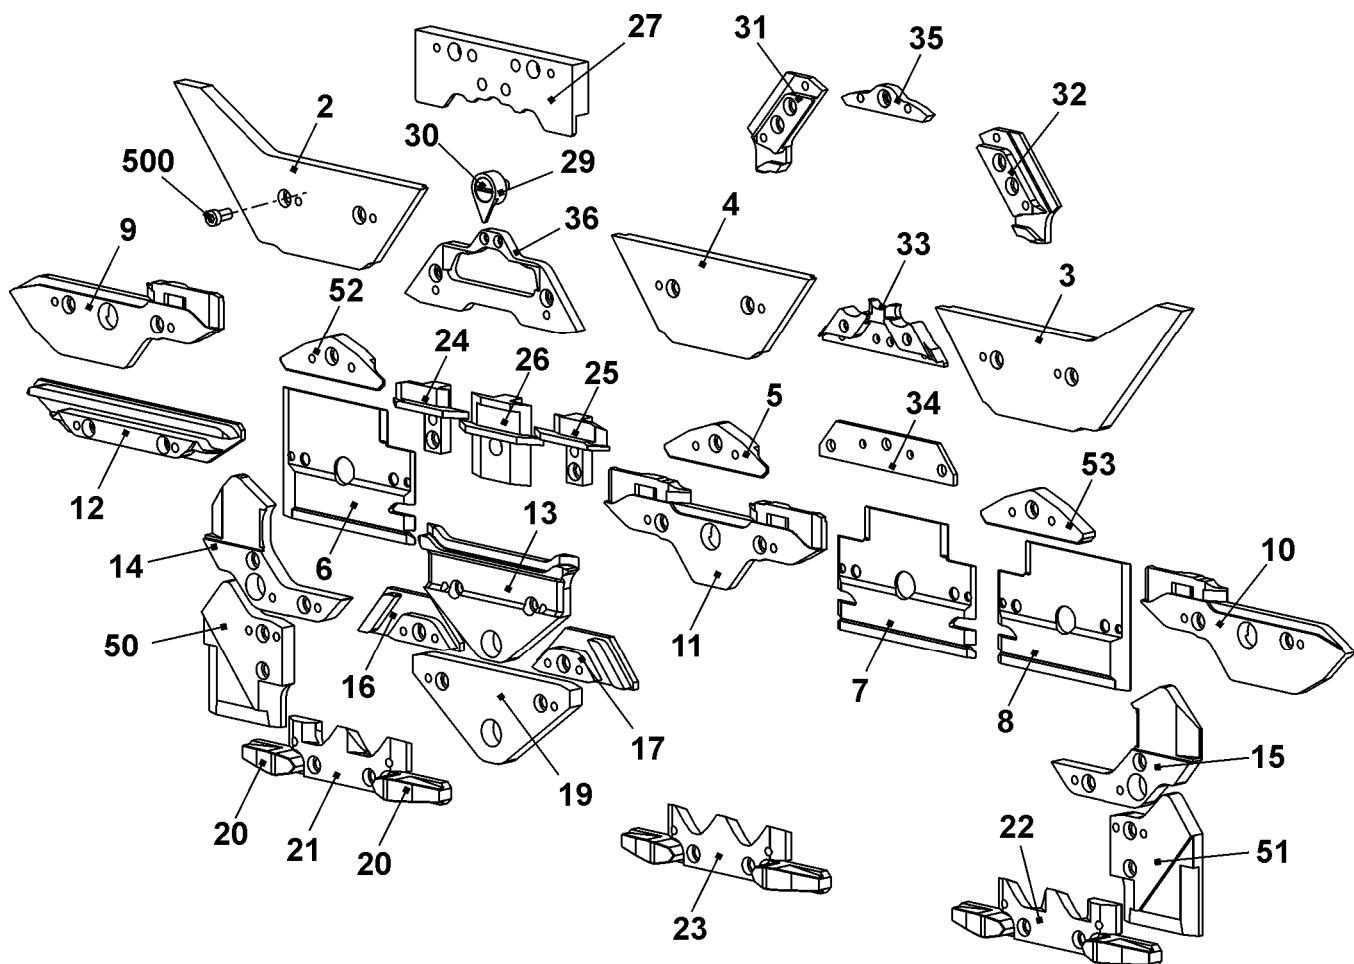


Cam box E10m.12

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set left and right co. E10m.12	244 767			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E5-10	211 163	46	Shoulder screw	239 626
38	Stitch forming cam on the left complete E5-10	211 164	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
402	Spring rod	209 791	509	Countersunk screw M3x4	023 142
541	Washer 4.3x7x0.5	022 153			
542	Circlip 3.2	021 019			
543	Spring	023 344			

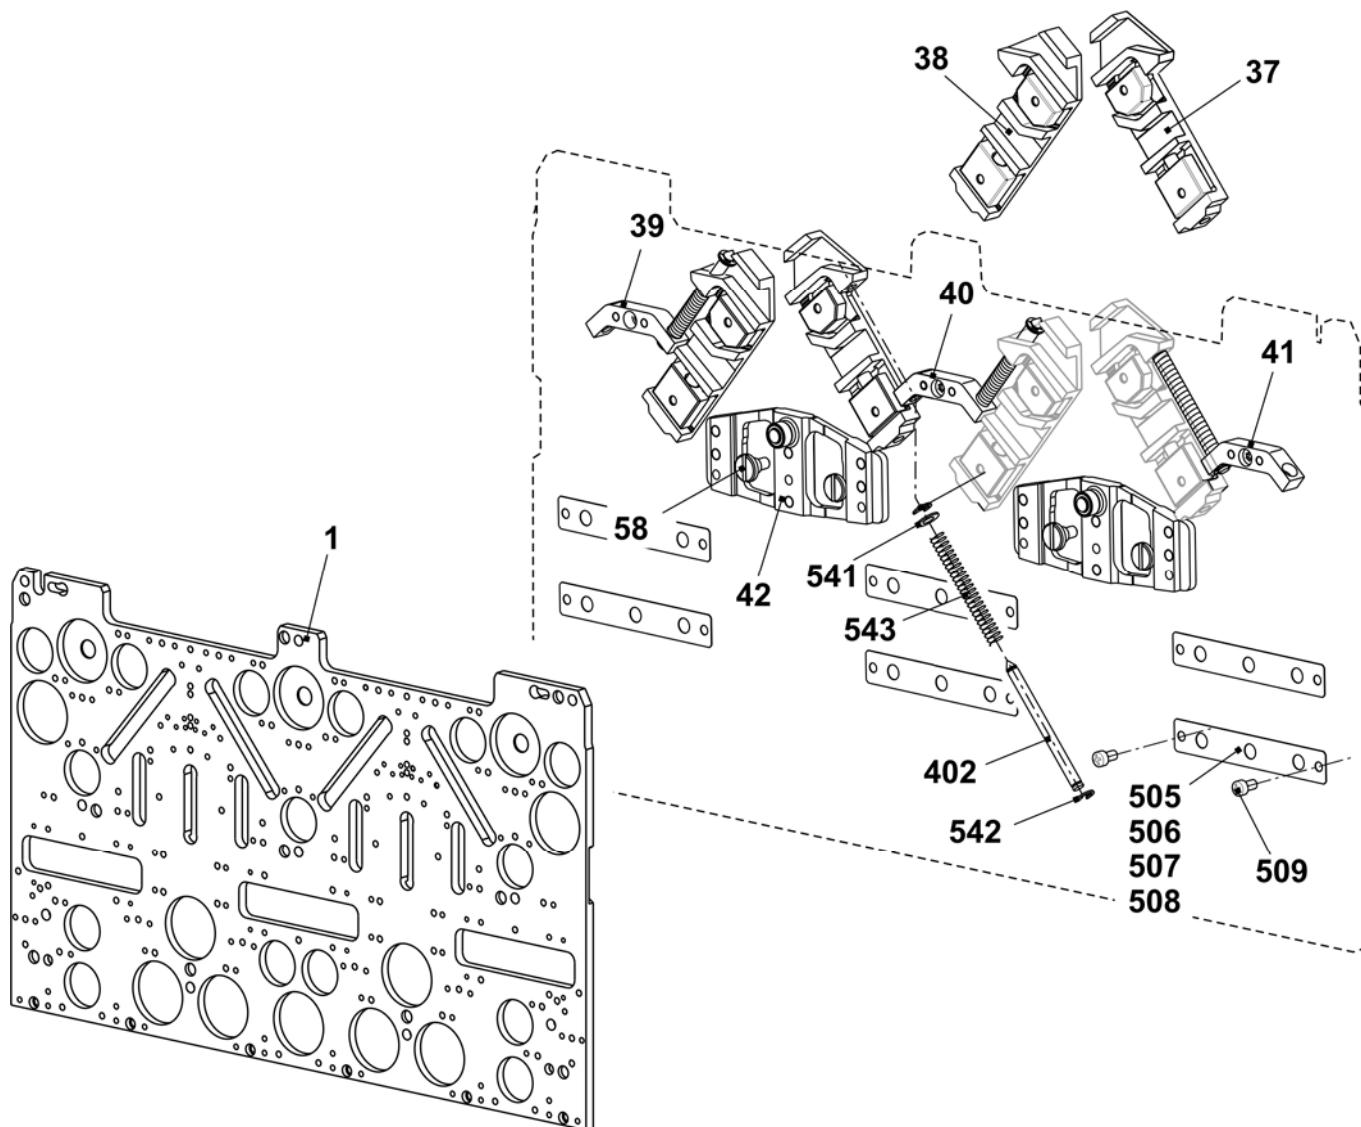


Cams E10m.12

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
2	Entry cam on the left	243 595	23	Selector cam	212 946
3	Entry cam on the right	243 597	24	Pressure part take-over on the left	239 848
4	Entry cam at the top	243 596	25	Pressure part take-over on the right	239 849
5	Entry cam at the bottom - 1.5 E10 - E14	216 328	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam E12 – E14	210 612
7	Plate in the middle	231 035	29	Pointer E10 – E14	210 349
8	Plate on the right	231 036	30	Screw	210 335
9	Cam on the left	231 039	31	Stitch cam on the left E10 - E14 + E7.2	236 318
10	Cam on the right	231 041	32	Stitch cam on the right E10 - E14 + E7.2	236 319
11	Cam in the middle	231 040	33	Tuck limit cam E12	236 403
12	Cam	227 923	34	Raising cam plate E4-12	204 372
13	Cam	210 254	35	Receiving cam E10 - E12	210 595
14	Cam on the left E5-14	212 265	36	Raising cam without split E10 – E12 + E7.2	237 993
15	Cam on the right E5-14	212 266		Raising cam with split E10 – E12 + E7.2 Accessories	213 300
16	Cam on the left	236 192	48	Cam on the right E5-14	212 275
17	Cam on the right	236 193	49	Entry cam on the left -1.5 E10 - E14	216 329
18	Cam on the left E5-14	212 274	50	Entry cam on the right -1.5 E10 - E14	216 330
19	Cam	210 252	51	Shoulder screw	239 626
20	Offering cam	210 185	500	Cap screw M4x8	020 091
21	Selector cam on the left	212 944		Stitch cam at the rear on the right E10 - E12	236 320
22	Selector cam on the right	212 947			

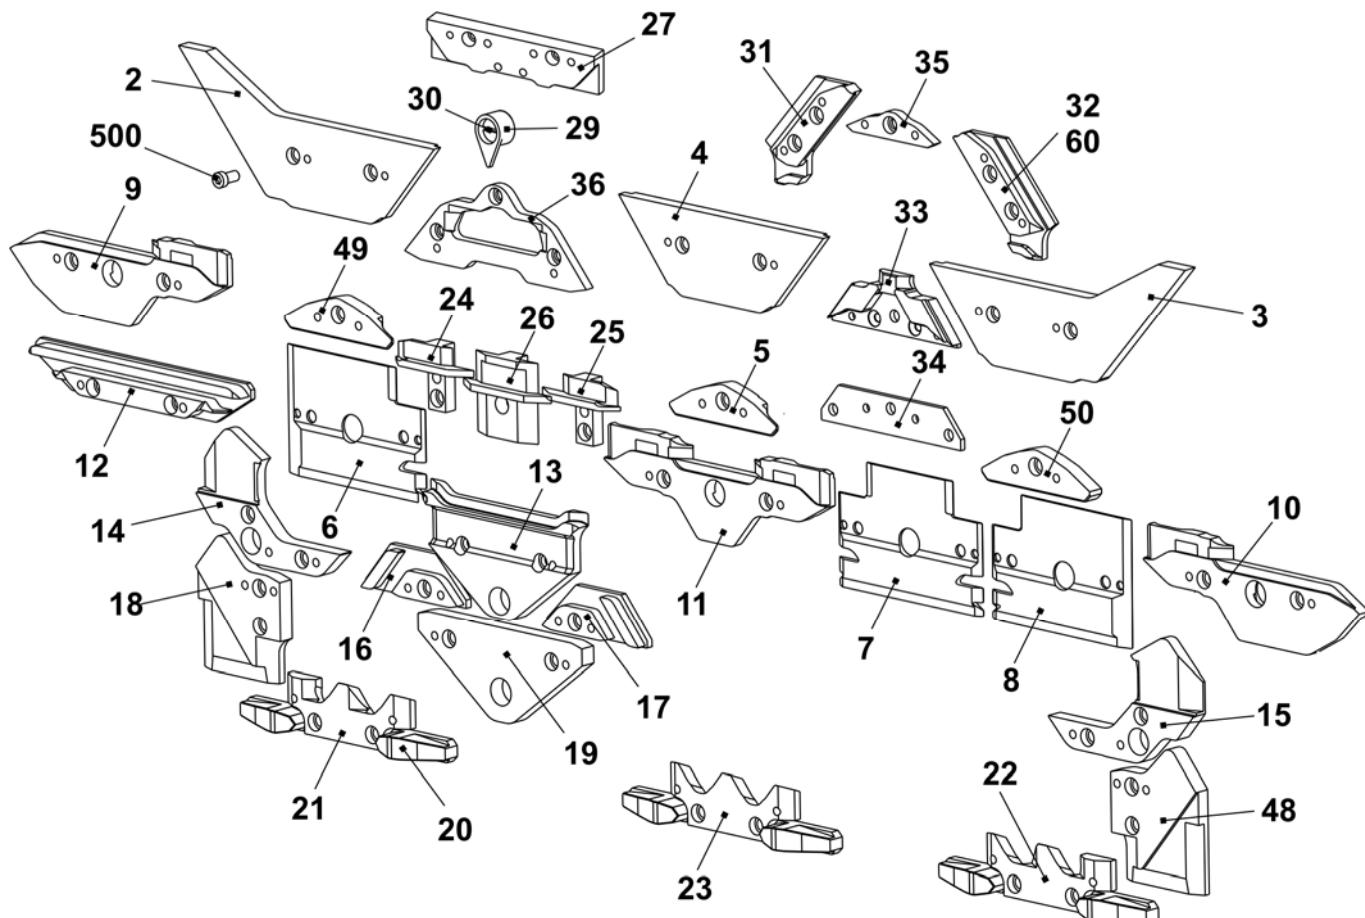


Cam box E12m.10

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set left and right co. E12m.10	244 769/70			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E12 – E14	214 088	46	Shoulder screw	239 626
38	Stitch forming cam on the left complete E12 – E14	214 089	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
	402 Spring rod	209 791	509	Countersunk screw M3x4	023 142
	541 Washer 4.3x7x0.5	022 153			
	542 Circlip 3.2	021 019			
	543 Spring	023 344			

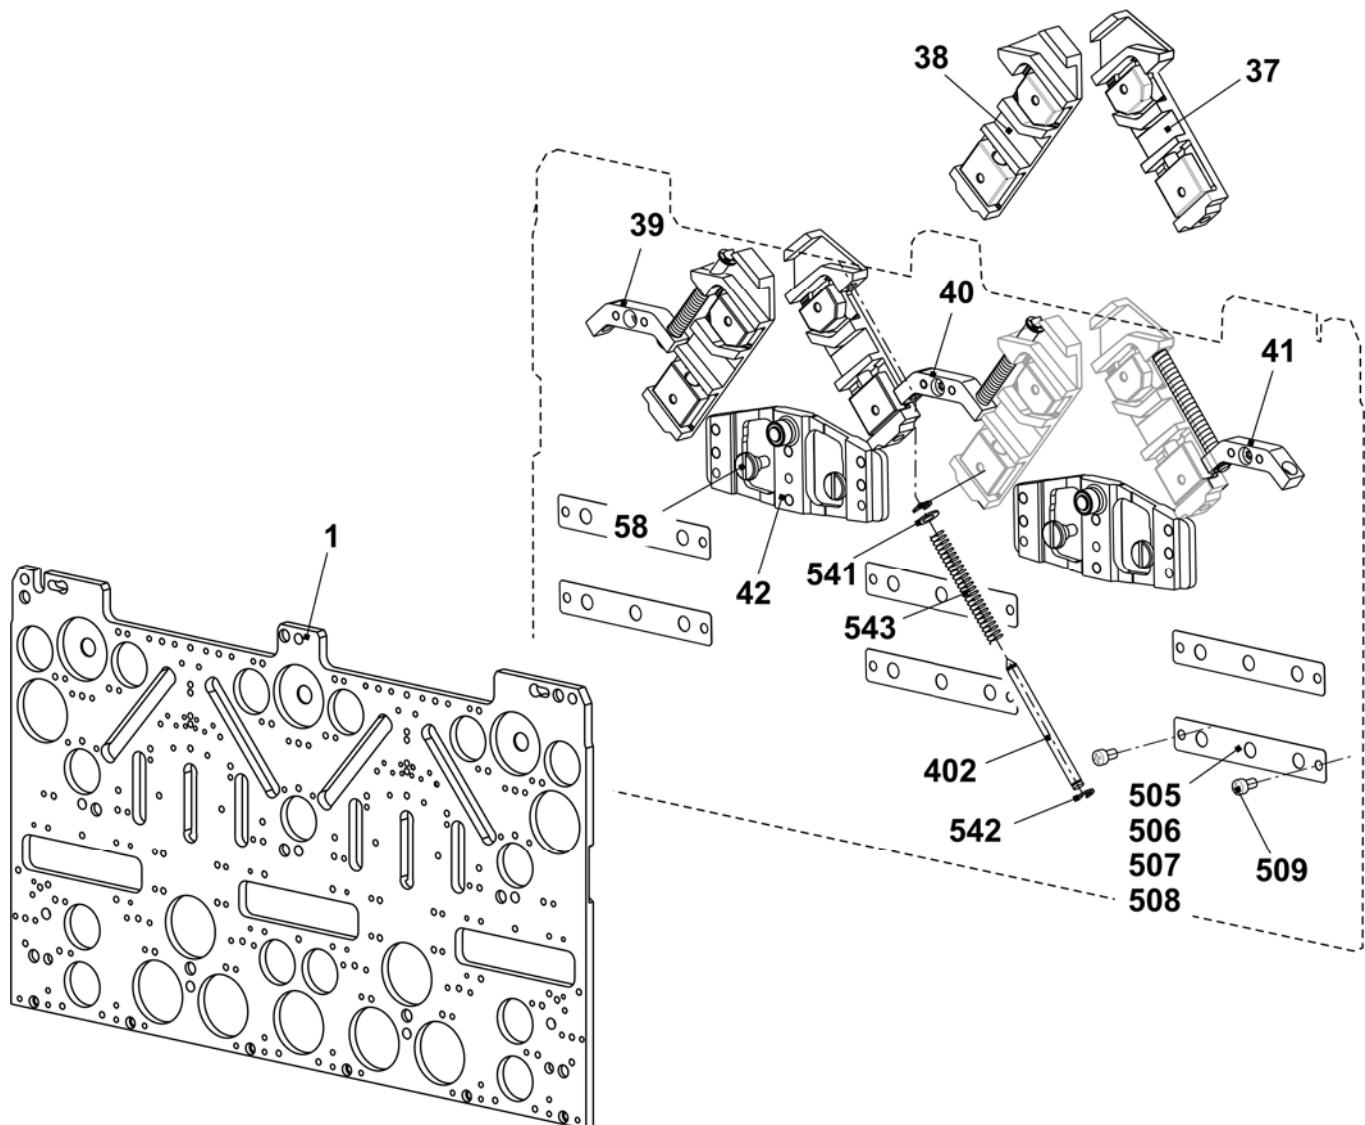


Cams E12m.10

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
2	Entry cam on the left	243 595	23	Selector cam	212 946
3	Entry cam on the right	243 597	24	Pressure part take-over on the left	239 848
4	Entry cam at the top	243 596	25	Pressure part take-over on the right	239 849
5	Entry cam at the bottom - 1.5 E10 - E14	216 328	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam E10	210 611
7	Plate in the middle	231 035	29	Pointer E10 – E14	210 349
8	Plate on the right	231 036	30	Screw	210 335
9	Cam on the left	231 039	31	Stitch cam on the left E10 - E14 + E7.2	236 318
10	Cam on the right	231 041	32	Stitch cam on the right E10 - E14 + E7.2	236 319
11	Cam in the middle	231 040	33	Tuck limit cam E10 + E7.2	236 345
12	Cam	227 923	34	Raising cam plate E4 - E12	204 372
13	Cam	210 254	35	Receiving cam E10 - E12	210 595
14	Cam on the left E5 - E14	212 265	36	Raising cam without split E10 – E12 + E7.2	237 993
15	Cam on the right E5 – E14	212 266		Raising cam with split E10 – E12 + E7.2 Accessories	213 300
16	Cam on the left	236 192	48	Cam on the right E5-14	212 275
17	Cam on the right	236 193	49	Entry cam on the left -1.5 E10 - E14	216 329
18	Cam on the left E5 – E14	212 274	50	Entry cam on the right -1.5 E10 - E14	216 330
19	Cam	210 252	51	Shoulder screw	239 626
20	Offering cam	210 185	500	Cap screw M4x8	020 091
21	Selector cam on the left	212 944		Stitch cam at the rear on the right E10 - E12	236 320
22	Selector cam on the right	212 947			

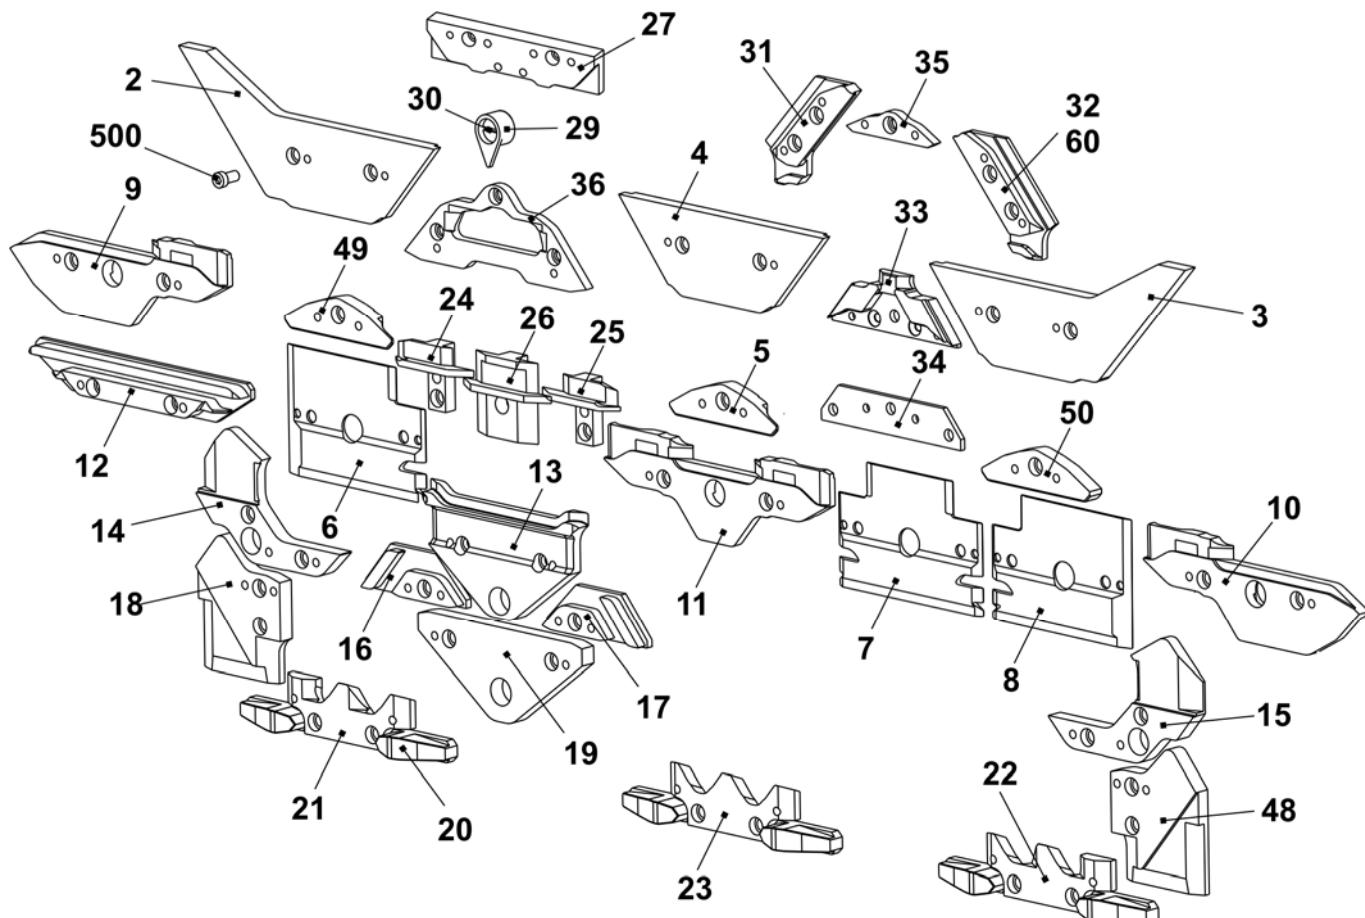


Cam box E6.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set E6.2	244 616			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E12 – E14	214 088	46	Shoulder screw	239 626
38	Stitch forming cam on the left complete E12 – E14	214 089	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
	402 Spring rod	209 791	509	Countersunk screw M3x4	023 142
	541 Washer 4.3x7x0.5	022 153			
	542 Circlip 3.2	021 019			
	543 Spring	023 344			

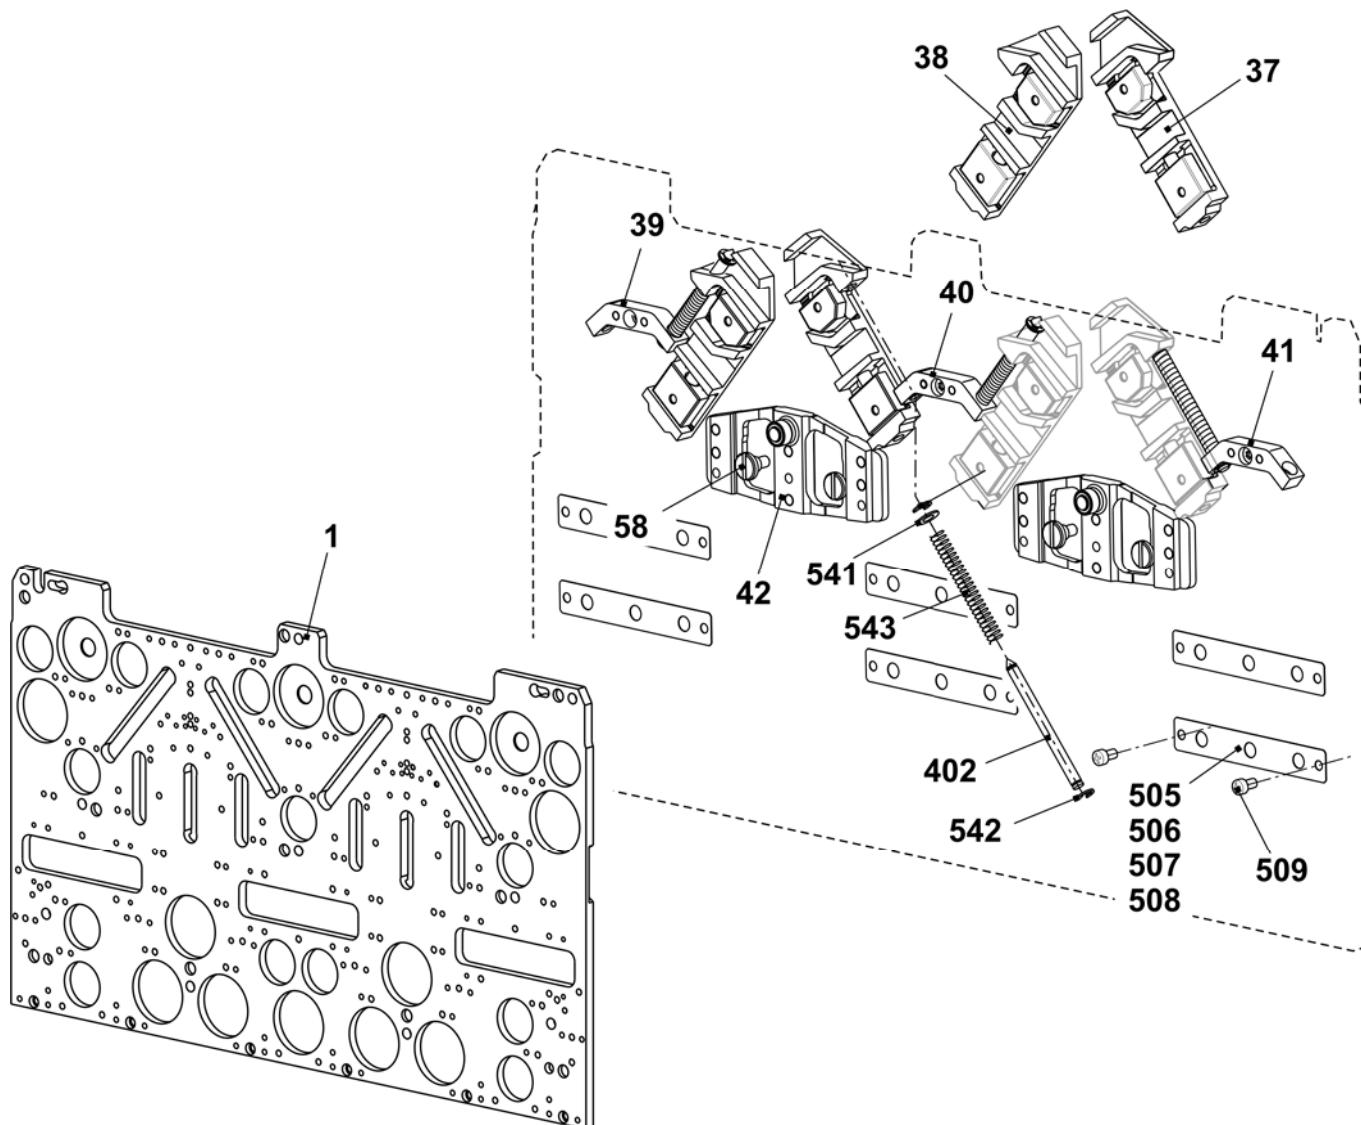


Cams E6.2

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
2	Entry cam on the left	243 595	23	Selector cam	212 946
3	Entry cam on the right	243 597	24	Pressure part take-over on the left	239 848
4	Entry cam at the top	243 596	25	Pressure part take-over on the right	239 849
5	Entry cam at the bottom - 1.5 E10 - E14	216 328	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam E6.2	218 306
7	Plate in the middle	231 035	29	Pointer E10 – E14	210 349
8	Plate on the right	231 036	30	Screw	210 335
9	Cam on the left	231 039	31	Stitch cam on the left E6.2	236 392
10	Cam on the right	231 041	32	Stitch cam on the right E6.2	236 393
11	Cam in the middle	231 040	33	Tuck limit cam E6.2	236 429
12	Cam	227 923	34	Raising cam plate E4 - E12	204 372
13	Cam	210 254	35	Receiving cam E6.2	236 943
14	Cam on the left E5 - E14	212 265	36	Knitting raising cam E6.2 without split	236 766
15	Cam on the right E5 – E14	212 266		Knitting raising cam with split E6.2	237 948
16	Cam on the left	236 192		Accessories	
17	Cam on the right	236 193	48	Cam on the right E5-14	212 275
18	Cam on the left E5 – E14	212 274	49	Entry cam on the left -1.5 E10 - E14	216 329
19	Cam	210 252	50	Entry cam on the right -1.5 E10 - E14	216 330
20	Offering cam	210 185	500	Cap screw M4x8	020 091
21	Selector cam on the left	212 944			
22	Selector cam on the right	212 947			

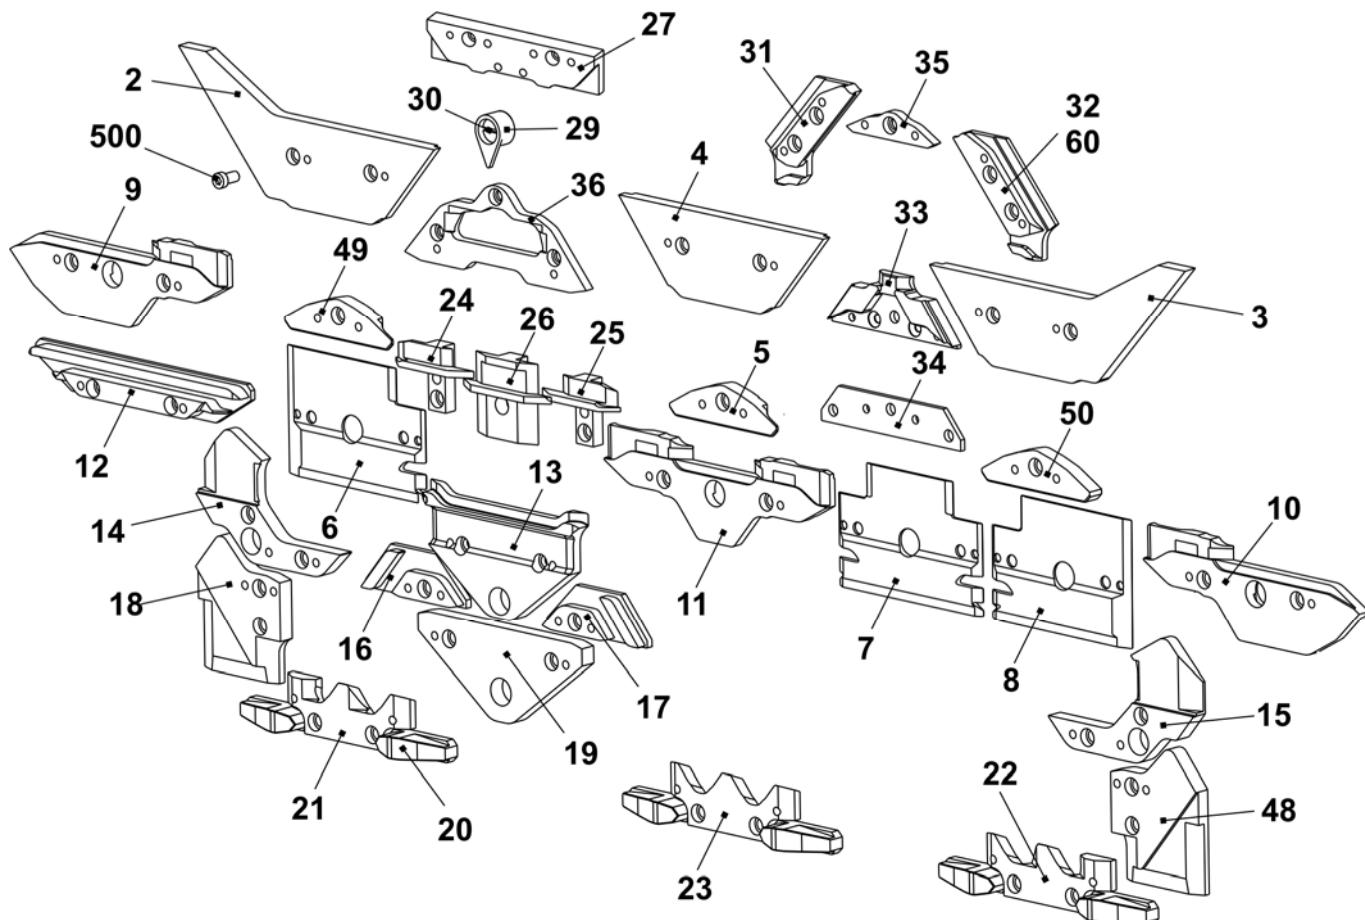


Cam box E7.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set complete E7.2	244 619			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E12 – E14	214 088	46	Shoulder screw	239 626
38	Stitch forming cam on the left complete E12 – E14	214 089	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
402	Spring rod	209 791	509	Countersunk screw M3x4	023 142
541	Washer 4.3x7x0.5	022 153			
542	Circlip 3.2	021 019			
543	Spring	023 344			

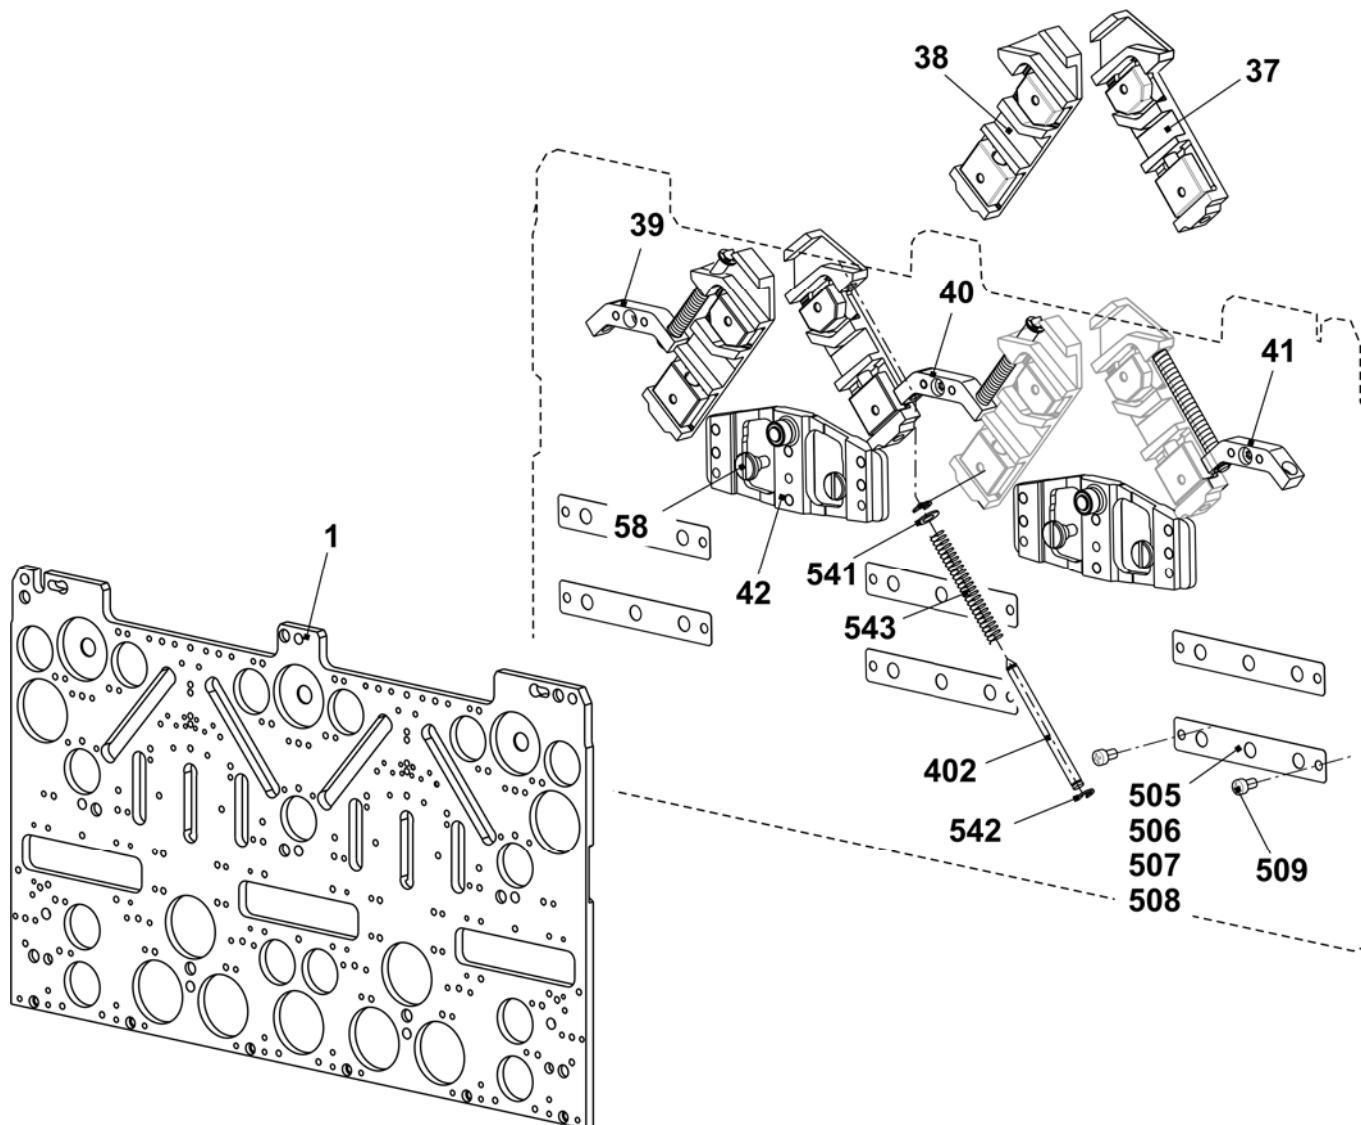


Cams E7.2

Pos	Designation	ID No.	Pos	Designation	ID No.
2	Entry cam on the left	243 595	23	Selector cam	212 946
3	Entry cam on the right	243 597	24	Pressure part take-over on the left	239 848
4	Entry cam at the top	243 596	25	Pressure part take-over on the right	239 849
5	Entry cam at the bottom - 1.5 E10 - E14	216 328	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam E10	210 611
7	Plate in the middle	231 035	29	Pointer E10 – E14	210 349
8	Plate on the right	231 036	30	Screw	210 335
9	Cam on the left	231 039	31	Stitch cam on the left E10 - E14 + E7.2	236 318
10	Cam on the right	231 041	32	Stitch cam on the right E10 - E14 + E7.2	236 319
11	Cam in the middle	231 040	33	Tuck limit cam E10 + E7.2	236 345
12	Cam	227 923	34	Raising cam plate E4-12	204 372
13	Cam	210 254	35	Receiving cam E10-12	210 595
14	Cam on the left E5-14	212 265	36	Knitting raising cam without split E10-12+7.2	237 993
15	Cam on the right E5-14	212 266		Raising cam with split E14	214 212
16	Cam on the left	236 192		Accessories	
17	Cam on the right	236 193	48	Cam on the right E5-14	212 275
18	Cam on the left E5-14	212 274	49	Entry cam on the left -1.5 E10 - E14	216 329
19	Cam	210 252	50	Entry cam on the right -1.5 E10 - E14	216 330
20	Offering cam	210 185	500	Cap screw M4x8	020 091
21	Selector cam on the left	212 944			
22	Selector cam on the right	212 947			

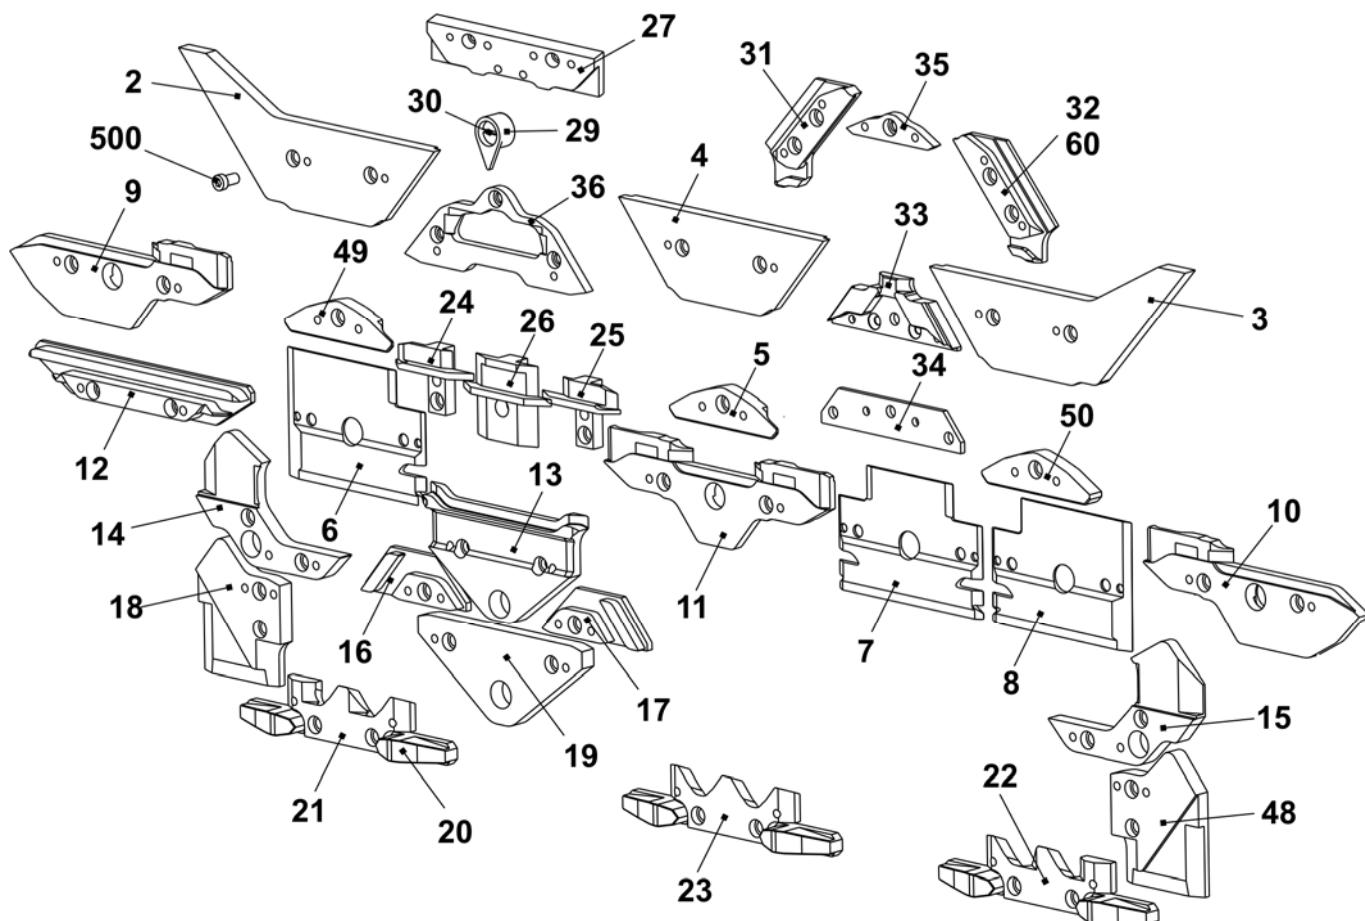


Cam box E8.2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Cam box set complete E8.2	244 626			
1	Cam plate	241 330	42	Switching piece	240 281
37	Stitch forming cam on the right complete E16 - E20	221 123	58	Shoulder screw	239 626
38	Stitch forming cam on the left complete E16 - E20	221 124	505	Shim 0.03x12x75	022 828
39	Rod guide element on the left	211 165	506	Shim 0.05x12x75	022 829
40	Rod guide element in the middle	211 166	507	Shim 0.1x12x75	022 830
41	Rod guide element on the right	211 168	508	Shim 0.2x12x75	022 831
	402 Spring rod	209 791	509	Countersunk screw M3x4	023 142
	541 Washer 4.3x7x0.5	022 153			
	542 Circlip 3.2	021 019			
	543 Compression spring	023 344			

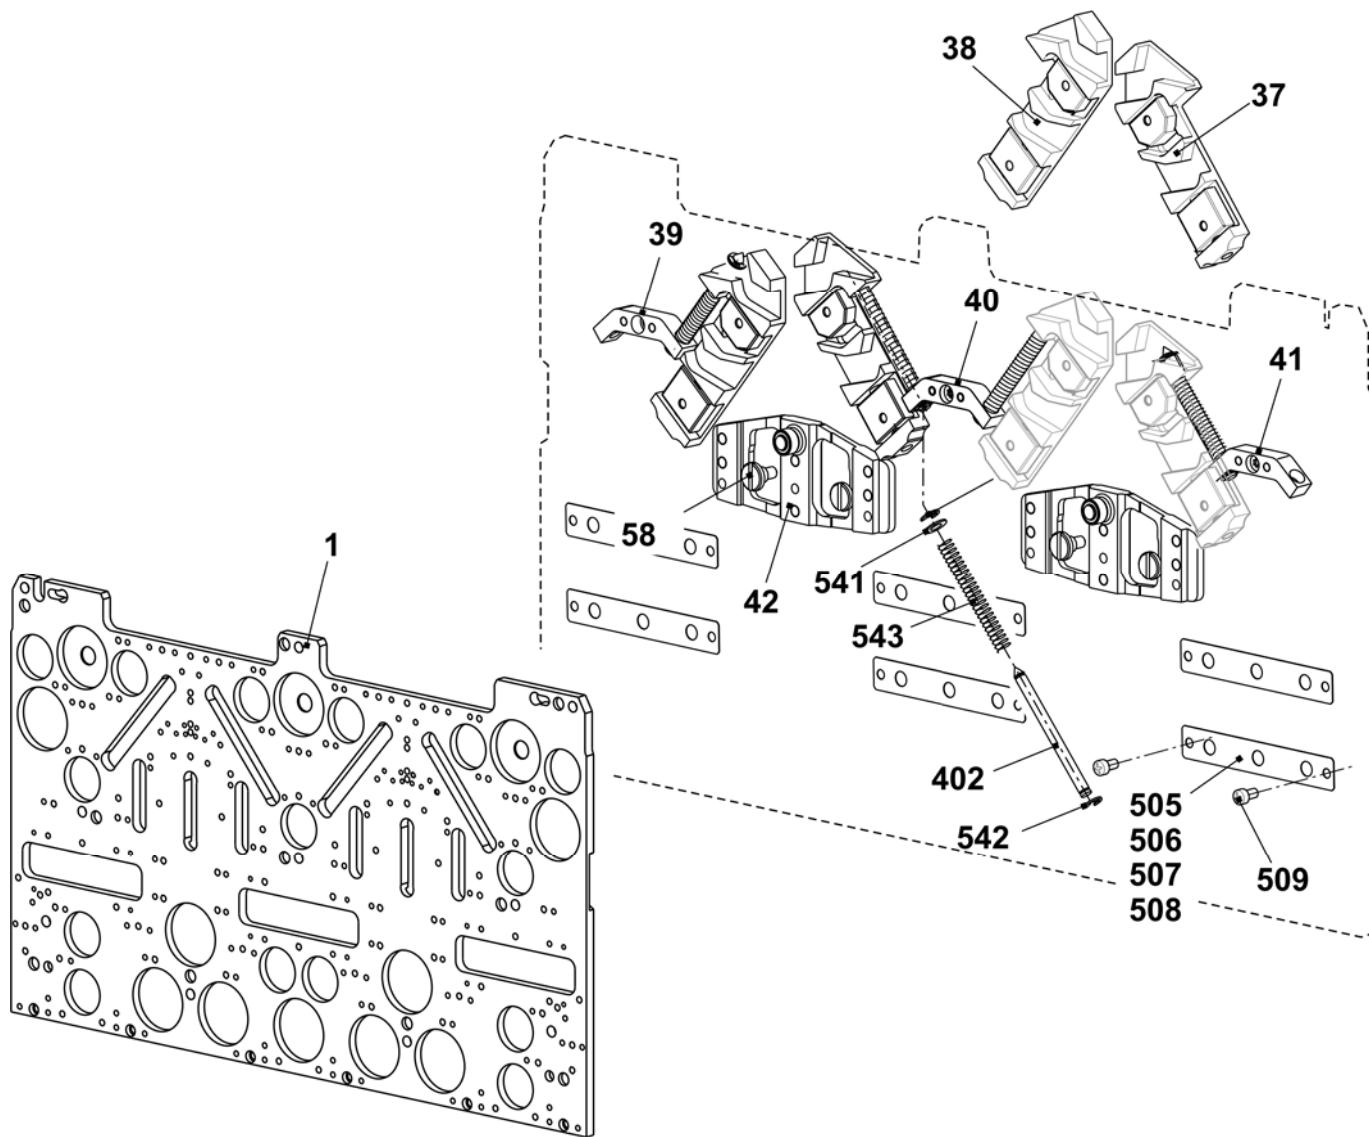


Cams E8.2

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
2	Entry cam on the left	243 595	23	Selector cam E16-18 + 8.2 + 9.2	253 630
3	Entry cam on the right	243 597	24	Pressure part take-over on the left	239 848
4	Entry cam in the middle	243 596	25	Pressure part take-over on the right	239 849
5	Entry cam at the bottom E16 - E20	220 842	26	Tuck pressure part	239 621
6	Plate on the left	230 988	27	Limit cam E9.2	228 978
7	Plate in the middle	231 035	29	Pointer E16 - E20	224 383
8	Plate on the right	231 036	30	Screw	210 335
9	Cam on the left	231 039	31	Stitch cam on the left E16 - E20	220 870
10	Cam on the right	231 041	32	Stitch cam on the right E16 - E20	220 871
11	Cam in the middle	231 040	33	Tuck limit cam E9.2	239 458
12	Cam	227 923	34	Raising cam plate E4-12	204 372
13	Cam	210 254	35	Receiving cam E9.2	228 977
14	Cam on the left E5 - E14	212 265	36	Raising cam without split E16 - E18 + E9.2	239 457
15	Cam on the right E5 - E14	212 266		Raising cam with split E16 - E18 + E9.2 Accessories	239 742
16	Cam on the left	236 192	48	Cam on the right E5 - E14	212 275
17	Cam on the right	236 193	49	Entry cam on the left E16 - E20	220 841
18	Cam on the left E5 - E14	212 274	50	Entry cam on the right E16 - E20	220 843
19	Cam	210 252	500	Cap screw M4x8	020 091
20	Offering cam	210 185			
21	Selector cam on the left E16-18 + 8.2 + 9.2	253 629			
22	Selector cam on the right E16-18 + 8.2 + 9.2	253 631			

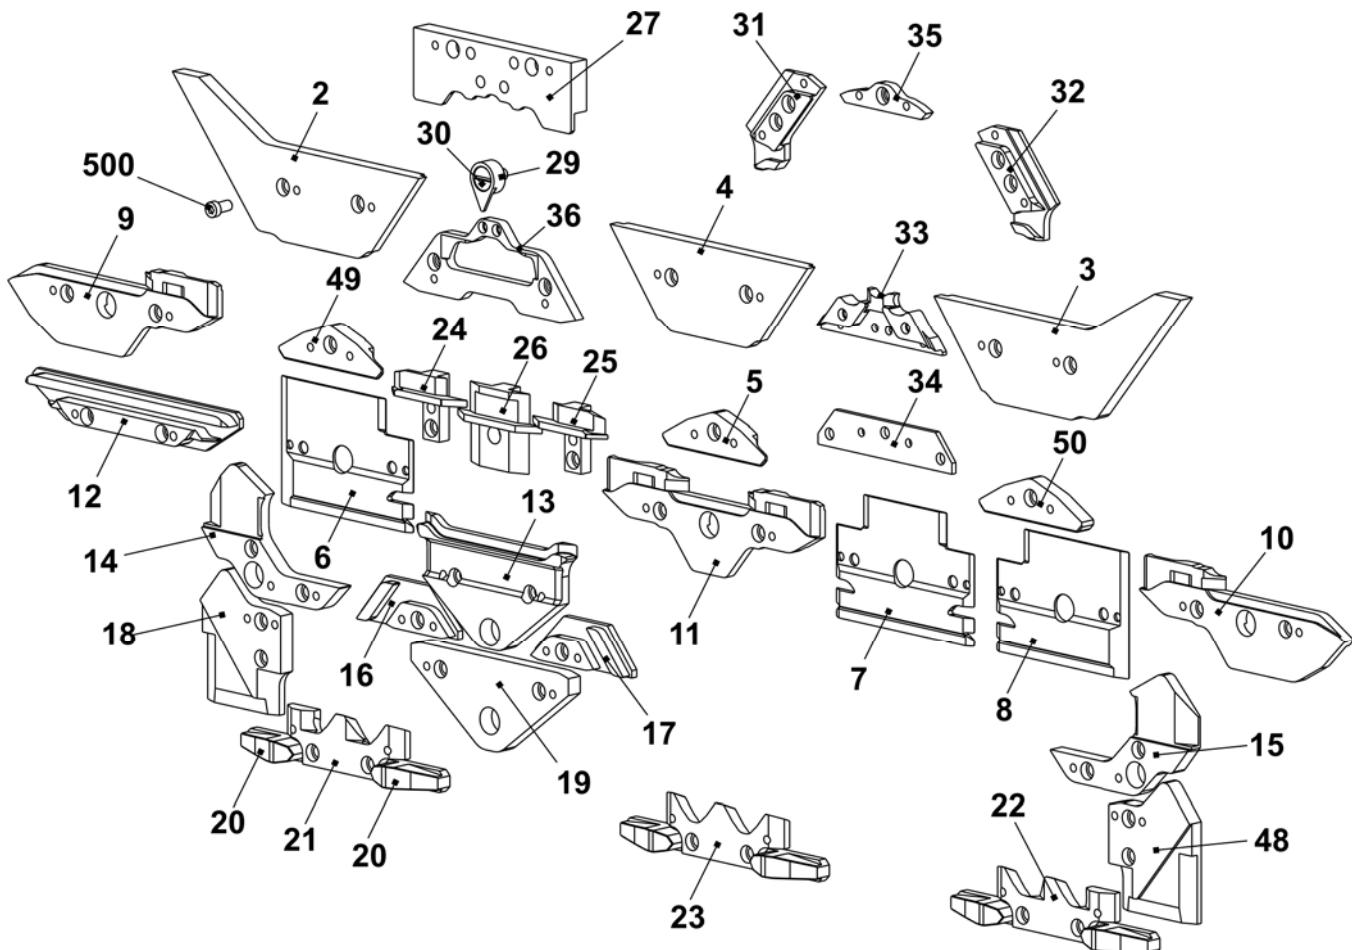


Main take-down

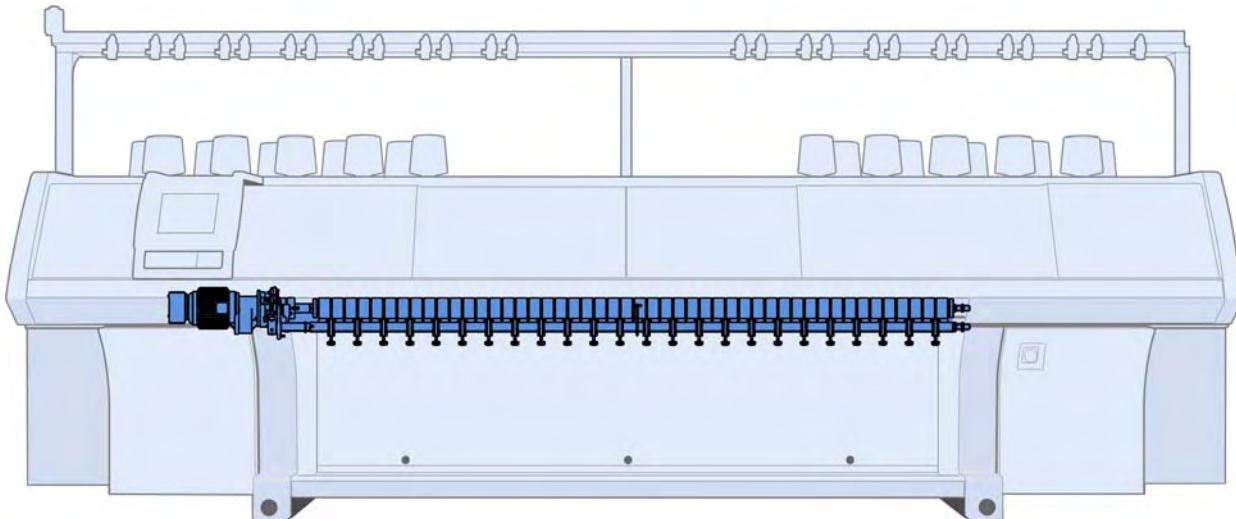


Main take-down

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Main take-down	243 279	9	Fabric stripper	211 207
1	Take-down roller complete	211 170	10	Stop point complete	209 009
2	Journal complete	209 496	10a	Microswitch	026 259
3	Pressure shaft complete	243 265	500	Cap screw M6x12	020 134
4	Bearing	207 692	501	Setting pin 8x20	020 693
5	Take-down unit	244 450	502	Cap screw M6x45	022 689
	A5 Take-down gear assembly complete		503	Cap screw M6x40	020 140
	5b Take-down motor with block		504	Cap screw M6x20-12.9	020 136
6	Support	243 294	505	Cap screw M8X40	020 145
7	Shaft complete	211 173	506	Cap screw M10x30	020 158
8	Lever complete	211 210			

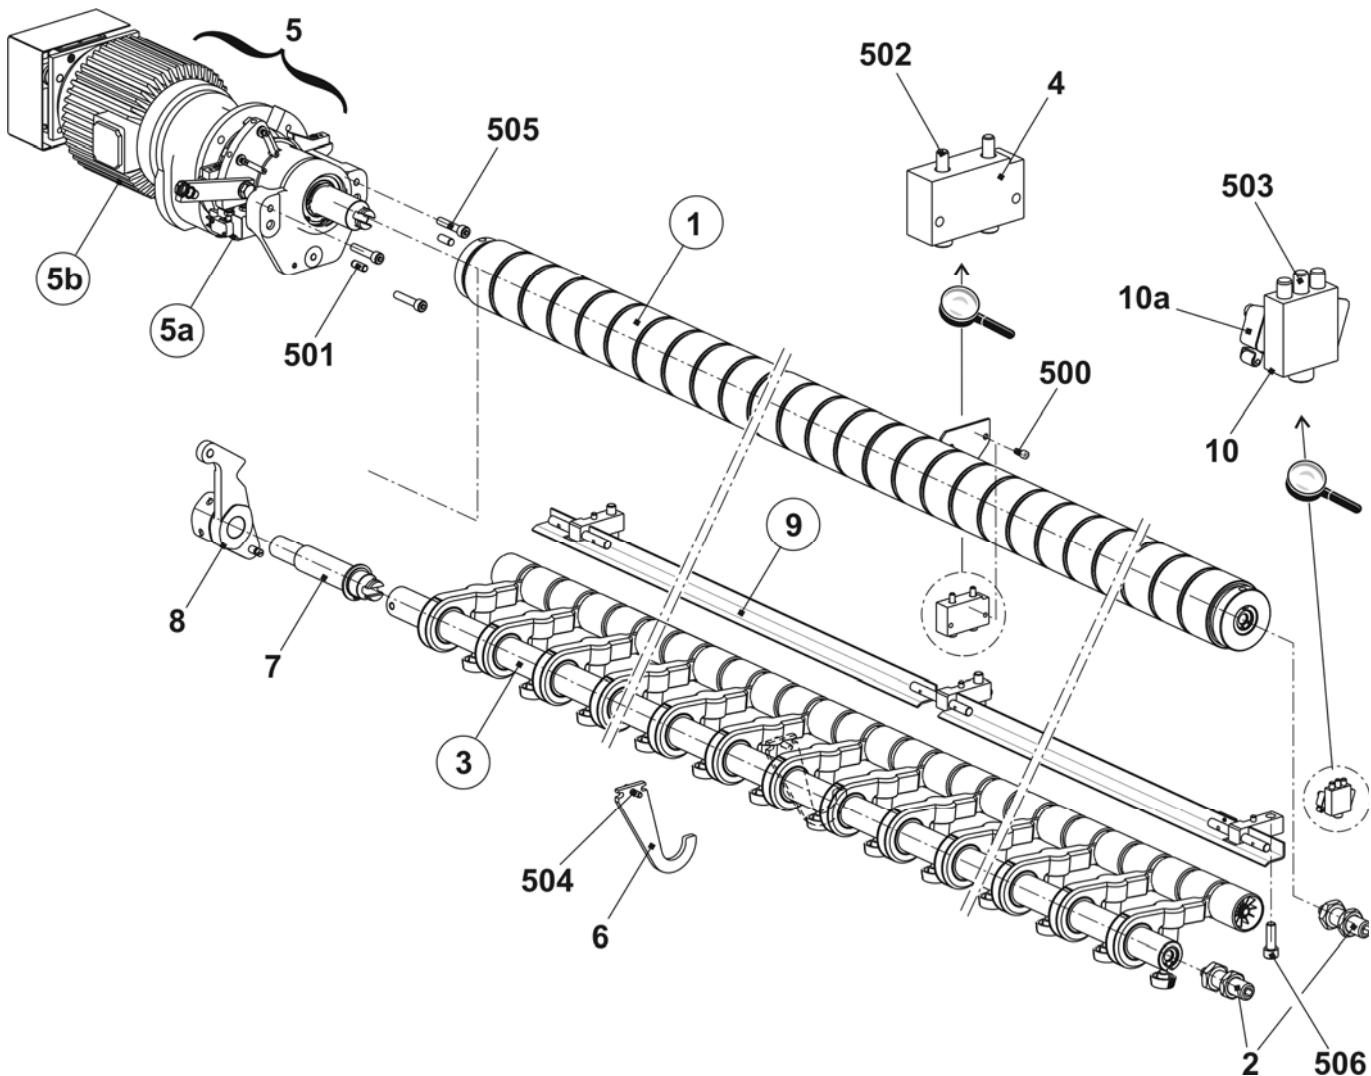


Take-down roller

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Take-down roller complete	211 170			
1	Shaft	211 111	9	Support	204 462
2	Spacer slide	204 340	9c	Grooved ball bearing 16007	021 697
3	Roller	236 169	10	Spacing ring	030 689
4	Stop ring on the left	204 369	500	Set screw M8x12-45H	023 393
5	Stop ring on the right	204 376	502	Setting pin 8x34	020 699
6	Slide	204 341	503	Locking ring 24x1.2	020 975
7	Spacing ring	204 343	504	Tension spring 8x0.95x65	023 231
8	End ring	211 110	506	Needle roller bearing NA4901	021 746

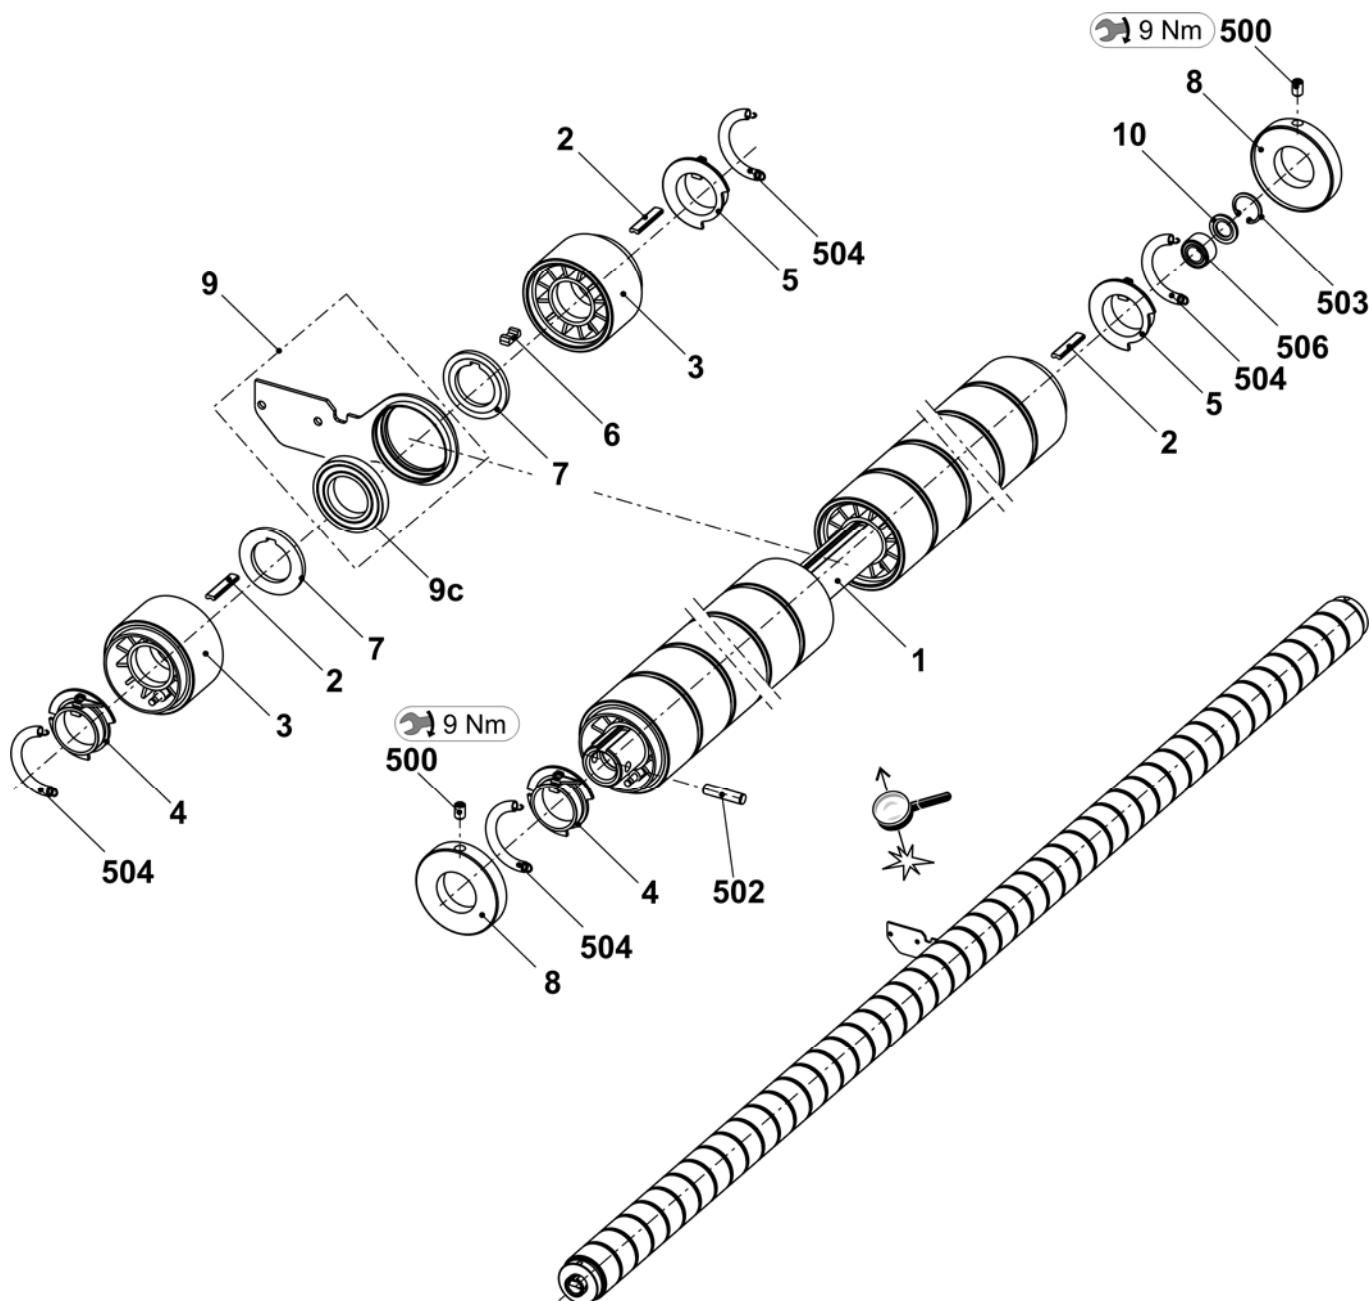


Contact shaft

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Pressure shaft complete	243 265			
1	Contact lever	243 262	3	Shaft	211112
a	Pressure roller	243 551	4	Spacing ring	030 689
b	Pressure roller	243 552	500	Setting pin 8x34	020 699
c	Knurled screw	242 331	501	Locking ring 24x1.2	020 975
511	Locking ring 12x1	020 951	502	Needle roller bearing NA4901	021 746
2	Contact lever on the left	243 263			
a	Pressure roller	243 551			

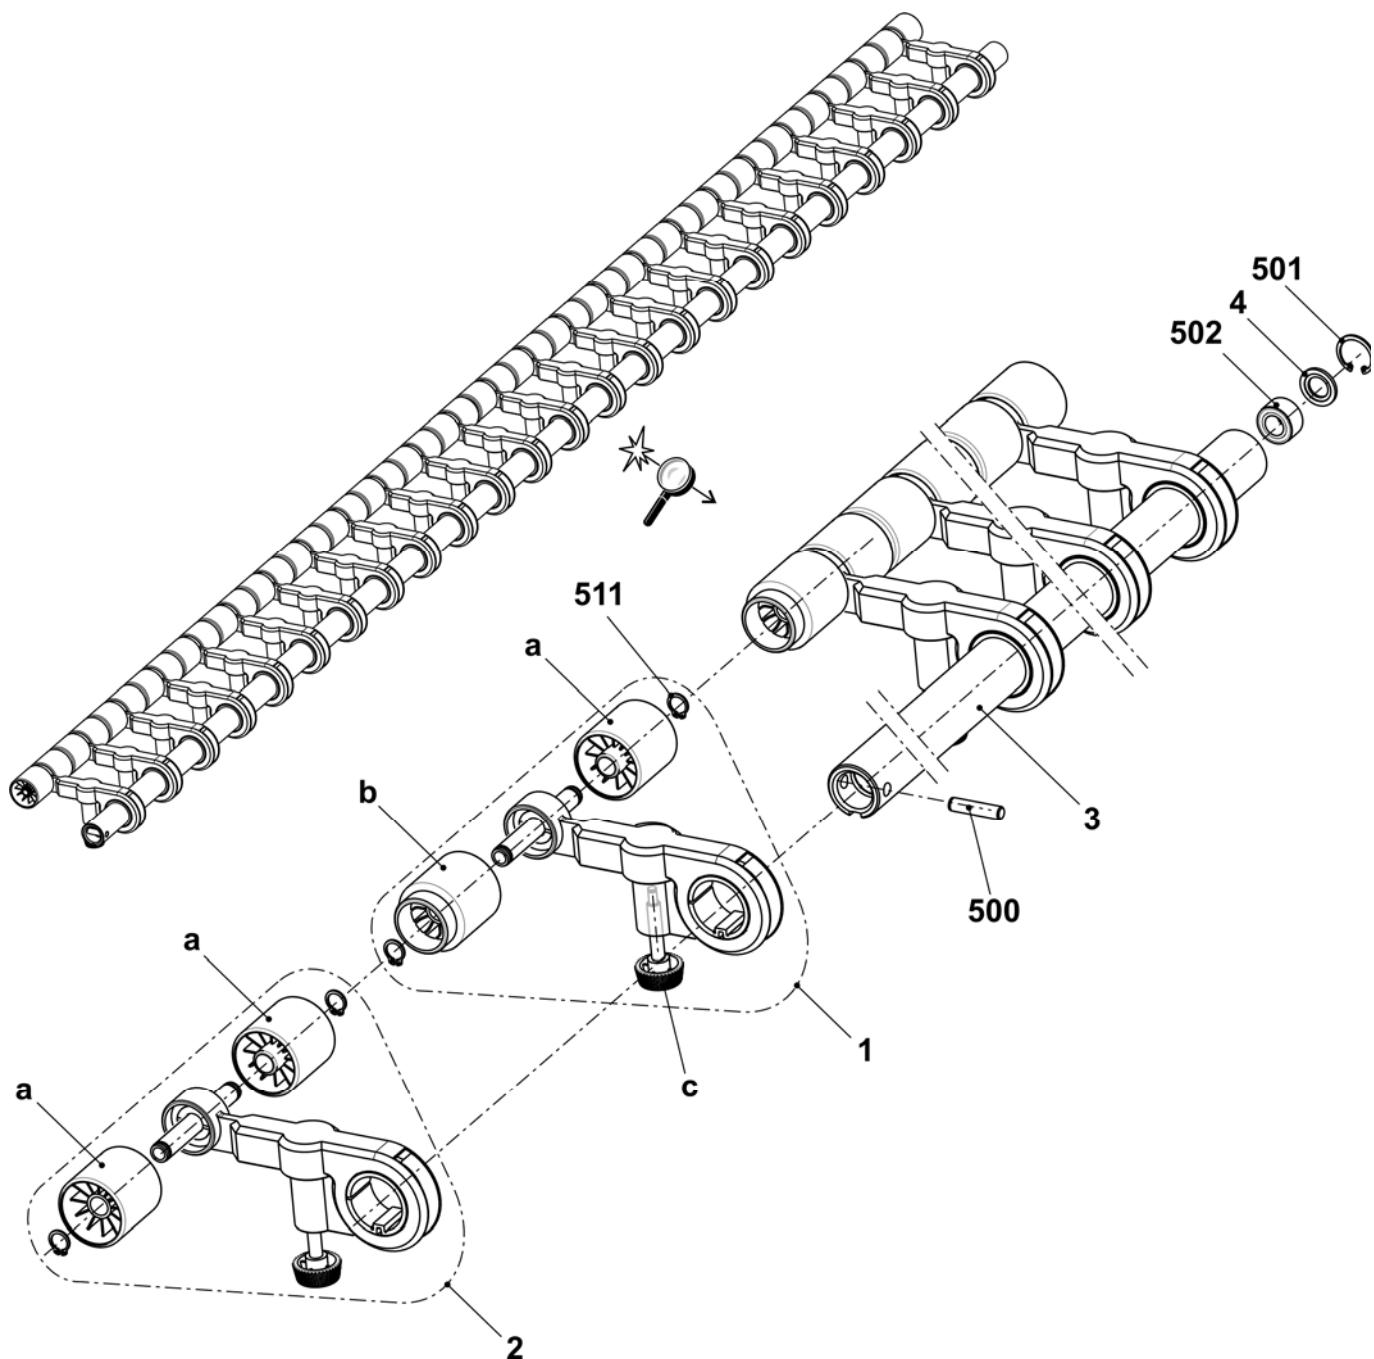


Take-down gear assembly

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Take-down gear assembly complete		506	Washer 6.4x12x0.3	022 737
1	Main bearing	204 292	507	Hexagon screw M6x16	020 356
2	Bearing housing	204 293	509	Locking ring 80x2.5	023 225
3	Slider	204 314	511	Shoulder screw M5x11x17	204 318
4	Driver sleeve	204 313	512	Shoulder screw M5x8x8	020 247
6	Strap	204 323	513	Shoulder screw M5x12.5x29-5.8	204 317
7	Ramp	209 281	518	Hexagon nut M6-04	020 855
8	Drive shaft	211 127	520	Locking ring 35x1.5	023 139
10	Roll	207 077	521	Locking ring 62x2	020 986
11	Microswitch	026 259	523	Supporting disk S 14x20x1.5	023 223
12	Insulating disk	048 012	525	Tension spring 6x0.65x20	021 187
13	Sleeve	207 078	527	Grooved ball bearing 6007-2	023 140
14	Damping pin	200 919	529	Hexagon screw M10X20	020 366
500	Cap screw M3x15	020 009	532	Shoulder screw M6x17x24-5.8	023 178
502	Cap screw M5x10	022 918	535	Shim ring 50x62x0.5	023 226
503	Cap screw M8X12	023 138	536	Hexagon screw M8x20	020 361

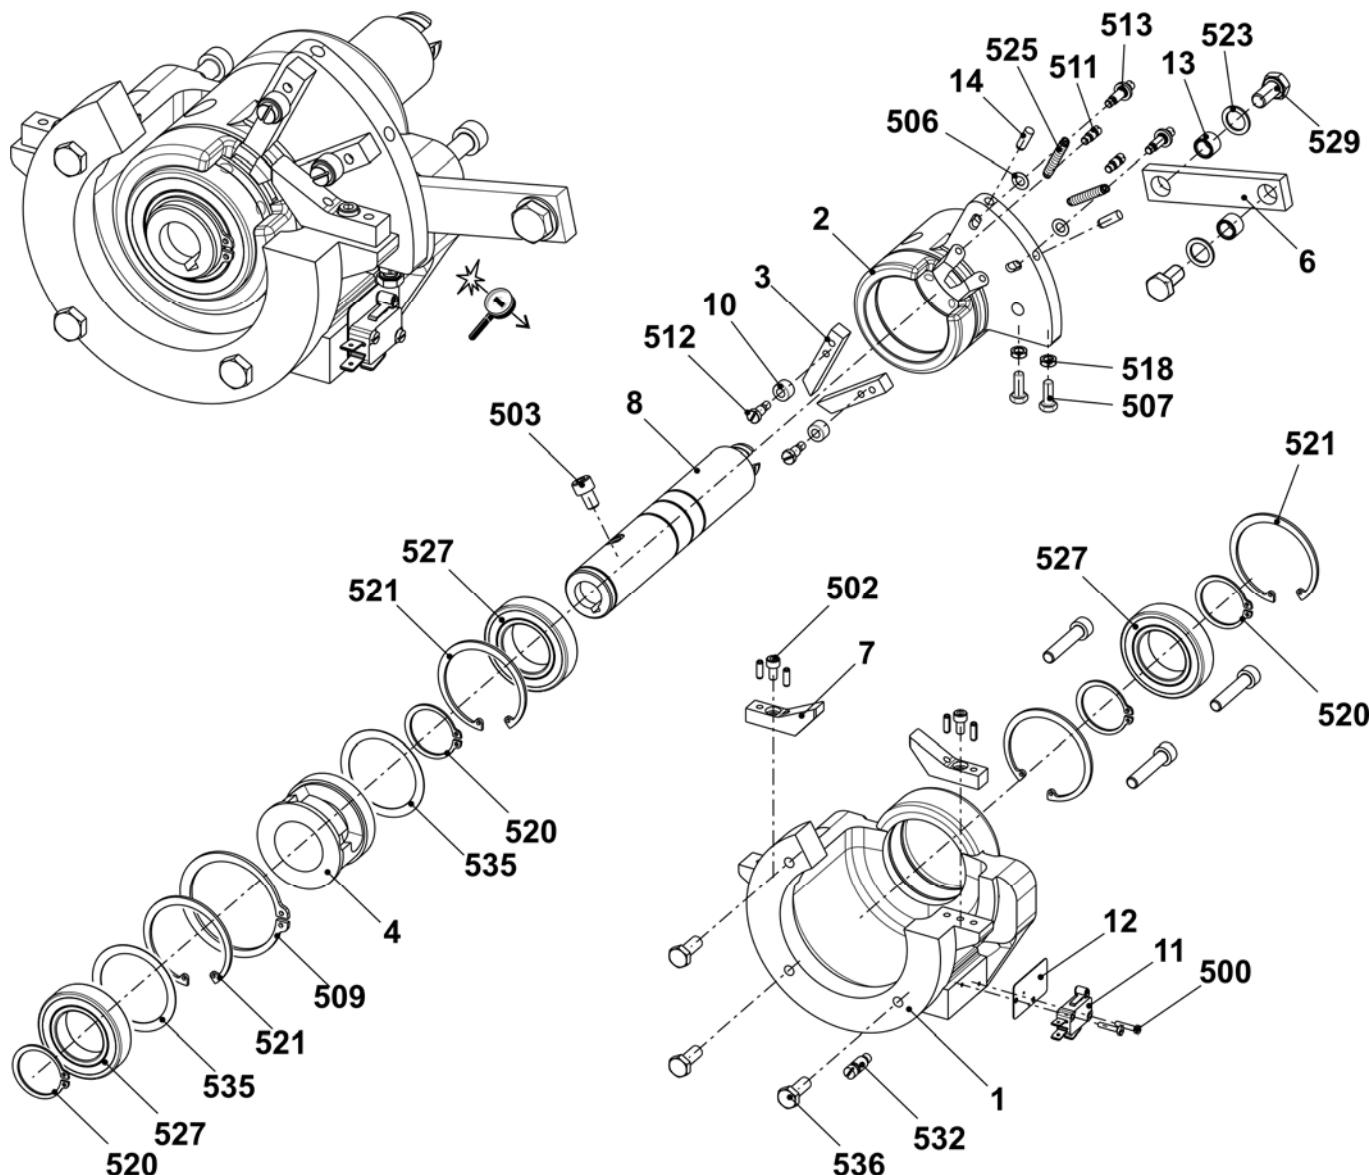


Take-down motor with block

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ Take-down motor with block					
1	Motor of main take-down	217 602	13	Thrust piece	202 940
2	Base plate	204 643	14	Nut	202 941
3	Hub switching ring	208 934	500	Cap screw M3x6-12.9	022 589
4	Bolt	202 933	501	Cap screw M4x6	023 067
5	Catch complete	211 560	502	Cap screw M5x12	020 132
6	Impulse disc WA1	202 751	503	Cap screw M6x16	020 135
7	Bridge	202 936	504	Cap screw M10x1x35	023 364
8	Plate	205 139	505	Hexagon nut M4-6	020 834
9	Catch magnet	026 042	506	Shim ring 10x16x1.5	023 261
10	Card for impulse giver of rotary field motor	300 487	507	Serrated lock washer	022 482
11	Cover	244 448	508	Compression spring 0.7x8.8x35	023 028

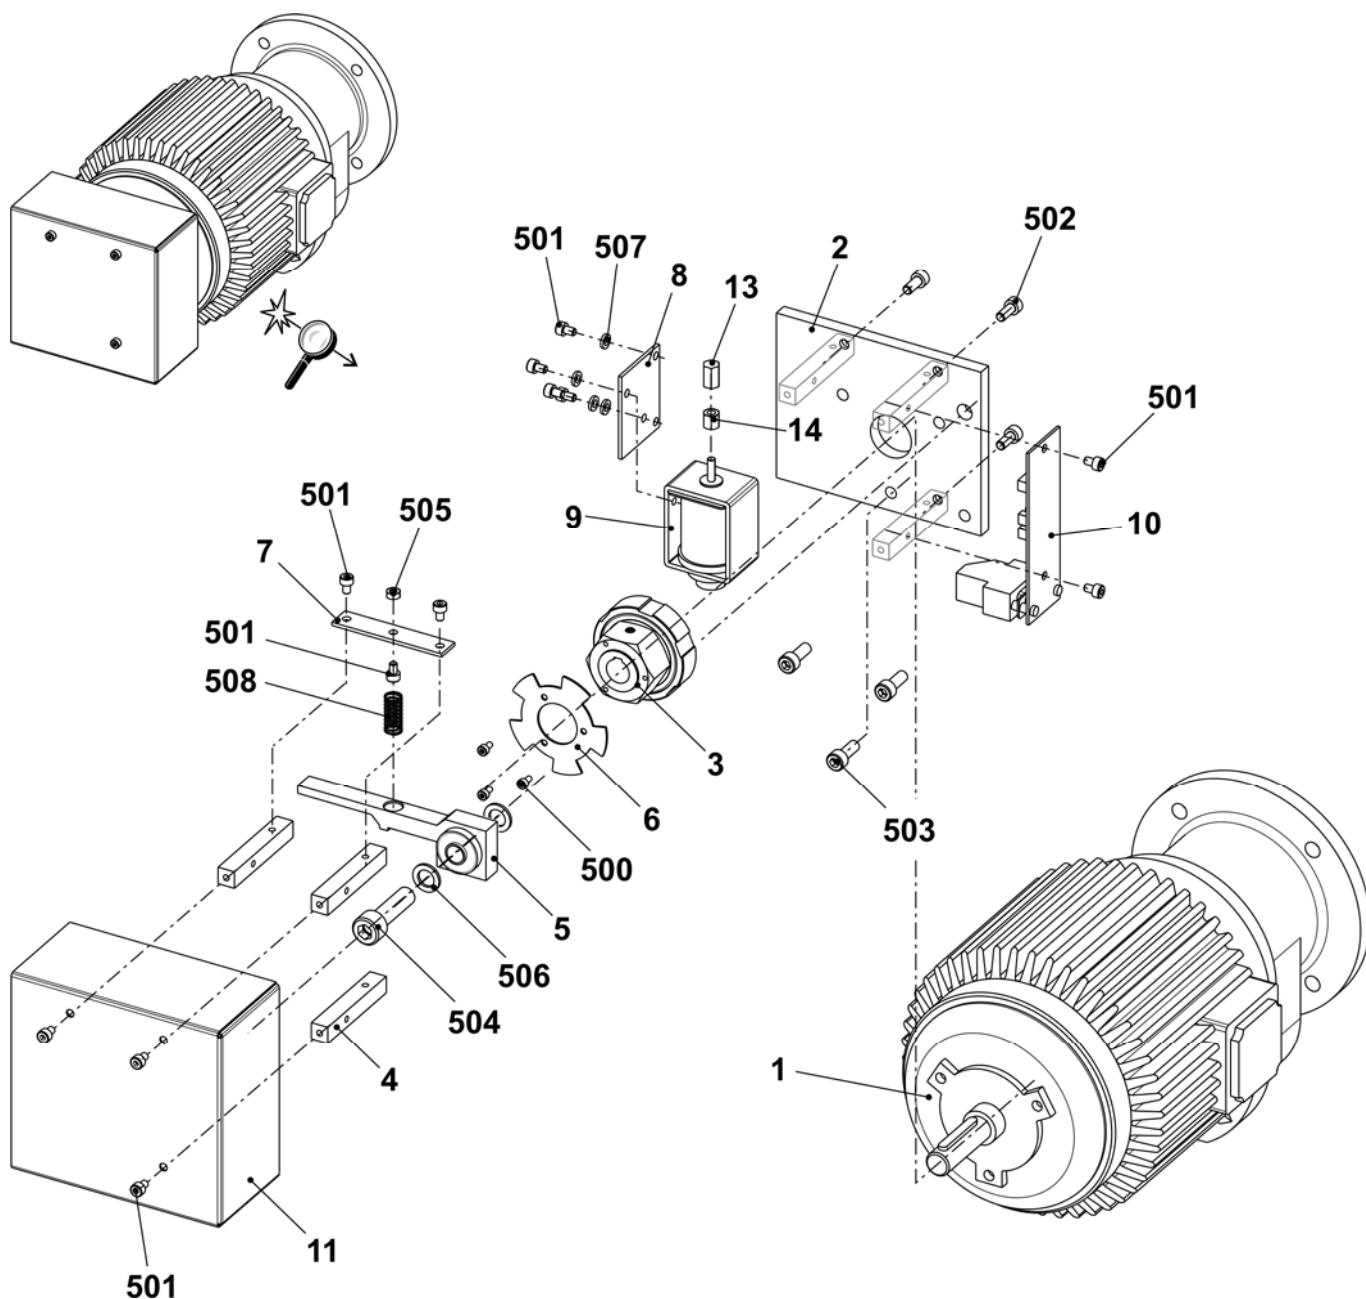


Fabric stripper

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Fabric stripper	211 207	4	Stripping plate on the left	211 151
1	Stripping plate on the right	211 150	5	Bearing	211 152
2	Axle	211 218	500	Cap screw M5x12	020 132
3	Lever	211 215	501	Spring dowel sleeve 4x10	020 781

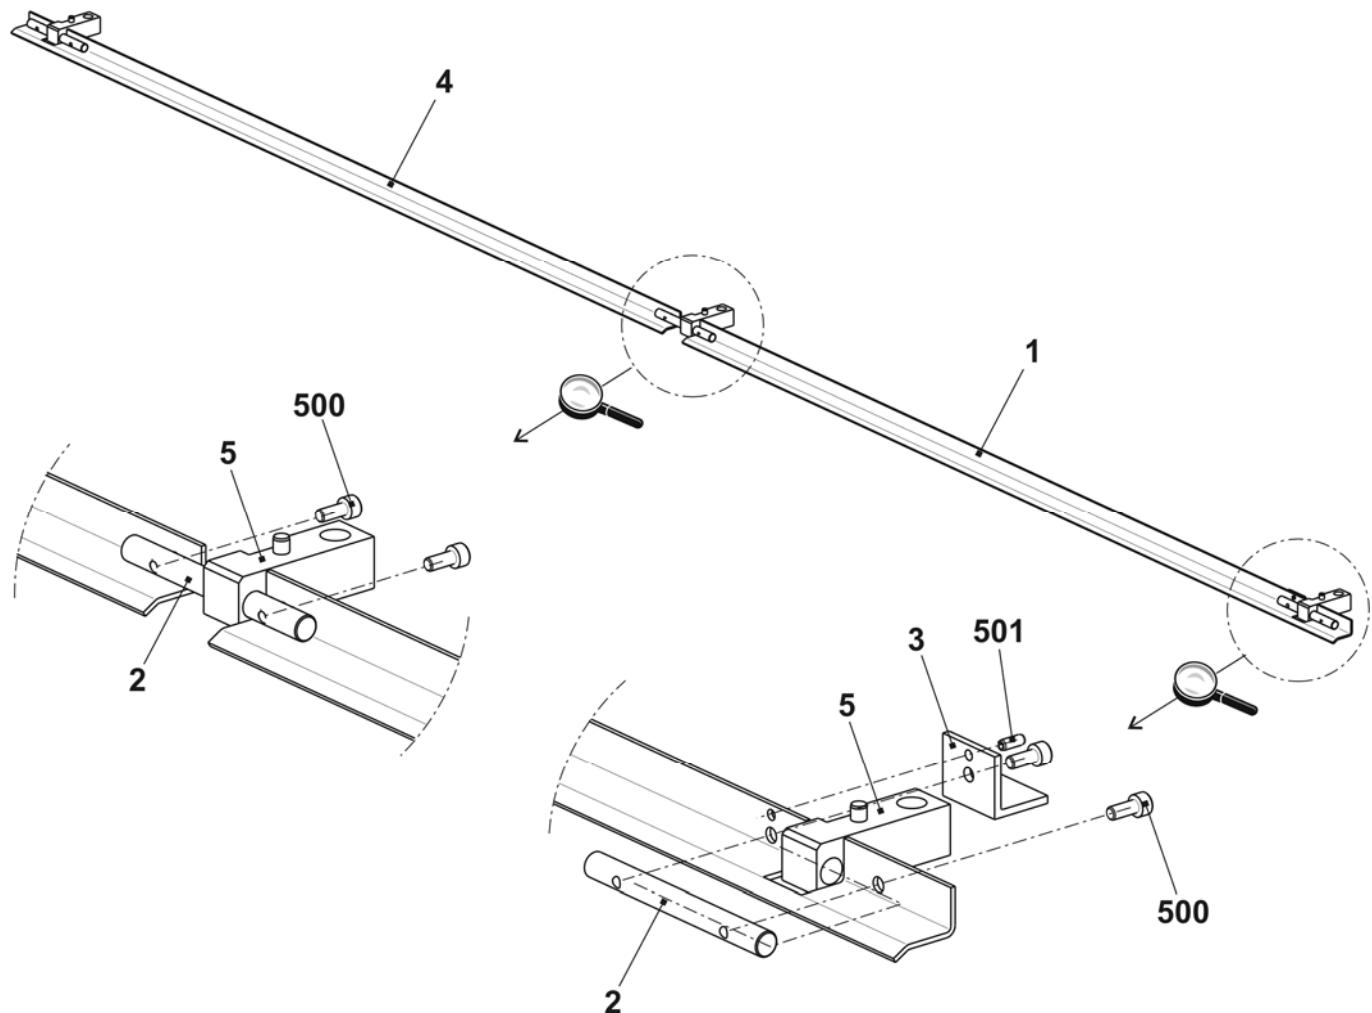


Auxiliary take-down

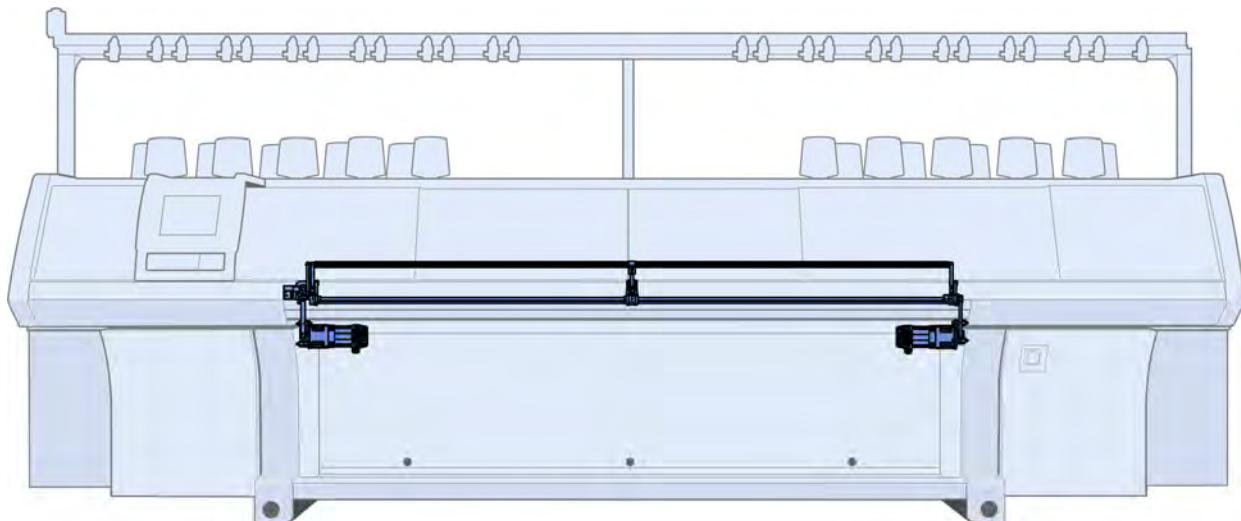


Auxiliary take-down

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Auxiliary take-down	239 084	12	Bolt	225 782
1	Main bearing complete	239 081	14	Cover	211 093
2	Motor biphasic complete	239 056	15	Timing belt pulley Z16 T5	207 575
3	Take-down roller complete	227 517	16	Bearing at the rear in the middle	227 520
4	Gear	211 204	17	Shaft	210 869
5	Motor biphasic complete	239 073	18	Bearing at the front and in the middle	227 524
6	Bearing on the right	227 522	20	Contact rod	211 195
7	Stay bolt	238 991	40*	Fabric sensor	208 200
8	Bolt	227 363	500	Cap screw M8X20	020 141
9	Toothed belt 16t5/525	207 635	508	Countersunk screw M4x8	023 036
10	Toothed belt 10t5/280	207 633	510	Cap screw M5x16-8.8	023 141
11	Toothed belt 10t5/420	239 036	900	Cap screw M8x35	020 144

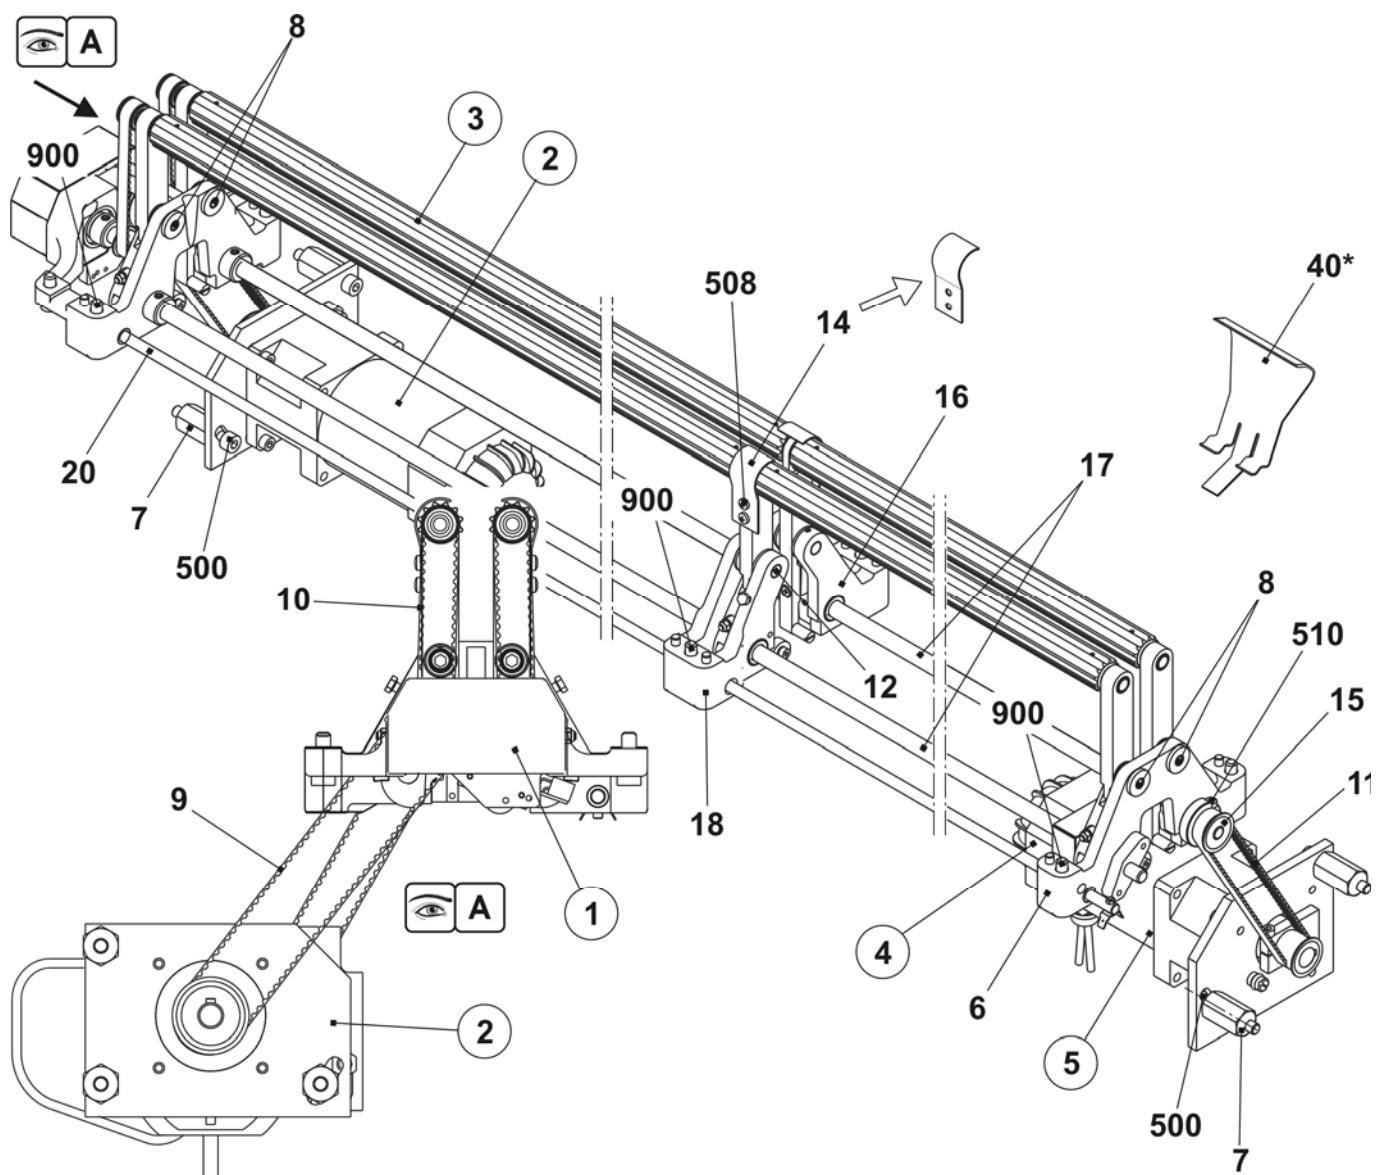



Main bearing

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Main bearing complete	239 081			
1	Main bearing pre-assembled	227 529	2	Gear wheel	209 428
A1	Main bearing	210 610	3	Timing belt pulley	209 436
510	Set screw M5x6	022 580	4	Timing belt pulley	210 555
512	Locking ring 32x1.2	023 355	5	Shaft	211 141
514	Deep groove ball bearing 6002-2ZY	023 217	6	Cover	211 357
515	Slide bearing MSM-0812-08	023 353	500	Set screw M6x5	023 192
517	Slide bearing GFM -121418-10	023 352	502	Set collar A12	020 935

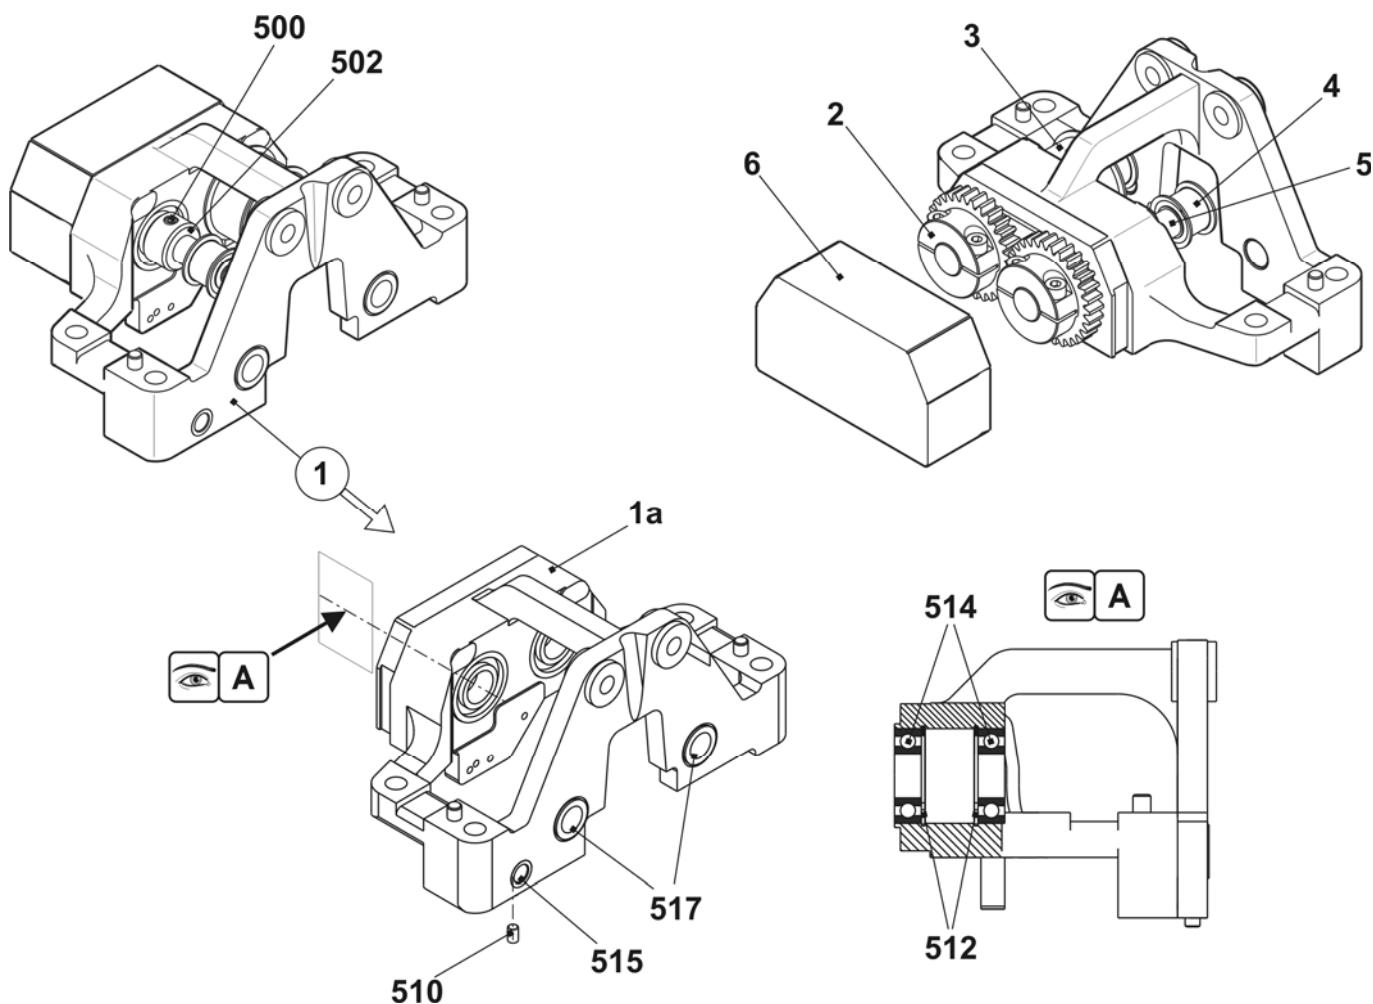


Motor on the left

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Motor biphasic complete	239 056	3	Timing belt pulley	238 060
1	Motor plate	238 061	500	Cap screw M6x16	020 135
2	Motor	234 805	501	Set screw M4x6	023 088

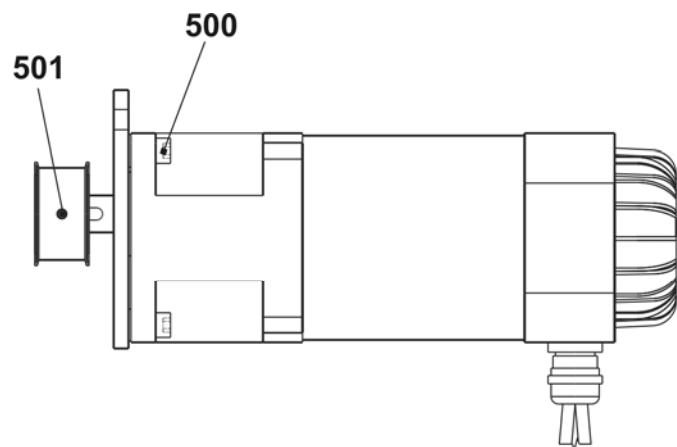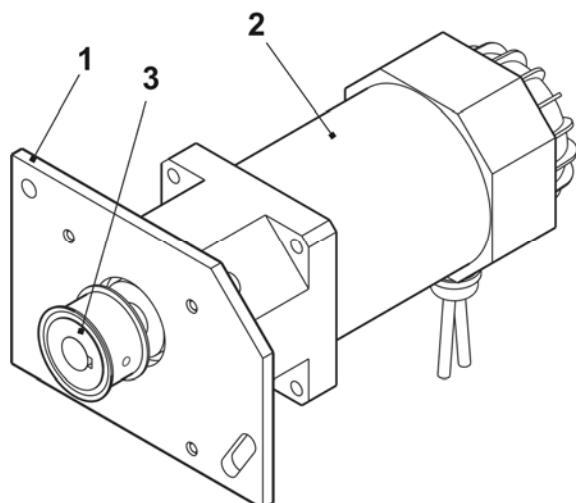


Take-down roller

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Take-down roller complete	227 517			
1	Lever at the front on the left complete	227 511	500	Spring dowel sleeve 3x20	020 776
2	Lever at the rear on the left complete	227 512	1-6	a Toggle	208 434
3	Lever at the front on the right complete	227 515		b Roll	200 577
4	Lever at the rear on the right complete	227 516		c Eccentric	208 486
5	Lever at the rear in the middle complete	227 513		d Slide bearing	023 655
6	Lever at the front in the middle complete	227 514	501	Cap screw M4x20	023 171
7	Timing belt pulley	225 910	504	Hexagon nut M4-6	023 046
8	Take-down roller	225 783	506	Washer 4-200HV	020 870
9	Bolt	225 782	508	Circlip S4	022 774
10	Bolt	225 781	509	Compression spring 1.6x6.4x27.1	023 288
11	Bolt	225 536	510	Countersunk screw M4x45	023 291

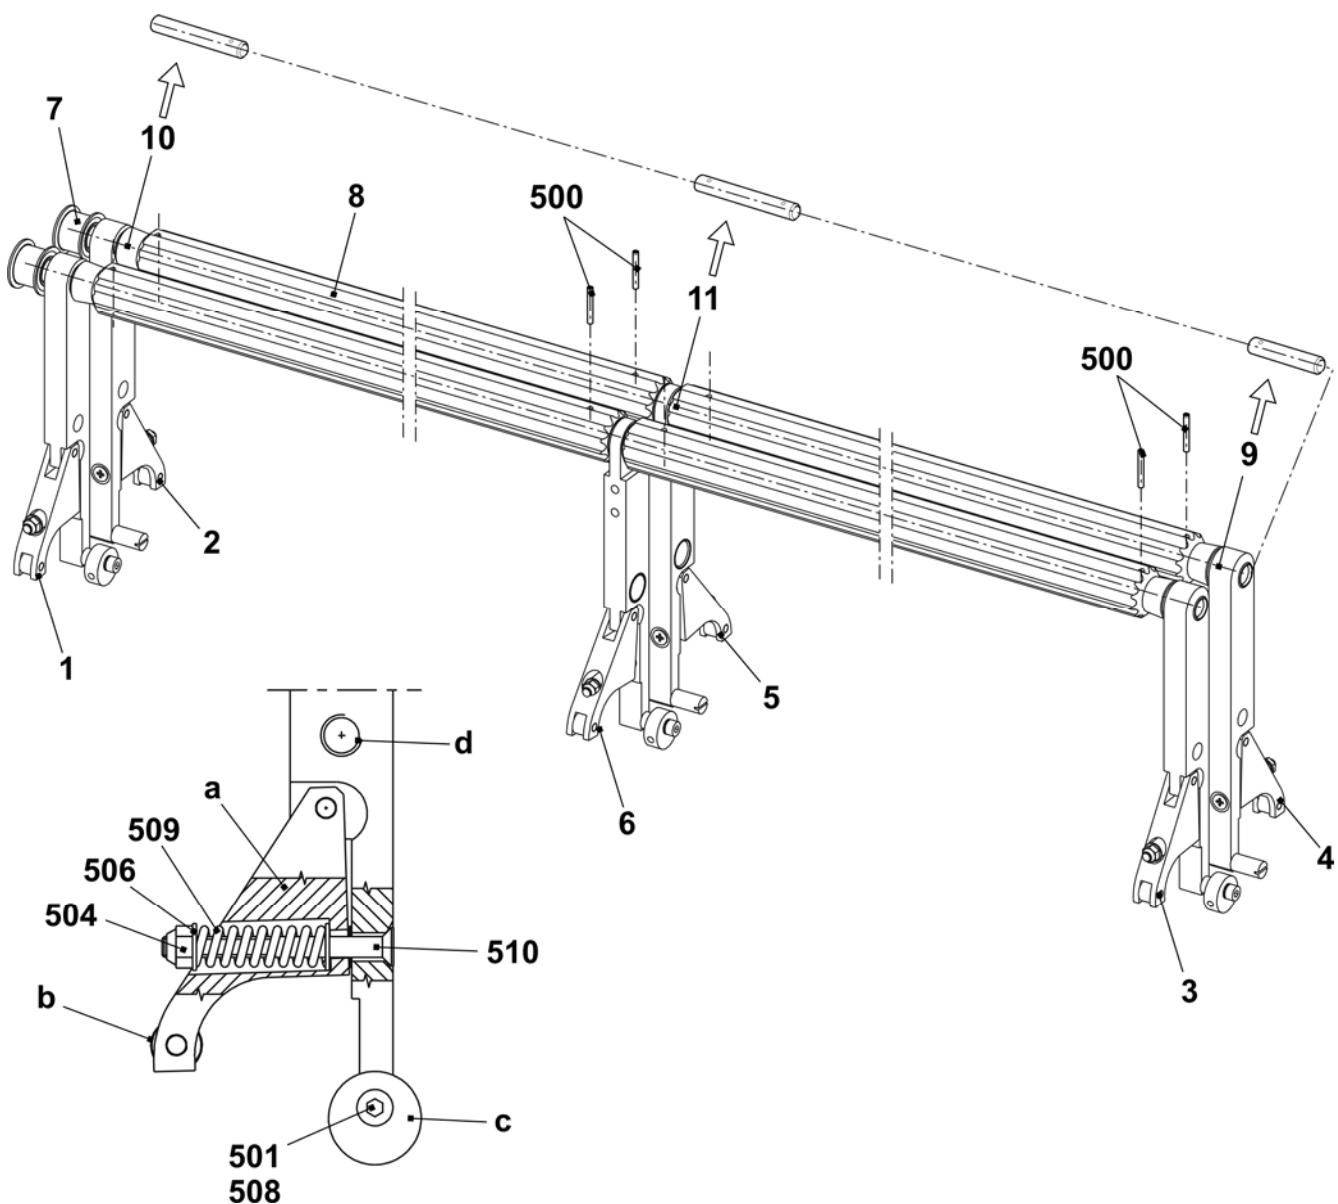


Gear

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Gear	211 204	500	Cap screw M3x6	022 589
1	Gear wheel	208 101	501	Cap screw M6x16	023 116
2	Sleeve	211 136	502	Slide bearing GFM-101216-09	023 356
3	Strap	211 134	504	Slide bearing GFM-121418-08	023 281
4	Gear wheel	211 138	505	U-washer 6.4x15x1	020 902
5	Shrouding cover	211 139			

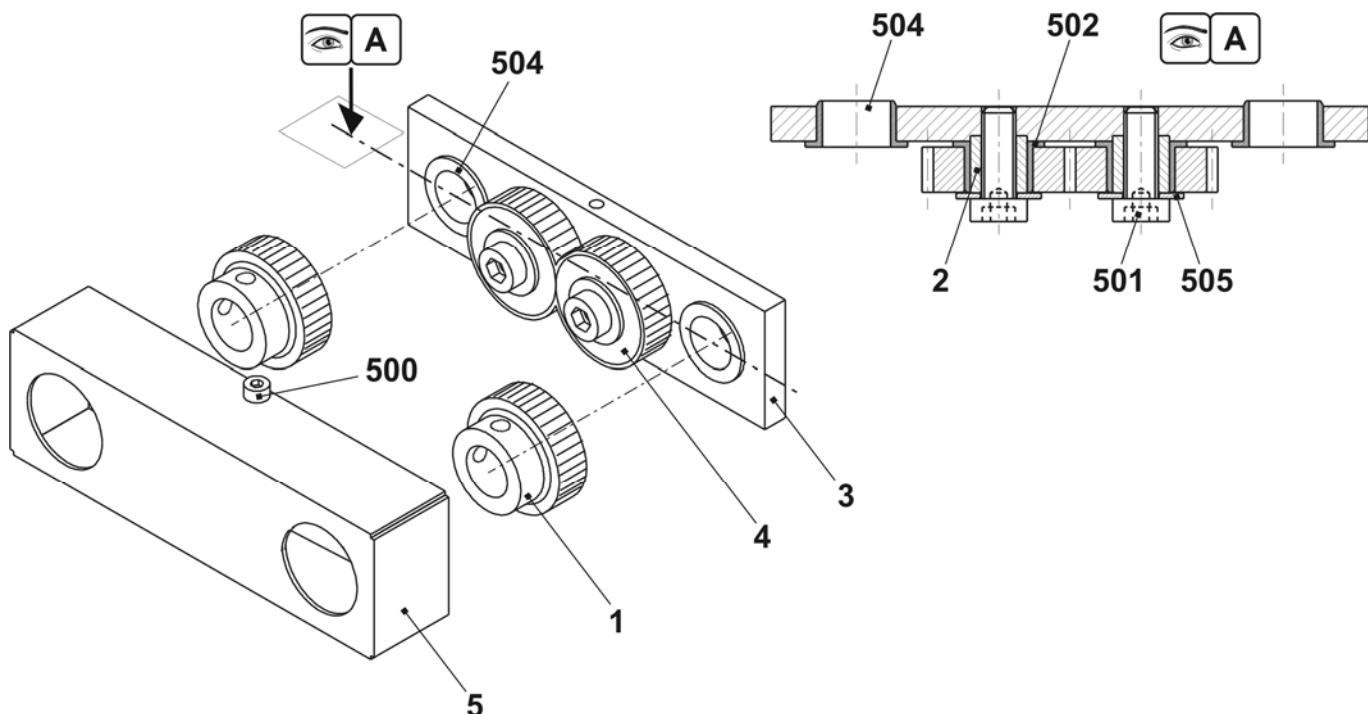


Motor on the right

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
Σ	Motor biphasic complete	239 073	5	Stop point complete	208 921
1	Plate for motor	238 069	A5	Stop point	207 617
2	Motor	234 805	550	O-ring 6x3	022 856
3	Timing belt pulley Z16 T5	238 086	500	Cap screw M5x25	023 523
4	Clamping lever	238 084	501	Cap screw M6x16	020 135

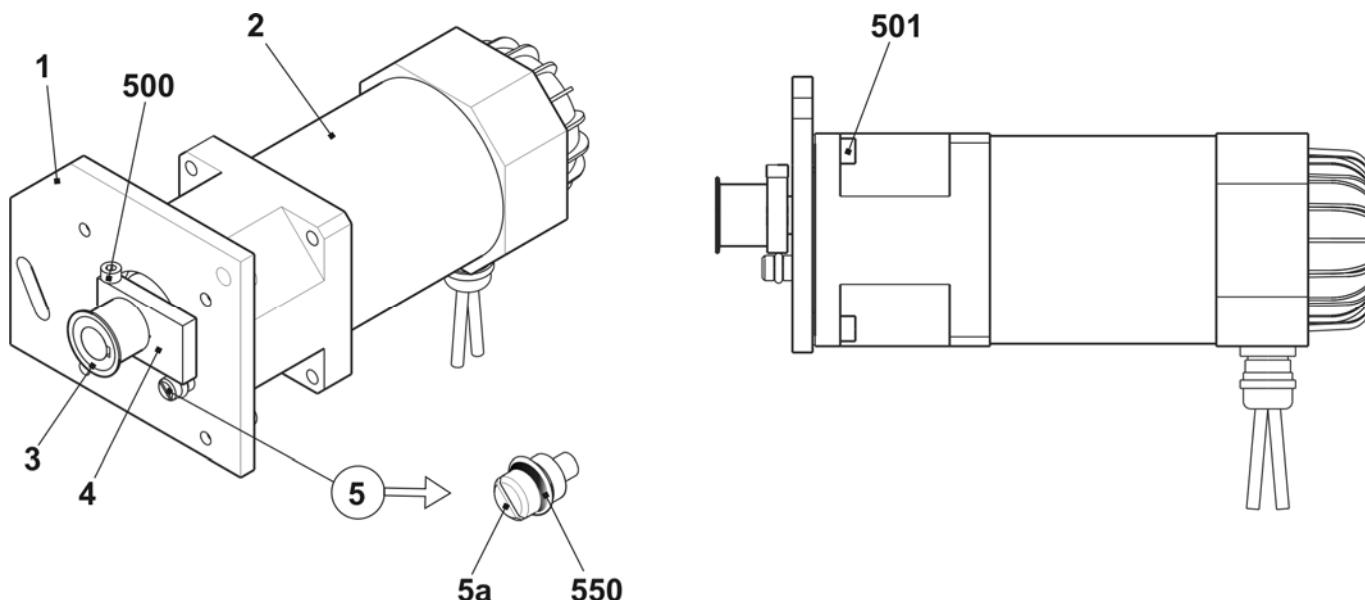


Yarn delivery device

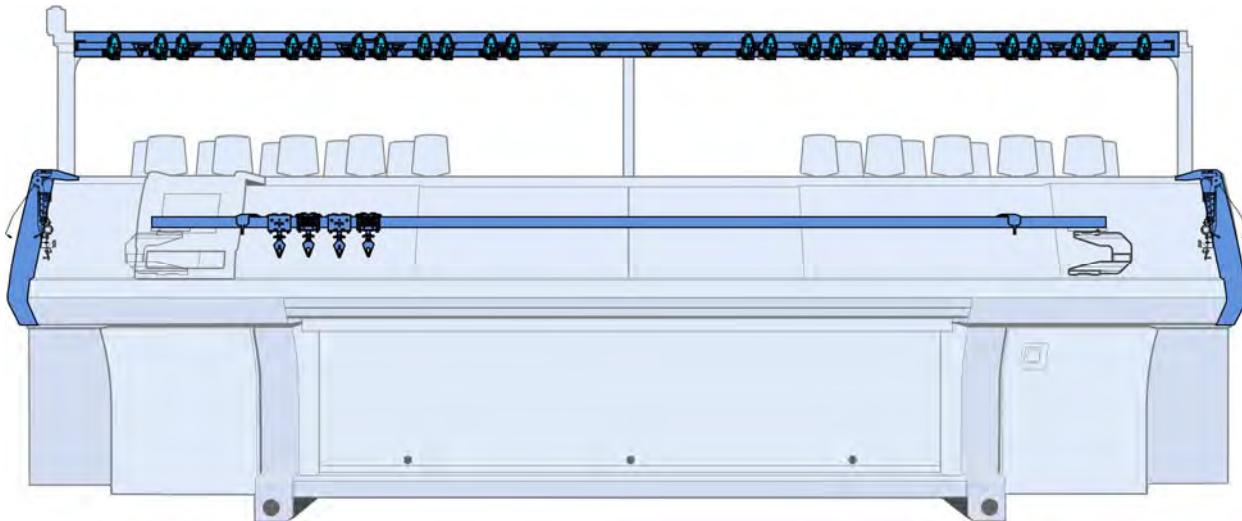


Yarn guide system from 22 up to 26 FKE

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Yarn guide system 22 FKE 922	242 989	10	Sliding block	228 851
	Yarn guide system 26 FKE 922	242 990	11	Yarn guide bracket complete	241 581
1	Support 922	243 113	501	Self-locking screw M6x12	023 415
3	Yarn control device	237 124	502	Screw CE M6x16	023 678
4	Connection cable FKE 3 CMS922	240 312	503	Ribbed lock washer M6-10	023 414
6	Yarn guide bar 96"-922	242 992	504	Countersunk screw M8x16	023 113
7	Support	243 792	505	Washer 6-200hv	022 431
8	Support on the left	243 600	507	Serrated lock washer J8.4	023 388
9	Support on the right	243 601			

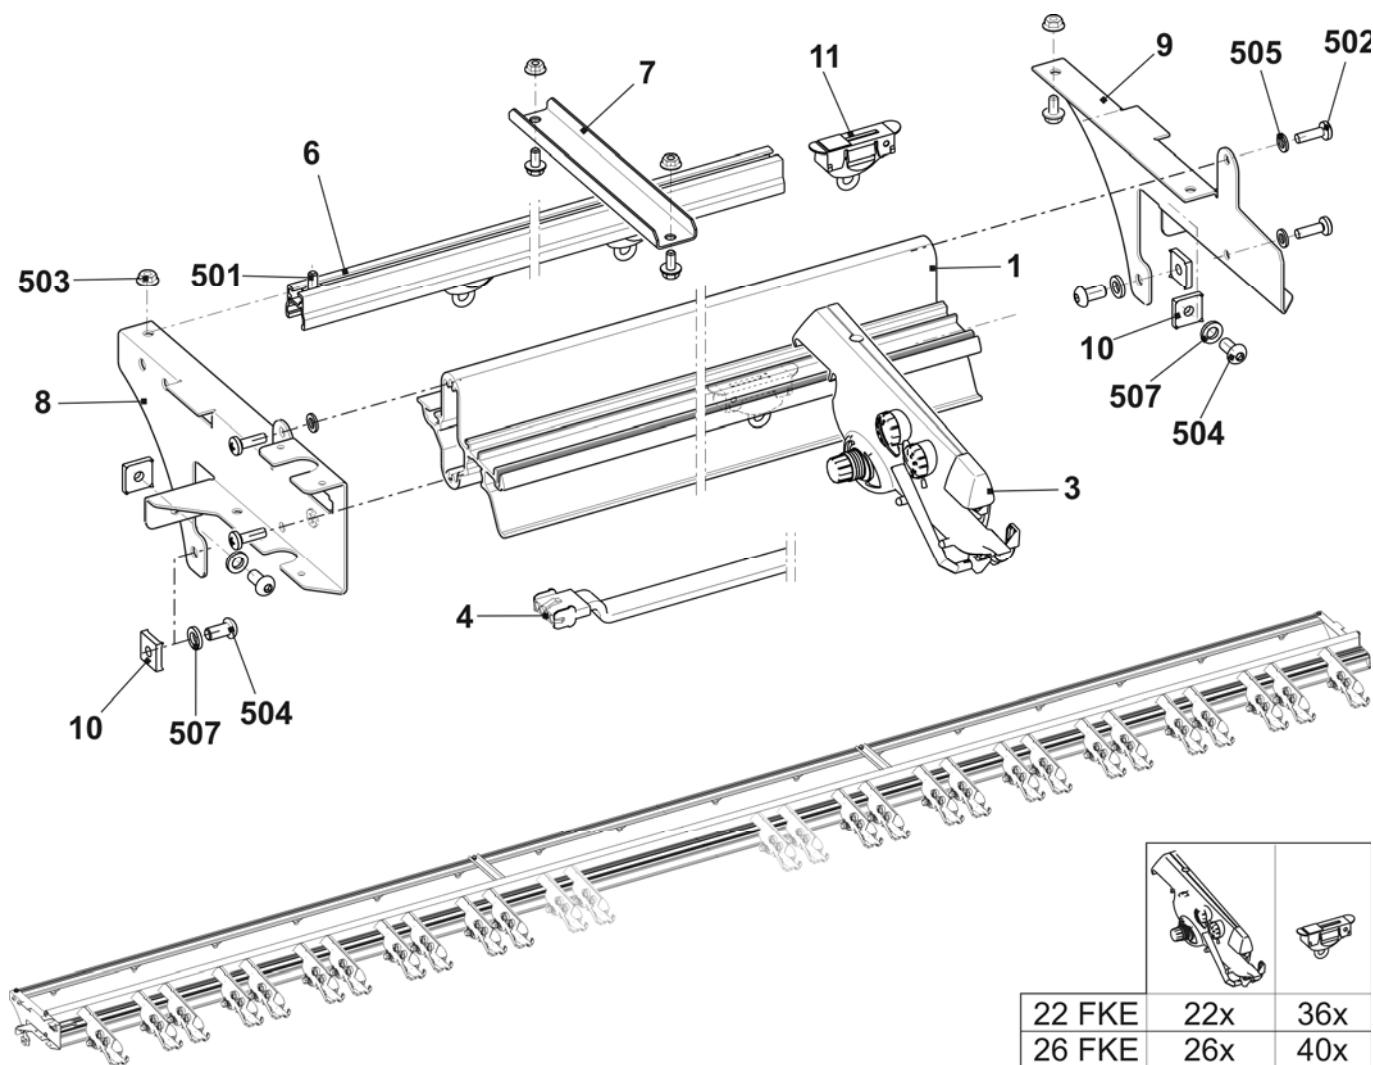


Yarn guide system with 32 FKE

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Yarn guide system 32 FKE 922	242 938			
1	Support 922	243 113	13	Support on the left	243 609
3	Yarn control device	237 124	14	Support on the right	243 610
4	Connection cable FKE 3 CMS922	243 012	500	Square nut M8	023 269
6	Yarn guide bar 96"-922	242 992	501	Self-locking screw M6x12	023 415
7	Support	243 766	502	Screw CE M6x16	023 678
8	Support on the left	243 600	503	Ribbed lock washer M6-10	023 414
9	Support on the right	243 601	504	Countersunk screw M8x16	023 113
10	Sliding block	228 851	505	Washer 6-200hv	022 431
11	Yarn guide bracket complete	241 581	507	Serrated lock washer J8.4	023 388

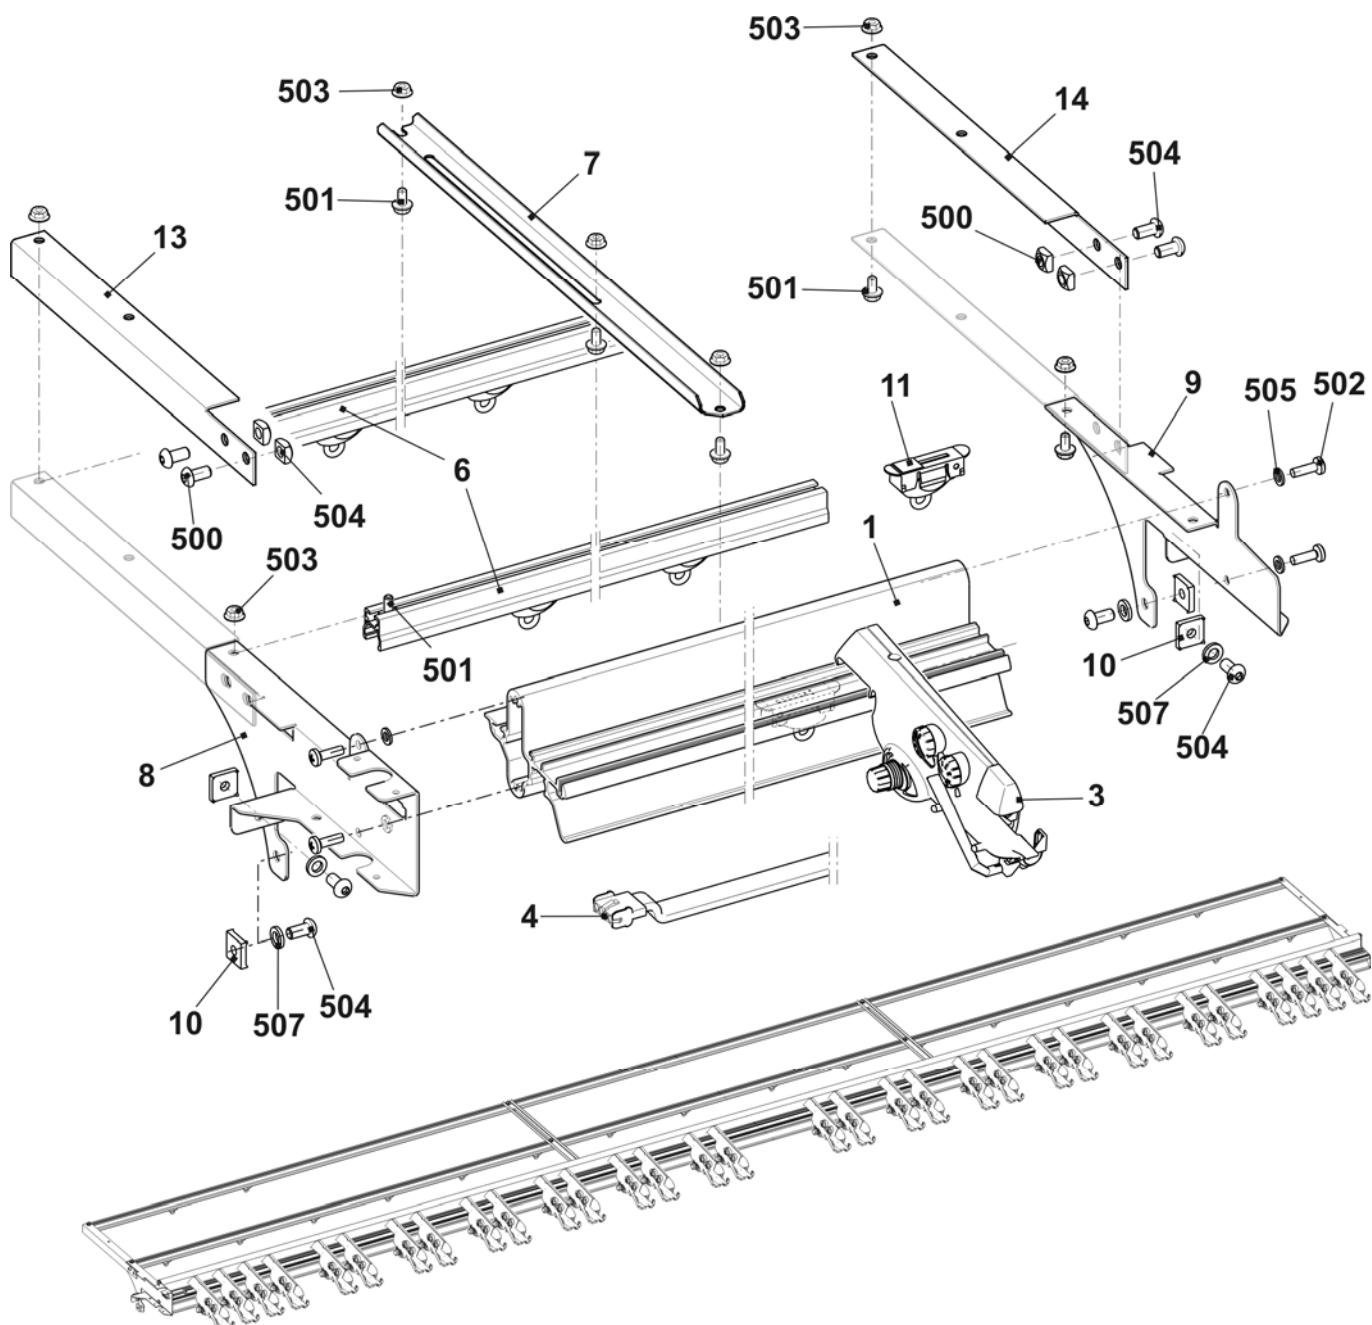


Yarn control unit

Pos	Designation	ID	Pos	Designation	ID
Σ	Yarn control unit	237 124	13	Tension spring	253 040
1	Lamp cap	251 166	14	Tension spring	253 041
2	Turning knob	251 167	15	Ceramic eyelet open	240 733
3	Knot catcher big	251 168	16	Stop bow	253 043
4	Knot catcher small	251 169	17	Jack	253 046
5	Screw	251 170	18	Contact pin	253 047
6	Yarn brake disk	216 365	19	Contact pin	253 048
7	Yarn holder	244 407	20	Contact pin	253 049
8	Sleeve	253 034	21	Contact pin	253 050
9	Compression spring	253 035	22	Compression spring	253 055
10	Pin	253 036	23	Turning knob	253 056
11	Trip cam	253 037	24	Disk	216 372
12	Tension spring	253 038			

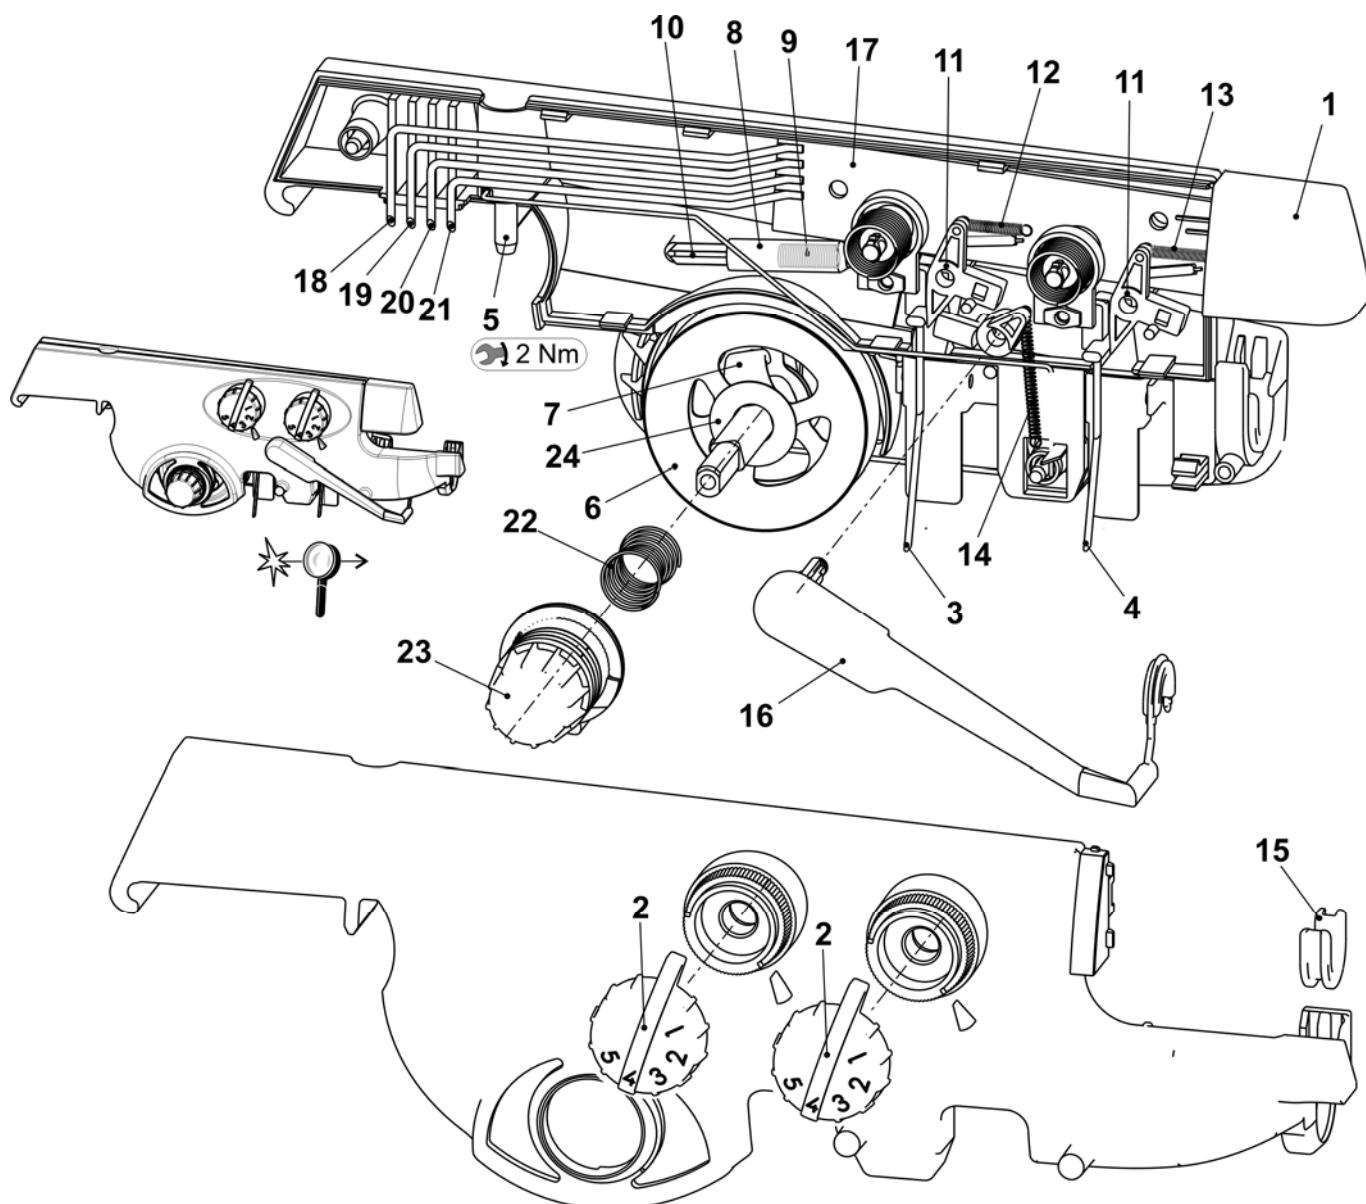


Left yarn guide

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Safety cover on the left complete		11	Connection cable yarn E10 + E12 + E14 + E16 + E18 + E7.2 + E8.2 + E9.2 + 10m.12 + E6.2(12m.10) + E14/12tensioner OKC	240 808
	E5 + E5m.4 + E7m.5 + E3.5.2 +	243 003	13	Yarn brake not adjustable	244 356
	E7 + E8 + E7m.8 + E8m.7 + E6.2	243 004	14	Clamping bow	244 409
	E10 + E12 + E14 + E16 + E10m.12 + E12m.10 + E7.2 + E8.2	243 005	15	Ground cable	244 404
5	Yarn brake complete	244 347	501	Ceramic eyelet	240 640
6	Shaft	241 318	502	Compression spring 0.90x5.40x13.60	241 360
7	Yarn tensioner on the left complete E5	242 994	504	U-washer	022 537
	Yarn tensioner on the left complete E7-8	242 996	508	Countersunk screw M5x16	237 683
	Yarn tensioner on the left complete E10-14	242 997	509	Disc 503x18x1.5	020 909
8	Deflector on the left complete	223 316	510	Screw KB 60x20	237 682
9	Wire bow on the left	241 370	511	Sheet metal screw ST4.8x9.5-F	242 374
10	Yarn deflector	242 011	512	Flat connector 2x45° M6	243 117

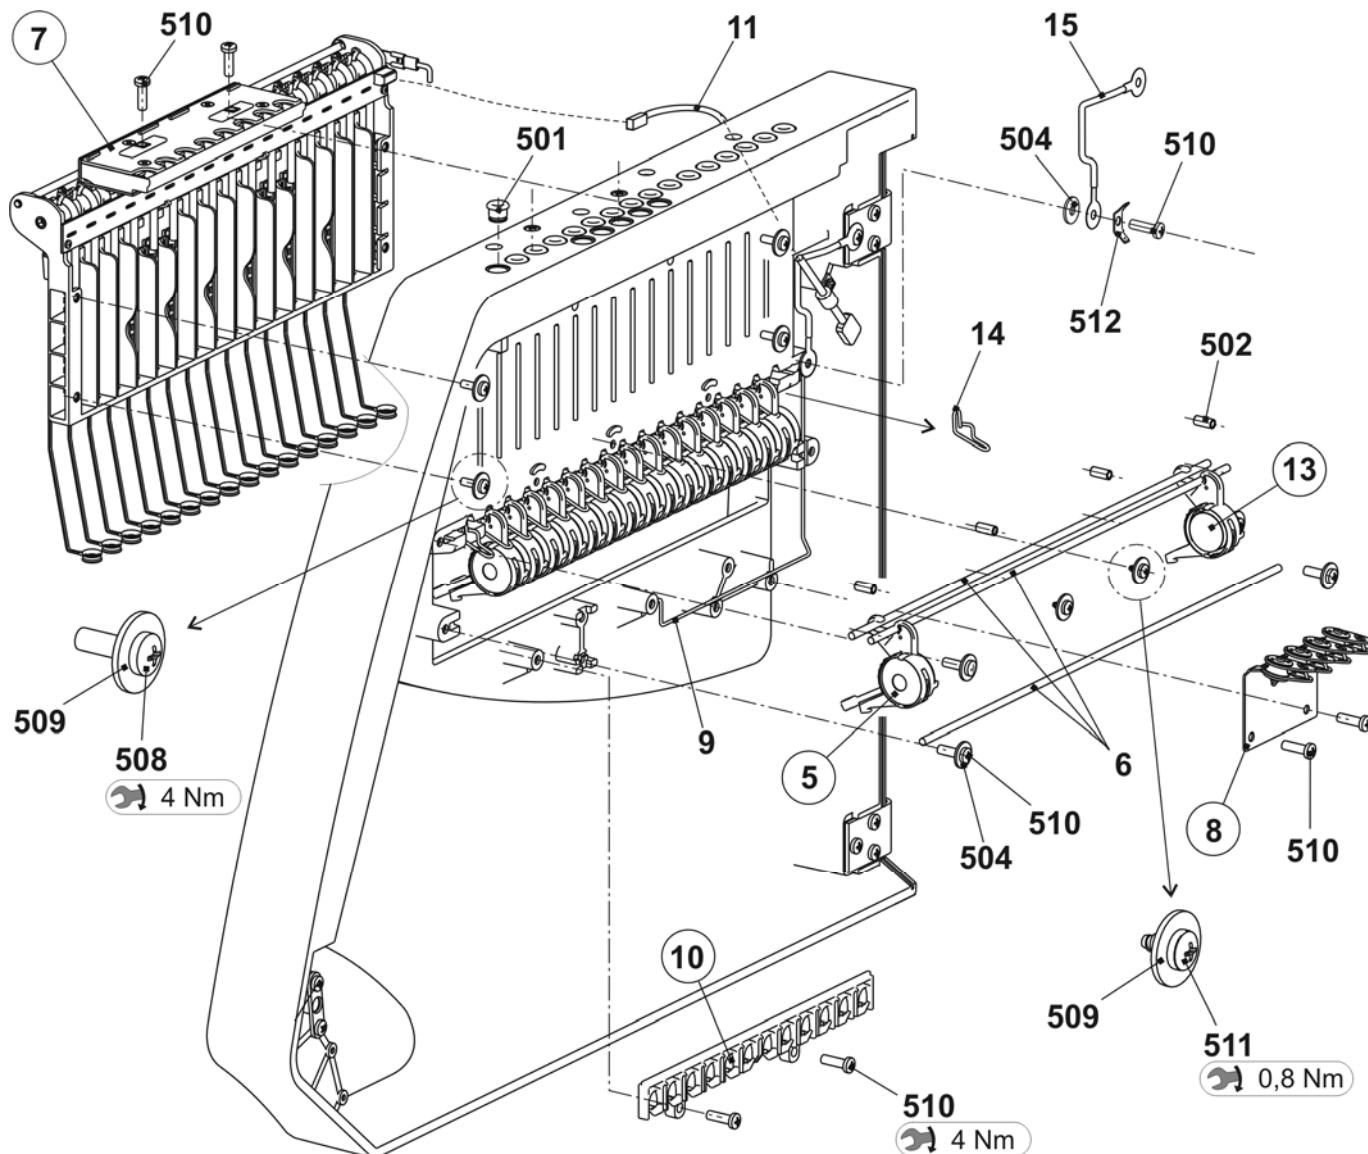


Left yarn tensioner

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Yarn tensioner on the left complete		6	Spacer	242 048
	E5 + E5m.4 + E7m.5 + E3,5.2	242 994	7	Grounding sheet metal of tension axle	243 121
	E7 + E8 + E7m.8 + E8m.7 + E6.2	242 996	8	Ground cable yarn tensioner OKC	243 105
	E10 + E12 + E14 + E16 + E10m.12 + E12m.10 + E7.2 + E8.2	242 997	500	Screw KB30x8	236 228
1	Card yarn tensioner 16-fold on the left	241 345	501	Circlip 6	021 022
2	Tension axle on the left complete (E5 – 8)	242 995	502	Tension spring	
	Tension axle on the left complete (E10 – 14)	242 998		Tension spring 5.05x0.55x53 (E5)	023 502
3	Housing	241 367		Tension spring 4.9x0.5x53 (E7-E8)	023 503
4	Slider	241 694		Tension spring 4.9x0.45x53 (E10-E14)	023 504
5	Stop point	241 368	503	Circlip	021 020
			504	Countersunk screw M4x10	241 914

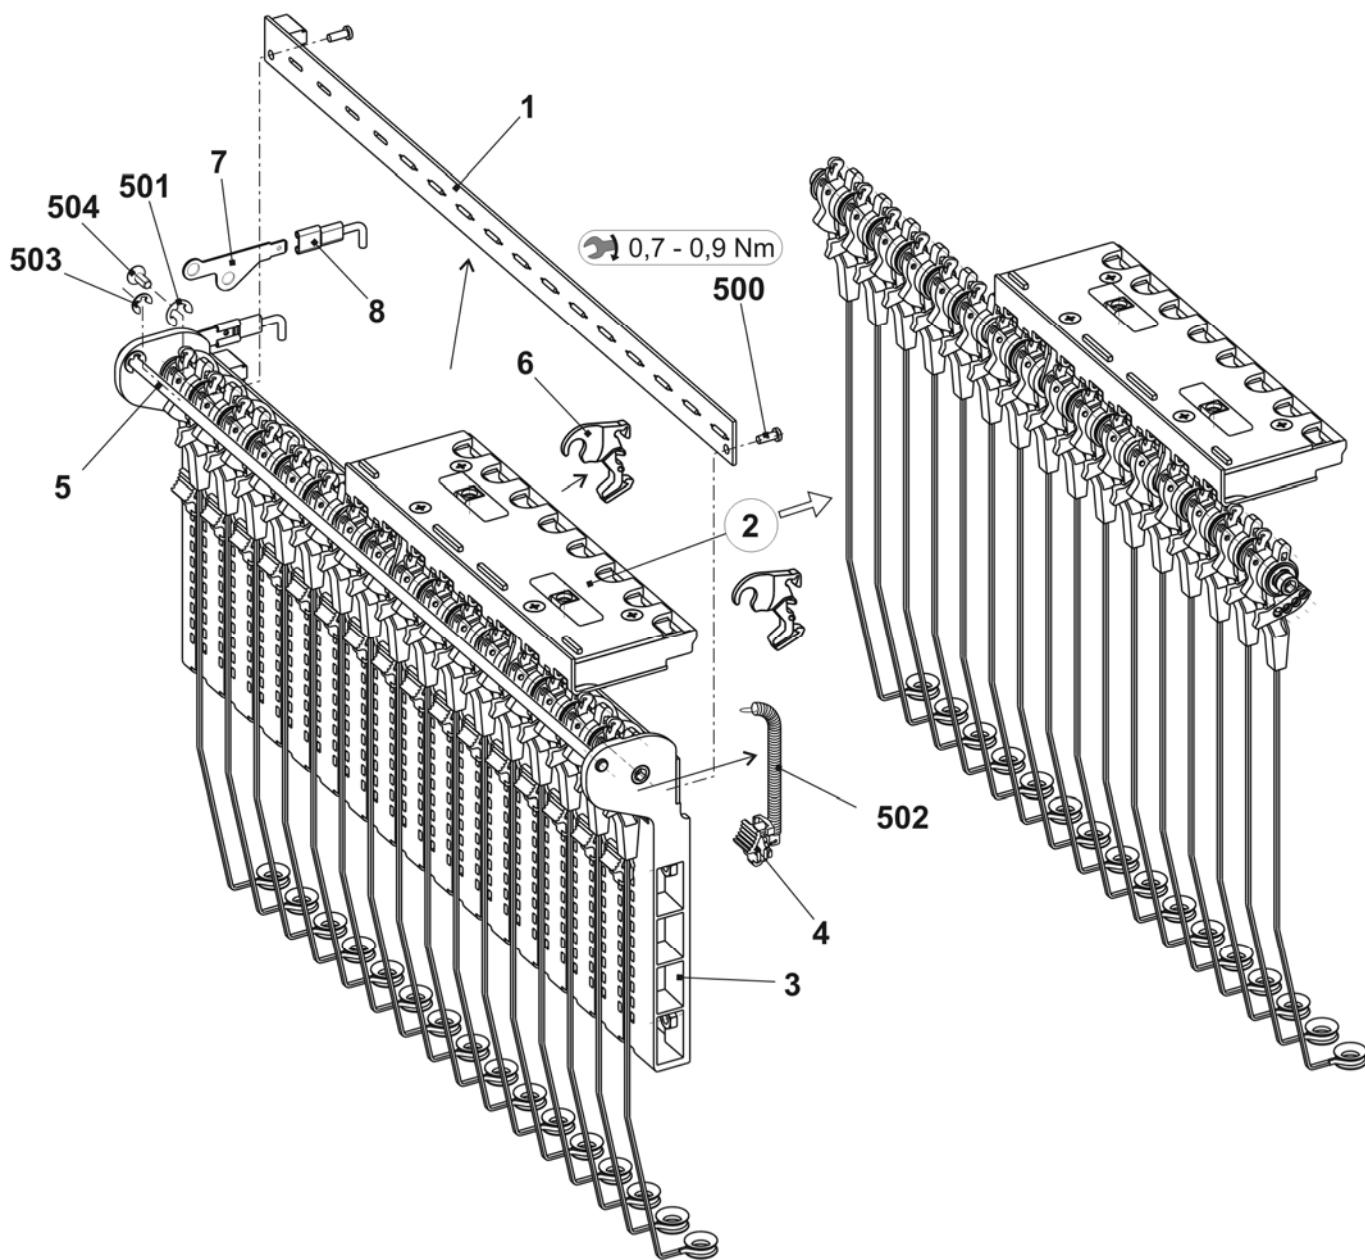


Left tension axle

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Tension axle on the left complete				
	E5 + E7 + E8 + E5m.4 + E7m.5 + E7m.8 + E8m.7 + E3.5.2 + E5.2 + E6.2 +	242 995	31	Housing AKF	238 689
	E10 + E12 + E14 + E16 + E10m.12 + E12m.10 + E7.2 + E8.2	242 998	32	Cover AKF	237 926
1	Axle	243 107	33	Sheet metal at the bottom (housing AKF)	240 719
2	Tension arm pre-assembled E5 – E8	242 995	34	Lever AKF	238 692
	Tension arm pre-assembled E10 – E18	242 998	35	Thrust piece AKF	238 690
4	Wire bow	238 694	36	Slider AKF	238 691
500	Adjusting washer 4x8x0.8x14x0.5	023 501	37	Wire bow	238 694
501	Circlip	021 022	38	Wire	237 940
502	Grooved pin 2x6	243 172	531	Screw KB 35x12	237 681
3	Thread clamp AKF	238 695	532	Screw KB 40x8	236 227
			533	Compression spring 0.30x4.50x18.50	241 437
			534	Grooved pin 2x6	243 172

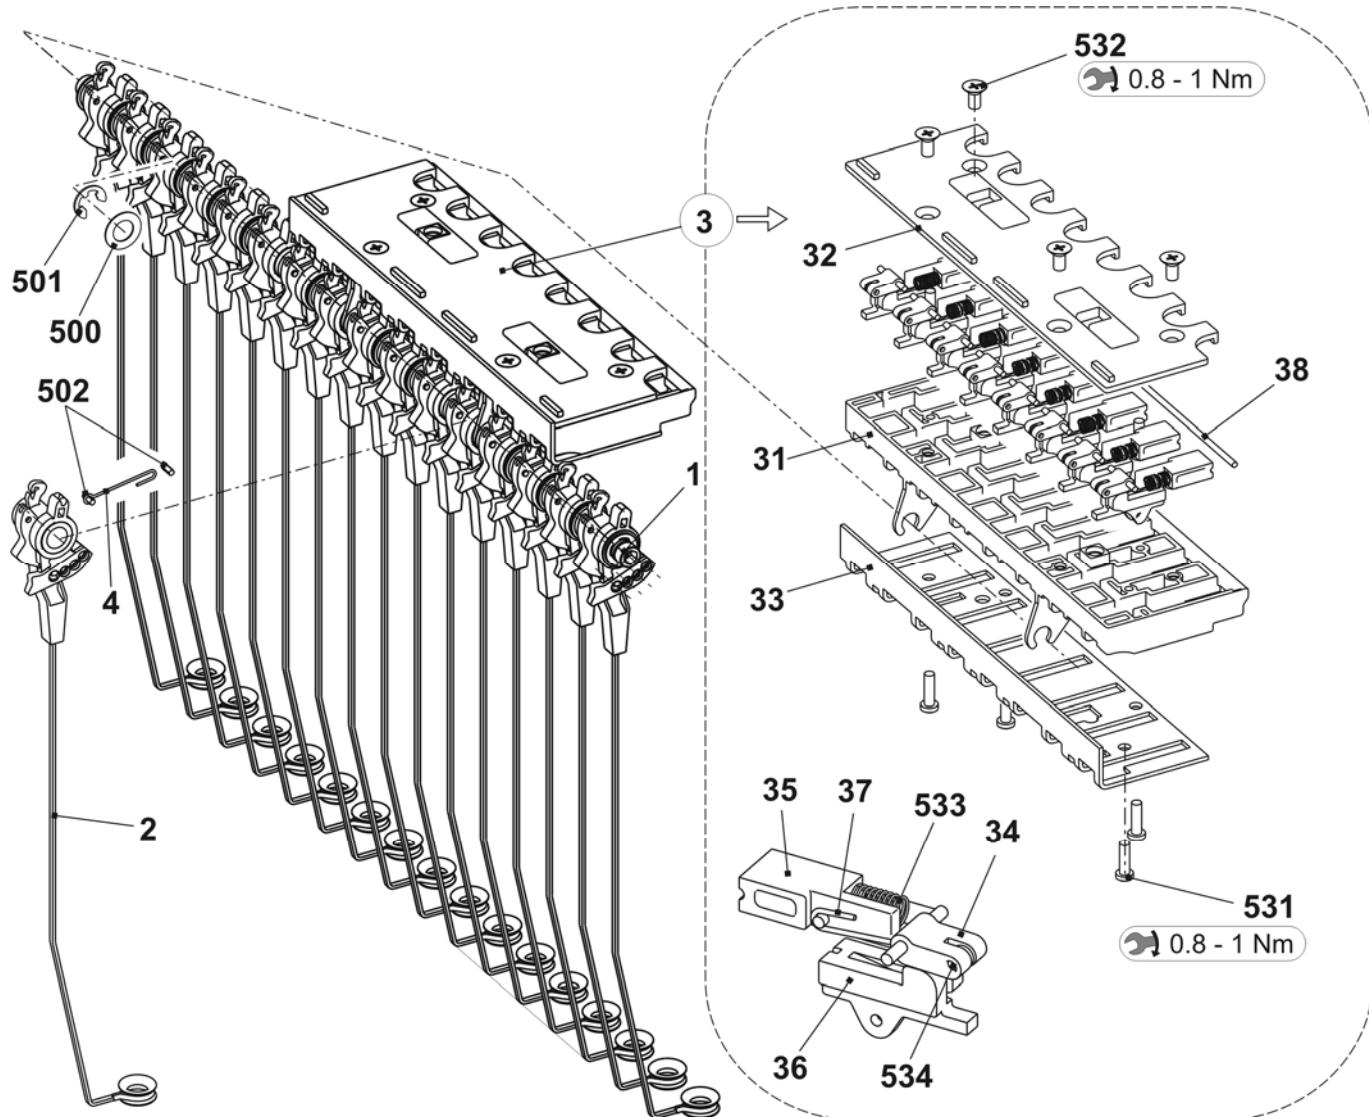


Yarn brake and yarn deflector

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
A	Yarn brake complete	244 347	B	Yarn deflector	242 011
1	Support	240 607	1	Support yarn deflector	242 009
2	Slider	240 606	2	Ceramic eyelet open	240 733
3	Brake disk	244 355			
4	Ceramic eyelet open	243 778			
500	Compression spring 0.65x20.15x14.80	241 361			
501	O-ring 11x2	241 434			

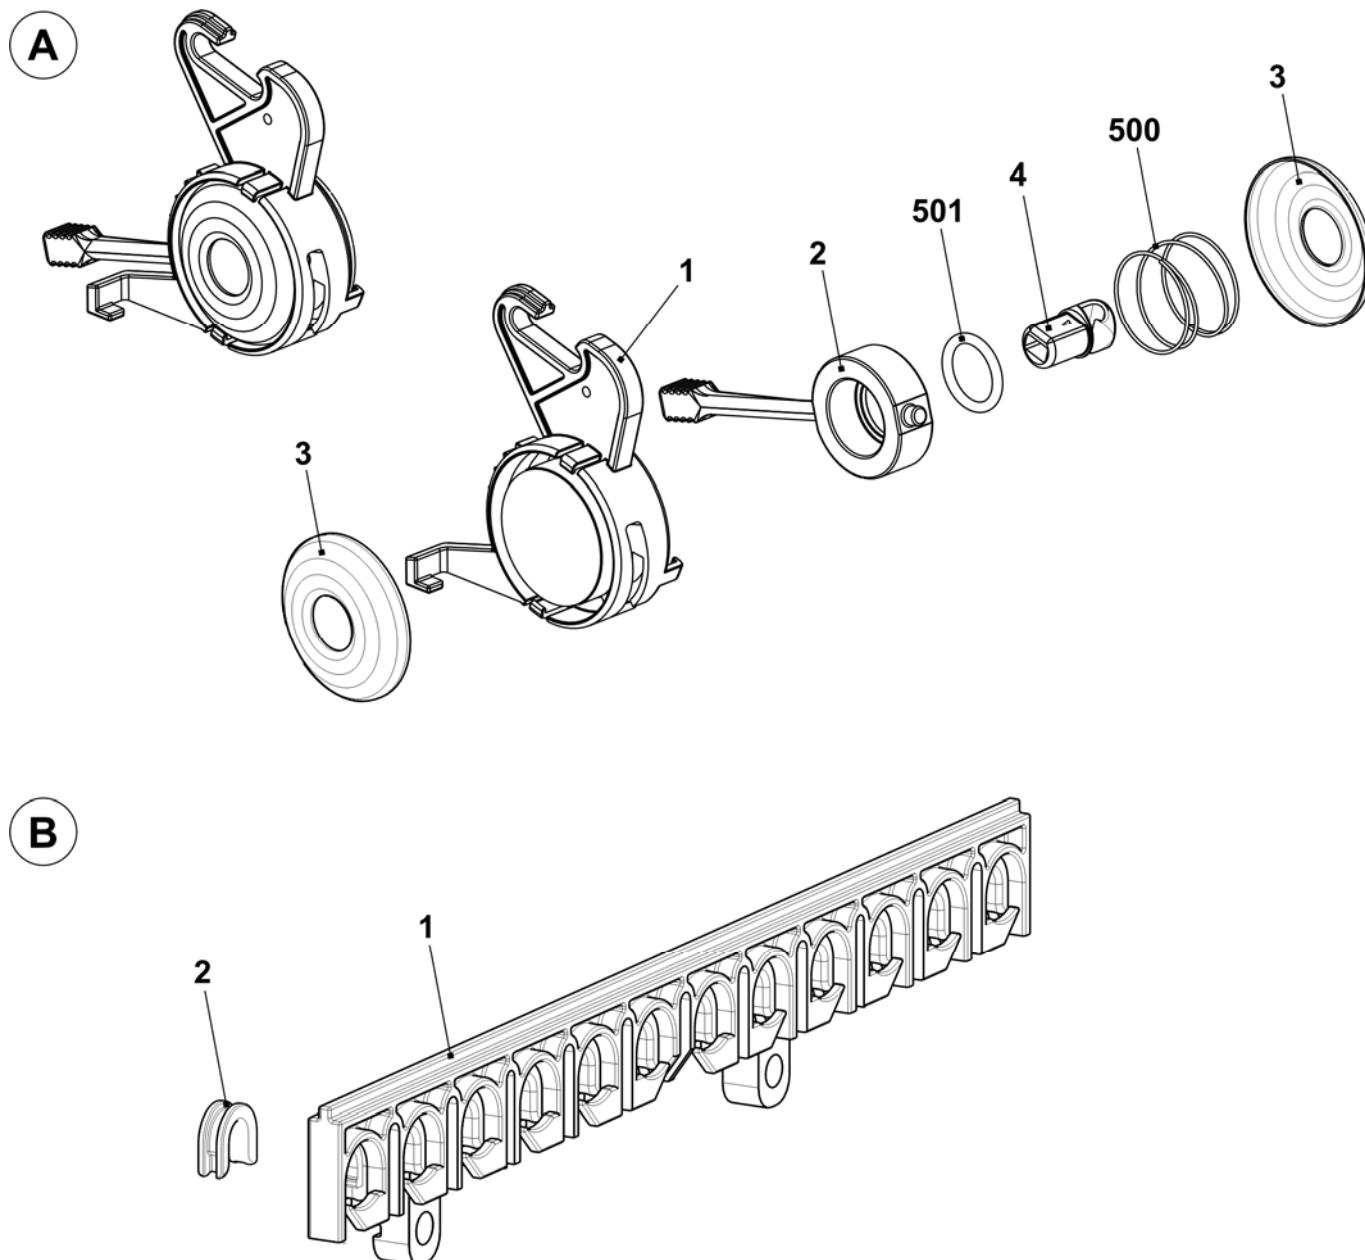


Deflector

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
Σ	Deflector on the left	223 316	Σ	Deflector on the right	223 049
1	Roller support on the left	223 312	1	Roller support on the right	223 044
2	Yarn holder	217 362	2	Yarn holder	217 362
3	Yarn holder	217 363	3	Yarn holder	217 363
4	Sleeve	219 222	4	Sleeve	219 222
5	Screw	223 298	5	Screw	223 298
6	Roller deflector	218 805	6	Roller deflector	218 805
500	Hexagon nut M3-6	022 884	500	Hexagon nut M3-6	022 884

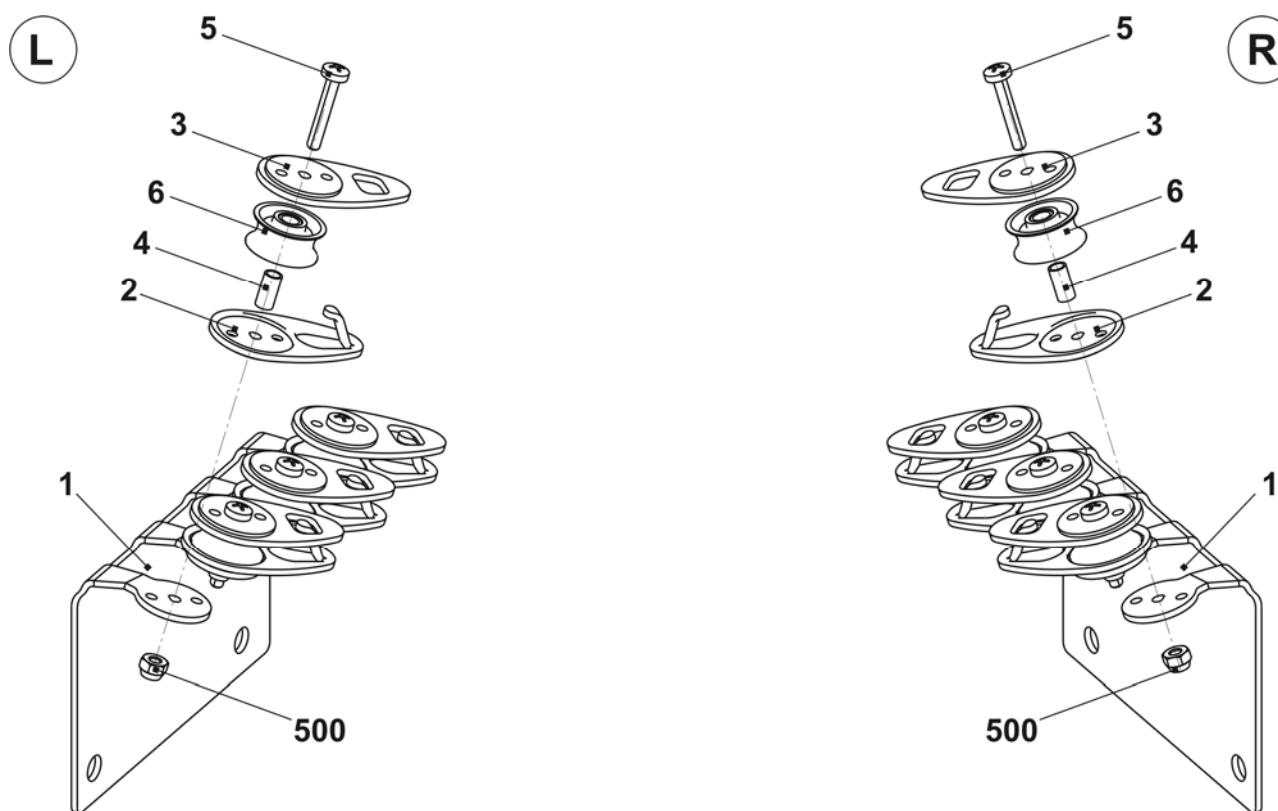


Right yarn guide

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Safety cover on the right complete		11	Connection cable yarn E10 + E12 + E14 + E16 + E18 + E7.2 + E8.2 + E9.2 + 10m.12 + E6.2(12m.10) + E14/12tensioner OKC	240 808
	E5 + E5m.4 + E7m.5 + E3,5.2 +	243 006	13	Yarn brake not adjustable	244 356
	E7 + E8 + E7m.8 + E8m.7 + E6.2	243 007	14	Clamping bow	244 409
	E10 + E12 + E14 + E16 + E10m.12 + E12m.10 + E7.2 + E8.2	243 008	15	Ground cable	244 404
5	Yarn brake complete	244 347	501	Ceramic eyelet	240 640
6	Shaft	241 318	502	Compression spring 0.90x5.40x13.60	241 360
7	Yarn tensioner on the right complete E5	242 999	504	U-washer	022 537
	Yarn tensioner on the right complete E7-8	243 000	508	Countersunk screw M5x16	237 683
	Yarn tensioner on the right complete E10-14	243 001	509	Disc 503x18x1.5	020 909
8	Deflector on the right complete	223 049	510	Screw KB 60x20	237 682
9	Wire bow on the right	241 369	511	Sheet metal screw ST4.8x9.5-F	242 374
10	Yarn deflector	242 011	512	Flat connector 2x45° M6	243 117

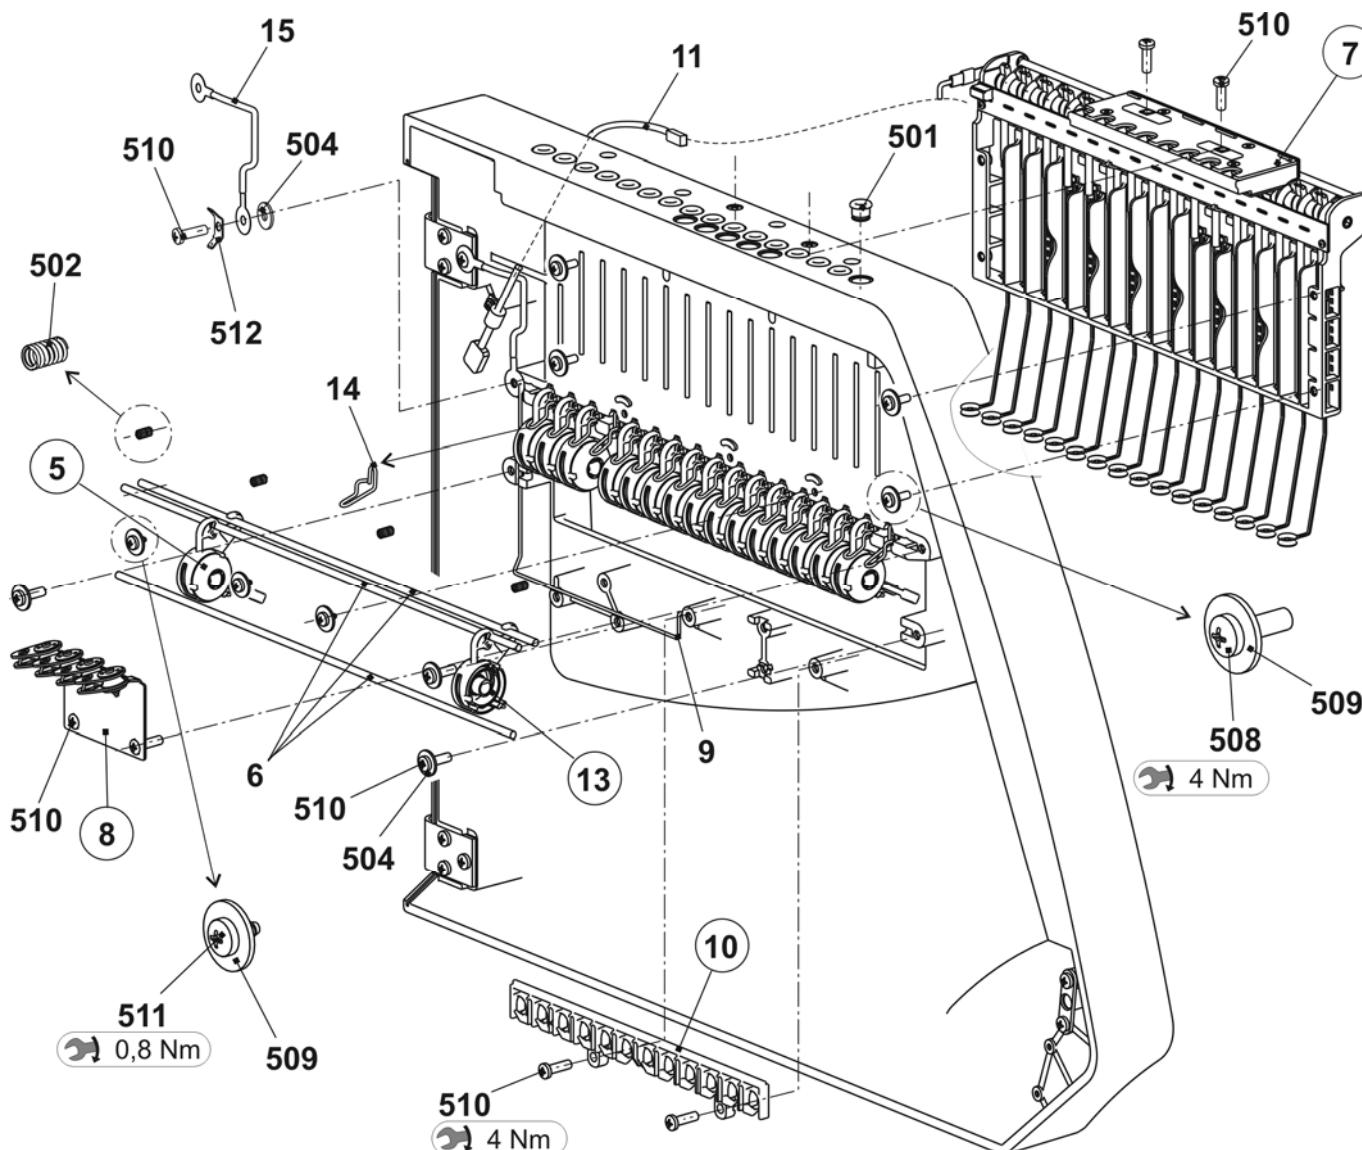


Right yarn tensioner

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Yarn tensioner on the right complete		6	Spacer	242 048
	E5 + E5m.4 + E7m.5 + E3,5.2	242 999	7	Grounding sheet metal of tension axle	243 121
	E7 + E8 + E7m.8 + E8m.7 + E6.2	243 000	8	Ground cable yarn tensioner OKC	243 105
	E10 + E12 + E14 + E16 + E10m.12 + E12m.10 + E7.2 + E8.2	243 001	500	Screw KB30x8	236 228
1	Card yarn tensioner 16-fold on the right	241 346	501	Circlip	021 022
2	Tension axle on the right complete E5-8	243 351	502	Tension spring	
	Tension axle on the right complete E10-14	243 352		Tension spring 5.05x0.55x53 (E3-E5)	023 502
3	Housing	241 367		Tension spring 4.9x0.5x53 (E7-E8)	023 503
4	Slider	241 694		Tension spring 4.9x0.45x53 (E10-E14)	023 504
5	Stop point	241 368	503	Circlip	021 020
			504	Countersunk screw M4x10	241 914

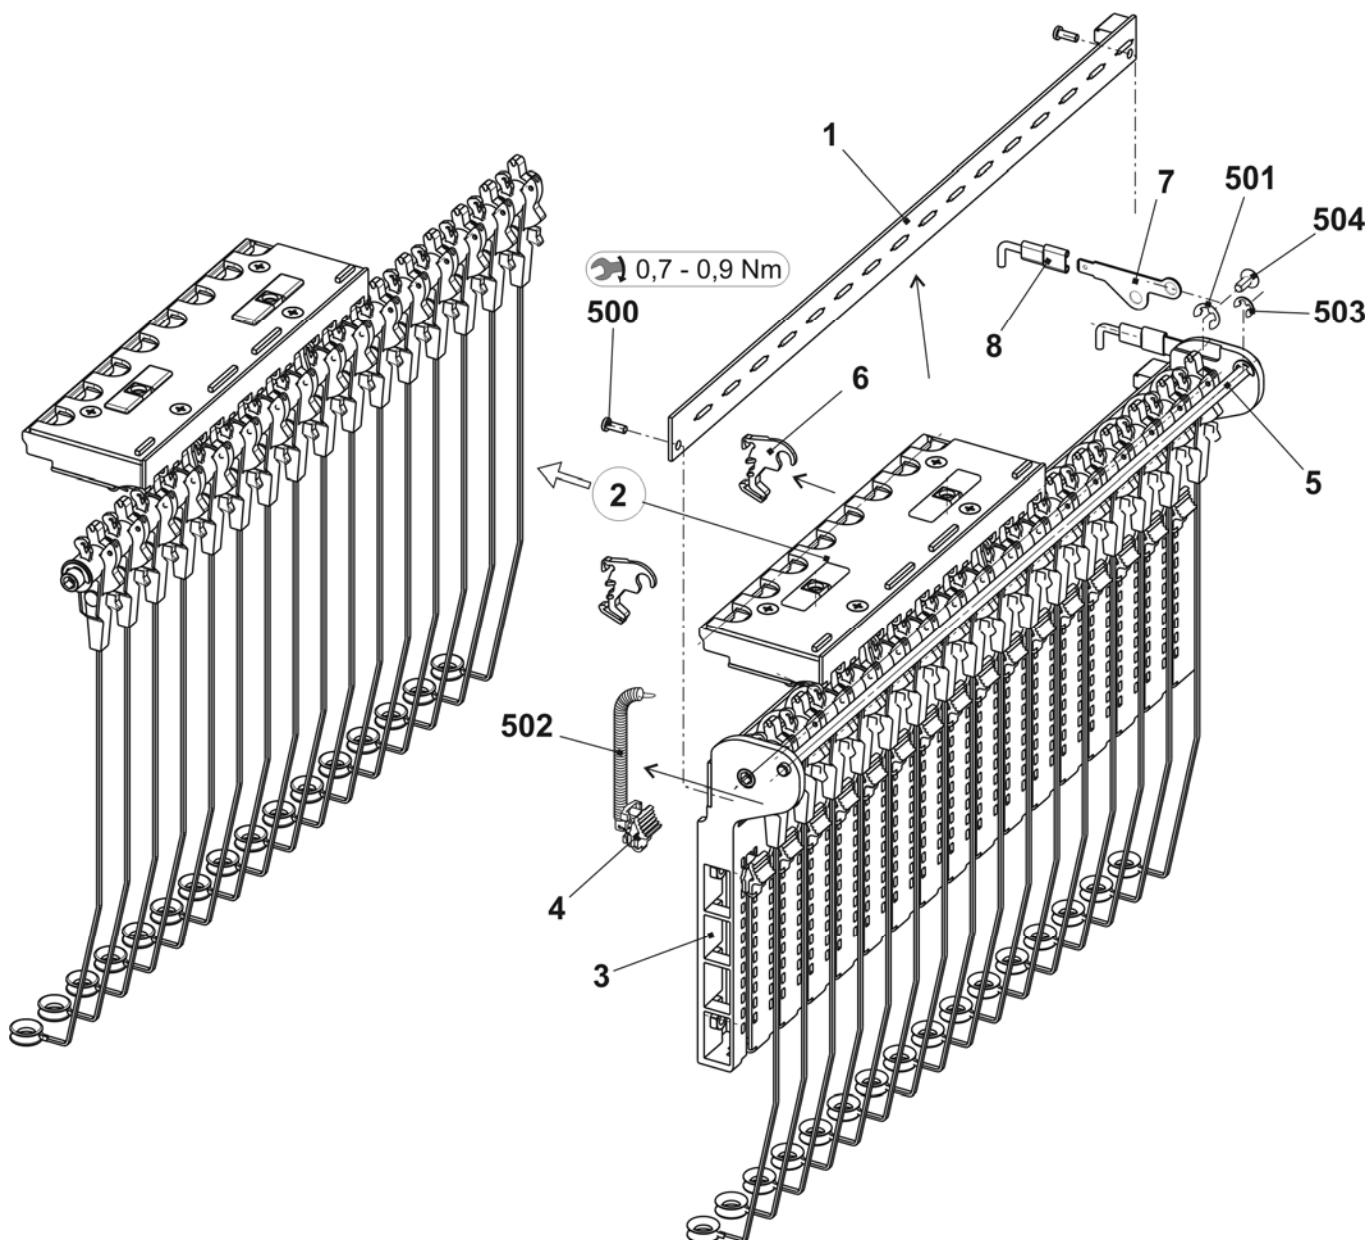


Right tension axle

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Tension axle on the left complete		31	Housing AKF	238 689
	E5 + E7 + E8 + E5m.4 + E7m.5 + E7m.8 + E8m.7 + E3,5.2 + E5.2 + E6.2 +	243 351	32	Cover AKF	237 926
	E10 + E12 + E14 + E16 + E10m.12 + E12m.10 + E7.2 + E8.2	243 352	33	Sheet metal at the bottom (housing AKF)	240 719
1	Axle	243 107	34	Lever AKF	238 692
2	Tension arm pre-assembled E5 – E8	242 770	35	Thrust piece AKF	238 690
	Tension arm pre-assembled E10 – E18	242 771	36	Slider AKF	238 691
4	Wire bow	238 694	37	Wire bow	238 694
500	Adjusting washer 4x8x0.8x14x0.5	023 501	38	Wire	237 940
501	Circlip	021 022	531	Screw KB 35x12	237 681
502	Grooved pin 2x6	243 172	532	Screw KB 40x8	236 227
3	Thread clamp AKF	238 695	533	Compression spring 0.30x4.50x18.50	241 437
			534	Grooved pin 2x6	243 172

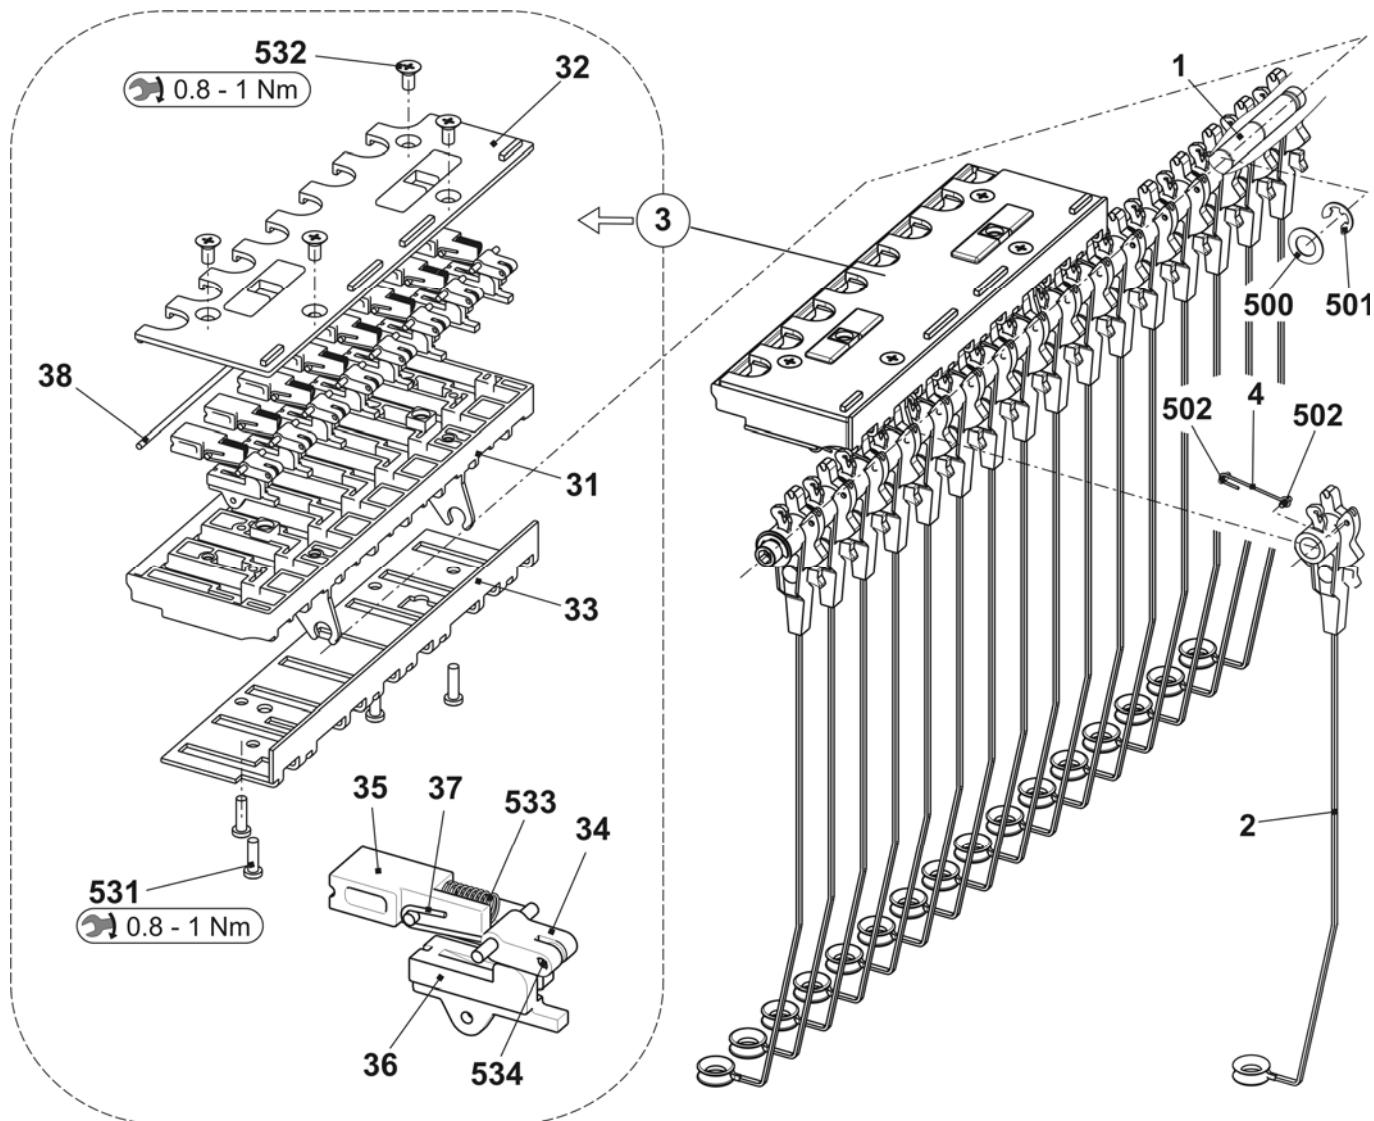


Bobbin board

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Table complete 922	242 821	17	Lamp at the top complete	220 137
1	Table	251 248		A17 Lamp long RR60V-230	212 580
4	Support element	228 594		17b Clamping bow	209 504
9	Cable USB extension 96 OKC	243 069		17c Cellular caoutchouc 40x20	208 018
10	Magnet switch protective hood	219 983		17d Lamp support	220 138
11	Magnet switch protective hood	220 159		501 Serrated lock washer J6	022 385
13	Guide rail at the top complete	242 824		502 Cap screw M6x10	022 773
18	Positioning pin	204 819		505 Countersunk screw M3x8	023 251
24	Energy chain display 38 links	253 888		512 Countersunk screw M8x16	023 113
30	Clamp	228 583		520 U-washer	020 901
31	Threaded strip	200 223			

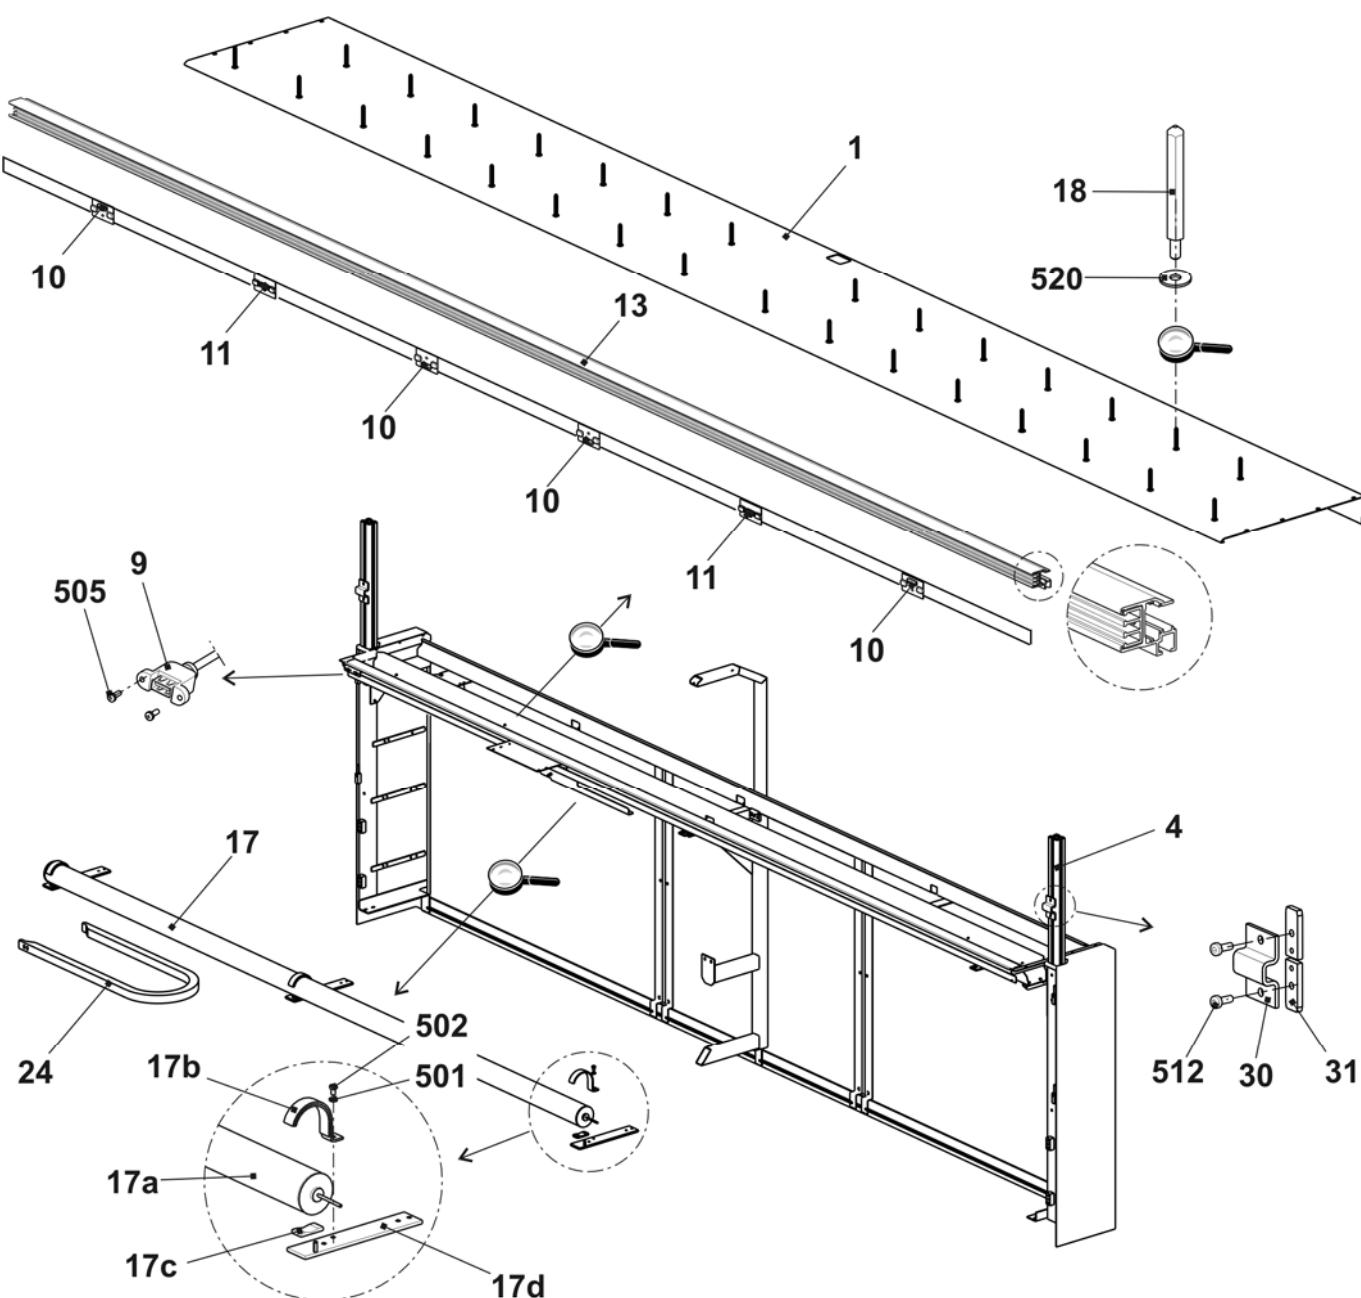


Yarn carrier and guide rails

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Yarn guide complete E5	244 003		E7 + E8 + E6.2 + E7m8 +E8m7	
	Yarn guide complete E7 – E8	244 004	1	YC bow 1+8 complete E7-8	212 892
	Yarn guide complete E10 – E14	244 005	2	YC bow 2+7 complete E7-8	212 914
	Yarn guide complete E16 – E18	244 006	3	YC bow 3+6 complete E7-8	212 925
5	Limiter on the left complete	244 099	4	YC bow 4+5 complete E7-8	212 910
6	Limiter on the right complete	244 098		E10 + E12 + E14 + E10m.12 + E12m10 + E7.2 + E8.2	
7	Slider with eyelet	230 709	1	YC bow 1+8 complete E10-14	212 994
9*	Yarn carrier rail	213 172	2	YC bow 2+7 complete E10-14	212 996
10	YC carriage complete	243 062	3	YC bow 3+6 complete E10-14	212 995
13	Shim	213 035	4	YC bow 4+5 complete E10-14	212 997
500	Hexagon screw M5x10	020 351			
E5 + E5m.4 + E7m.5, + E3.5.2 +E5.2			E16		
1	YC bow 1+8 complete E5	212 990	1	YC bow 1+8 complete E16-18	223 199
2	YC bow 2+7 complete E5	212 992	2	YC bow 2+7 complete E16-18	223 201
3	YC bow 3+6 complete E5	212 991	3	YC bow 3+6 complete E16-18	223 200
4	YC bow 4+5 complete E5	212 993	4	YC bow 4+5 complete E16-18	223 202
			a	Yarn guide wheel complete	209 257
			510	Countersunk screw M3x10	023 032

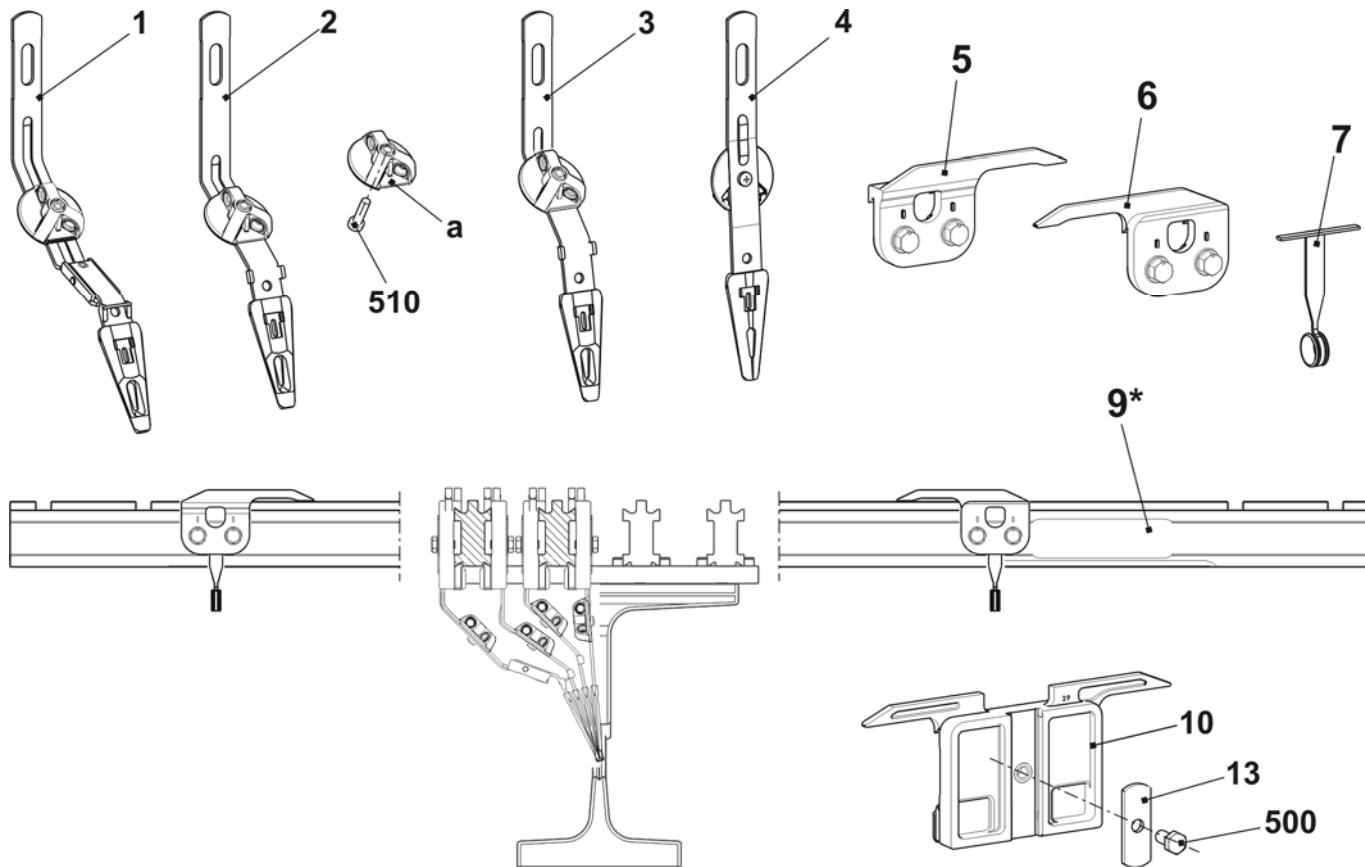


Complete yarn carriers

Pos	Designation	Track	ID No.	Pos	Designation	Track	ID No.
Yarn guide complete							
E5+E5m.4+E7m.5+E3,5.2+E5.2			244 003	E10 + E12 + E14 + E10m.12 + E12m.10 + E7.2 + E8.2			244 005
1	YC carriage complete E5	1+8	243 935	1	YC carriage complete E10-14	1+8	243 943
2	YC carriage complete E5	2+7	243 934	2	YC carriage complete E10-14	2+7	243 942
3	YC carriage complete E5	3+6	243 933	3	YC carriage complete E10-14	3+6	243 941
4	YC carriage complete E5	4+5	243 932	4	YC carriage complete E10-14	4+5	243 940
E7 + E8 + E7m.8 + E8m.7 + E6.2			244 004	E16			244 006
1	YC carriage complete E7-8	1+8	243 939	1	YC carriage complete E16-18	1+8	243 947
2	YC carriage complete E7-8	2+7	243 938	2	YC carriage complete E16-18	2+7	243 946
3	YC carriage complete E7-8	3+6	243 937	3	YC carriage complete E16-18	3+6	243 945
4	YC carriage complete E7-8	4+5	243 936	4	YC carriage complete E16-18	4+5	243 944

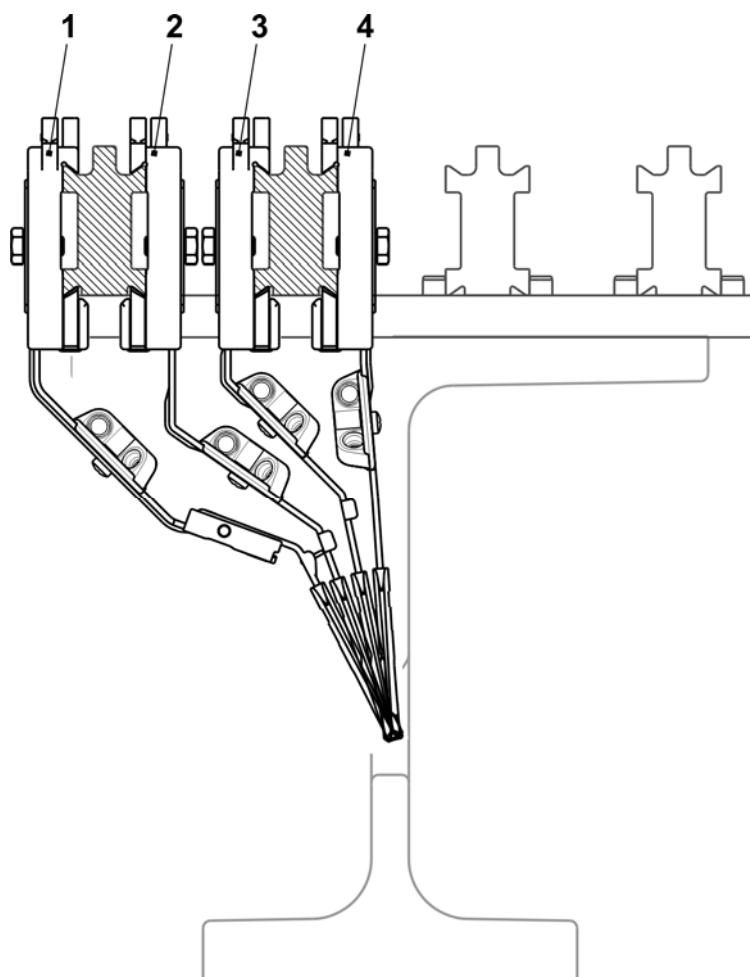


Fluff absorption

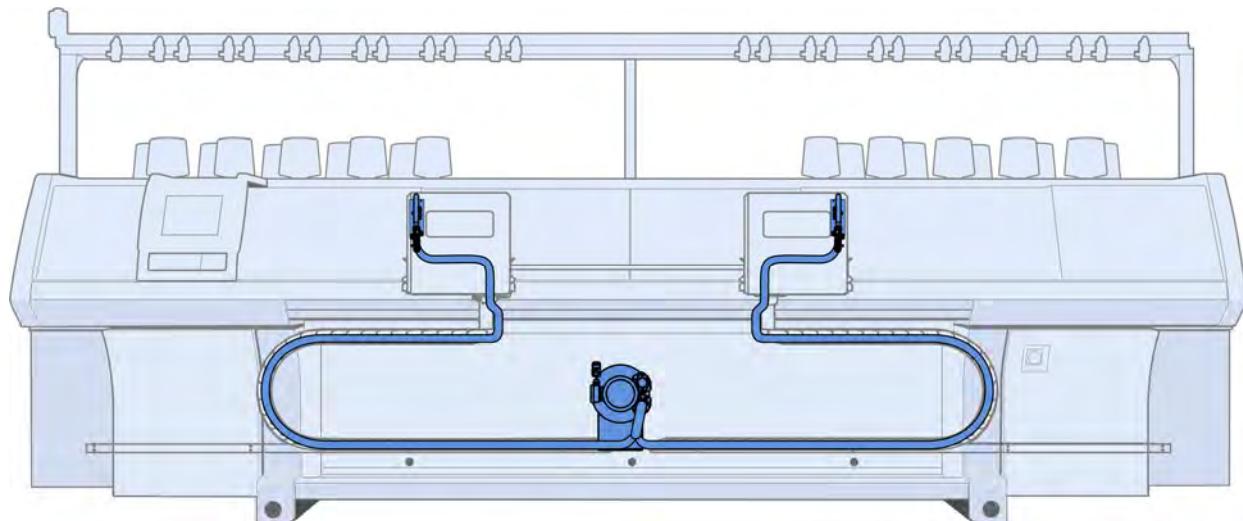



Fluff absorption

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Fluff absorption		6	Lint container	245 024
1	Suction fan complete	251 333	7	Set of tubes on the left complete 922/933	251 349
2	Suction hose 29x25x150	251 348	8	Set of tubes on the right complete 922/933	251 350
3	Hose connector	245 011	500	Cap screw M8x16	023 629
4	Suction hose 29x25x3580	215 625	550	Countersunk head screw M4x8	251 011
5	Hose fitting	214 653	551	Cap screw M4x8	022 501

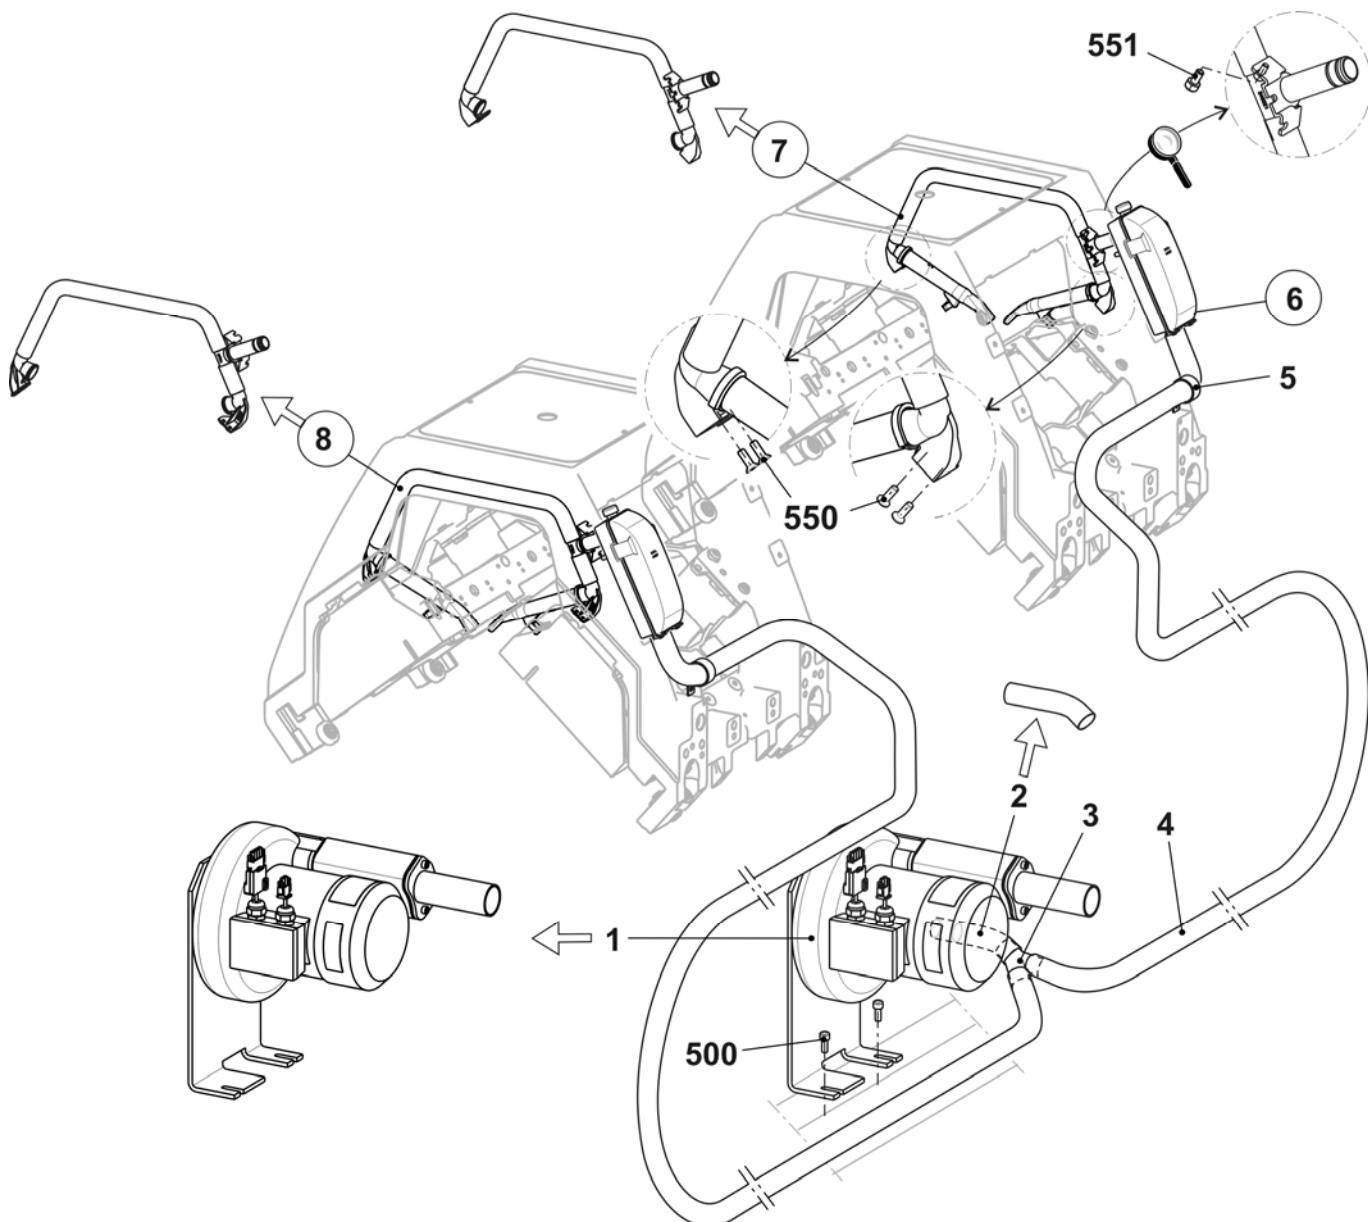


Set of tubes on the left and right

Pos	Designation	ID No.	Pos	Designation	ID No.
L	Set of tubes on the left complete 922/933	251 349			
R	Set of tubes on the right complete 922/933	251 350	500	Suction hose 20x16x400	244 983
1	Angle connection on the right	250 121	501	Suction hose 20x16x40	251 043
2	Angle connection on the left	251 101	504*	Countersunk head screw M4x8	251 011
3	T-piece FLENT	245 021	531*	Cap screw M4x8	022 501

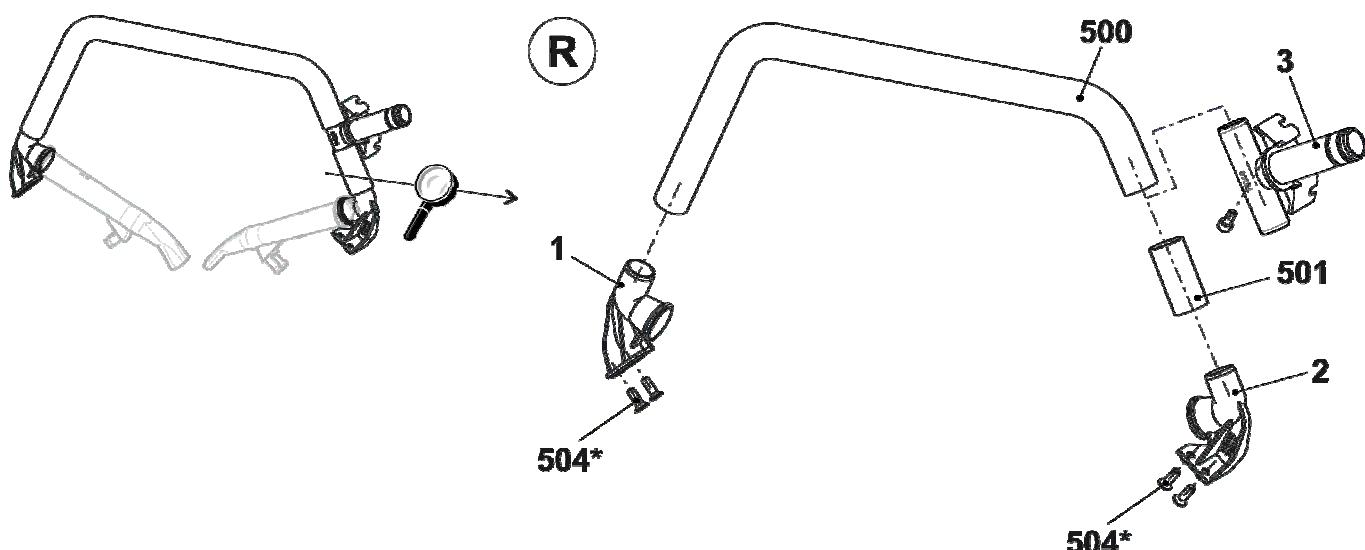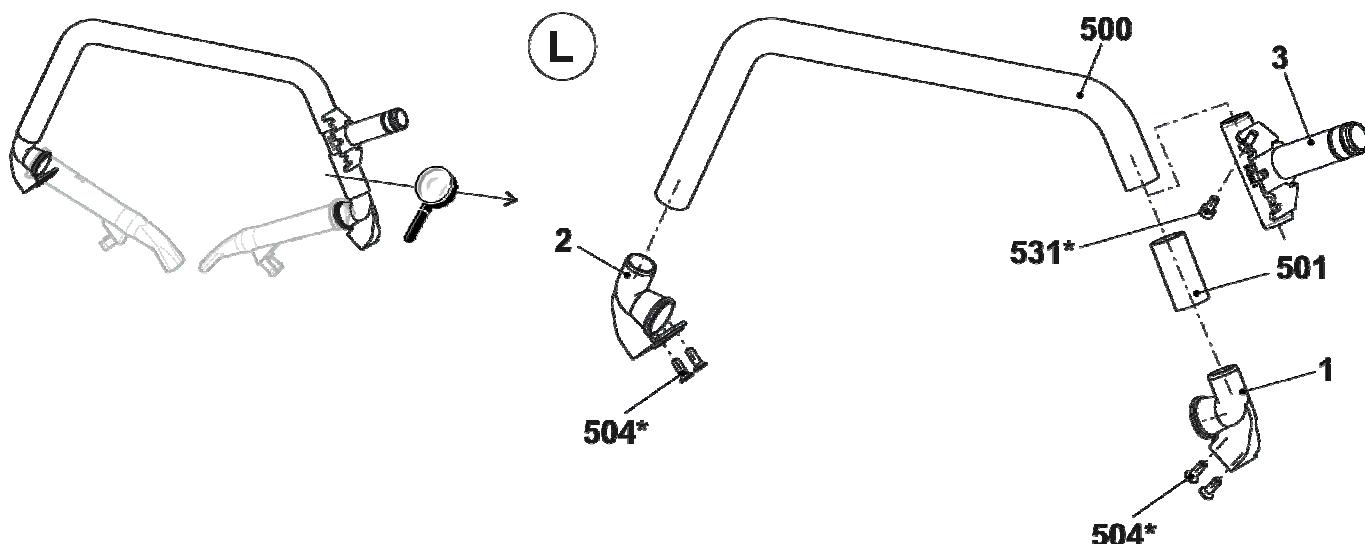



Lint container

Pos	Designation	ID	Pos	Designation	ID
Σ	Lint container		6*	Sealing plug	245 029
1	Lint container	245 024	10*	Cover with filter	251 335
5*	Sealing plug	245 028	501*	Cap screw M6x10	023 690

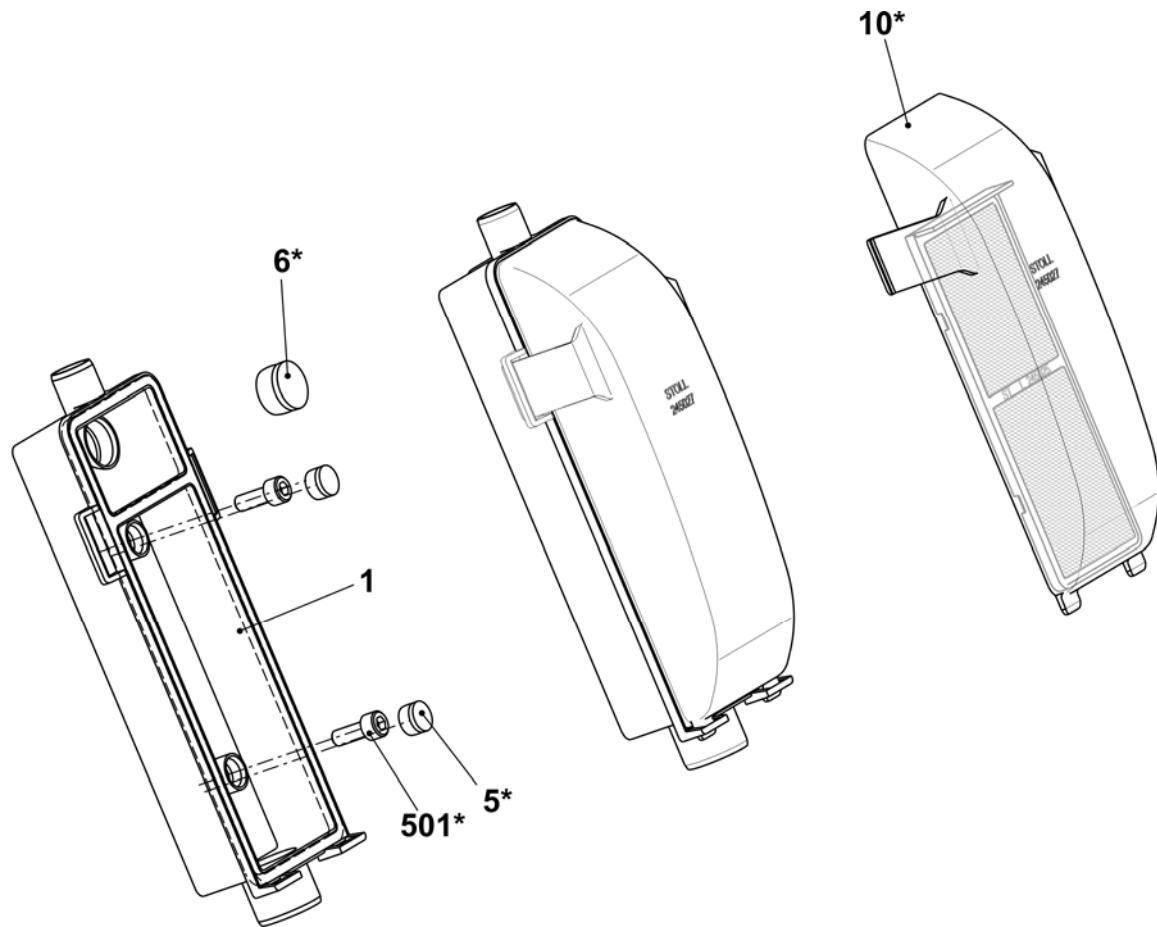


Suction tube

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
Σ	Suction tube complete (E5-14)	251 310	Σ	Suction tube complete E16-18	251 311
1	Suction tube	255 386	1	Suction tube	255 605
2	Bracket	255 627	2	Bracket	255 627
500	Screw KB 30x6	214 424	500	Screw KB 30x6	214 424

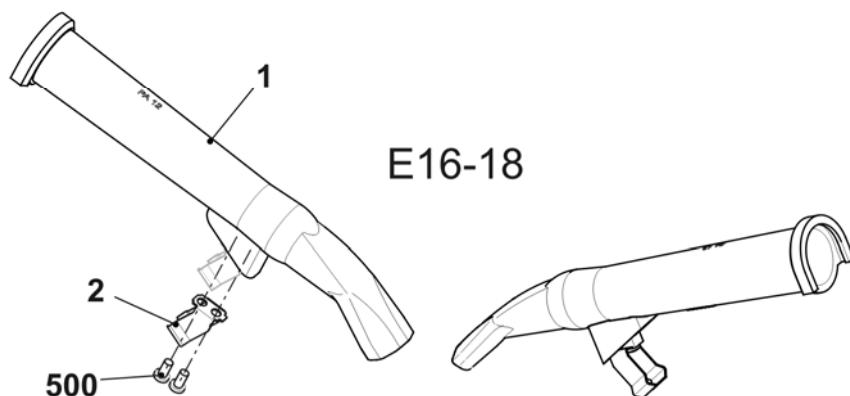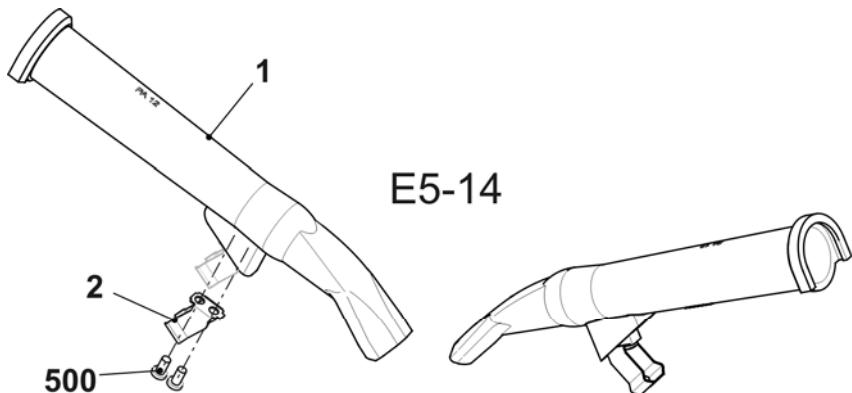


Central lubrication

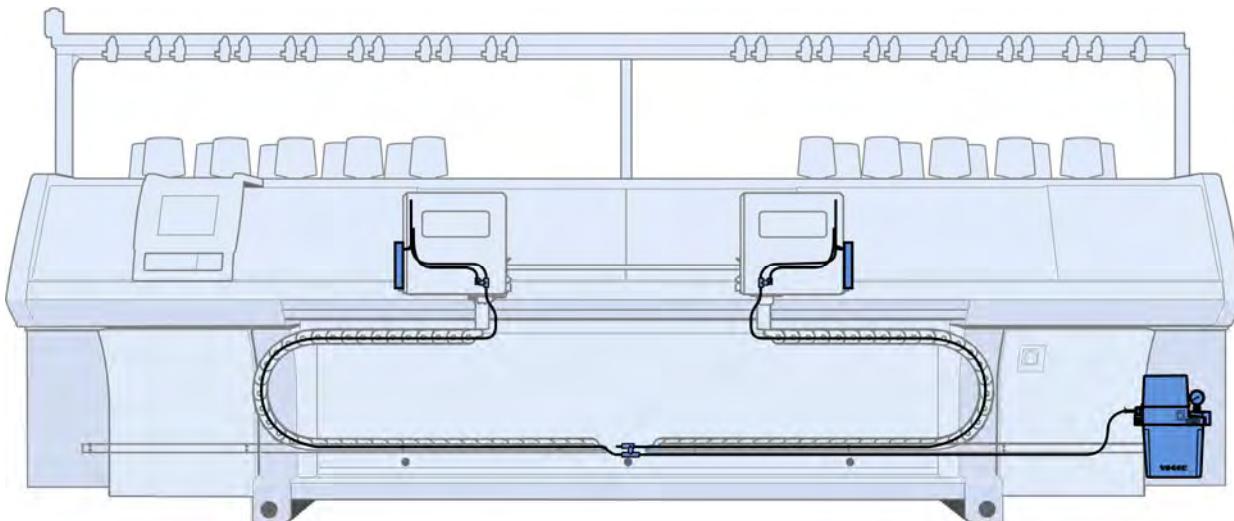


Central lubrication

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Central lubrication	242 949	11	Sealing plug	240 777
1	Oil central lubricating pump Vogel	235 068	12	Cover	240 778
2	Support for oil equipment	241 636	500	Hose D6, L = 500	235 037
3	Lubricating unit at the front complete	241 047	501	Hose D6, L = 1000	235 038
4	Lubricating unit at the rear complete	241 048	502	Hose D6, L = 2500	236 545
5	Joint at the front	240 791	503	Cap screw M8x16	023 629
6	Joint at the rear	240 792	504	U-washer 8	020 883
7	T-piece complete	235 039	507	Countersunk screw M6x12	235 935
8	Cable mains supply 50"/96" OKC	244 406	509	Assembling element	209 543
9	Cable control ZS OKC	238 704	510*	Hose D6, L = 3300	235 044

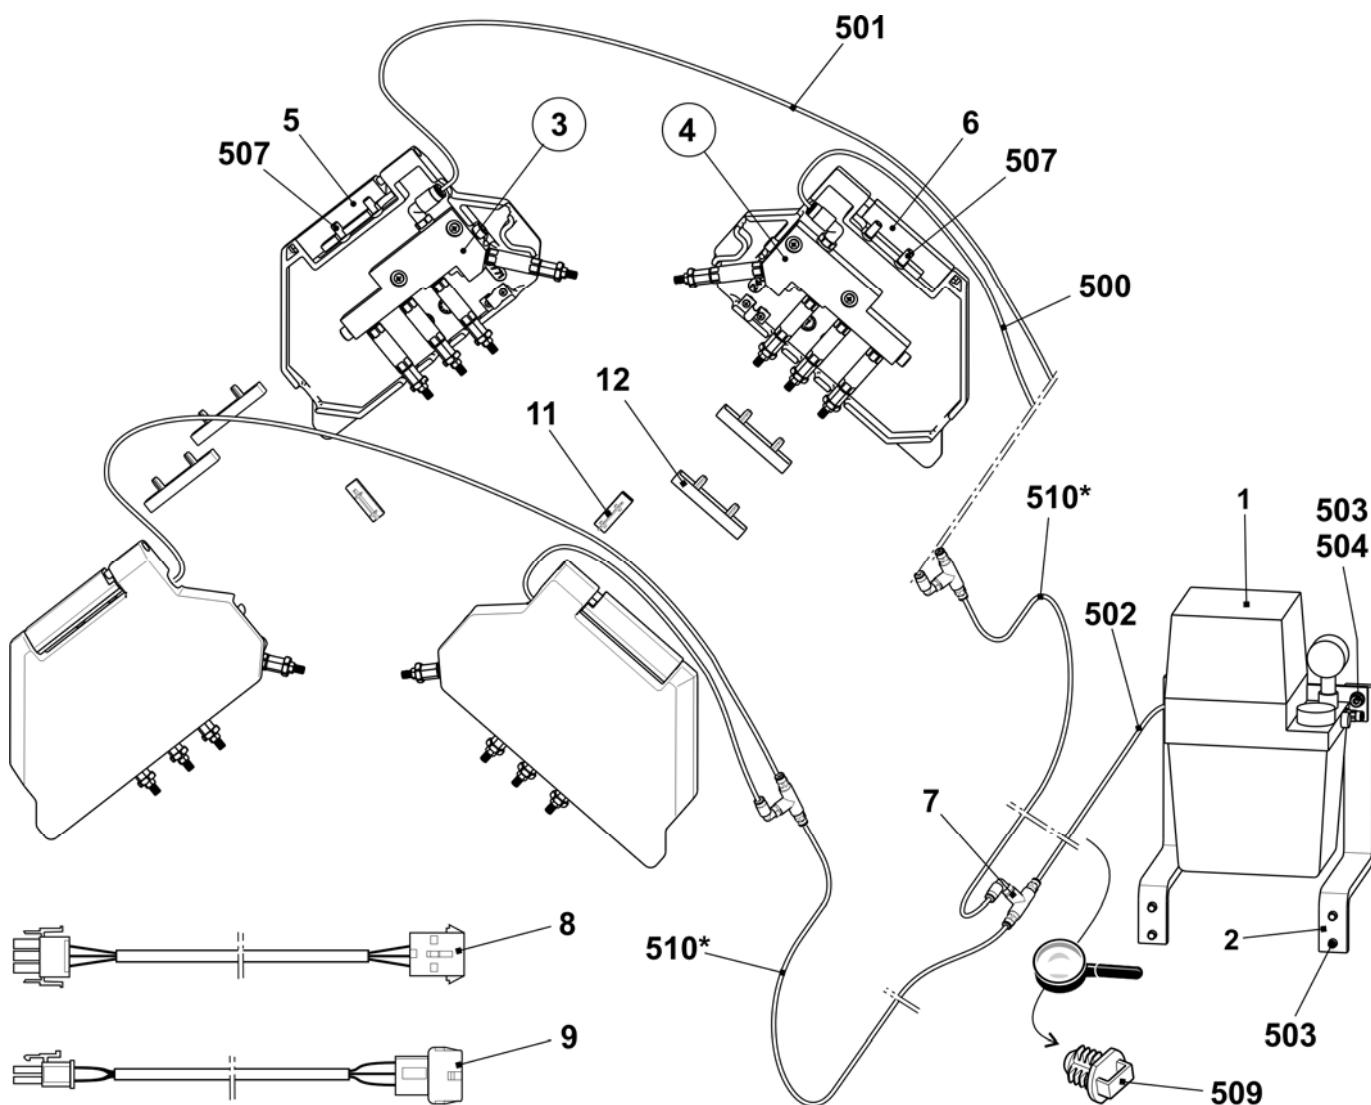


Lubricating unit at the front complete

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Lubricating unit at the front complete	241 047			
1	Housing at the front	240 771	500	Hexagon nut M4	023 046
2	Distributor complete	241 046	501	U-washer 4	023 047
4	Locking plunger	235 054	502	Screw KB 40x8	238 089
5	Shoulder screw	240 790	503	Screw KB30x8	236 228

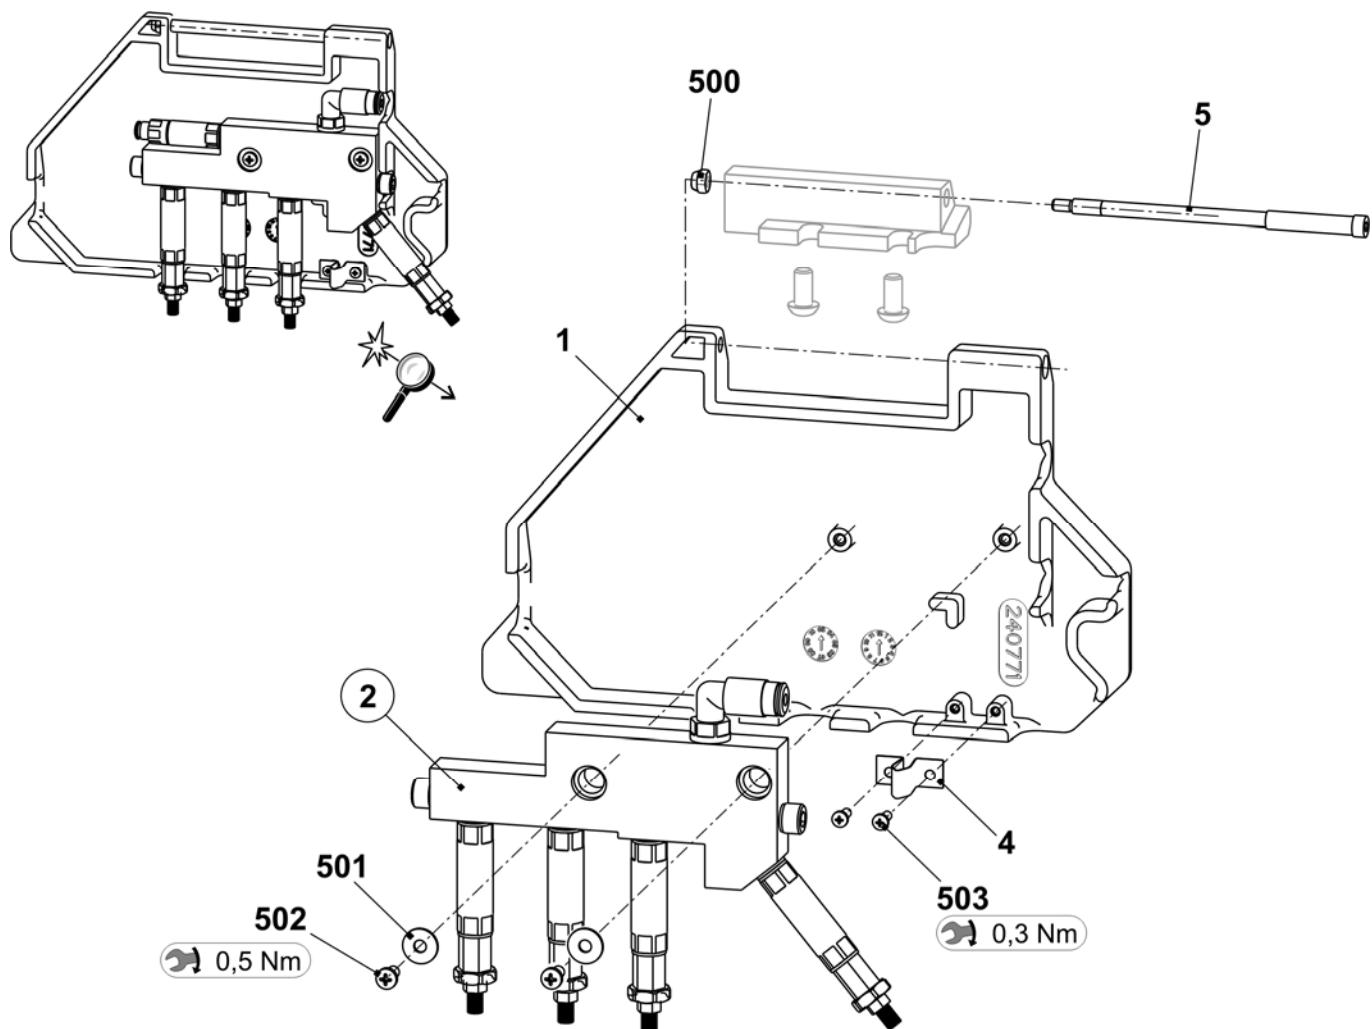


Distributor complete

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Distributor complete	241 046	502	Hexagon nut M8-04	020 856
1	Distributor	240 773	503	Sealing ring A8x11.5	023 892
2	Brush	235 050	505	Swivelling connection	235 067
3	Adapter brush	235 049	506	Dosing unit screw connection	235 079
500	Cap screw M6x10	023 690	507	Dosing unit screw connection	237 809
501	Sealing ring A6.5x9.5	237 456			

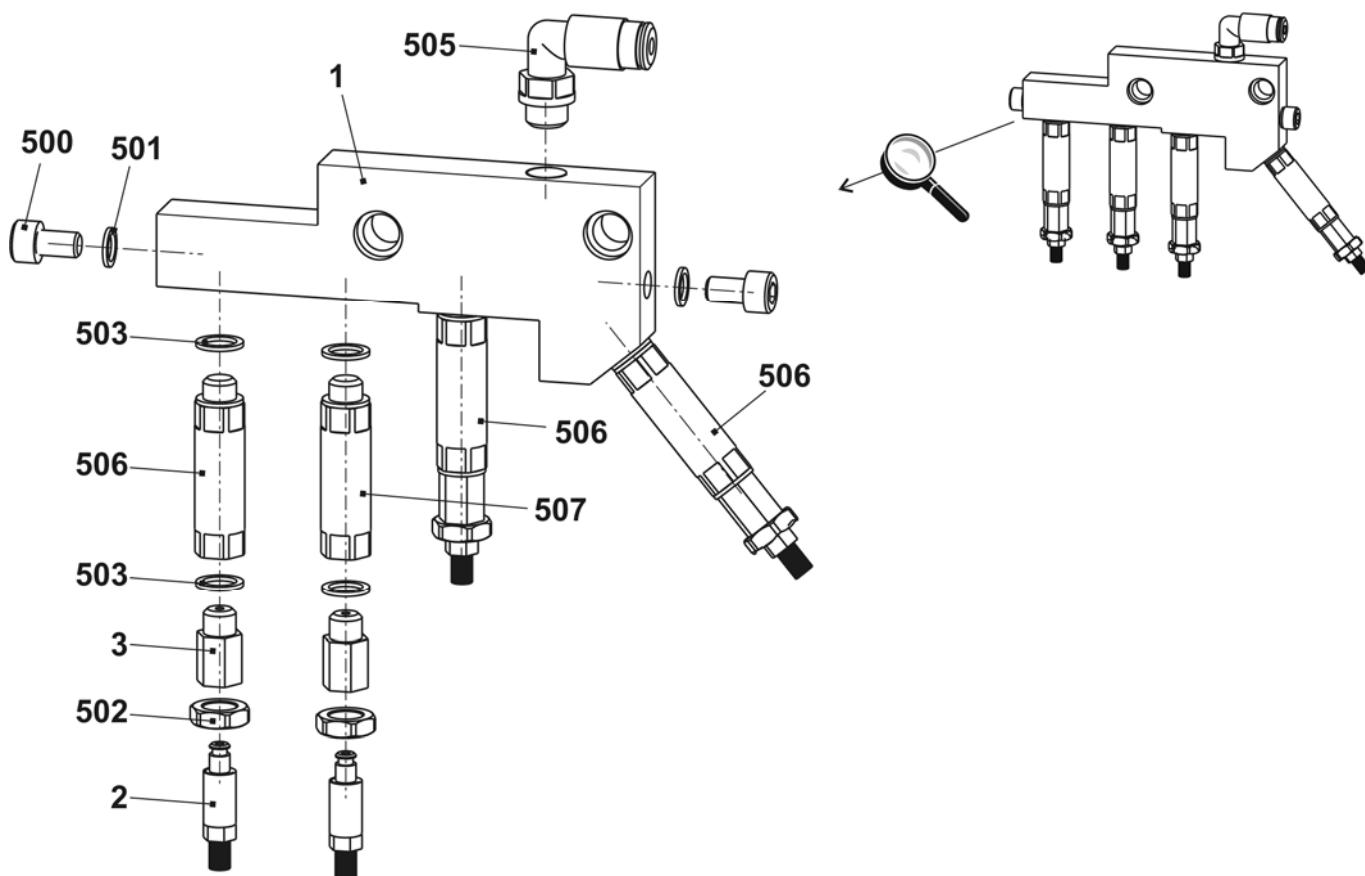


Lubricating unit at the rear complete

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Lubricating unit at the rear complete	241 048			
1	Housing at the rear	240 772	500	Hexagon nut M4	023 046
2	Distributor complete	241 046	501	U-washer 4	023 047
4	Locking plunger	235 054	502	Screw KB 40x8	238 089
5	Shoulder screw	240 790	503	Screw KB30x8	236 228

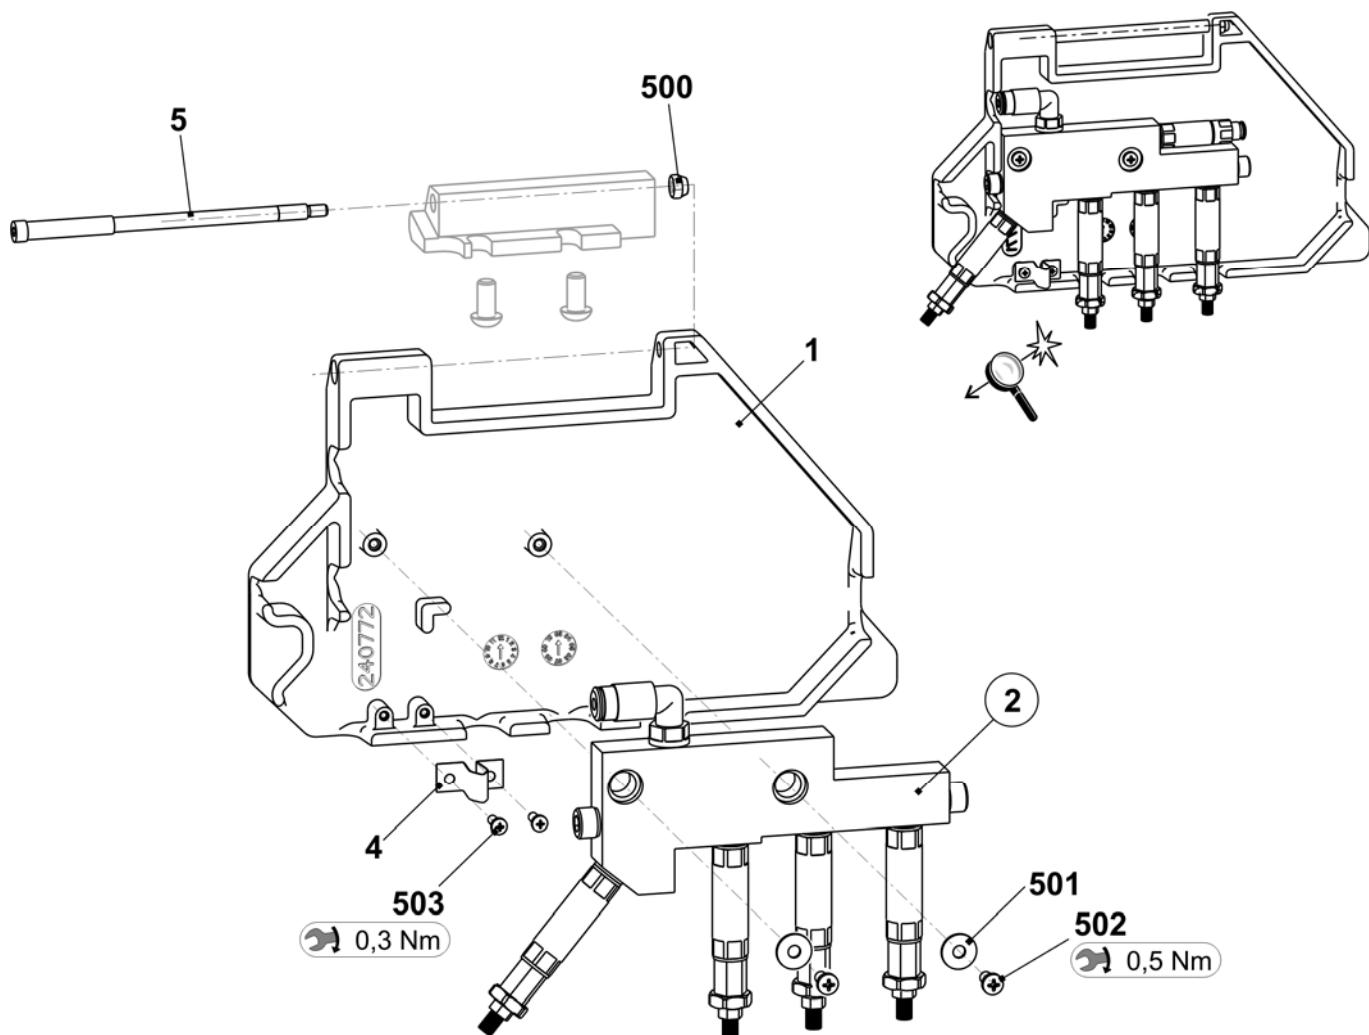


Operation and control

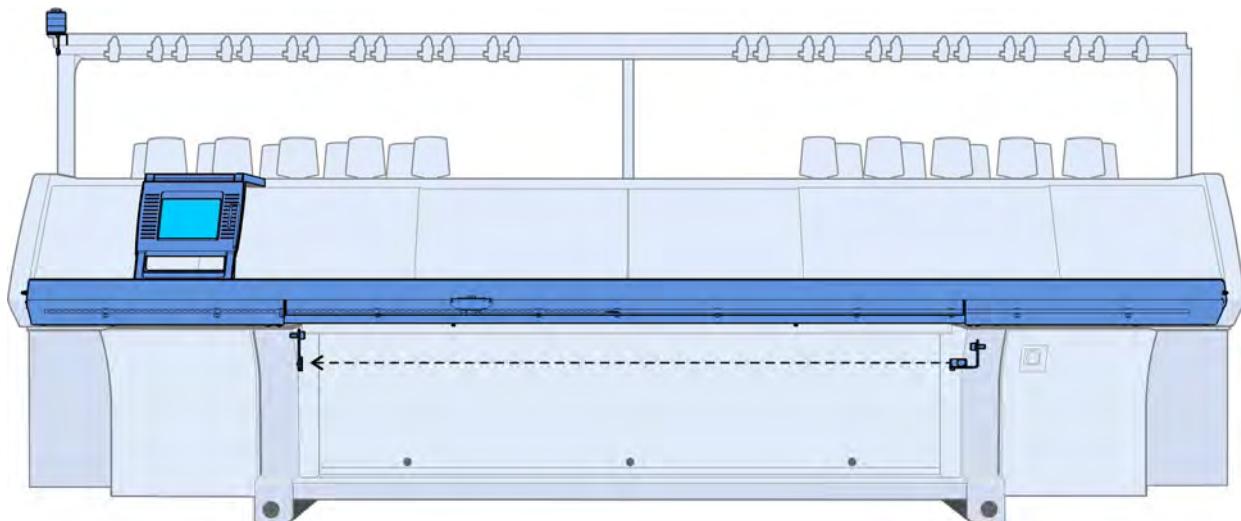


Input unit

Pos	Designation	ID	Pos	Designation	ID
Σ	Input unit complete	240 194	6	Touch pen	242 812
1	Base frame	240 195	10*	Touch panel spare parts package	244 554
3	Bearing strip complete	240 198	502	U-washer	020 901
4	Display touch complete	250 298	503	Screw KB 50x12	240 359

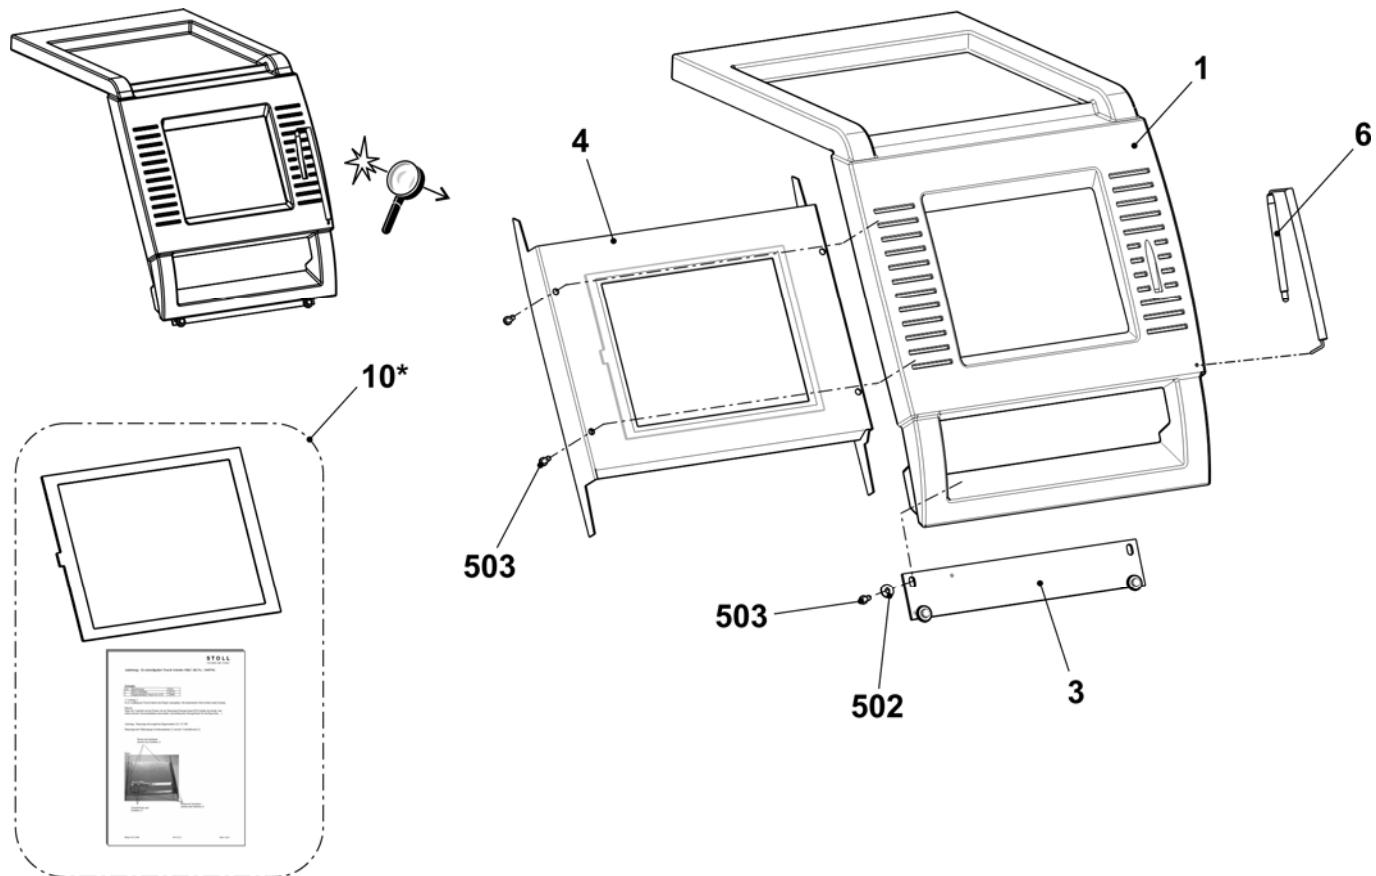


Starting unit

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Starting unit complete	241 350			
1	Engaging rod	241 224	12	Bearing on the right complete	252 964
2	Bearing on the left complete	250 071	502	Cap screw M6x16	020 135
3	Guide rail at the bottom complete	251 229	503	Countersunk screw M5x14	023 588
6	Cover plate on the right	251 220	504	Cap screw M6x12	020 134
7	Cover plate on the left	251 221	505	Cap screw M6x20-12.9	020 136
8	Fixing bolt	219 107	506	U-washer	020 872
9	Switch with cable to protective hoods	223 350	509	Screw M6x25	023 510
10	Sliding nut (sliding block)	225 099	511	Adhesive base	243 055
11	Stabilizer	244 634	512	Cap screw M6x10	023 690

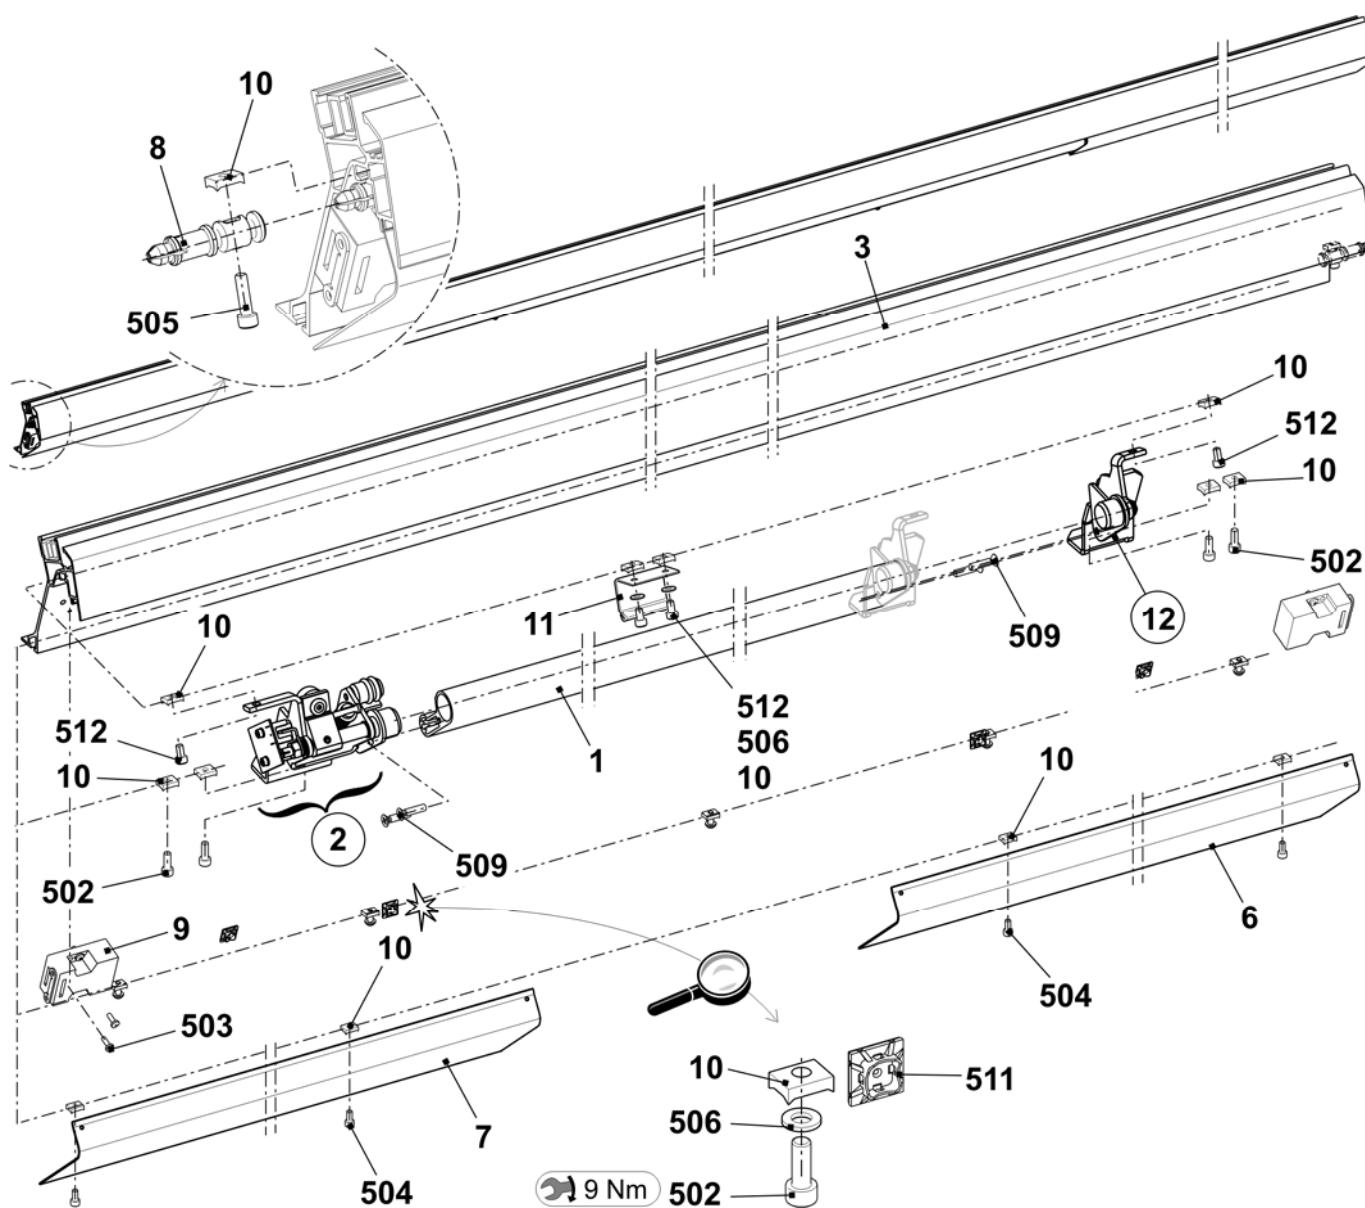


Bearing of the engaging rod

Pos	Designation	ID No.	Pos	Designation	ID No.
L	Bearing on the left complete	250 071			
1	Bearing on the left	245 218	505	Hexagon nut M8x6	020 838
A1	Clip bearing MCM12-04	023 639	506	Dowel pin 1.5x8	236 923
2	Support buffer	220 561	507	Spring dowel sleeve 6x20	023 719
2a	O-ring 14x4	023 237	508	Shoulder screw M4x24.8x7.7	240 299
3	Shaft on the left	245 219	509	Shoulder screw	251 316
4	Rotor	253 776	510	Shim ring 12x18x1	023 315
5	Switch flag	245 220	511	Locking ring 12x1	020 951
6	Spring pin	251 340	512	Compression spring 1.25x15x98.2	023 609
7	Disc	245 222	513	Compression spring 0.5x11x12	251 369
8	Shoulder screw	254 528			
9	Distance bolt	240 287			
500	Cap screw M4x6	023 067	R	Bearing on the right complete	252 964
501	Cap screw M4x8	022 501	1	Bearing on the right	240 230
502	Shim ring 4x8x1	023 369	A1	Clip bearing MCM 12-04	023 639
503	Card engaging OKC	240 167	2	Shaft on the right	242 888
504	Adhesive magnet direct current	026 233	500	Shim ring 12x18x1	023 315
			502	Locking ring 12x1	020 951

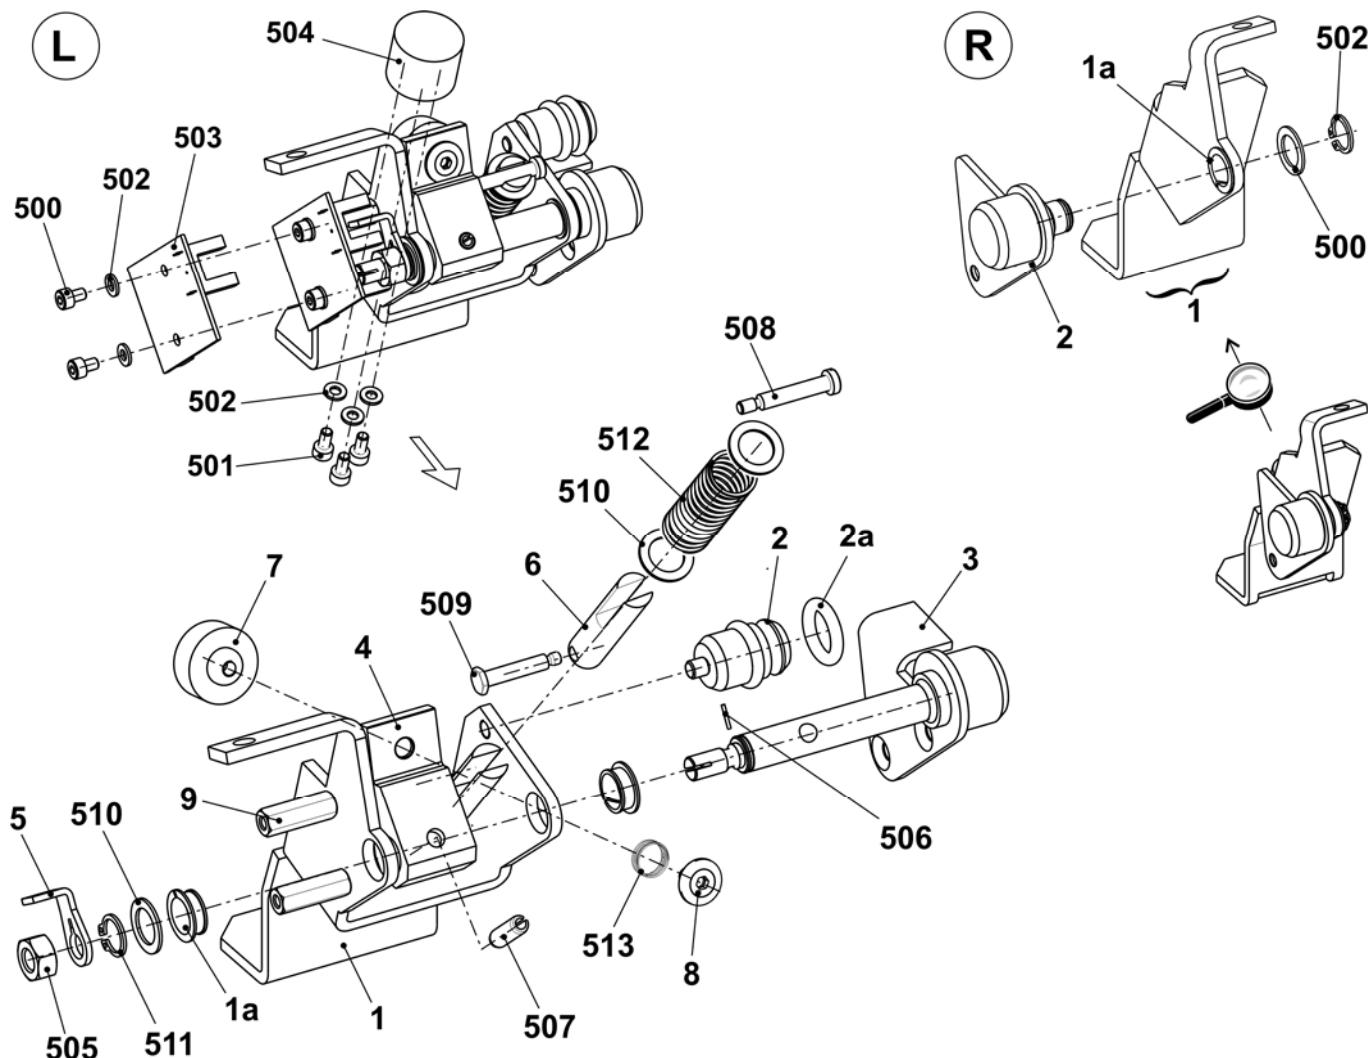


Signal light

Pos	Designation	ID	Pos	Designation	ID
Σ	Warning light LED	240 395			
500	Countersunk screw M4x14	023 037			
501	Serrated lock washer A4.3-FS	022 482			

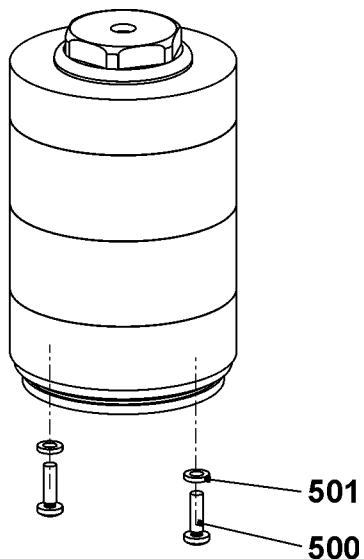


Shock stop motion (up to E14)

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Shock stop motion complete	220 873	3	End plug piezo sensor	220 053
1	Shock stop motion (Piezo)	220 011	500	Countersunk screw M4x8	023 036
2	Connecting cable piezo sensor	220 063	502	Cable clip N-3B, 5 mm	210 729

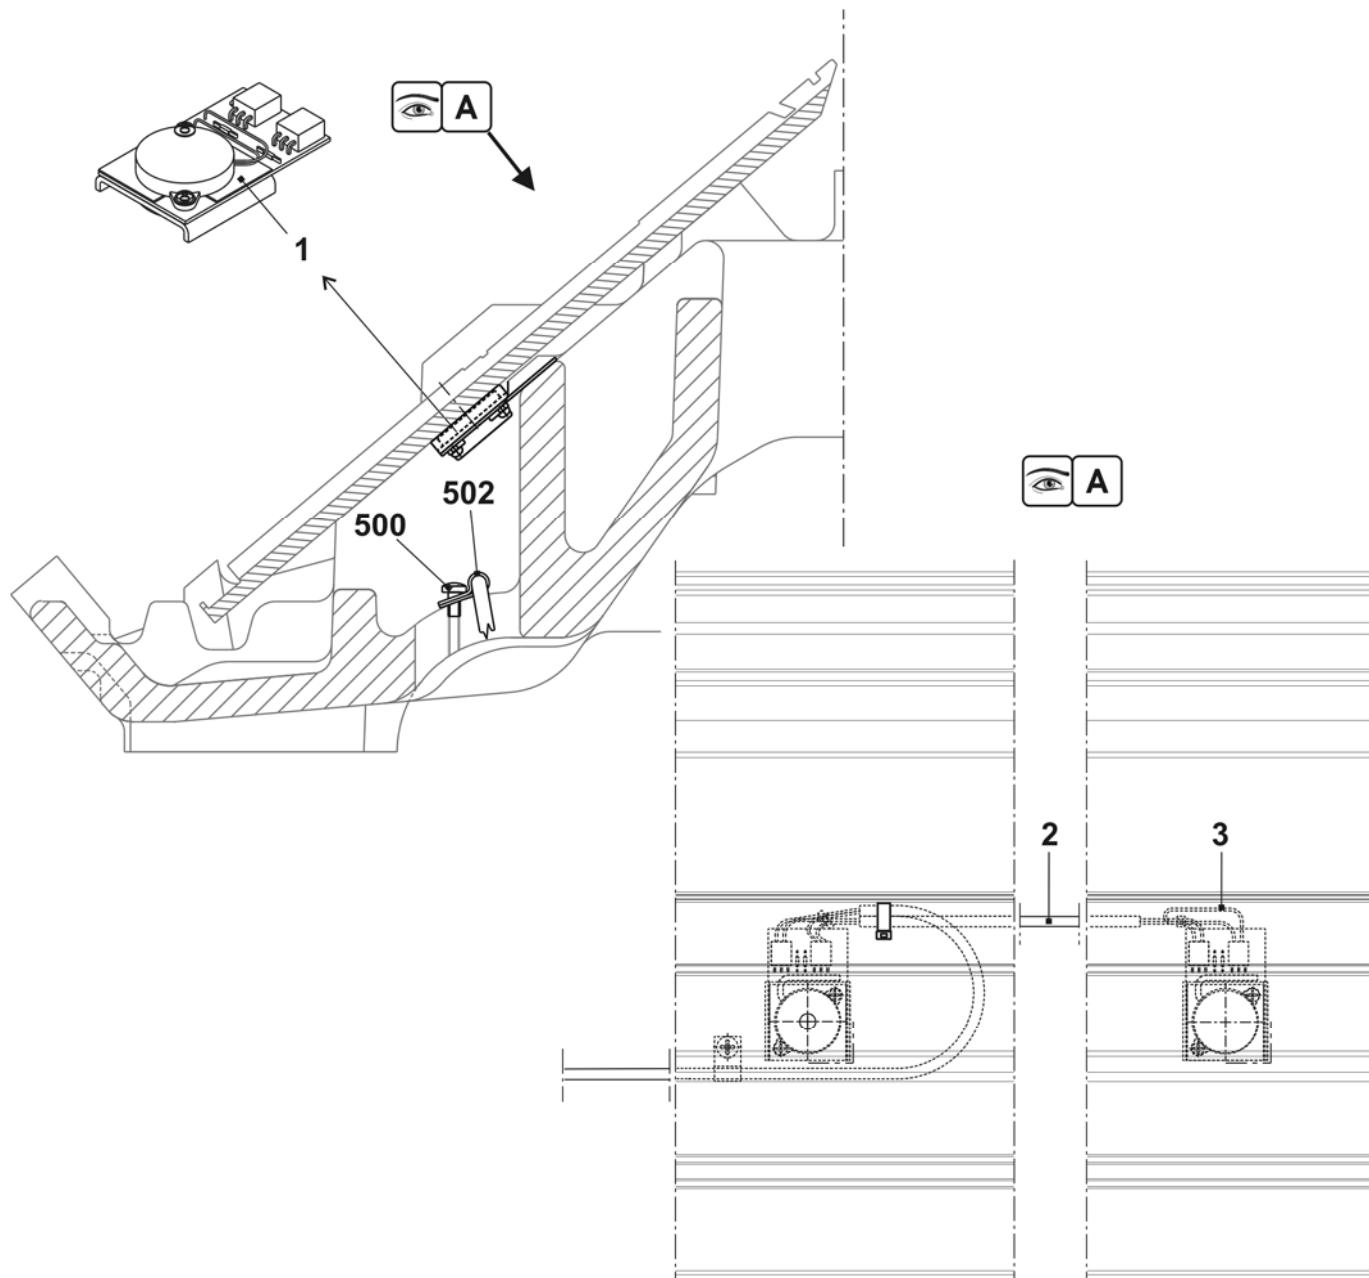



Shock stop motion E16-18

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Shock stop motion complete E16 – E18	250 387			
1	Shock stop motion (Piezo)	220 011	4	Cable connection piezo	250 294
2	Cable connection piezo	250 293	500	Countersunk screw M4x8	023 036
3	End plug piezo sensor	220 053	502	Cable clip N-3B, 5 mm	210 729

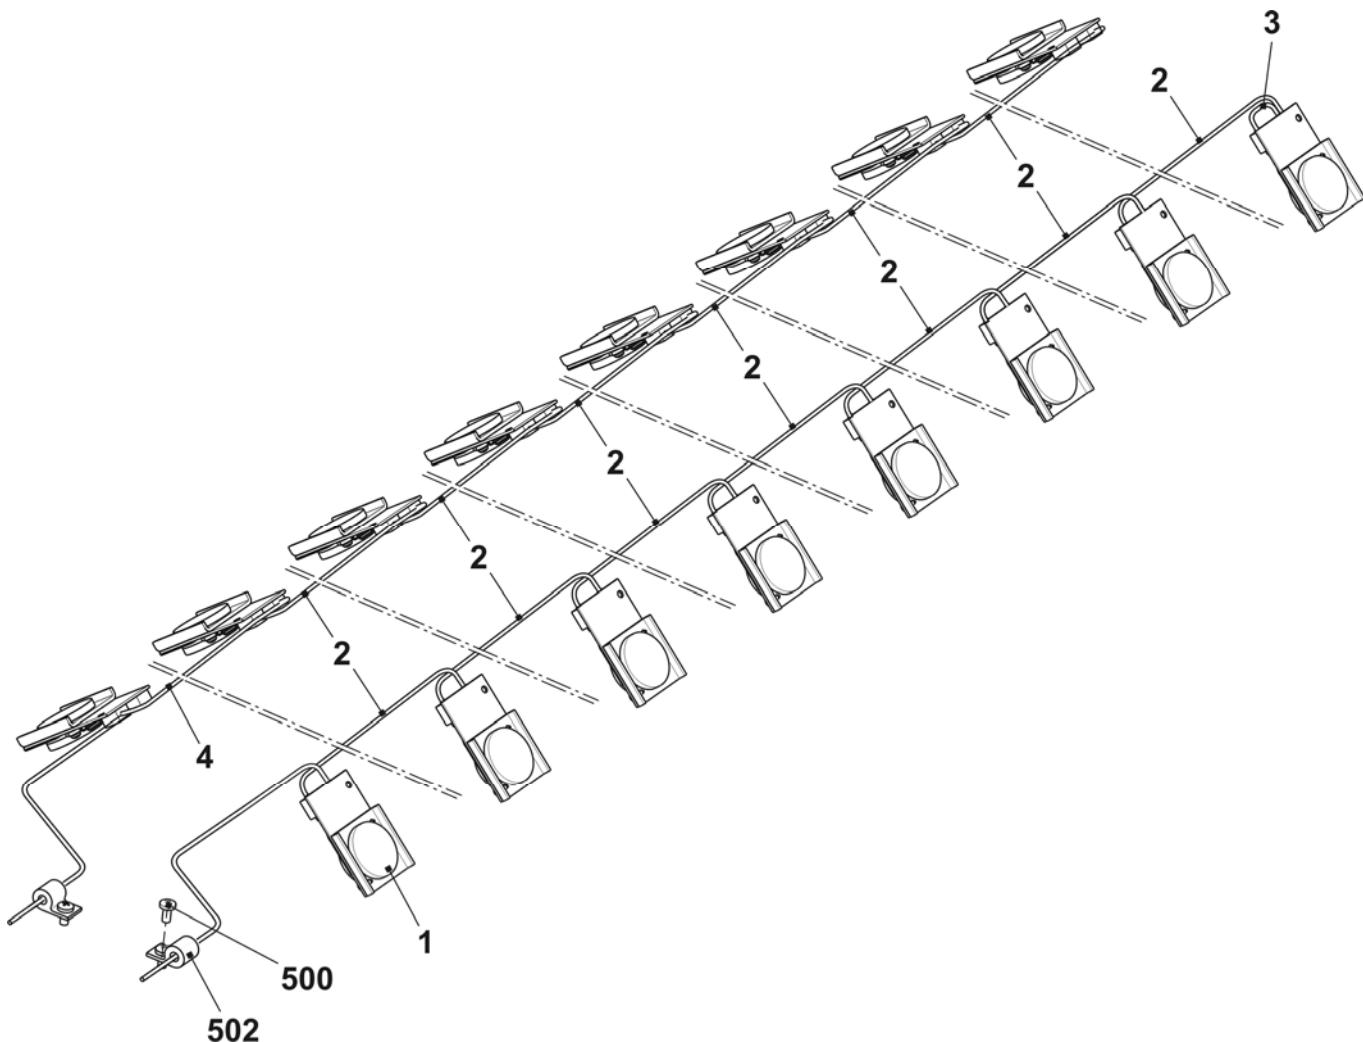


Measuring device E5 + 8

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Measuring device E5 + E7 + E8 + E5m.4 + E7m.5 + E7m.8 + E8m.7 + E3,5.2	254 153			
1	Measuring bar	242 359	500	Countersunk screw	241 603
2	Guidance	212 210	502	U-washer	020 881
4	Guidance	240 672	10*	Measuring head complete	240 562
	540 Set screw	230 803			

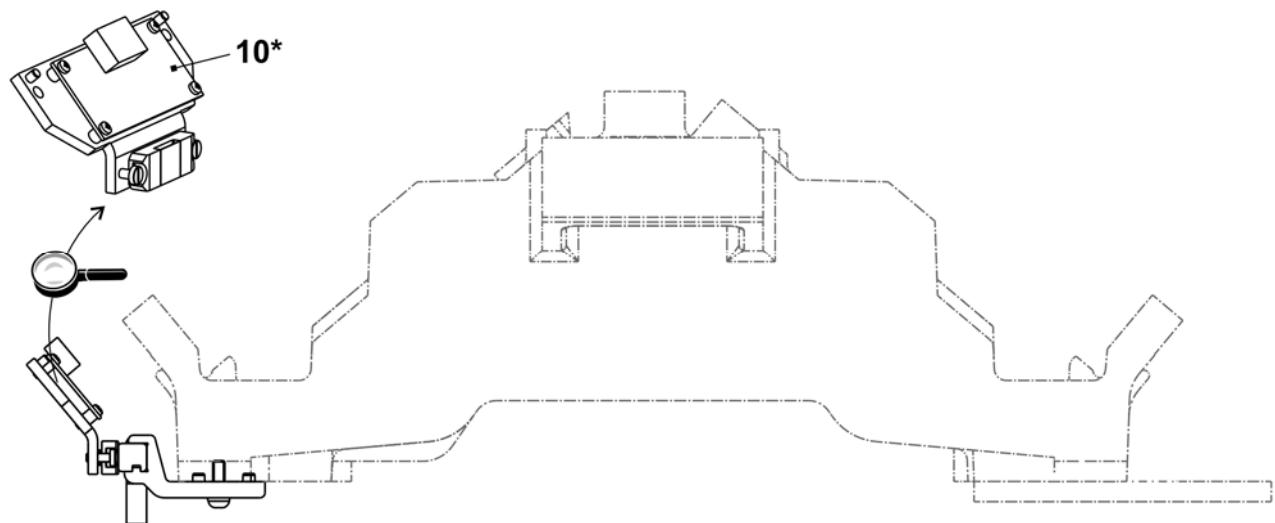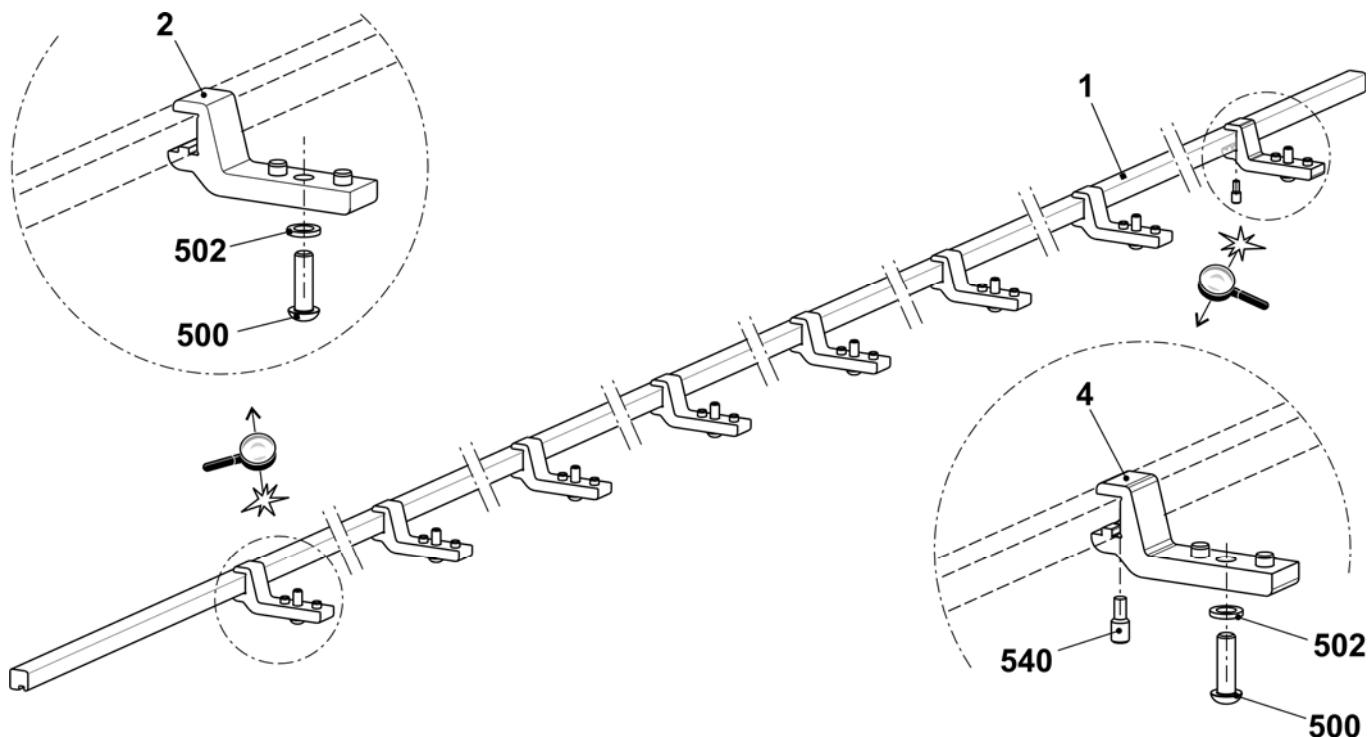


Measuring device E10 + 16

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
Σ	Measuring device E10 + E12 + E14 + E16 + E7m.5 + E10m.12 + E12m.10 + E5.2 + E6.2 + E7.2 + E8.2	242 972			
1	Measuring bar	242 359	5	Guidance exterior	251 633
2	Guidance	212 210	500	Countersunk screw	241 603
4	Guidance	240 672	502	U-washer	020 881
	540	Set screw	10*	Measuring head complete	240 562

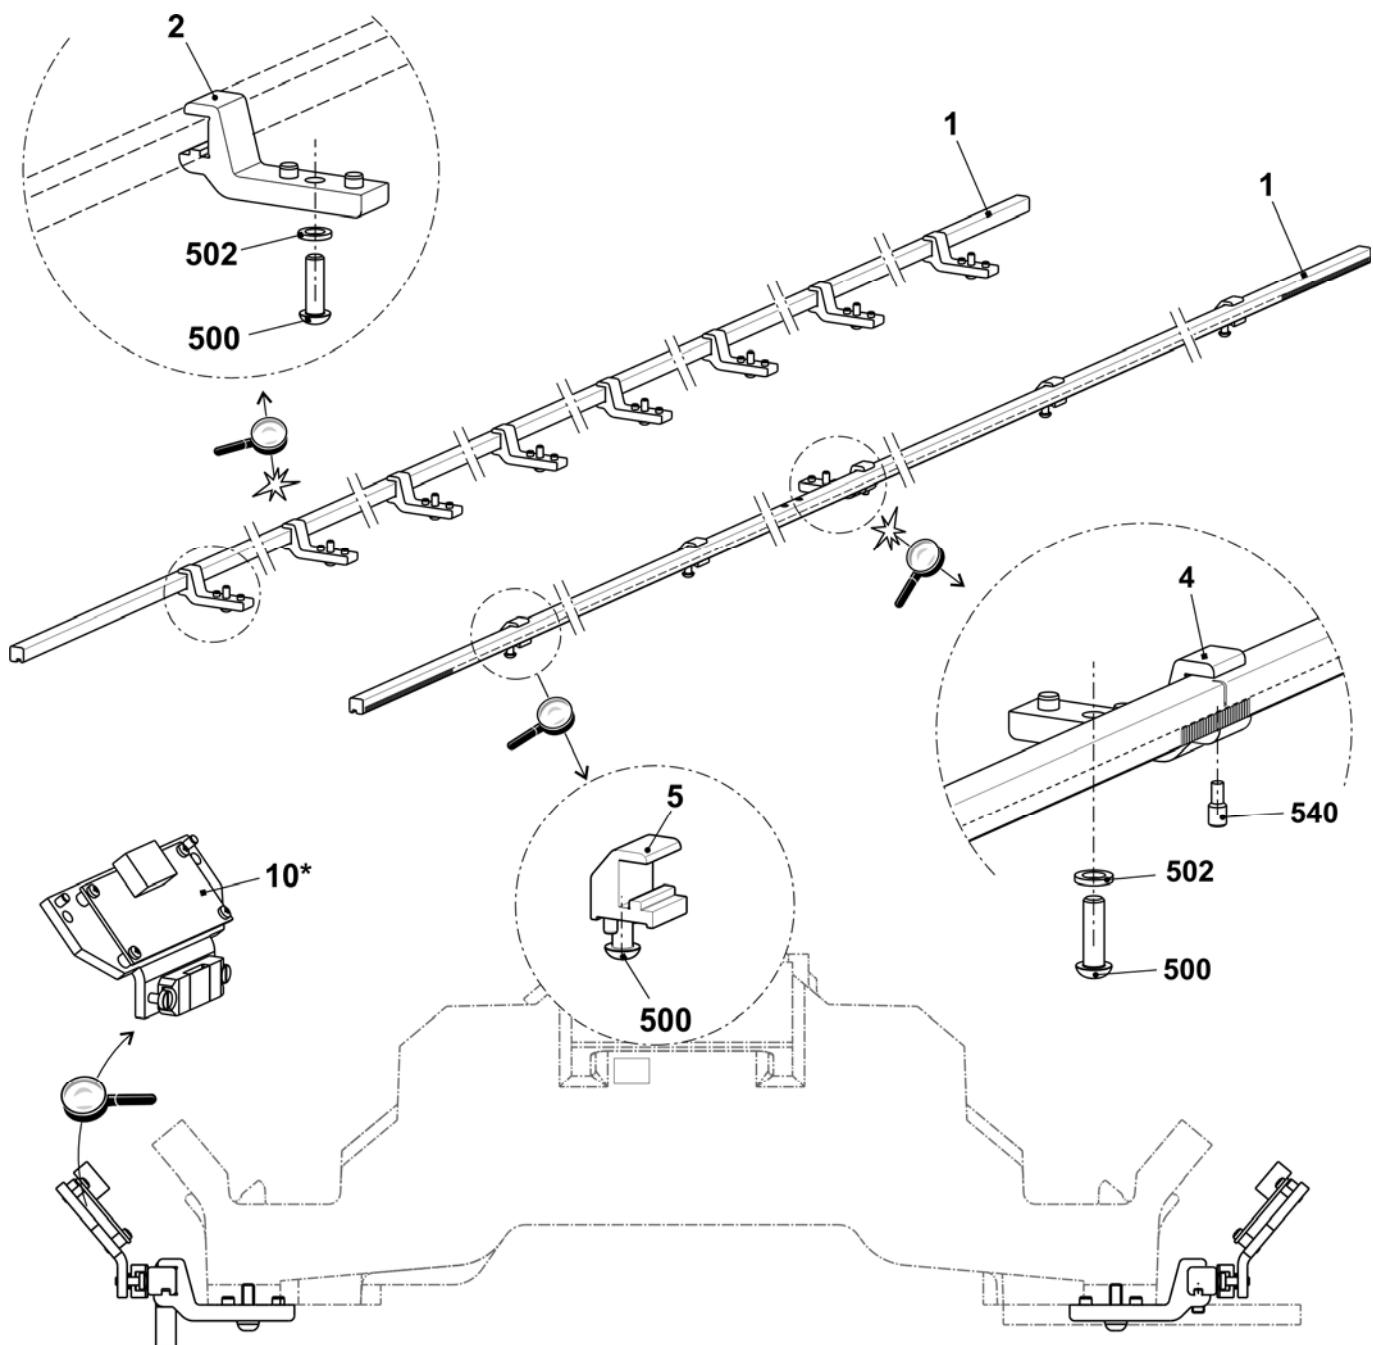


Protective device

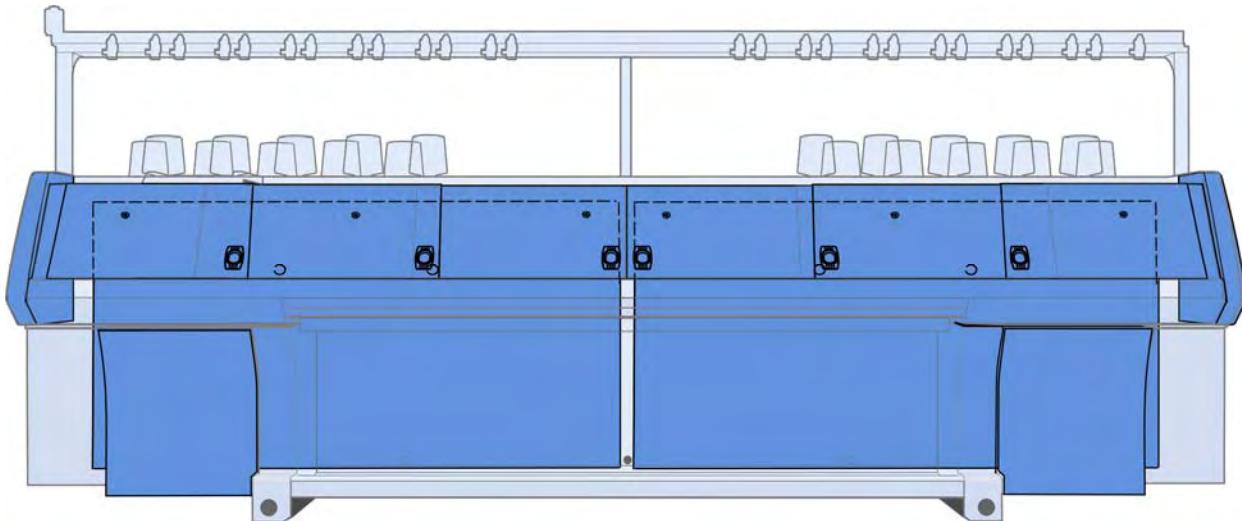


Lateral safety covers

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
1	Safety cover on the left	250 562	4*	Locking plate	219 748
	Safety cover on the right	250 563	505*	Screw KB60x30	237 683
2*	Hinge	241 994	510*	Screw KB 60x20	237 682
3*	Plate	224 717			

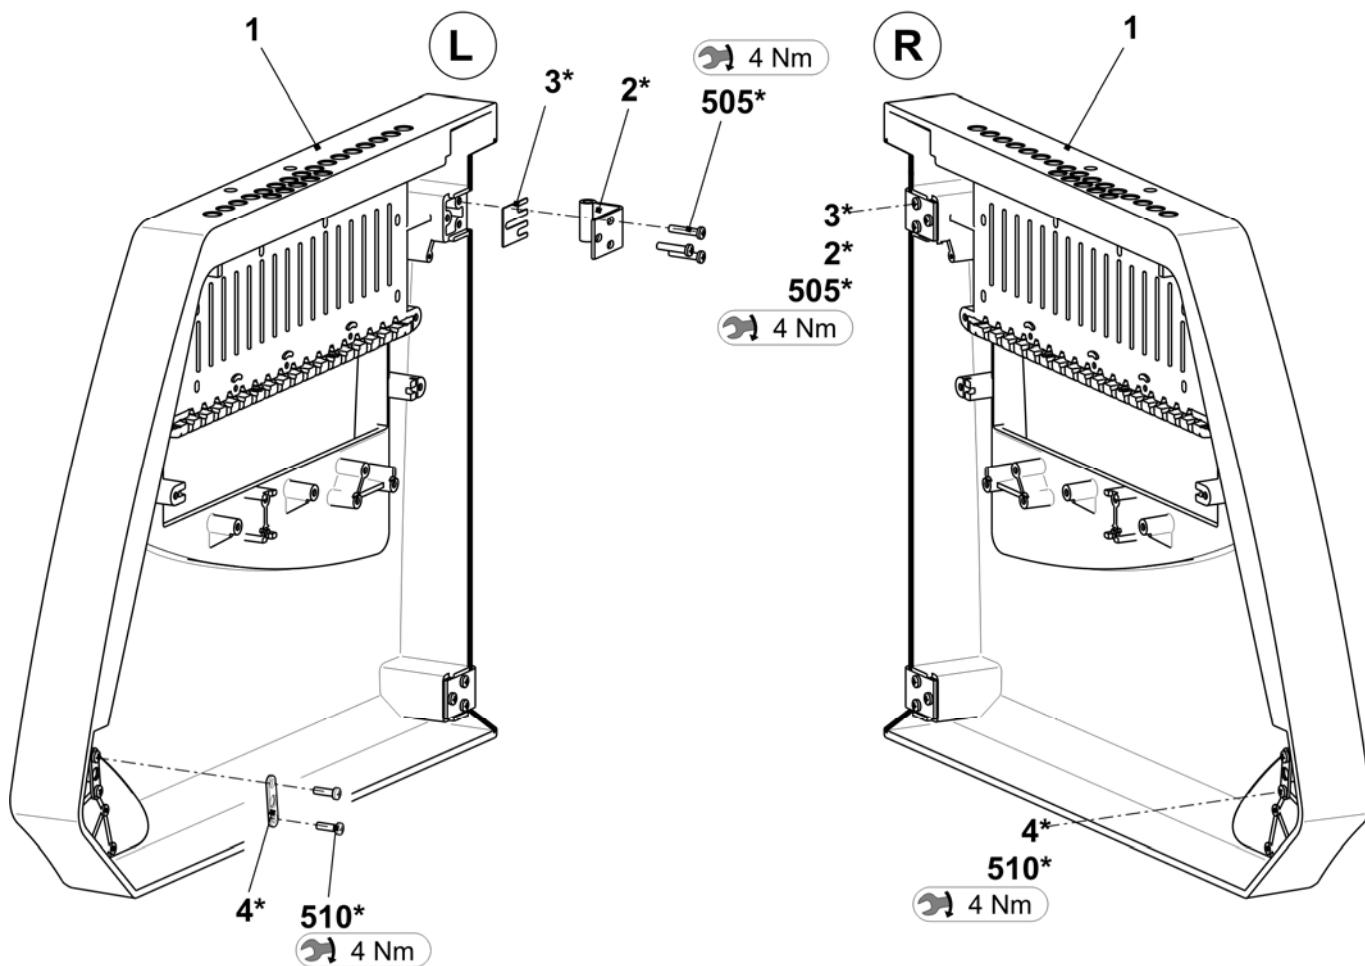


Rear panel

Pos	Designation	ID No.	Pos	Designation	ID No.
1	Panelling at the rear complete	251 567	2	Panelling at the rear complete	251 575
	A1 Panelling at the rear	251 566		2a Panelling at the rear	251 574
	1b Safety sash fastener complete	243 052		2b Safety sash fastener complete	243 052

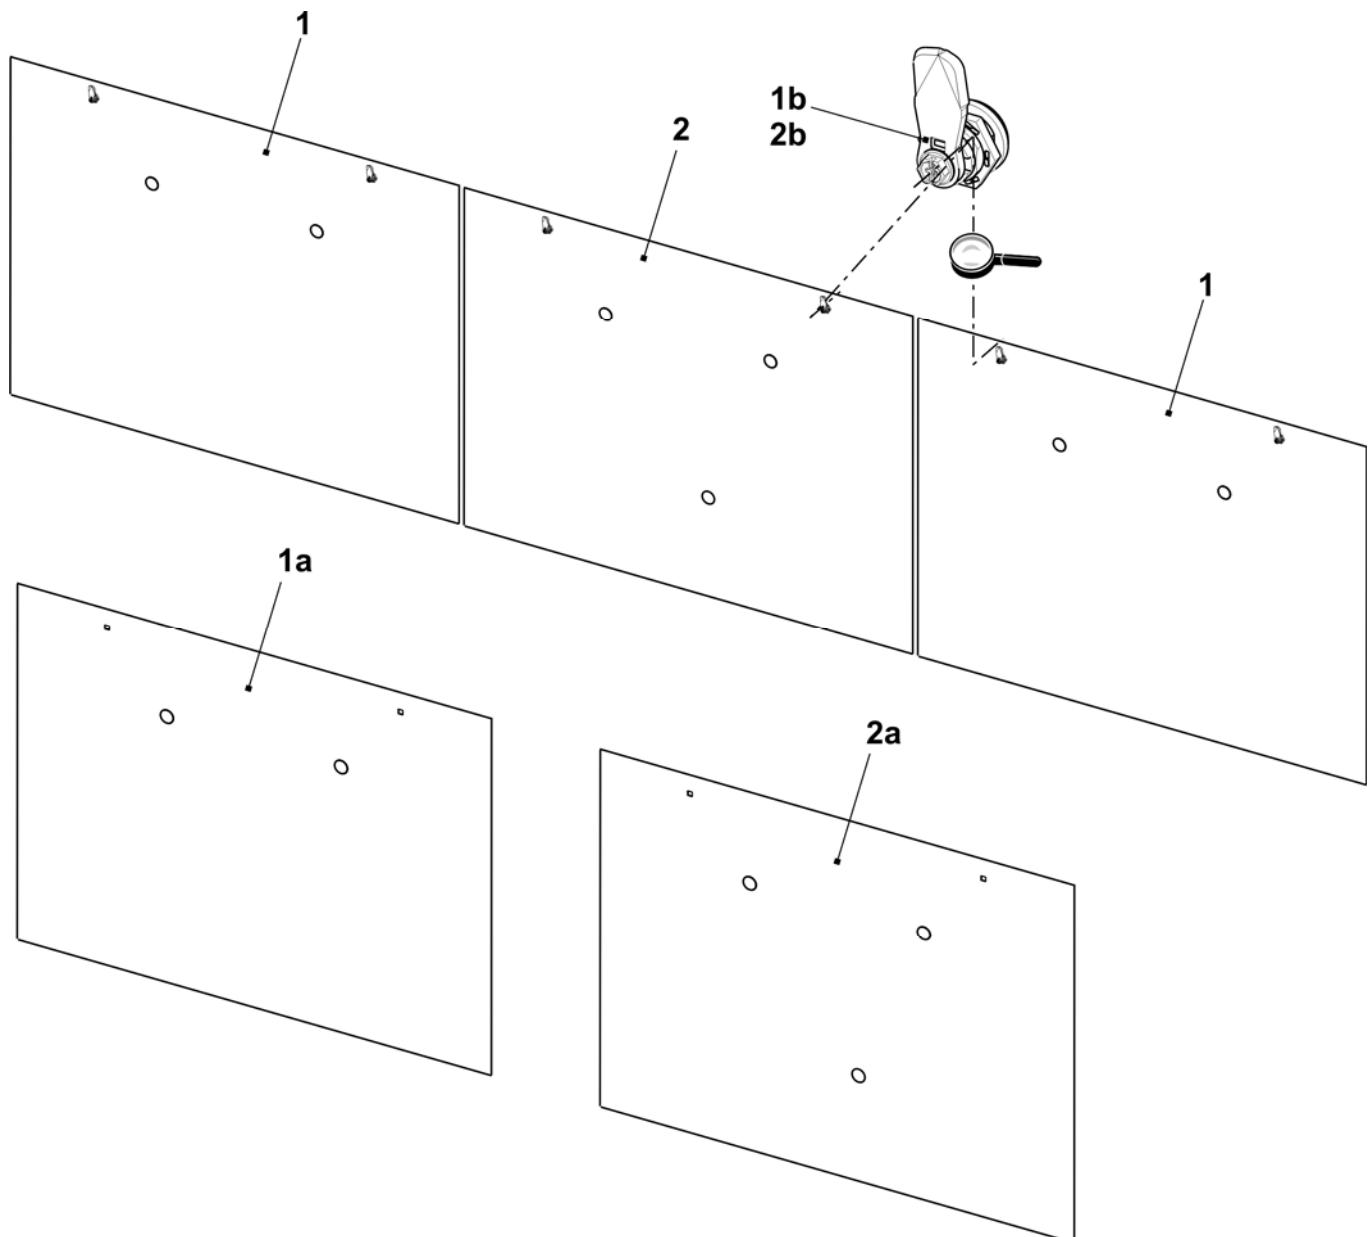


Panelling

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
1	Cover 1 (complete)	251 304	5	Cover 5 (complete)	251 308
A1	Cover 1	251 298	A5	Cover 5	251 302
2	Cover 2 (complete)	251 305	6	Cover 6 (complete)	251 309
2a	Cover 2	251 299	A6	Cover 6	251 303
3	Cover 3 (complete)	251 306	b	Inlet type handle	251 376
3a	Cover 3	251 300	c	Stripper	219 393
4	Cover 4 (complete)	251 307	d	Magnet	204 666
A4	Cover	251 301	8	Control unit panelling on the right complete	251 172
7	Control unit panelling on the left complete	251 171	A8	Control unit panelling on the right	251 186
A7	Control unit panelling on the left	251 185	8b	Side part on the right	251 174
7b	Side part on the left	251 173	r	Hinge on the right	252 891
p	Hinge on the left	252 890	7/8	500 Screw KB 50x12	240 359
7/8	q Strap	240 412	501	Cap screw M6x16	020 135

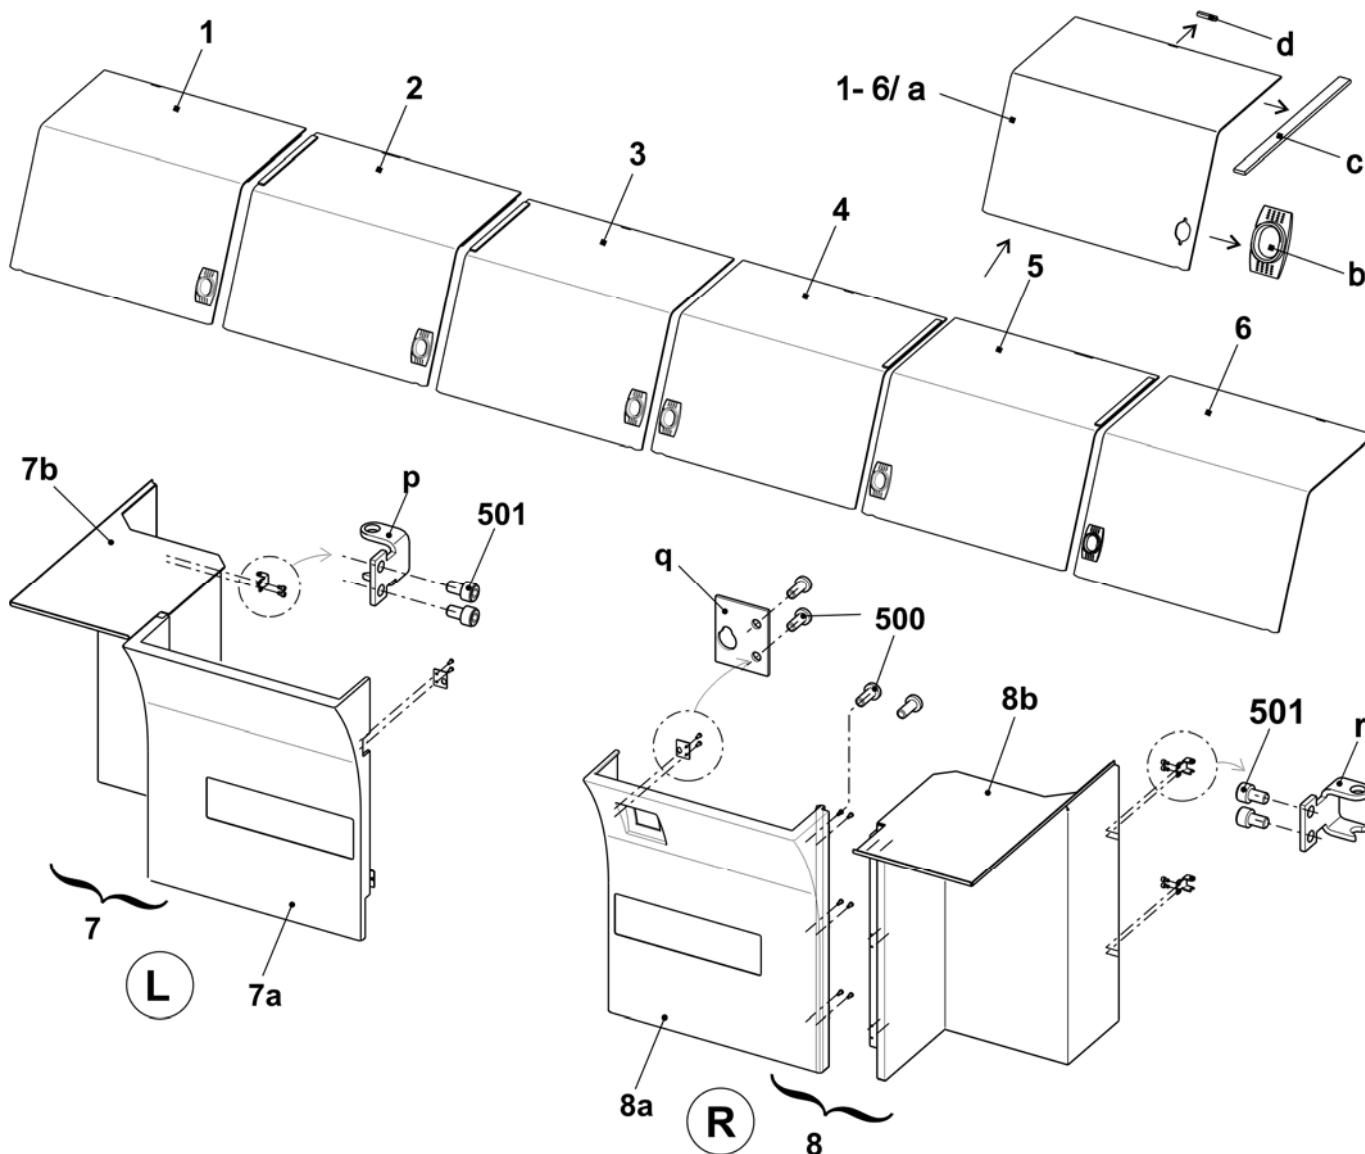

Electrical equipment

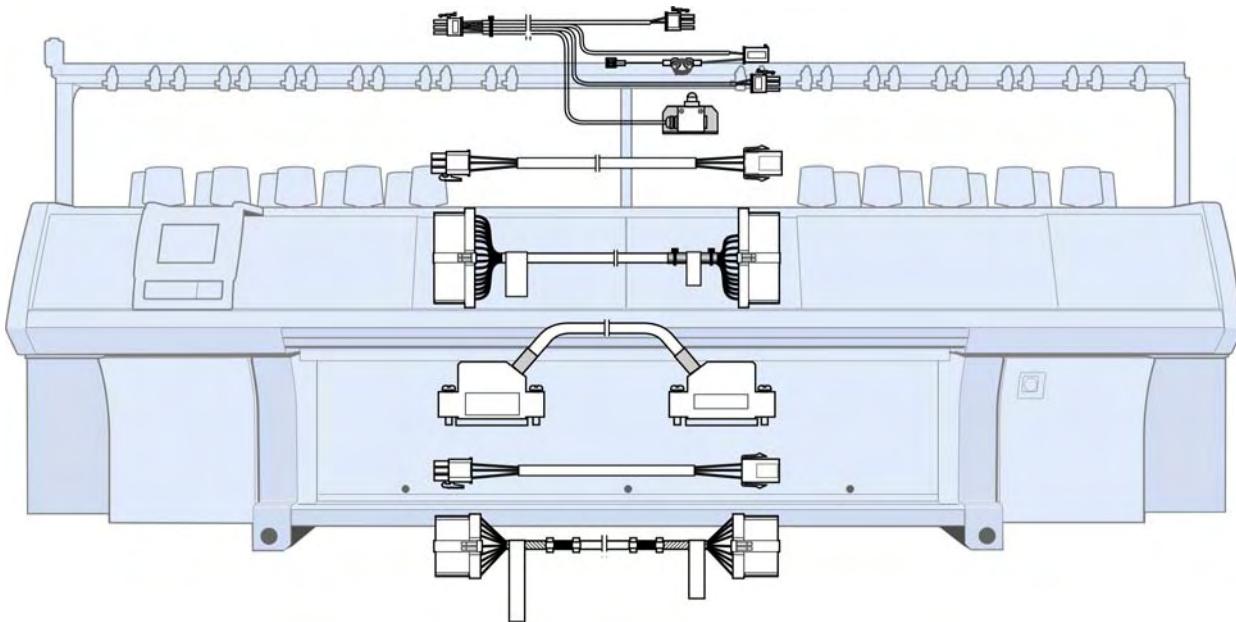


Fuses

<i>Designation</i>		<i>ID</i>
	Fuse 1.0A F 5x20	008 748
	Fuse 3,15A T/440V 6,3x32	025 261
	Fuse 10A T/440V 6,3x32	025 258
	Fuse 2,5A T/440V 6,3x32	217 465
	Fuse 1,6A T/440V 6,3x32	236 229
	Fuse 6,3A T/440V 6,3x32	026 809
	Fuse 8A T/440V 6,3x32	241 866
	Fuse 12,5A T/440V 6,3x32	232 367





Circuit diagram as PDF

Designation	ID No.	Marking
Circuit diagram 219 German	243 991	_GB
Circuit diagram 219 English	243 991	_GB
Circuit diagram 219 Chinese	243 991	_CN




You will find the circuit diagram 219 on the CMS documentation DVD with the ID 253 132.

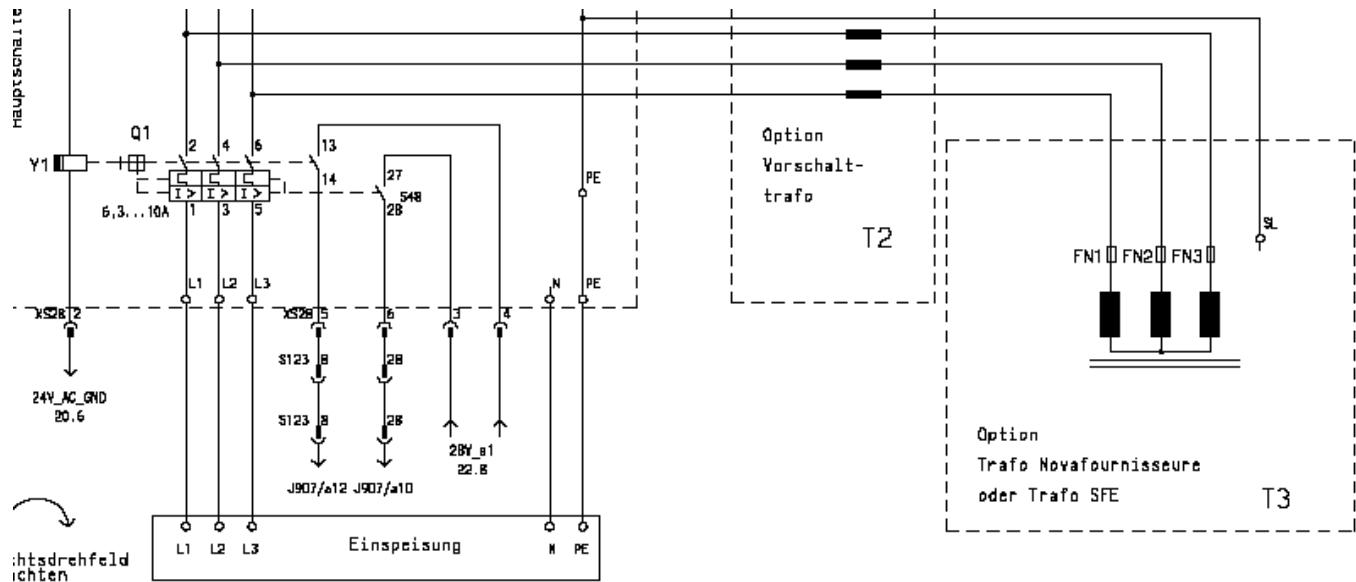








Trailing cable

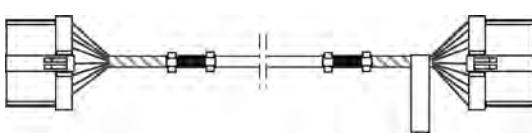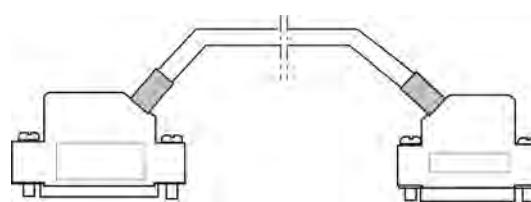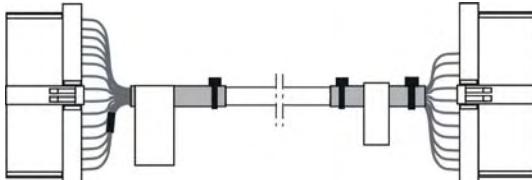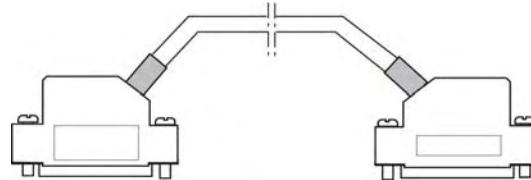Designation	ID No.	Designation	ID No.
Cable impulse giver at the rear on the left XL138, 933 OKC	242 703	Cable SM at the rear on the left XL321, 922 OKC	242 914
Cable impulse giver at the front on the left XL139, 933 OKC	242 704	Cable SM at the front on the left XL323, 922 OKC	242 916
Cable impulse giver at the rear on the right XL136, 933 OKC	242 705	Cable SM at the rear on the right XL325, 922 OKC	242 918
Cable impulse giver at the front on the right XL137, 933 OKC	242 706	Cable SM at the front on the right XL327, 922 OKC	242 920
			
Cable yarn carrier on the left, 9XX OKC	242 707	Cable signal at the rear on the left XL322, 922 OKC	242 915
Cable yarn carrier on the right, 9XX OKC	242 708	Cable signal at the front on the left XL324, 922 OKC	242 917
			
Cable signal at the rear on the right XL326, 922 OKC	242 919	Cable signal at the front on the right XL328, 922 OKC	242 921









Loom of cables 1
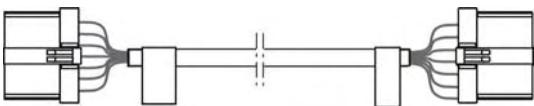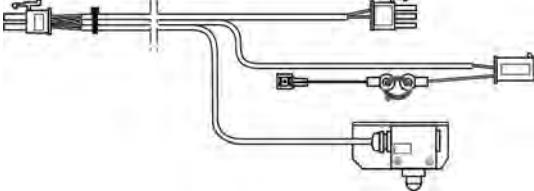
<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
Σ	Loom of cables 1 OKC 9XX	242 502			
1	Cable engaging 9XX OKC	242 505	2	Cable mains supply FKE lamp 9XX OKC	242 506
					
3	Cable protective unit on the left 9XX OKC	253 616			


Loom of cables 2

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Loom of cables 2 OKC 9XX	242 503			
1	Cable motor HIAB pressure roller 96" OKC	242 508	2	Cable impulse giver pressure roller 96" OKC	242 509
					
3	Cable limit switch racking 9XX OKC	242 510	4	Cable ventilator drive 9XX OKC	242 511
					
5	Cable feed wheel on the right 96" OKC	242 512	6	Cable drive motor 9XX OKC	242 513
					
7	Cable resolver drive 9XX OKC	242 514	8	Cable racking motor 9XX OKC	242 515
					
9	Cable resolver racking 9XX OKC	242 516	10	Cable protective unit on the right 9xx OKC	253 615
					
11	Cable fabric sensor OKC	242 518			
					

Loom of cables 3

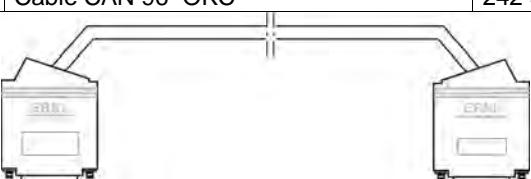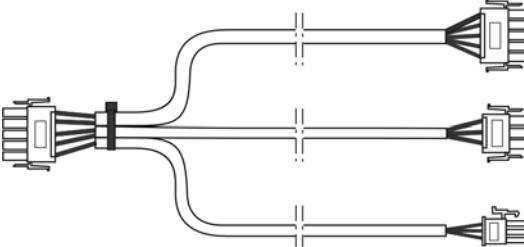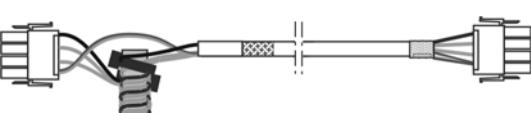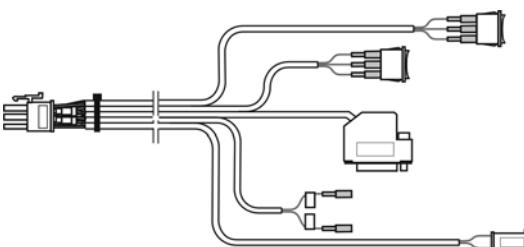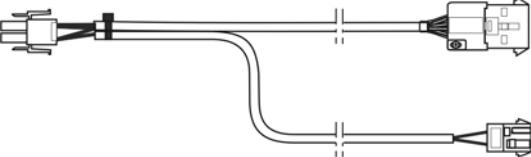
Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Loom of cables 3. 96" OKC	242 504			
1	Cable CAN 96" OKC	242 522	2	Cable electro 96" OKC	242 523
					
3	Cable feed wheel on the left 96" OKC	242 524	4	Cable motor HAAB 9XX OKC	242 521
					
5	Cable switch HAAB 96" OKC	242 520	6	Cable power supply WAZ/F 96" OKC	242 765
					
7	Cable power supply Servo 96" OKC	242 766	8	Cable power supply of power supply unit 96" OKC	242 767
					
9	Cable power supply lighting 96" OKC	242 768	10	Cable motor HIAB 96" OKC	242 525
					
11	Cable impulse giver HIAB 96" OKC	242 526	12	Cable impulse giver HAAB 96" OKC	242 519
					
13	Cable power supply FLENT 96" OKC	251 232			
					

Control electronics

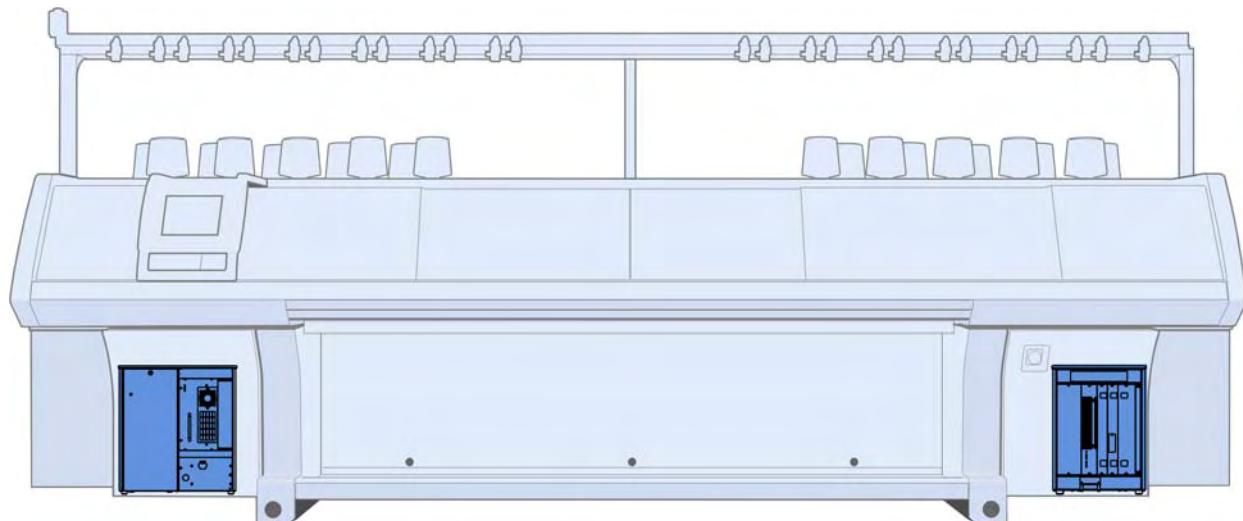


Left control cabinet

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Control unit on the left complete 922 OKC	241 313			
1	Control unit on the left without equipment OKC	240 757	4	Card battery OKC	300 951
2	Battery plug-in unit	300 924	6	Card amplifier 4SM 7TE	300 943
3	Power supply unit CG54	300 923	7	Card N-CPU 432	300 965
3a	Ventilator power supply unit	239 305	8	Card power CPU1	300 966
3b	Filter mat CG54	239 350	9	Card IPC P8X OKC	300 976

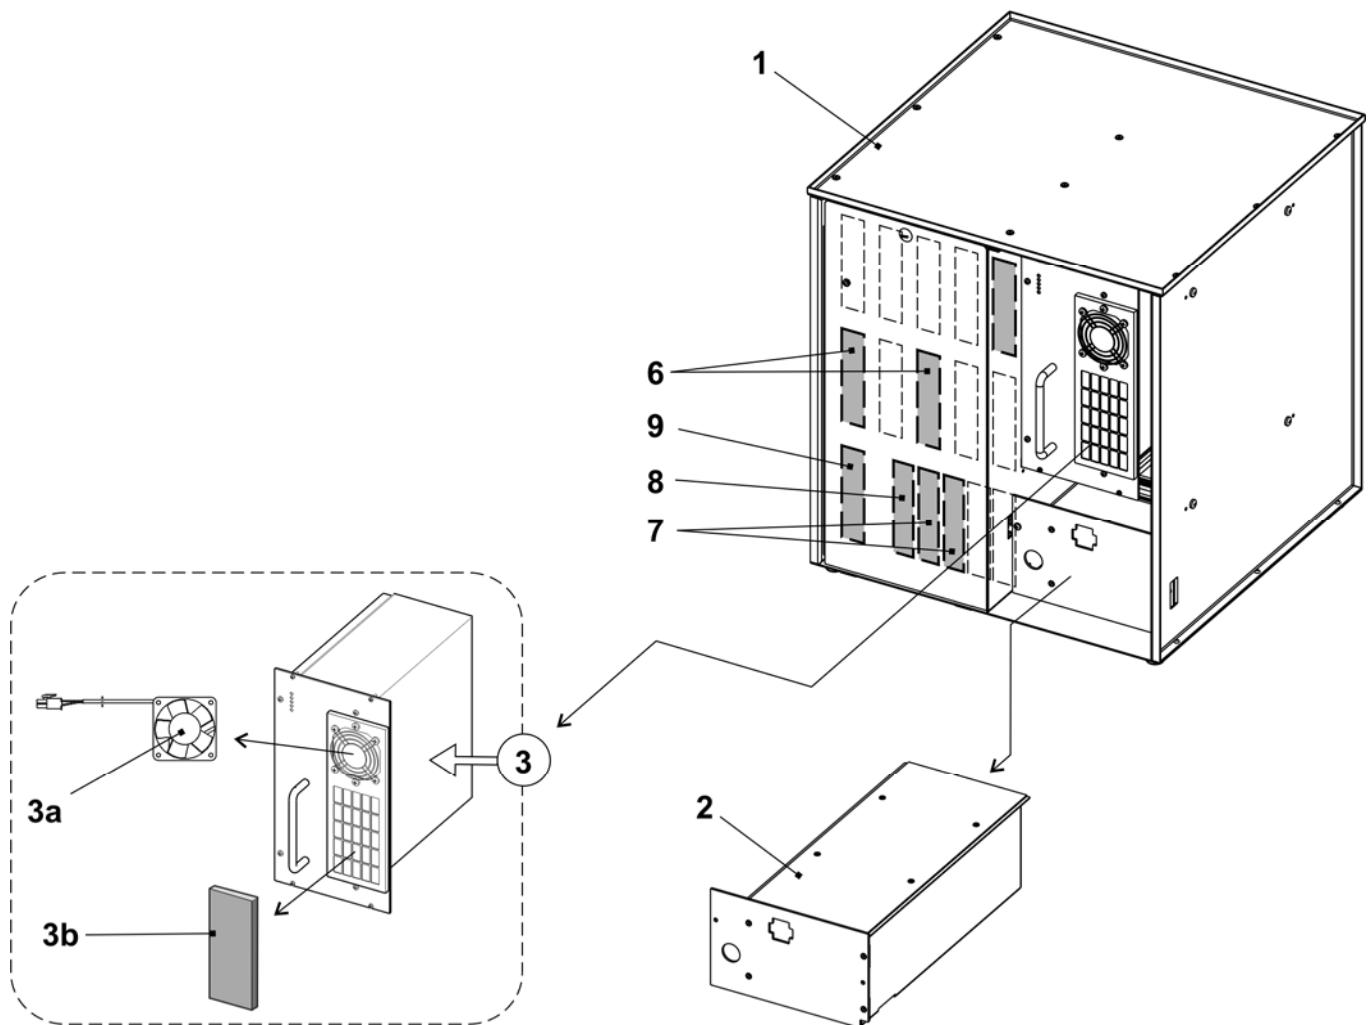


Right control cabinet

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Control unit on the right complete OKC	238 738			
1	Control unit on the right without equipment	238 737	3	Card relay OKC	300 953
A1	Axial fan Servo 5	229 059	4	Card CWAZ	300 929
2	Card servo	301 000	5	Card CWAZ capacitor	300 936

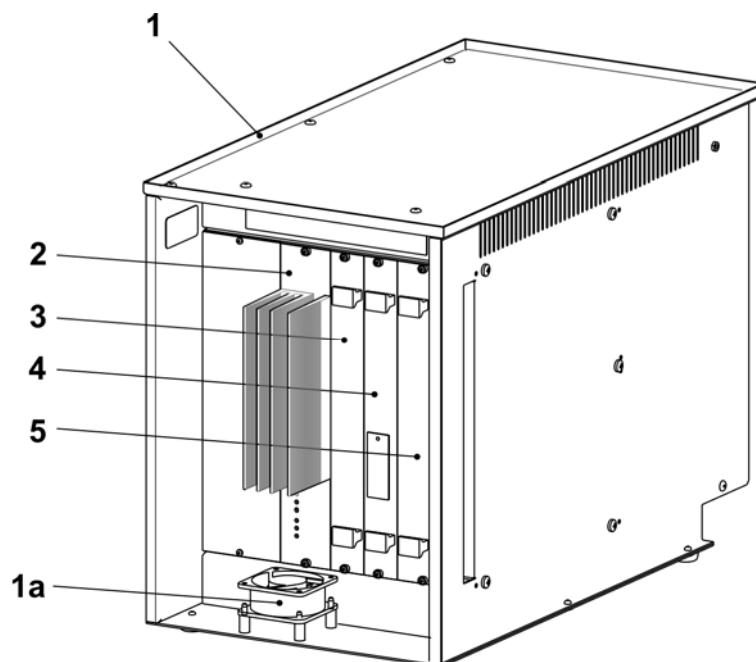

Deliverable accessories

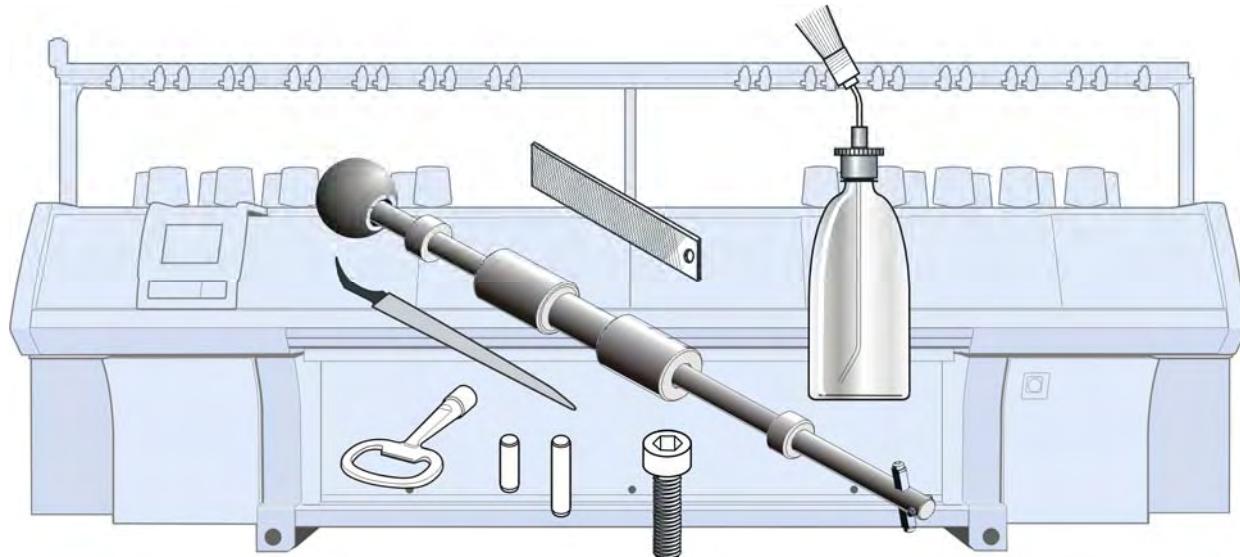


You can order the following tools, lubricants and expendables.

The following list does not correspond to the scope of delivery of the knitting machine.


Tool

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
1	Channel support E4	062 309	6	Groove file 1.33mm E3-4	006 169
	Channel support E5, E2,5,2	062 310		Groove file 1.25 mm E5-8, E3,5,2	006 170
	Channel support E7, E3,5,2	062 312		Groove file 0.90 mm E10-12, E5.2 + 6.2	006 175
	Channel support E8	062 313		Groove file 0.73 mm E14, E7.2	006 173
	Channel support E10, E5,2	062 314		Groove file 0.45 mm E16-18, E9.2	006 179
	Channel support E12, E6,2	062 315	7	Key of switch cabinet	009 346
	Channel support E14, E7,2	218 069		Groove cleaner E4	031 232
	Channel support E16, E8,2	230 188		Groove cleaner E5	031 233
	Channel support E18, E9,2	230 189		Groove cleaner E6	031 234
	Channel support E20	230 190		Groove cleaner E7, E3,5,2	031 235
2	Channel chisel E14-20 (E5-14)	062 316	8	Groove cleaner E8	031 236
	Channel chisel E4-8 (E3,5,2)	062 317		Groove cleaner E10 (E5,2)	031 238
	Channel chisel E10-14	062 318		Groove cleaner E12 (E6,2)	031 240
3	Yarn guide on the left	227 071		Groove cleaner E14 (E7,2)	031 242
	Yarn guide on the right	227 070		Groove cleaner E16	225 111
4	Working hook	227 249		Groove cleaner E18 (E9,2)	225 112
5	Extraction hook	232 027		Groove cleaner E20	225 113
	A5 Small pin	202 843		9 Measuring tape L=150 cm	228 180
	5b Pin	232 022		10 Tool kit	209 527

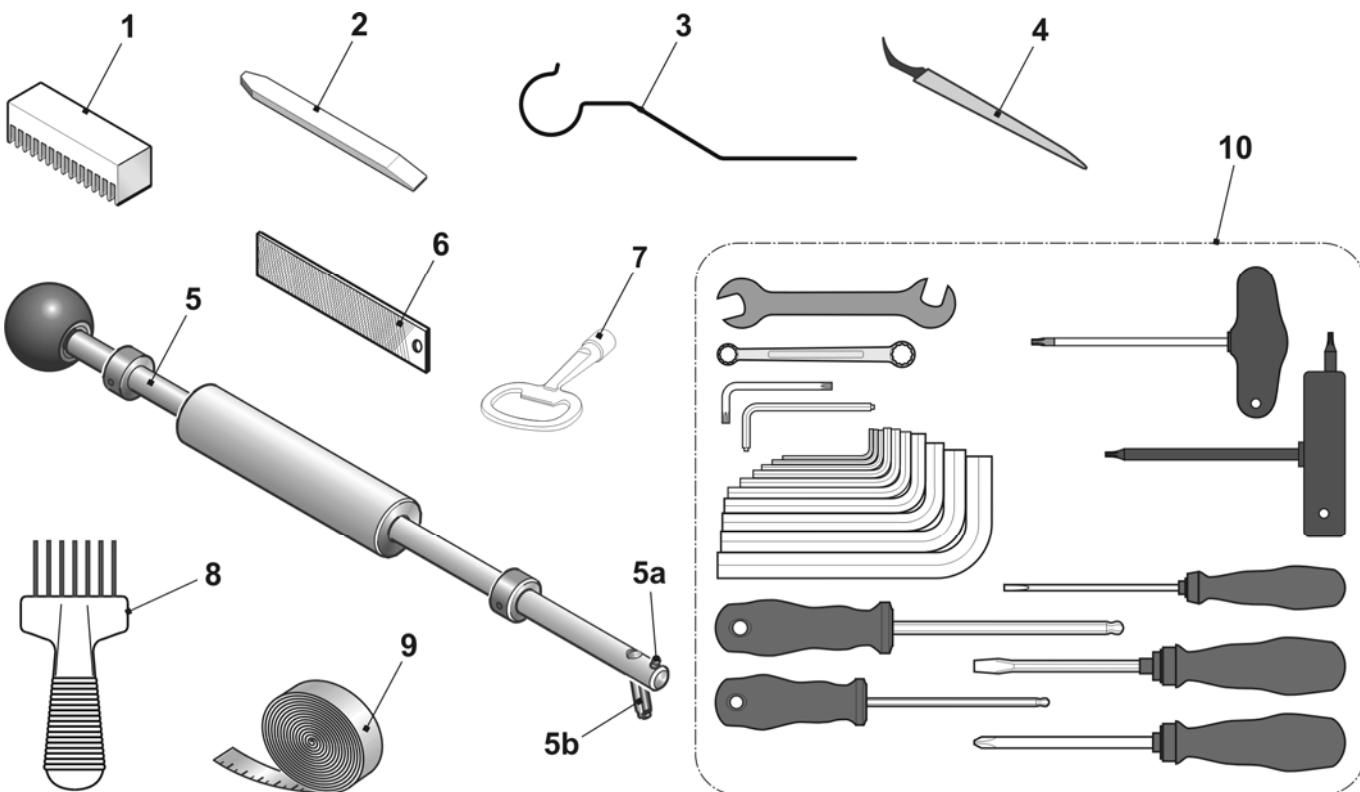


Lubricating stuff

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
1	Textile machines oil T46, 1l	230 614	4	Oil combifix	216 732
2	Grease OKS 475, 1kg	009 200		White grease paste OKS270	229 372
3	Grease OKS 475, 150g	005 351		Grease Staburags NBU 12/300KP	231 191

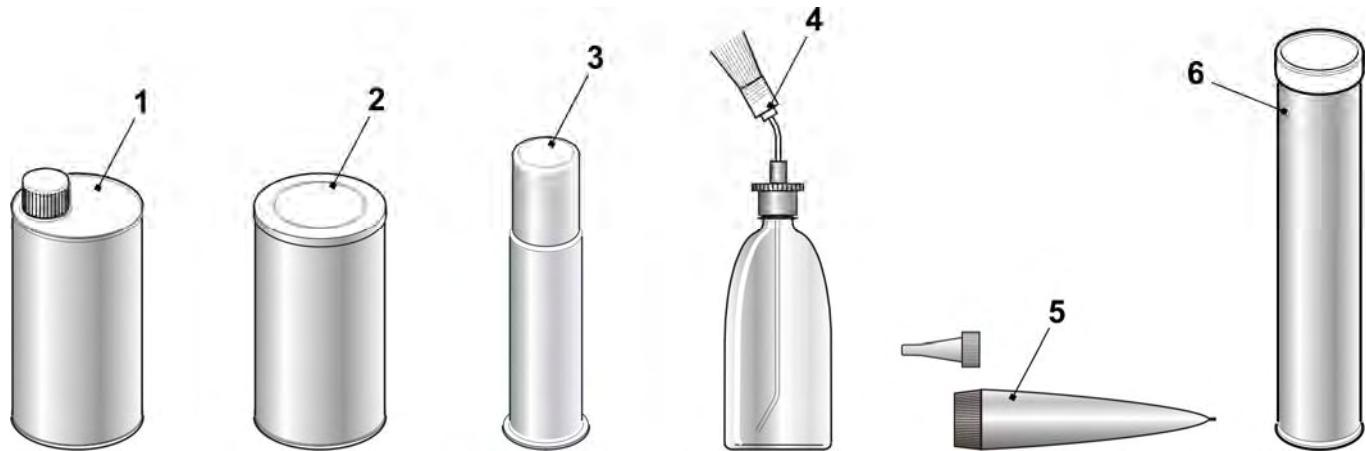


Mechanical parts

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
1	Cap screw M4x8	020 091	11	Cable binder 203x3,6mm	025 815
2	Countersunk screw M3x6	020 286		Cable binder T50L	026 294
3	Cap screw M5x16	022 726		Cable binder 140x3,6mm	008 379
4	Cap screw M6x14	022 658		Cable binder 302x4,8mm	008 642
5	Set screw M16x50	023 235		Cable binder 92x2,4mm	008 378
6	Setting pin 3x7	020 643	12	Reusable tie ABV 232 320 mm	026 557
7	Setting pin 3x10	020 645			
8	Setting pin 3x12	020 647			
9	Setting pin 5x12	021 988			
10	Setting pin 5x18	022 622			

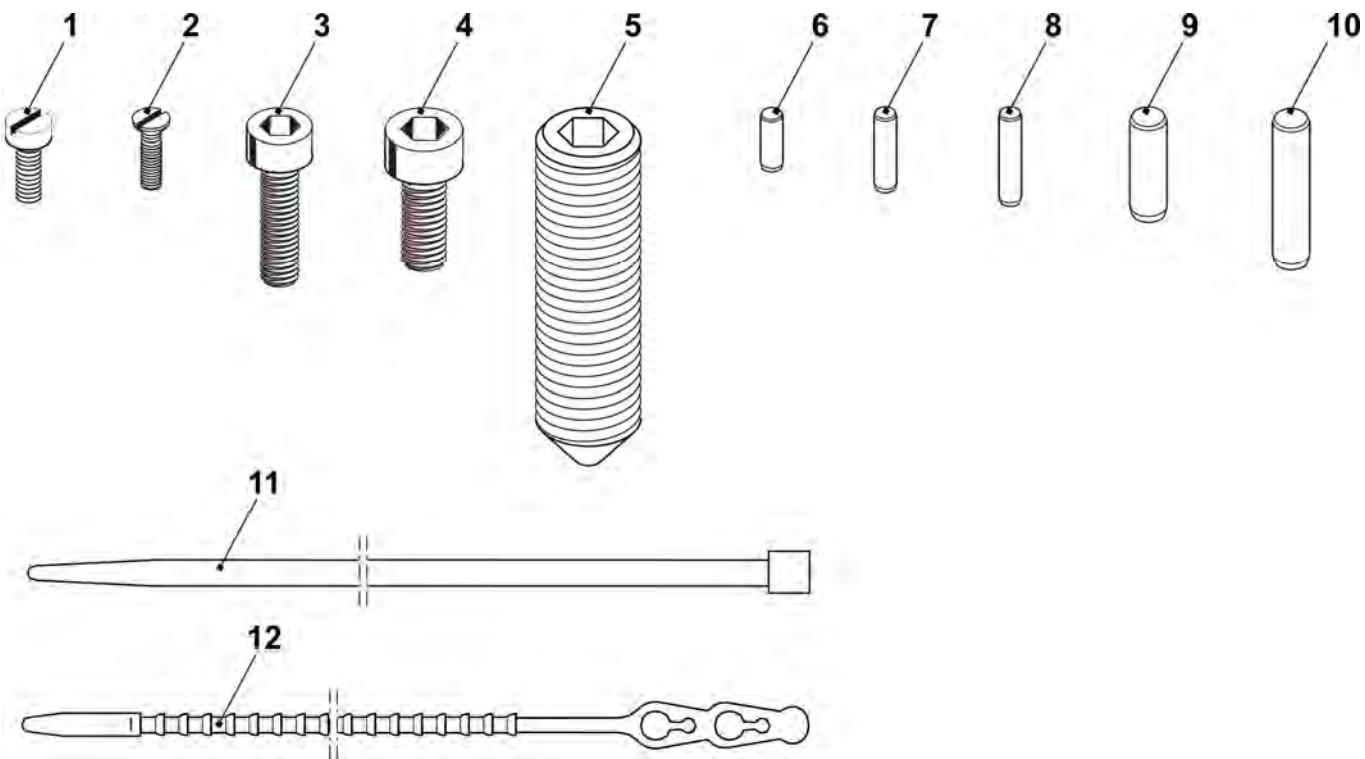


Special attachments

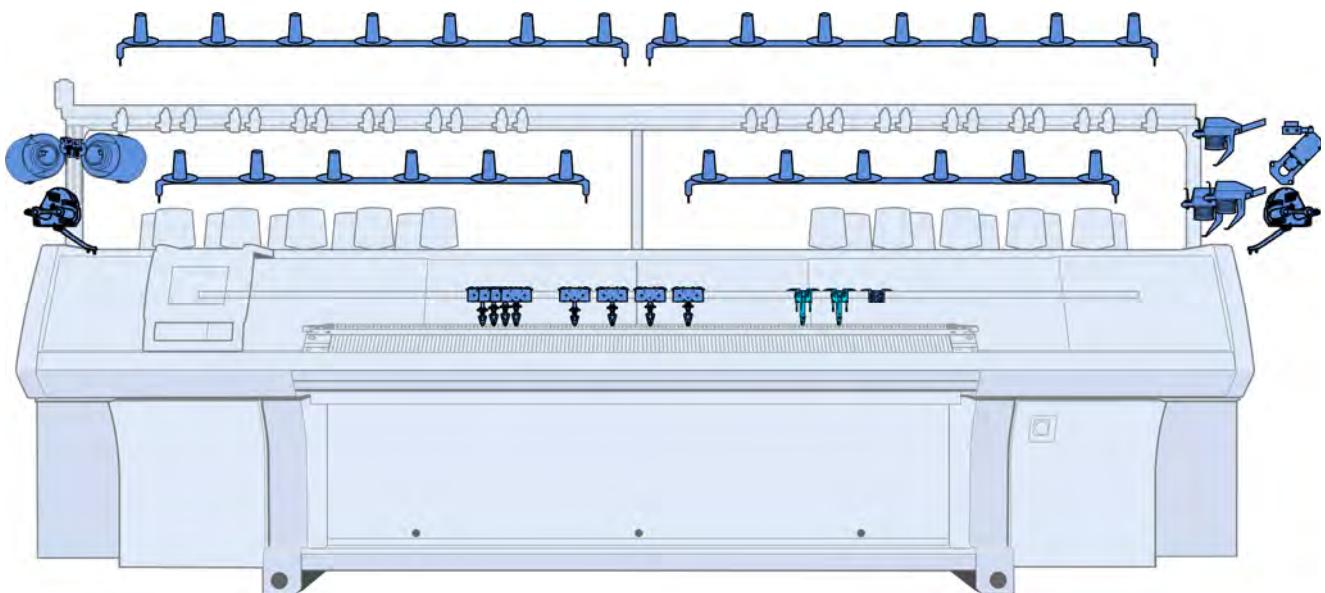


Plating yarn carrier 3+6

Pos	Designation	ID	Pos	Designation	ID
Σ	Plating yarn carrier carriage 3+6 co.		6	Sliding piece	252 797
	E5 + E2,5.2 + E3,5.2 + E5.2	252 782	7	Eyelet holder complete	252 825
	E7 + E8 + E6.2	252 784	8	Eyelet holder complete	252 824
	E10 + E12 + E14 + E7.2 + E8.2	252 786	9	Spacer	252 796
	E16 + E18 + E9.2	252 788	10	Shim	213 035
1	Plating yarn carrier carriage	252 806	11	Shim	216 143
2	Sliding piece	212 583	12	Adjusting screw	253 436
3	Slider	252 798	500	Hexagon screw M4x5	243 779
4	Plating yarn carrier bow 3+6		501	Hexagon screw M4x10	020 346
	E5	252 820	502	Hexagon screw	252 832
	E7-8	252 821	503	Set screw M4x16	254 196
	E10-14	252 822	504	Compression spring	021 399
	E16-18	252 823	505	Threaded bolt	213 399
5	Plating yarn carrier bow 3+6 E5-8	252 800	506	Compression spring	253 058
	Plating yarn carrier bow 3+6 E10-18	252 808			

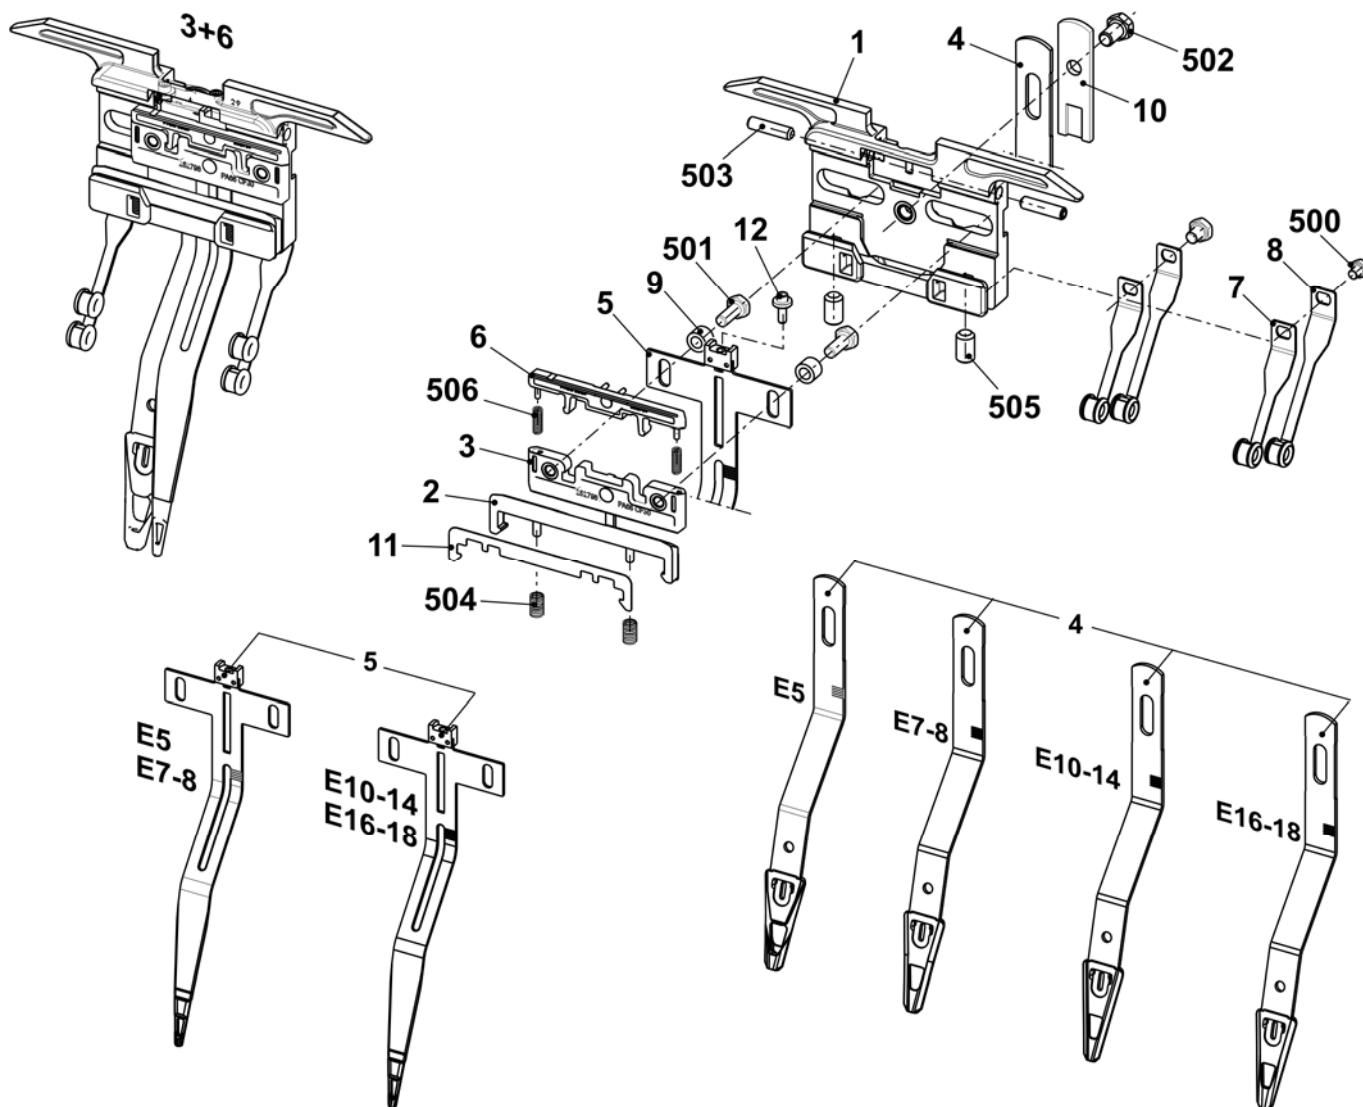


Plating yarn carrier 4+5

Pos	Designation	ID	Pos	Designation	ID
Σ	Plating yarn carrier carriage 4+5 co.				
	E5 + E2,5.2 + E3,5.2 + E5.2	252 781	6	Sliding piece	252 797
	E7 + E8 + E6.2	252 783	7	Eyelet holder complete	252 815
	E10 + E12 + E14 + E7.2 + E8.2	252 785	8	Eyelet holder complete	252 816
	E16 + E18 + E9.2	252 787	9	Spacer	252 796
1	Plating yarn carrier carriage	252 806	10	Shim	213 035
2	Sliding piece	212 583	11	Shim	216 143
3	Slider	252 798	12	Adjusting screw	253 436
4	Plating yarn carrier bow 4+5		500	Hexagon screw M4x5	243 779
	E5	252 790	501	Hexagon screw M4x10	020 346
	E7-8	252 791	502	Hexagon screw	252 832
	E10-14	252 792	503	Set screw M4x16	254 196
	E16-18	252 793	504	Compression spring	021 399
5	Plating yarn carrier bow 4+5 E5-8	252 799	505	Threaded bolt	213 399
	Plating yarn carrier bow 4+5 E10-18	252 807	506	Compression spring	253 058

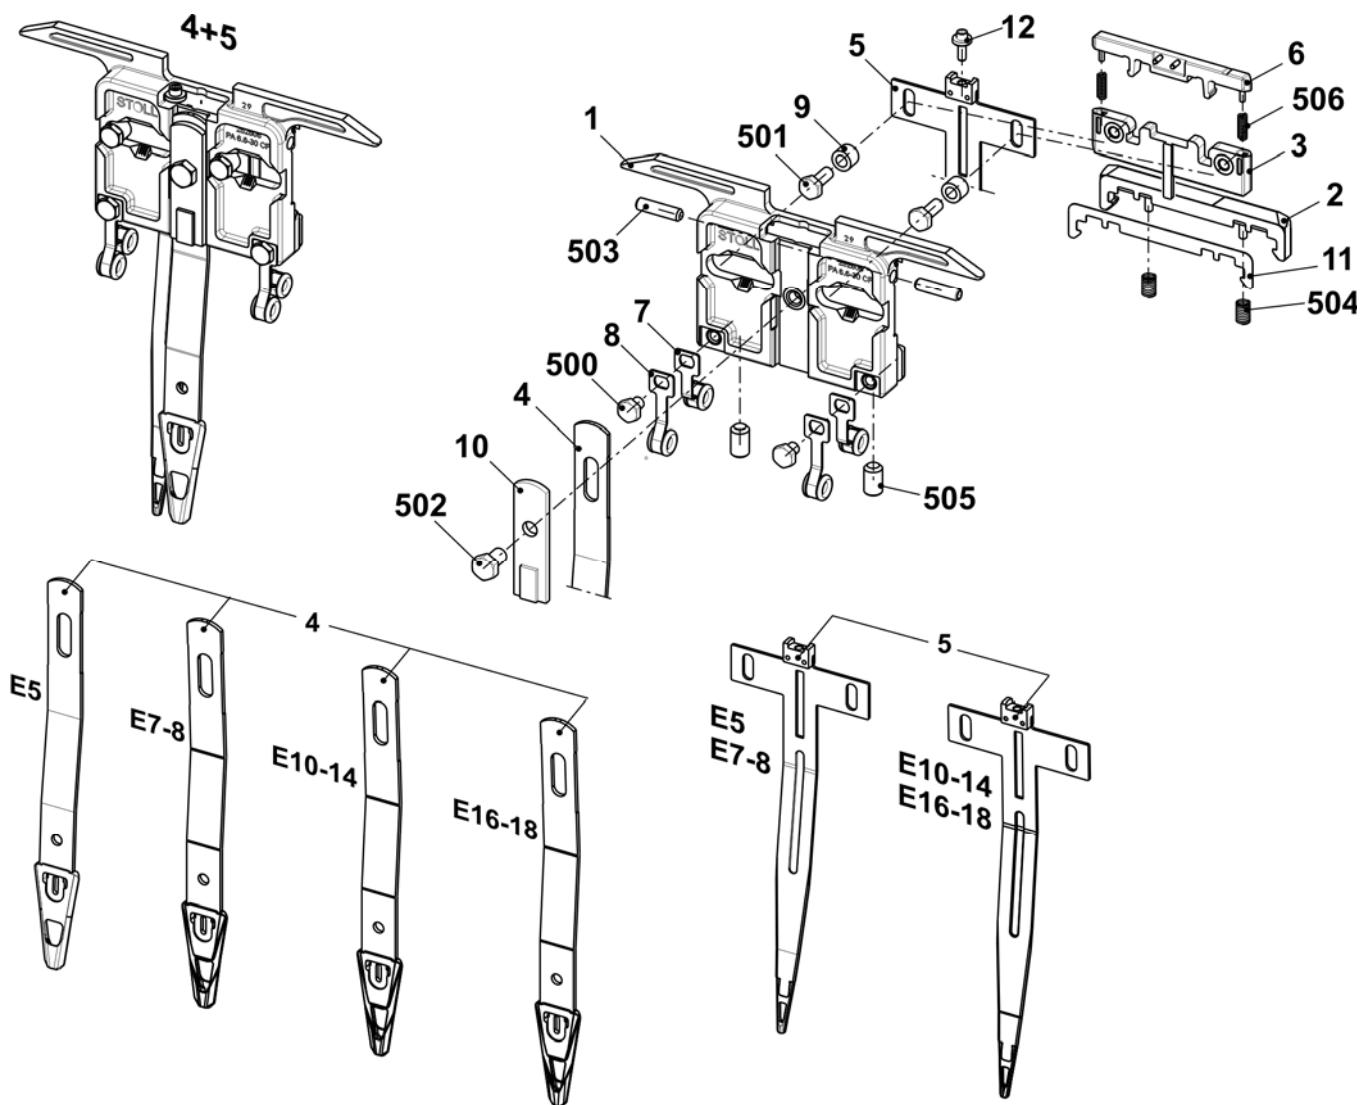


Carriage of plating yarn carrier

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
Σ	Carriage of plating YC co. E5-18	244 998			
1	YC carriage MW46	244 253	500	Hexagon screw M5x10	020 351
2	Shim	213 035			

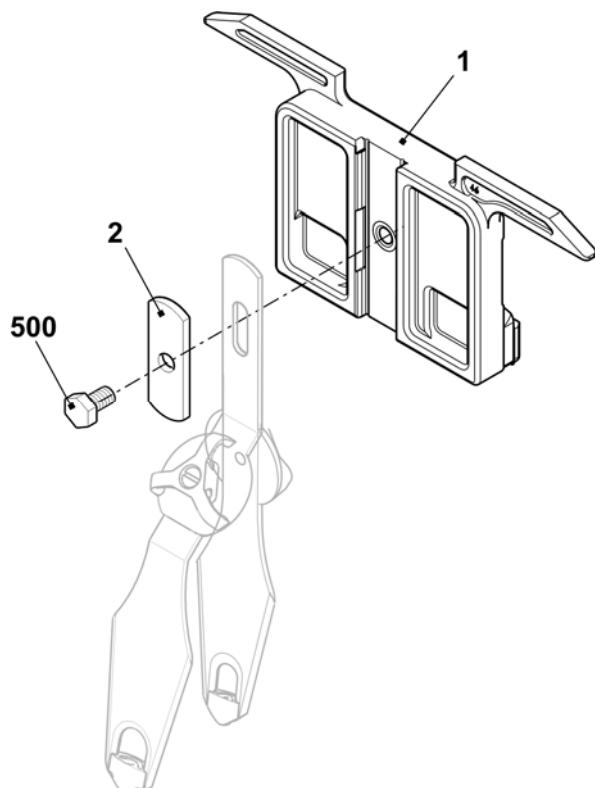



Carriage of plating yarn carrier (adjustable)

Pos	Designation	ID	Pos	Designation	ID
Σ	Plating yarn carrier carriage co.	251 867			
1	Carriage of yarn carrier	251 864	7	Guiding part	253 226
2	Sliding piece	212 583	8	Shim	213 035
3	Shim	216 143	500	Compression spring	021 399
4	Threaded bolt	213 399	511	U-washer 4	022 481
5	Insert on the right	251 866	512	Hexagon screw M4x8	022 461
6	Insert on the left	251 865	513	Hexagon screw M5x10	020 351

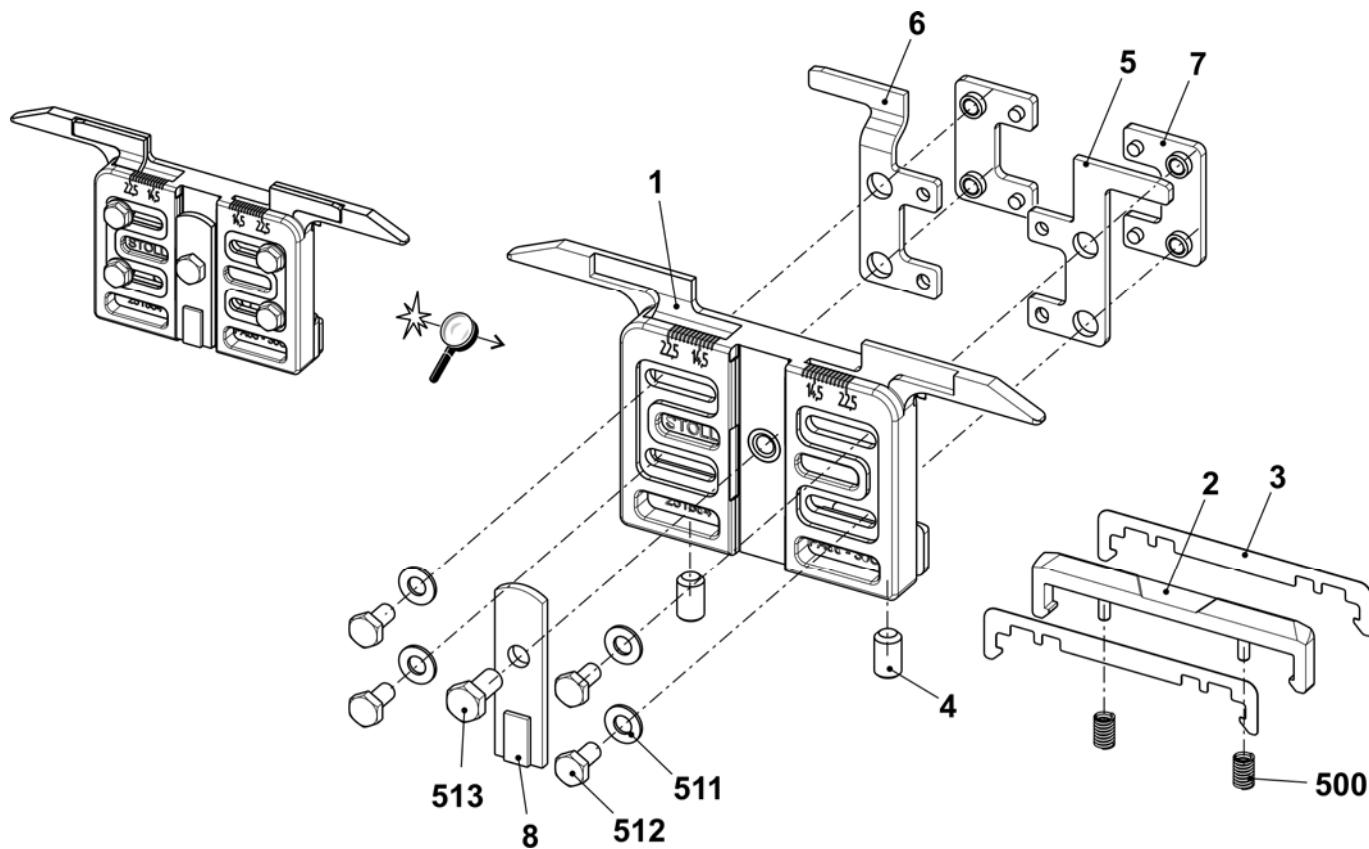


Complete intarsia yarn carriers type 1

Designation	Gauge	Track	Pos	ID	Designation	Gauge	Track	Pos	ID
IYC carriage complete	E5	1 + 8	1	212 974	IYC carriage complete	E14	1 + 8	1	214 146
	E2,5.2	2 + 7	2	212 977		E8.2	2 + 7	2	214 147
	E 3,5.2	3 + 6	3	212 980		3 + 6	3	214 148	
	E5.2	4 + 5	4	212 983		4 + 5	4	214 149	
	E7 - E8	1 + 8	1	212 975		E16 - E18	1 + 8	1	227 126
		2 + 7	2	212 978			2 + 7	2	227 127
		3 + 6	3	212 981			3 + 6	3	227 128
		4 + 5	4	212 984			4 + 5	4	227 129
	E10 - E12	1 + 8	1	212 976					
		2 + 7	2	212 979					
		3 + 6	3	212 982					
		4 + 5	4	212 985					

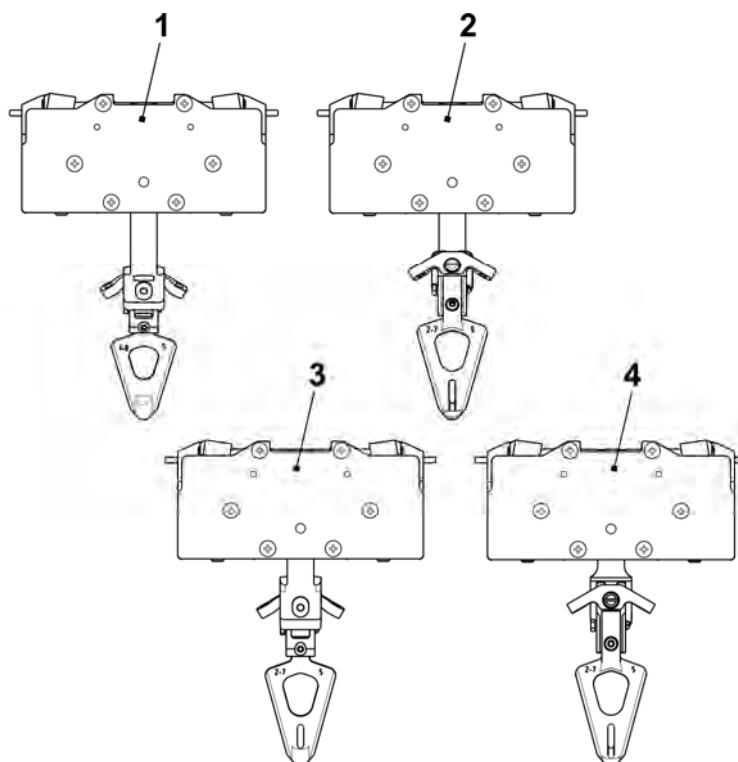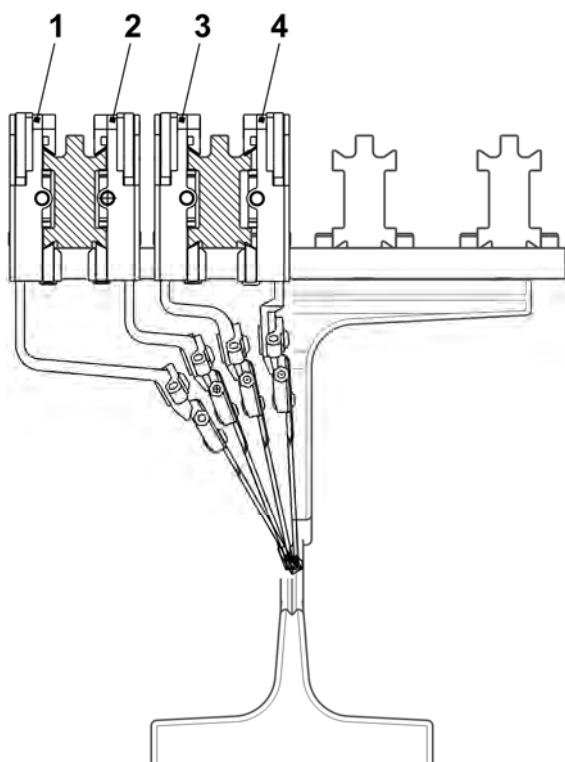

Carriage IYC


Pos	Designation	ID	Pos	Designation	ID
1	Basic plate complete	216 031			
20	Threaded bolt	213 399	14	Pressure plate 2.04	201 654
2	Slider complete	217 170		Pressure plate 2.06	208 924
3	Locking plunger	212 508		Pressure plate 2.02	235 740
4	Sliding block	213 807	16	Spring pin	201 677
7	Locating pin 3.3	212 504	17	Lifter	212 547
	Locating pin 3.4	212 505	18	Sliding part	212 543
	Locating pin 3.3	212 506	20	Threaded bolt	213 399
9	Thrust piece	212 773	500	Countersunk head screw M4x6	022 994
10	Pressure roller	212 774	502	Countersunk head screw M4x12.5	022 979
11	Cover	212 507	505	Compression spring 0,4x3,2x26,5	022 982
12	Clamping lever on the right	216 087	506	Compression spring 4.0x0.7x25	022 969
13	Clamping lever on the left	216 088	508	Compression spring 2.8x0.35x19	023 394

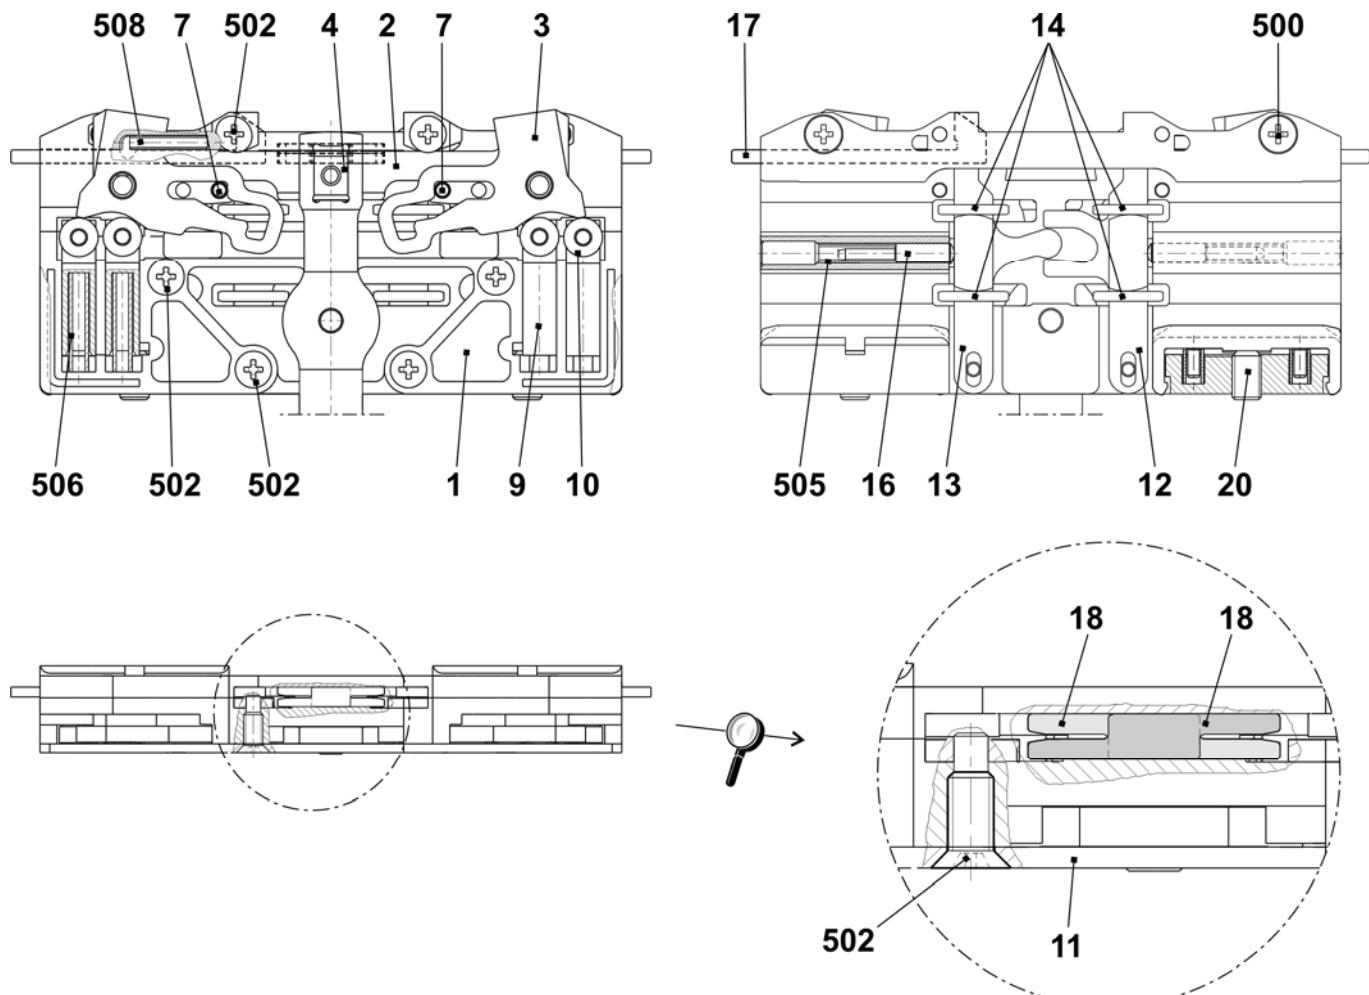

Bow and head IYC


<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
1	YC bow 1+8	212 986	7	Yarn guide angle	201 672
2	YC bow 2+7	212 987	500	Countersunk screw M4x8	023 579
3	YC bow 3+6	212 988	501	Circlip S4-FST	022 774
4	YC bow 4+5	212 989			

<i>Pos</i>	<i>Designation</i>	<i>Gauge</i>	<i>Track</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>Gauge</i>	<i>Track</i>	<i>ID</i>
5	YC head	E5, E5.2	1 + 8	208 579	6	YC head	E5, E5.2	2 + 7 3 + 6 4 + 5	208 581
		E2,5.2		208 580			E2,5.2		208 582
		E 3,5.2		209 700			E 3,5.2		209 701
		E7 - E8		213 864			E7 - E8		213 865
		E6,2		227 109			E6,2		227 113
		E10 - E12					E10 - E12		
		E6,2(12)					E6,2(12)		
		E7,2					E7,2		
		E9,2					E9,2		
		E14					E14		
		E8,2					E8,2		
		E16 - E18					E16 - E18		

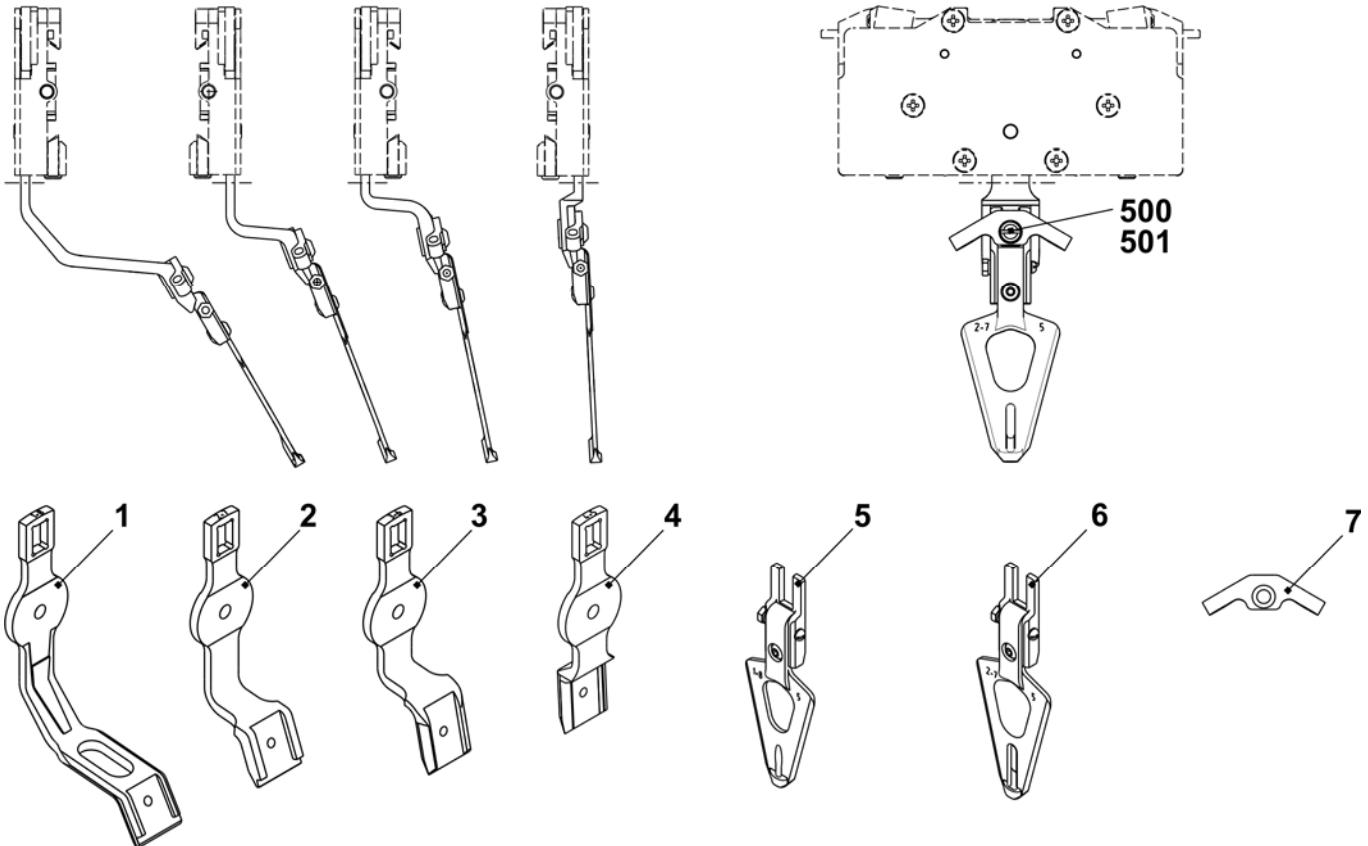


STIXX device

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Yarn length measuring device	225 149	4	Clamp	223 025
1	Yarn length measuring device 3	236 275	5	Adjustment weight	212 241
A1	Sensor	211 354	9	Cable length measuring MSLU7	225 114
1b	Sensor complete	212 406	500	Countersunk screw M5x10	023 247
1ba	Rubber running ring	212 390	501	Spring nut M5	022 873
1c	Threaded strip	211 801	502	Countersunk screw M5x6	023 246
1d	Yarn guide rod	211 352	503	Sheet metal screw ST3.5x13	022 940
1e	Card STIXX-CPU	300 934	504	Spring washer A5	022 454
F 1	Ventilator complete	212 255	505	Oval head screw M3x10	023 380
2	Cable length measuring	236 718	506	Cap screw M5x22	023 193
3	Support	223 029			

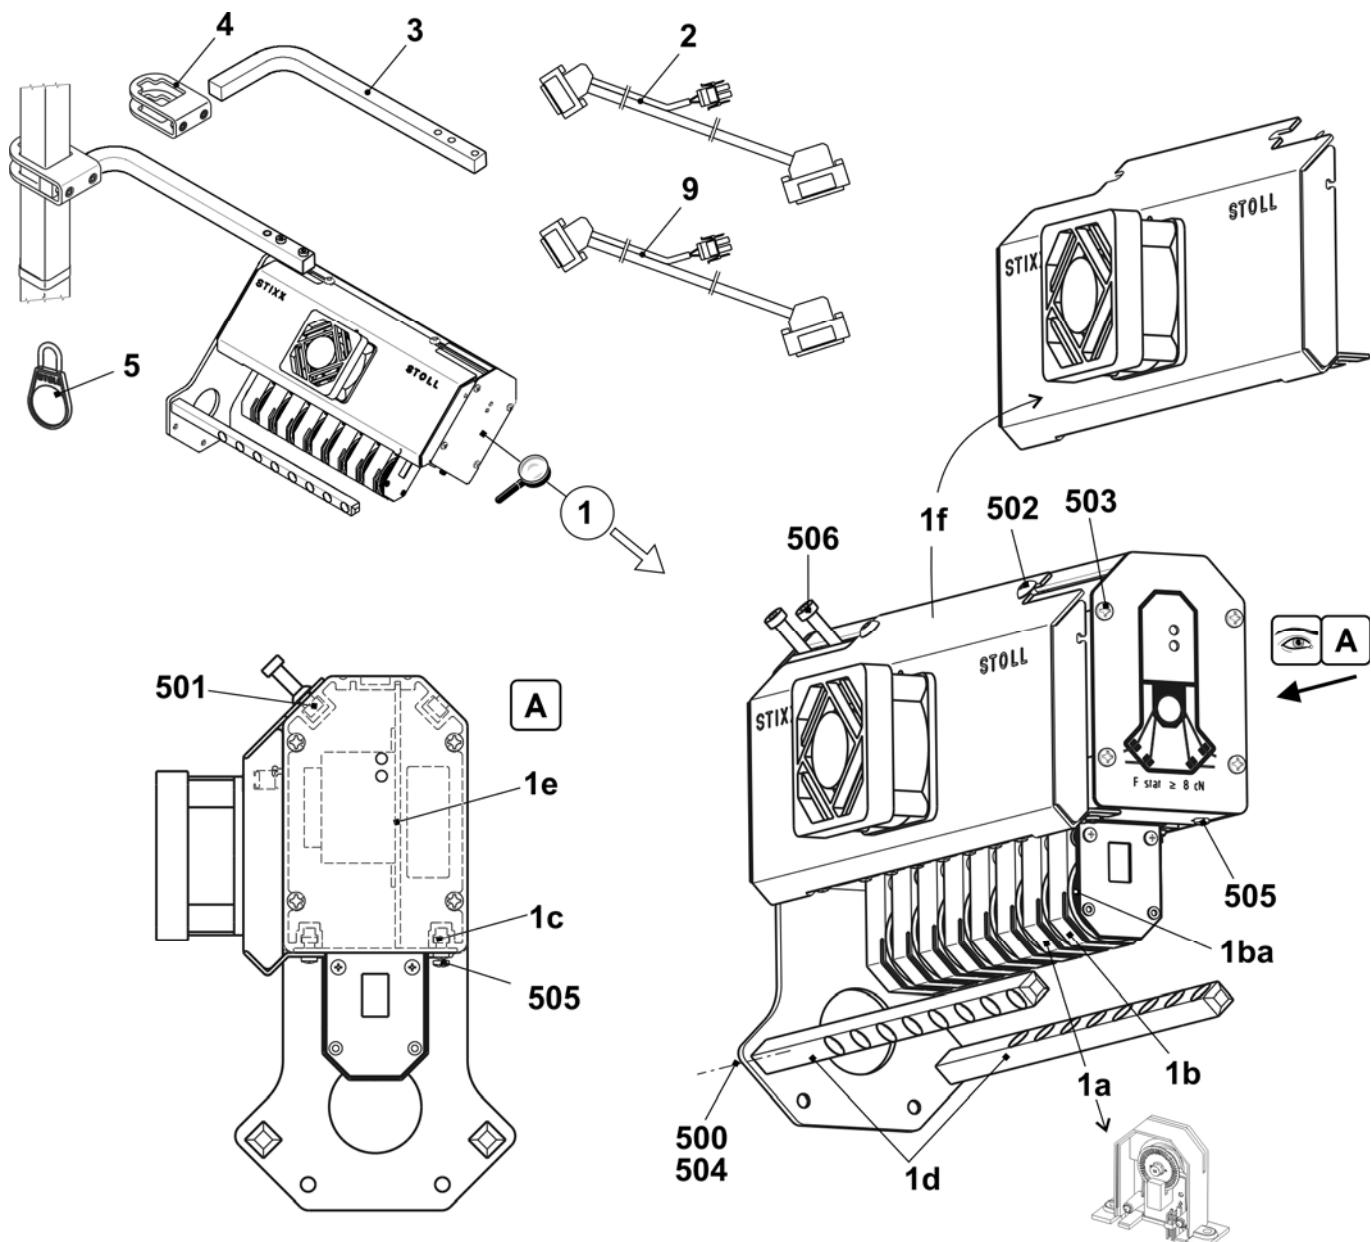


Feed wheel SFE

Pos	Designation	ID	Note
Σ	Mounted set storage feed wheel SFE	231 427	Please order the SFE spare parts at: MEMMINGER-IRO GMBH Jakob-Mutz-Strasse 7 D-72280 Dornstetten Phone: +49 7443 281-0 Fax: +49 7443 281-101
1	Transfo with cable	231 979	
2	Mounted set SFE without transformer	231 980	
2a	SFE feed wheel	231 537	The item no. and the designation for the SFE spare parts can be found in the enclosed assembling instructions of the company MEMMINGER-IRO.

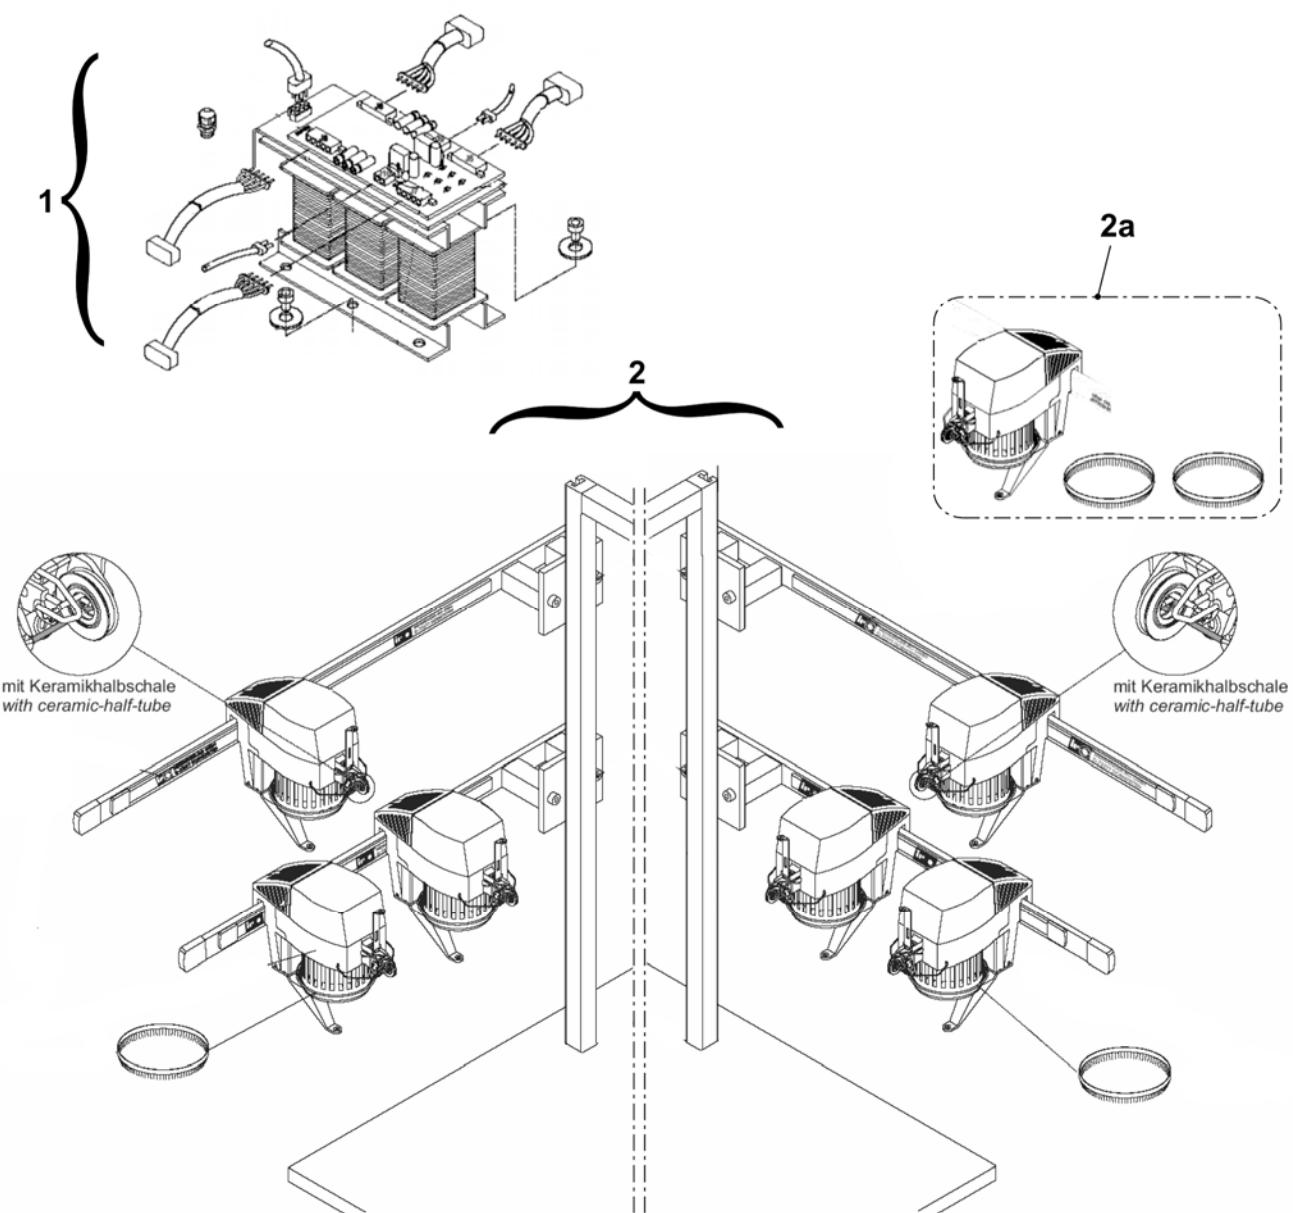


Friction feed wheel on the left and on the right co.

Pos	Designation	ID No.	Pos	Designation	ID No.
ΣL	Friction feed wheel on the left co. 922	243 573	ΣR	Friction feed wheel on the right co. 922	243 574
1	Friction feed wheel on the left	243 571	1	Friction feed wheel on the right	243 572
2	Support	244 987	2	Support	244 988
502	Countersunk screw M8x25	023 027	502	Countersunk screw M8x25	023 027
503	Cap screw M6x16	020 135	500	Cap screw M6X30	020 138

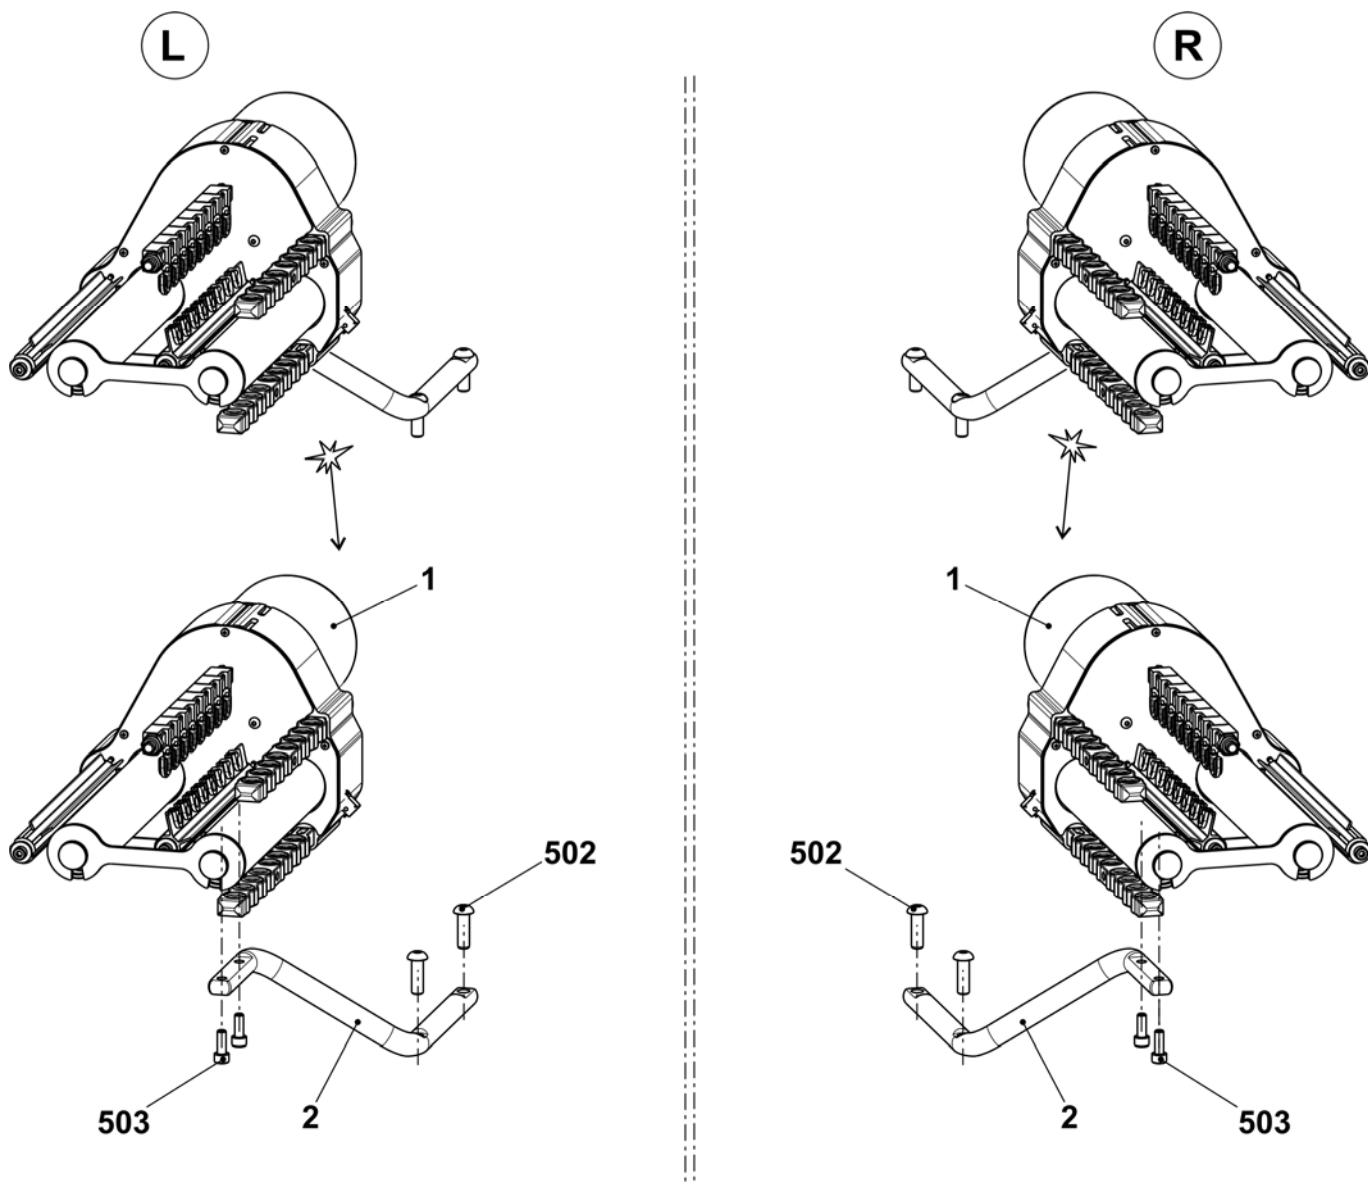


Left friction feed wheel

Pos	Designation	ID	Pos	Designation	ID
Σ	Friction feed wheel on the left complete	243 571	13	Bush	221 391
1	Housing	240 368	14	Ribbed V-belt pulley	221 268
2	Friction roller complete	231 704	15	Ribbed V-belt pulley V3J 406	206 927
3	Three-phase AC motor complete	219 800	16	Rod	221 319
3a	Microswitch	008 664	17	Supporting plate	251 096
4	Deflector complete 8-fold	250 089	18	Cover	230 758
A4	Support rail	250 055	19	Knurled screw	223 361
4b	Eyelet holder complete	250 077	20	Rod	230 658
540	Spring dowel sleeve 4x15	020 783	500	Screw KB30x8	236 228
541	Hexagon nut M8-8	022 843	501	Screw 20x10	244 736
7	Yarn guide rod complete	239 431	503	Cap screw M5x12	020 132
570	Eyelet 8	021 504	504	Cap screw M5x16	022 726
8	Stop motion rail on the right complete	230 690	506	Screw KB40x14	241 358
9	Stop motion rail on the left complete with eyelets	230 683	507	Screw KB 40x25	241 595
9b	Eyelet	230 662	509	Washer 5,3x22x2,5	023 219
590	Slide bearing	023 627	510	U-washer 5	020 901
591	O-ring	244 895	512	Adjusting washer 15x21x1	023 216
11	Strap	221 316	514	U-washer 4.3	020 908
12	Cover	251 098	515	Countersunk screw M4x10	023 450

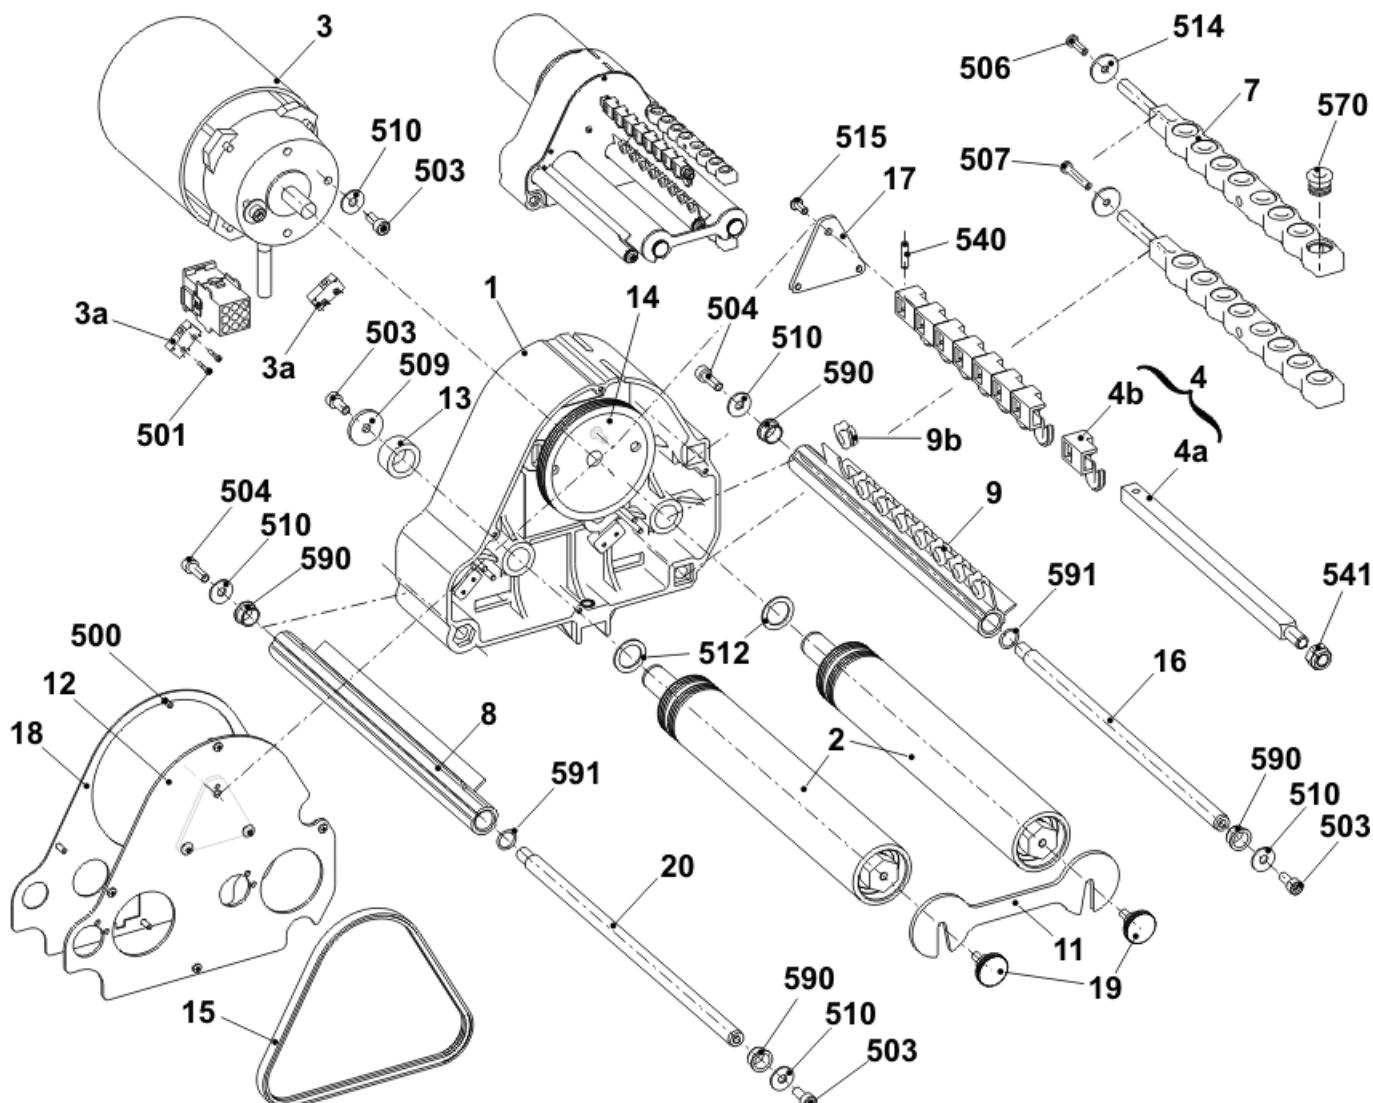


Right friction feed wheel

Pos	Designation	ID	Pos	Designation	ID
Σ	Friction feed wheel on the right complete	243 572	13	Bush	221 391
1	Housing	240 368	14	Ribbed V-belt pulley	221 268
2	Friction roller complete	231 704	15	Ribbed V-belt pulley V3J 406	206 927
3	Three-phase AC motor complete	219 800	16	Rod	221 319
3a	Microswitch	008 664	17	Supporting plate	251 096
4	Deflector complete 8-fold	250 089	18	Cover	230 758
A4	Support rail	250 055	19	Knurled screw	223 361
4b	Eyelet holder complete	250 077	20	Rod	230 658
540	Spring dowel sleeve 4x15	020 783	500	Screw KB30x8	236 228
541	Hexagon nut M8-8	022 843	501	Screw 20x10	244 736
7	Yarn guide rod complete	239 431	503	Cap screw M5x12	020 132
570	Eyelet 8	021 504	504	Cap screw M5x16	022 726
8	Stop motion rail on the right complete	230 690	506	Screw KB40x14	241 358
9	Stop motion rail on the right complete with eyelets	230 682	507	Screw KB 40x25	241 595
9b	Eyelet	230 662	509	Washer 5,3x22x2,5	023 219
590	Slide bearing	023 627	510	U-washer 5	020 901
591	O-ring	244 895	512	Adjusting washer 15x21x1	023 216
11	Strap	221 316	514	U-washer 4,3	020 908
12	Cover	251 098	515	Countersunk screw M4x10	023 450

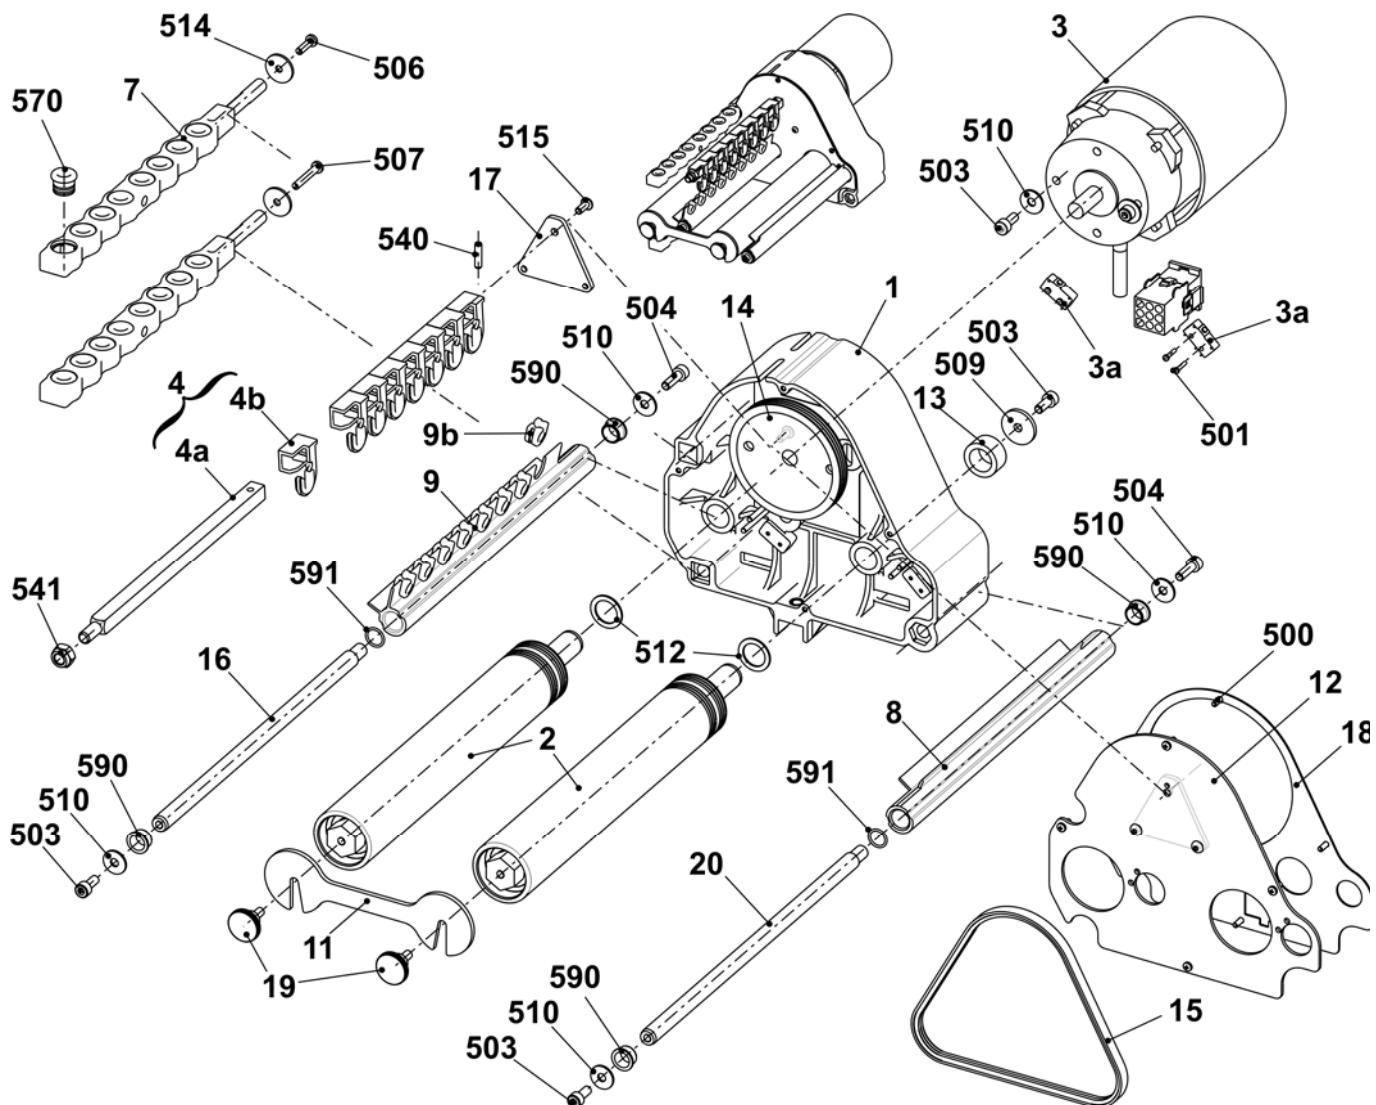


Bobbin holder on the left

Pos	Designation	ID	Pos	Designation	ID
Σ	Bobbin holder on the left	253 965	501	Countersunk screw M4x25	023 511
1	Support	253 969	502	U-washer 4	022 481
2	Support	252 769	503	Hexagon nut M4-6	022 536
3	Leaf spring	253 350	505	U-washer 6	022 431
4	Support on the left	253 347	506	Hexagon nut M6-6	022 899
5	Spacer	253 349	507	Countersunk screw M4x16	023 412
6	Yarn detector Massardi	226 964	508	Countersunk screw M4x12	023 062
7	Clamp	228 583	509	Countersunk screw M8x16	023 113
8	Sliding block	228 851	510	Countersunk screw M8x18	251 331
10	Cover	253 968	511	Countersunk screw M6x30	023 451
11	Support angle	253 964	512	Serrated lock washer A4.3	022 482
12	Support angle	253 963	513	Countersunk screw M4x6	022 946
13	Support angle	253 967	514	Countersunk screw M4x10	023 450
14	Cable plating	253 468	515	Cap nut M4-6	253 805

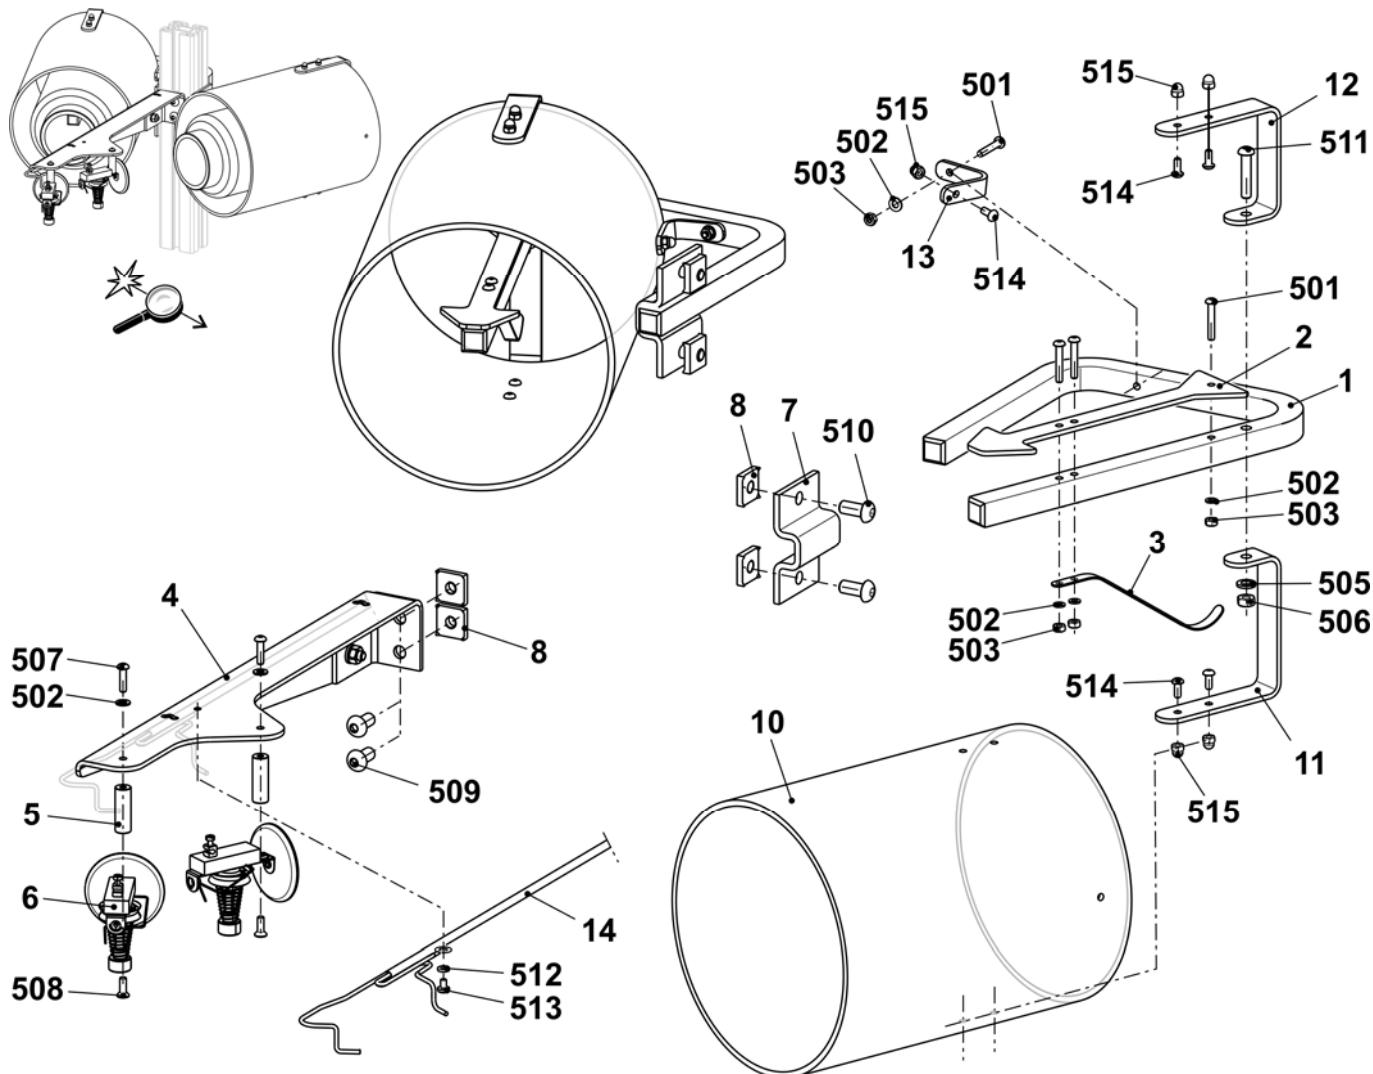


Bobbin holder on the right

Pos	Designation	ID	Pos	Designation	ID
Σ	Bobbin holder on the right	253 966	501	Countersunk screw M4x25	023 511
1	Support	253 969	502	U-washer 4	022 481
2	Support	252 769	503	Hexagon nut M4-6	022 536
3	Leaf spring	253 350	505	U-washer 6	022 431
4	Support on the right	253 348	506	Hexagon nut M6-6	022 899
5	Spacer	253 349	507	Countersunk screw M4x16	023 412
6	Yarn detector Massardi	226 964	508	Countersunk screw M4x12	023 062
7	Clamp	228 583	509	Countersunk screw M8x16	023 113
8	Sliding block	228 851	510	Countersunk screw M8x18	251 331
10	Cover	253 968	511	Countersunk screw M6x30	023 451
11	Support angle	253 964	512	Serrated lock washer A4.3	022 482
12	Support angle	253 963	513	Countersunk screw M4x6	022 946
13	Support angle	253 967	514	Countersunk screw M4x10	023 450
14	Cable plating	253 468	515	Cap nut M4-6	253 805

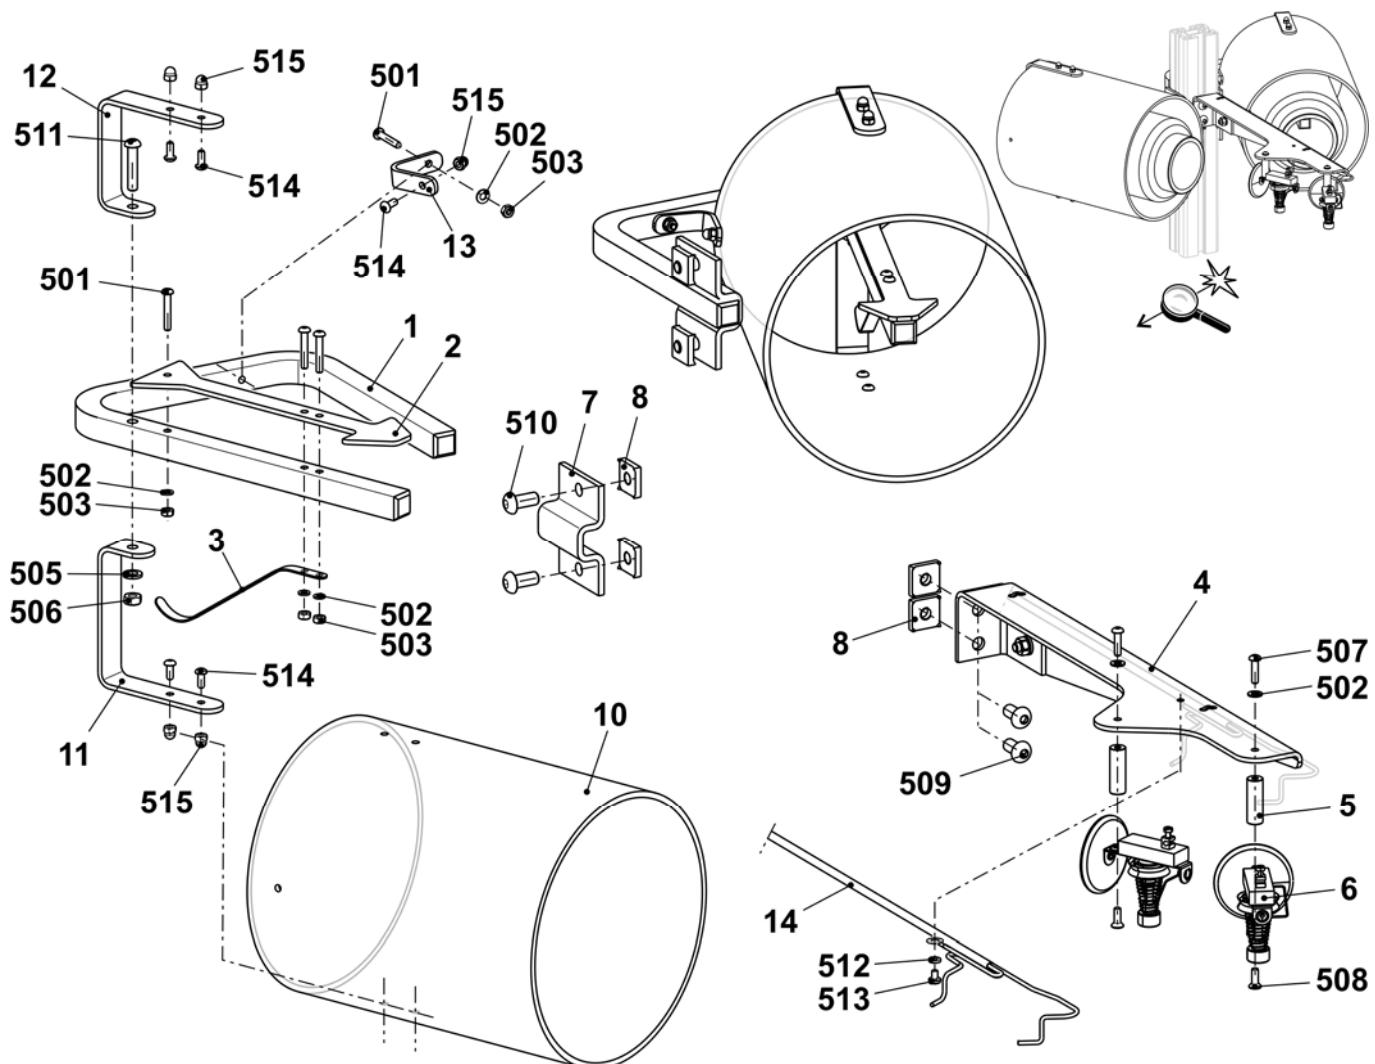


Additional bobbin board

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
Σ	Additional bobbin board	242 742			
1	Additional bobbin board welded	242 741	4	Bobbin support	200 363
2	Positioning pin	202 777	500	Pan-head screw M4x30	023 681
3	Disk ø130	062 385	501	Washer 5.3x30x1.25	023 556

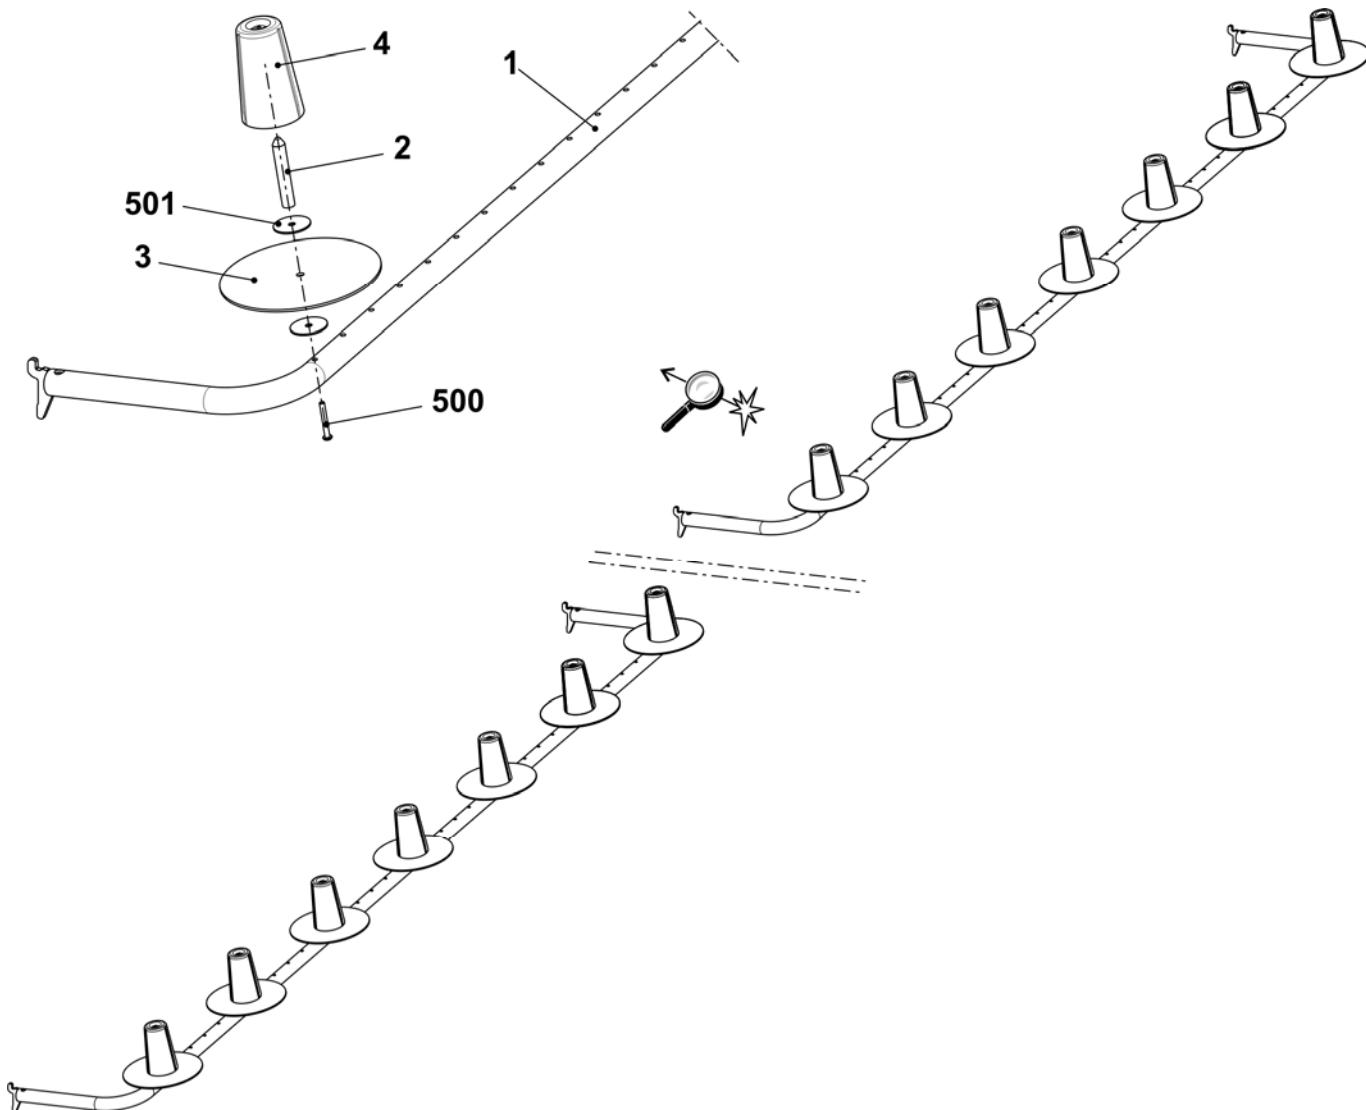


Additional board at the bottom

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Additional board 9XX at the bottom	253 647	502	Pan-head screw M4x25	023 511
1	Additional bobbin board welded	253 503	8	Yarn guide	243 765
2	Positioning pin	202 777	A8	Guiding part	243 623
3	Disk ø130	062 385	580	Setting pin 3x12	020 647
4	Bobbin support	200 363	581	Eyelet 8	021 504
500	Pan-head screw M4x30	023 681	582	Snap ring A12	020 996
501	Washer 5.3x30x1.25	023 556	9	Yarn guide bracket complete	241 581

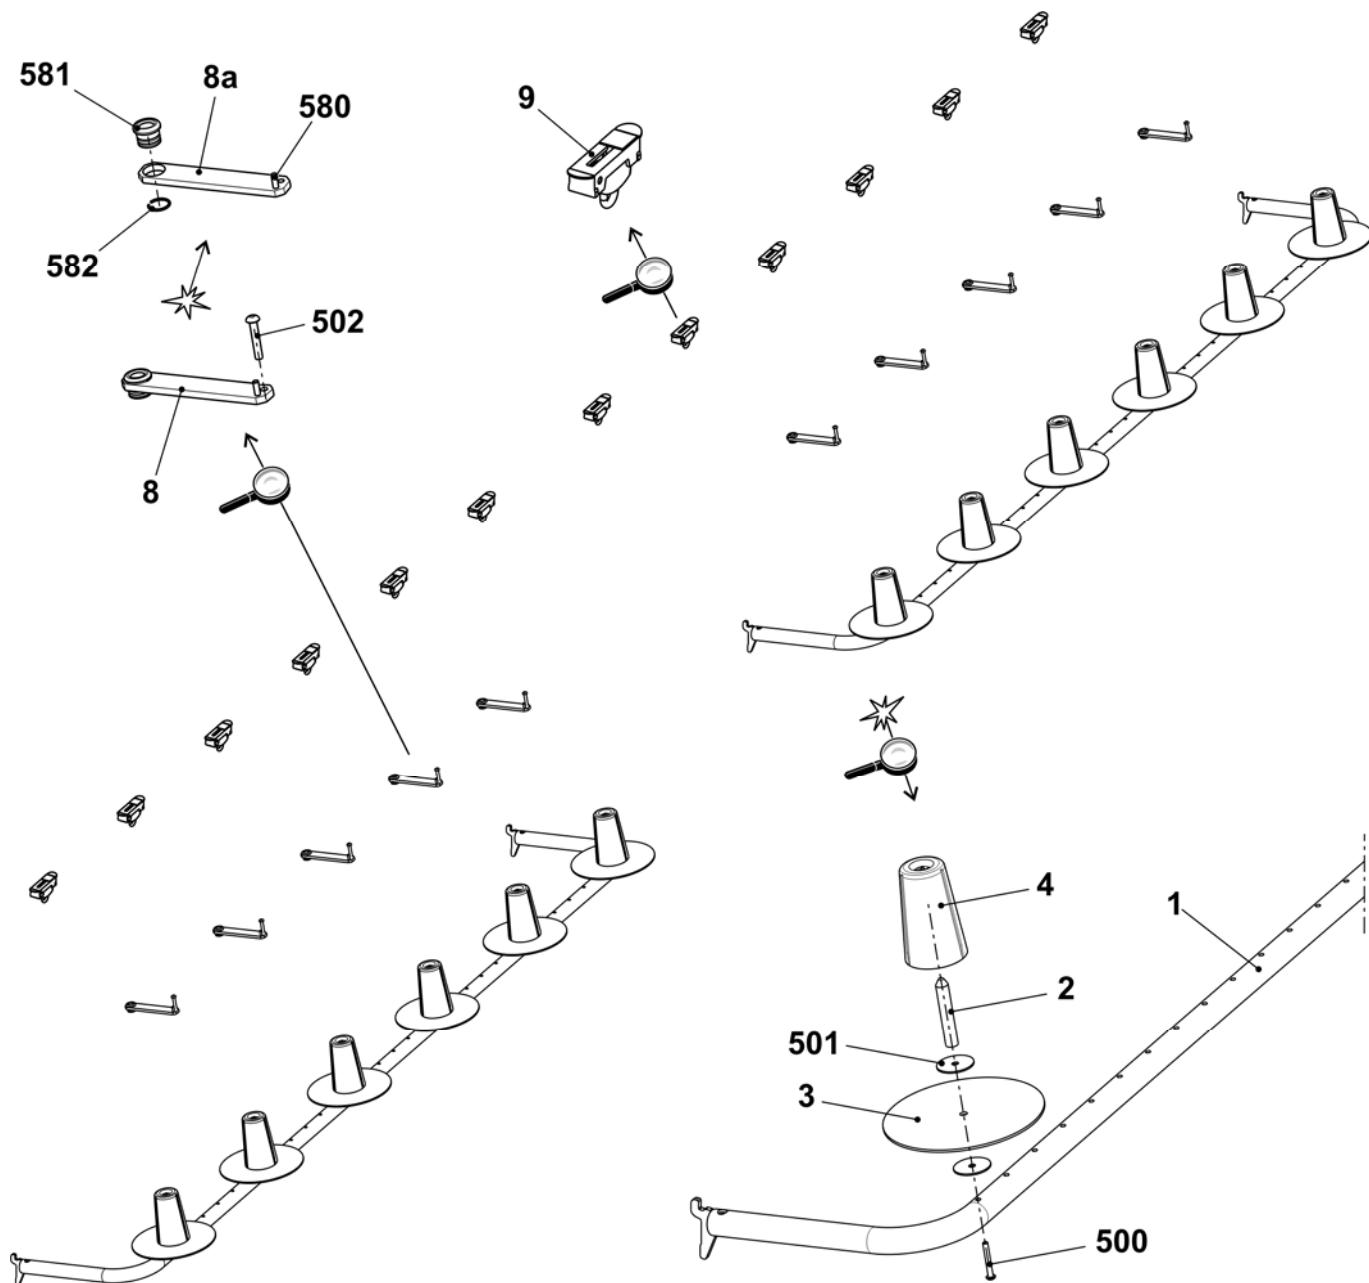


Conversion kit 32 IYC

Gauge	Designation	ID No.
E5 + E3,5.2 + E5.2	Conversion kit 32 OIFF E5	254 948
E7 + E8 + E6.2	Conversion kit 32 OIFF E7-8	254 949
E10 + E12 + E14 + E7.2 + E8.2	Conversion kit 32 OIFF E10-14	254 950
E16	Conversion kit 32 OIFF E16-18	254 951

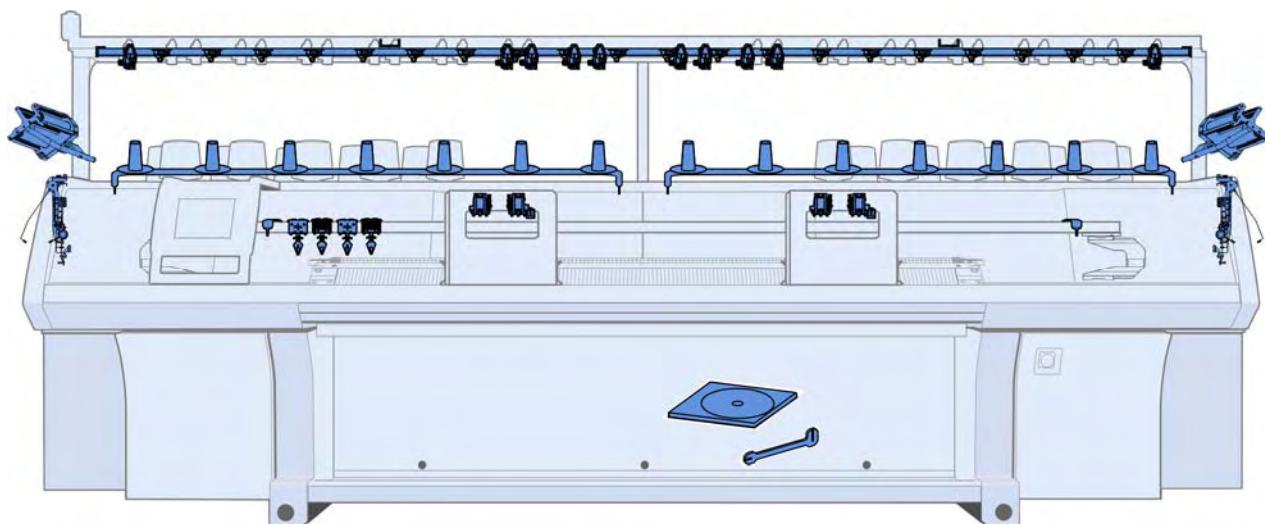


Overview of conversion kit E5

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Conversion kit 32 IFF E5	254 948			
1	Yarn tensioner on the left complete E5	244 498	6	Friction feed wheel on the right co. 16-fold	244 992
2	Yarn tensioner on the right complete E5	244 501	9	DVD instructions conversion kit IYC	245 169
3	YC driving in the middle complete	245 298	10	Adjusting part for yarn carrier bow	250 119
4	YC driving outside complete	245 297	11	Yarn guide complete E5 IYC	245 161
5	Friction feed wheel on the left co. 16-fold	244 991	500	Screw KB 60x20	237 682

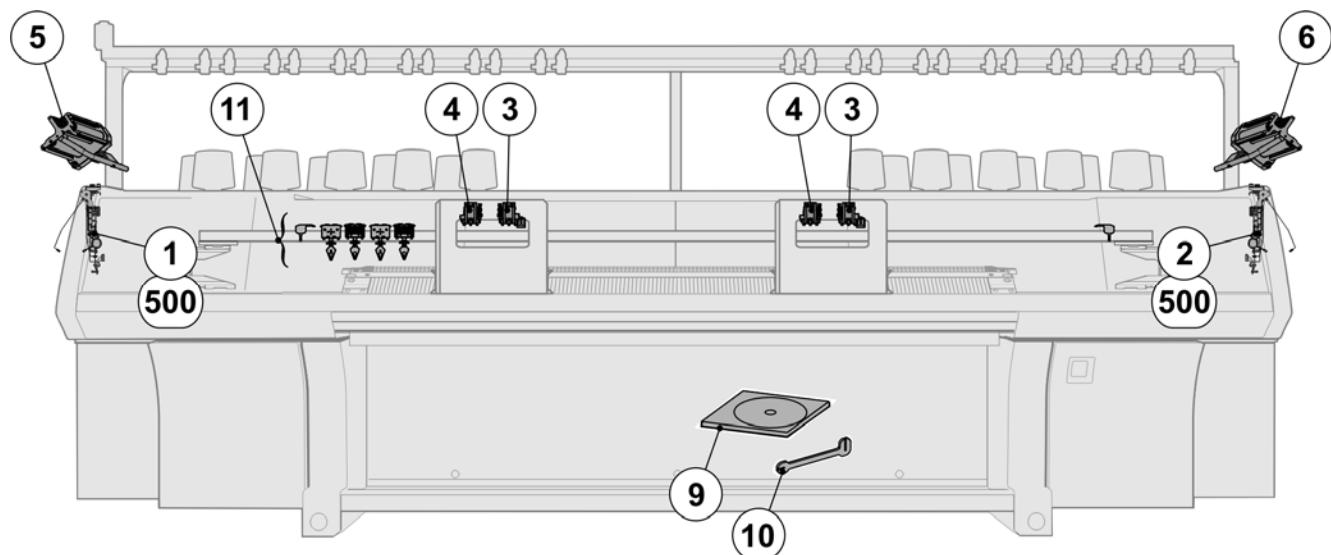


Overview of conversion kit E7-8

<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>	<i>Pos</i>	<i>Designation</i>	<i>ID No.</i>
Σ	Conversion kit 32 IFF E7-8	254 949	11	Friction feed wheel on the left co. 16-fold	244 991
1	Yarn tensioner on the left complete E7-8	244 499	12	Friction feed wheel on the right co. 16-fold	244 992
2	Yarn tensioner on the right complete E7-8	244 502	13	DVD instructions conversion kit IYC	245 169
3	Yarn guide bar	242 992	14	Adjusting part for yarn carrier bow	250 119
4	Support on the left	243 609	15	Yarn guide complete E7-8 IYC	245 162
5	Support on the right	243 610	16	Additional bobbin board 9XX	242 742
6	Support	243 766	500	Self-locking screw M6x12	023 415
7	Yarn control device	237 124	501	Ribbed lock washer M6-10	023 414
8	Yarn guide bracket complete	241 581	502	Square nut M8	023 269
9	YC driving in the middle complete	245 298	503	Countersunk screw M8x16	023 113
10	YC driving outside complete	245 297	504	Screw KB 60x20	237 682

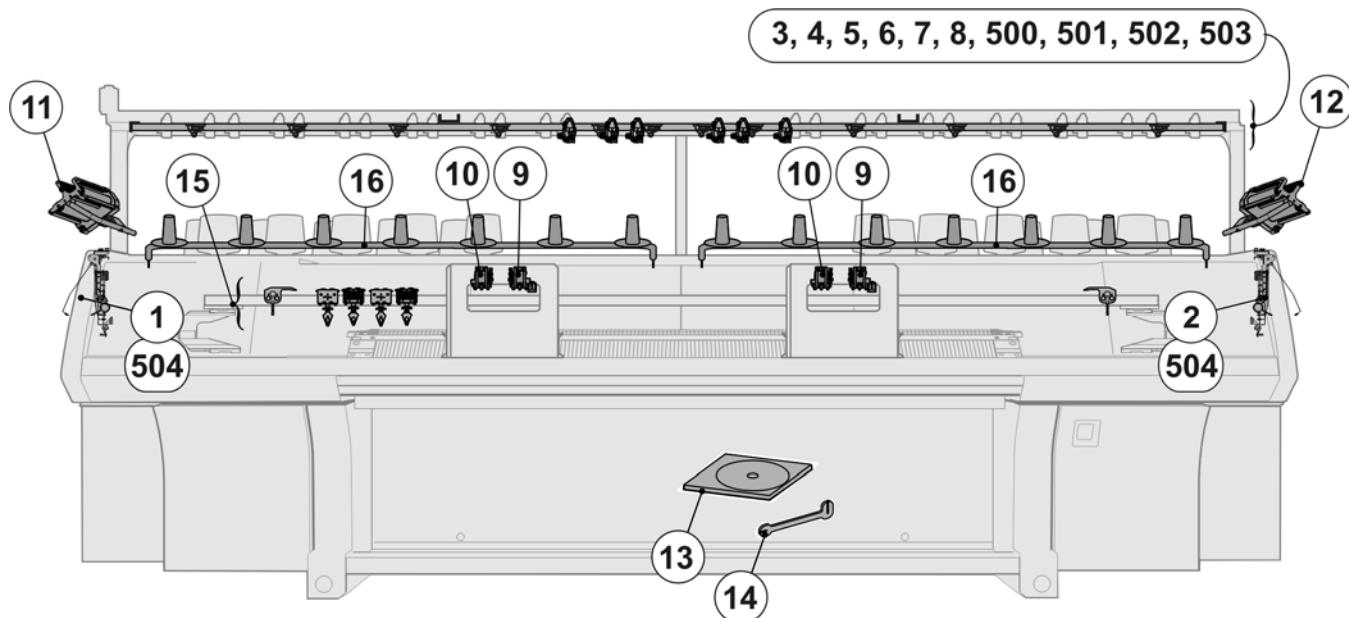


Overview of conversion kit E10-18

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Conversion kit 32 IYC				
E10-14		254 950	11	Friction feed wheel on the left co. 16-fold	244 991
E16-18		254 951	12	Friction feed wheel on the right co. 16-fold	244 992
1	Yarn tensioner on the left complete E10-18	244 500	13	DVD instructions conversion kit IYC	245 169
2	Yarn tensioner on the right complete E10-18	244 503	14	Adjusting part for yarn carrier bow	250 119
3	Yarn guide bar	242 992	15	Yarn guide complete E10-14 IYC	245 163
4	Support on the left	243 609		Yarn guide complete E16-18 IYC	245 164
5	Support on the right	243 610	16	Additional bobbin board 9XX	242 742
6	Support	243 766	500	Self-locking screw M6x12	023 415
7	Yarn control device	237 124	501	Ribbed lock washer M6-10	023 414
8	Yarn guide bracket complete	241 581	502	Square nut M8	023 269
9	YC driving in the middle complete	245 298	503	Countersunk screw M8x16	023 113
10	YC driving outside complete	245 297	504	Screw KB 60x20	237 682

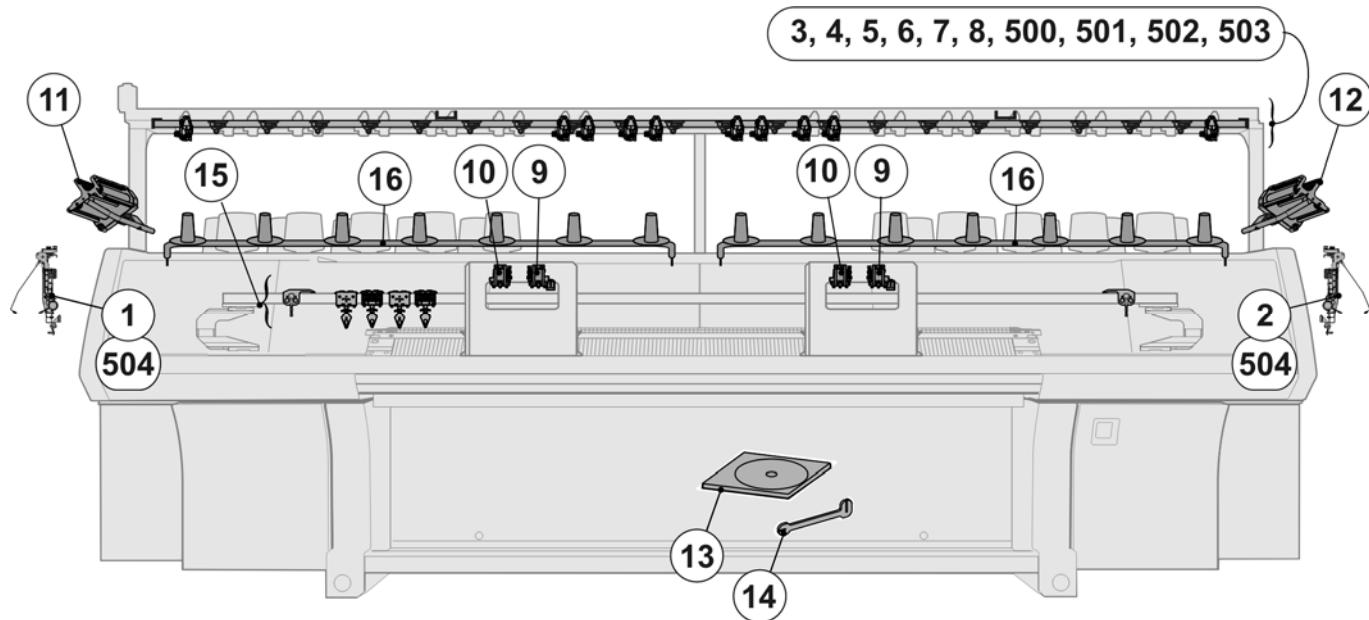


Parts for the yarn guide system

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ Yarn guide system					
3	Yarn guide bar 96"	242 992	7	Yarn guide bracket complete	241 581
4	Support on the left	243 609	500	Self-locking screw M6x12	023 415
5	Support on the right	243 610	501	Ribbed lock washer M6-10	023 414
6	Support	243 766	502	Square nut M8	023 269
7	Yarn control device	237 124	503	Countersunk screw M8x16	023 113

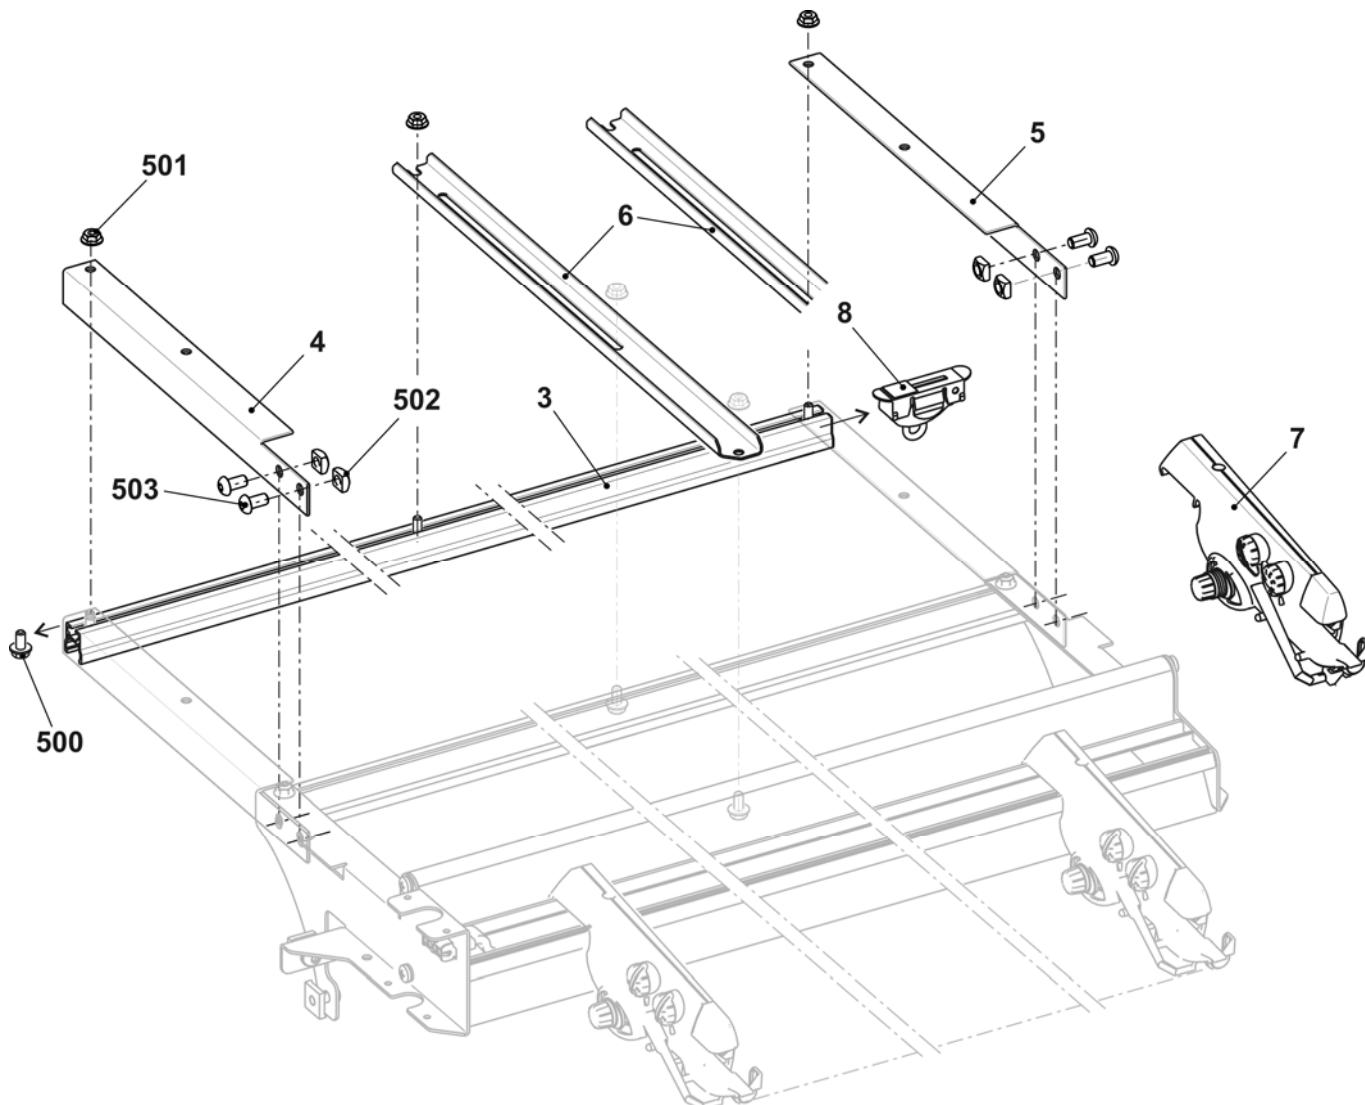


Yarn tensioner on the left

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Yarn tensioner on the left complete				
	E5 + E2,5.2 + E3,5.2 + E5.2	244 498	6	Spacer	242 048
	E7 + E8 + 6.2	244 499	7	Grounding sheet metal of tension axle	243 121
	E10 + E12 + E14 + E16 + E18 + E7.2 + E8.2	244 500	8	Ground cable yarn tensioner OKC	243 105
1	Card yarn tensioner 16-fold on the left	241 345	500	Screw KB30x8	236 228
2	Tension axle complete		501	Circlip	021 022
	E3-8	244 494	502	Tension spring 5.05x0.55x53 (E3-5) Tension spring 4.9x0.5x53 (E7-8)	023 502 023 503
	E10-18	244 495		Tension spring 4.9x0.45x53 (E10-18)	023 504
3	Housing	241 367	503	Circlip	021 020
4	Slider	241 694	504	Countersunk screw M4x10	241 914
5	Stop point	241 368			

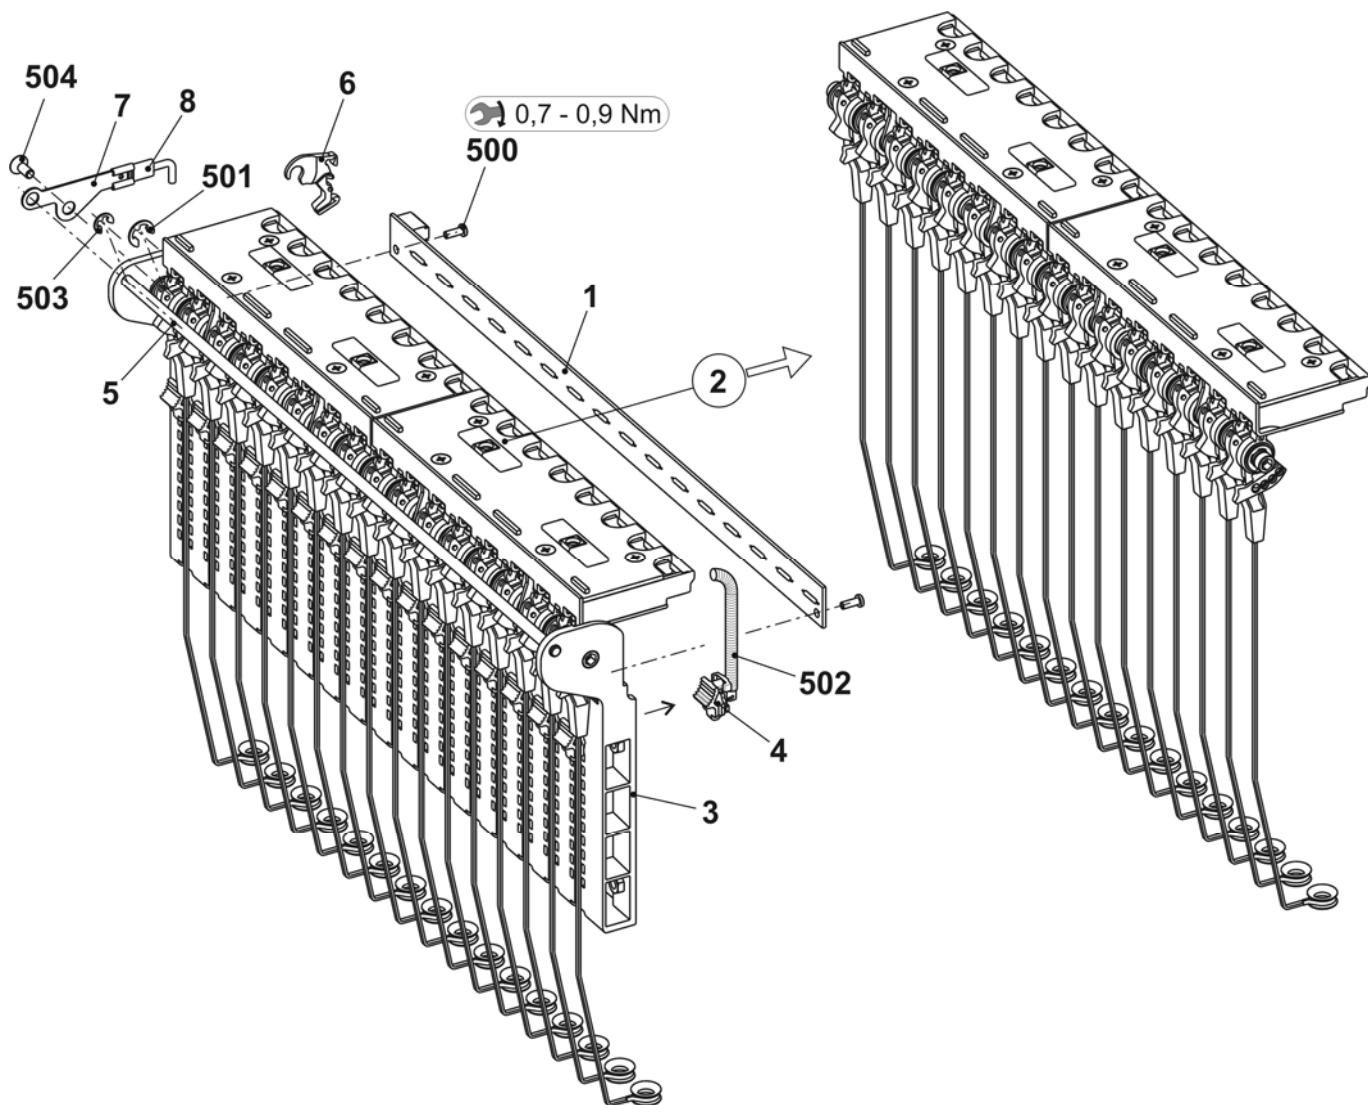


Yarn tensioner on the right

Pos	Designation	ID	Pos	Designation	ID
Σ	Yarn tensioner on the right complete		6	Spacer	242 048
	E5 + E2,5.2 + E3,5.2 + E5.2	244 501	7	Grounding sheet metal of tension axle	243 121
	E7 + E8 + E6.2	244 502	8	Ground cable yarn tensioner OKC	243 105
	E10 + E12 + E14 + E16 + E18 + E7.2 + E8.2	244 503	500	Screw KB30x8	236 228
1	Card yarn tensioner 16-fold on the right	241 346	501	Circlip	021 022
2	Tension axle complete		502	Tension spring 5.05x0.55x53 (E3-5)	023 502
	E3-8	244 494		Tension spring 4.9x0.5x53 (E7-8)	023 503
	E10-18	244 495		Tension spring 4.9x0.45x53 (E10-18)	023 504
3	Housing	241 367	503	Circlip	021 020
4	Slider	241 694	504	Countersunk screw M4x10	241 914
5	Stop point	241 368			

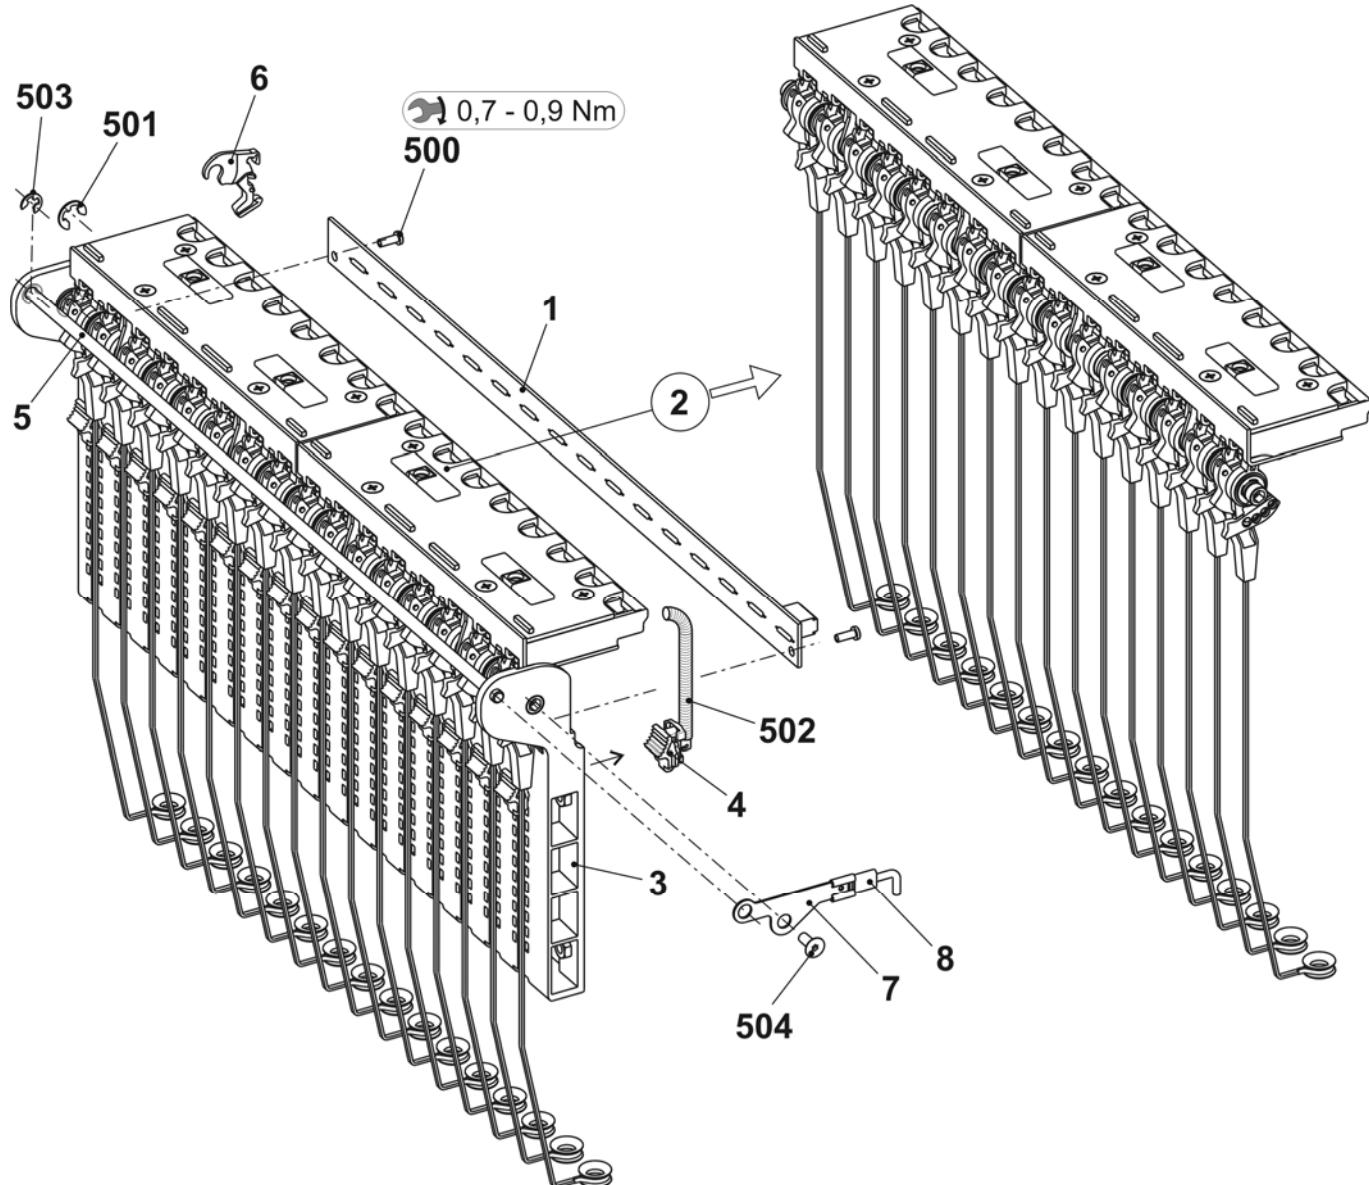


Tension axle

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Tension axle complete		3	Thread clamp AKF	238 695
	E5 + E7 + E8 (E2.5.2/3.5.2/5.2/6.2)	244 494	31	Housing AKF	238 689
	E10+ E12 + E14 + E16 + E18 (E7.2/8.2)	244 495	32	Cover AKF	237 926
1	Axle	244 522	33	Sheet metal at the bottom (housing AKF)	240 719
2	Tension arm pre-assembled		34	Lever AKF	238 692
	E3 – E8	242 770	35	Thrust piece AKF	238 690
	E10 – E18	242 771	36	Slider AKF	238 691
4	Wire bow	238 694	37	Wire bow	238 694
500	Adjusting washer 4x8x0.8x14x0.5	023 501	38	Wire	237 940
501	Circlip	021 022	531	Screw KB 35x12	237 681
502	Grooved pin 2x6	243 172	532	Screw KB 40x8	236 227
			533	Compression spring 0.30x4.50x18.50	241 437
			534	Grooved pin 2x6	243 172

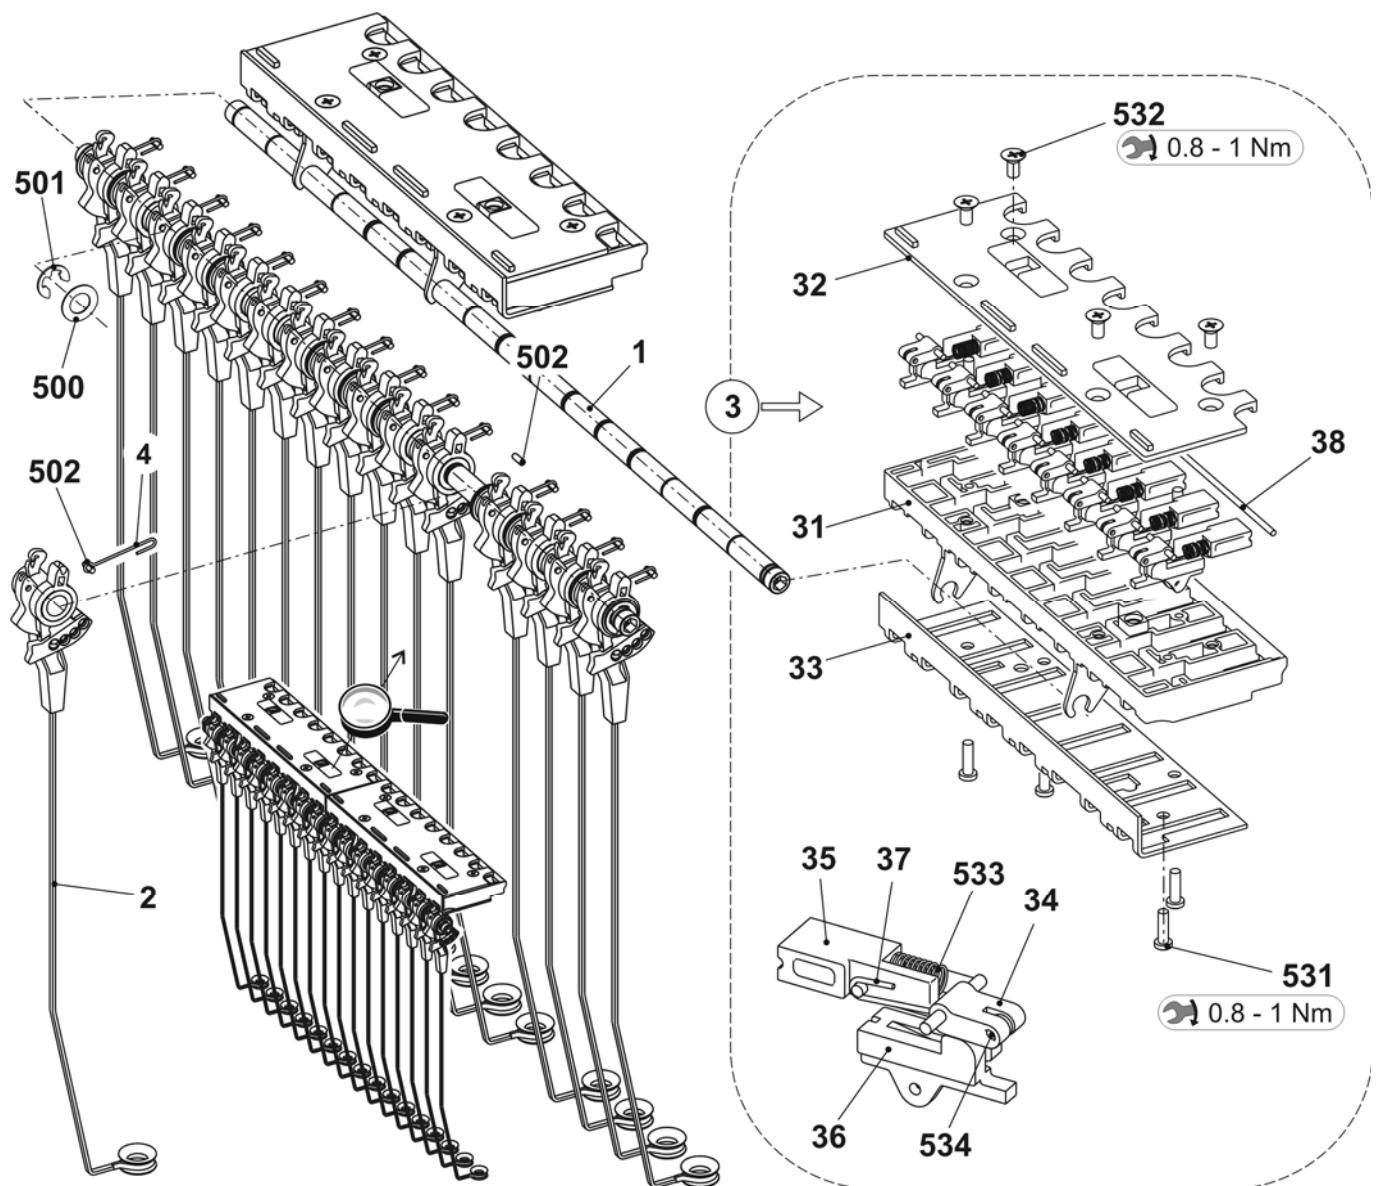


Driving in the middle

Pos	Designation	ID	Pos	Designation	ID
Σ	YC driving in the middle complete	245 298	7	Card yarn carrier final stages OKC	300 960
1	Yarn carrier plunger on the right complete	243 080	500	Cap screw M4x14-I-Torx	242 279
2	Yarn carrier plunger on the left complete	243 118	501	Cap screw M4x25-I-Torx	245 305
3	Support angle for jack	245 313	502	Cap screw M3x12-12.9	022 648
4	Mounting block in the middle	245 308	503	Screw KB 60x20	243 625
5	Switch mechanism	251 137	900	Shoulder screw	231 899
6	Guiding part	239 972	901	Cap screw M6x16	020 135

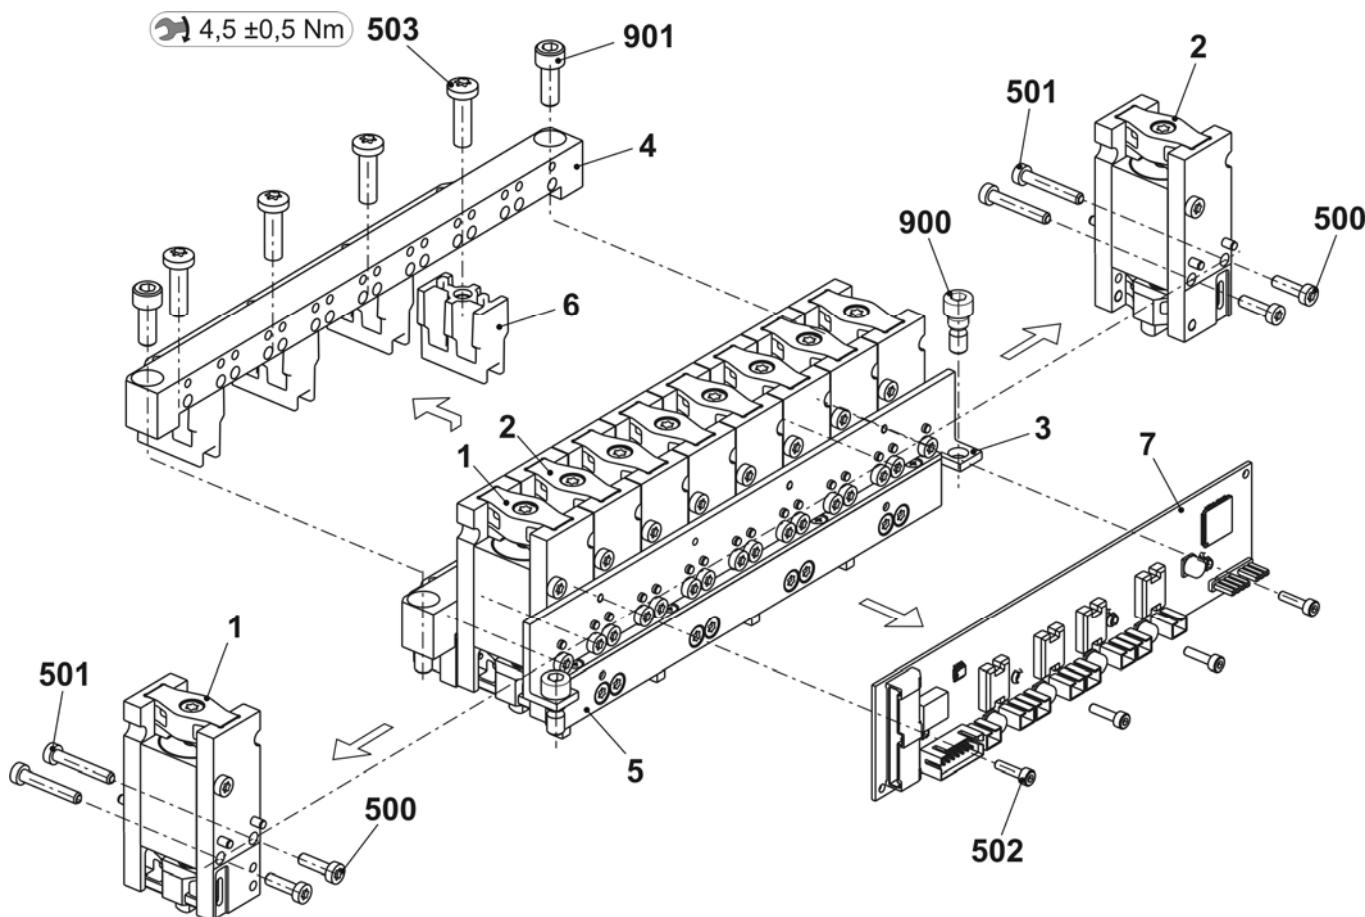


Driving outside

Pos	Designation	ID	Pos	Designation	ID
Σ	YC driving outside complete	245 297	6	Switch mechanism	251 137
1	Yarn carrier plunger on the right complete	243 080	500	Cap screw M4x14-I-Torx	242 279
2	Yarn carrier plunger on the left complete	243 118	501	Cap screw M4x25-I-Torx	245 305
3	Support angle for jack	245 313	502	Cap screw M3x12-12.9	022 648
4	Mounting block outside	245 294	900	Shoulder screw	231 899
5	Card yarn carrier final stages OKC	300 960	901	Cap screw M6x16	020 135

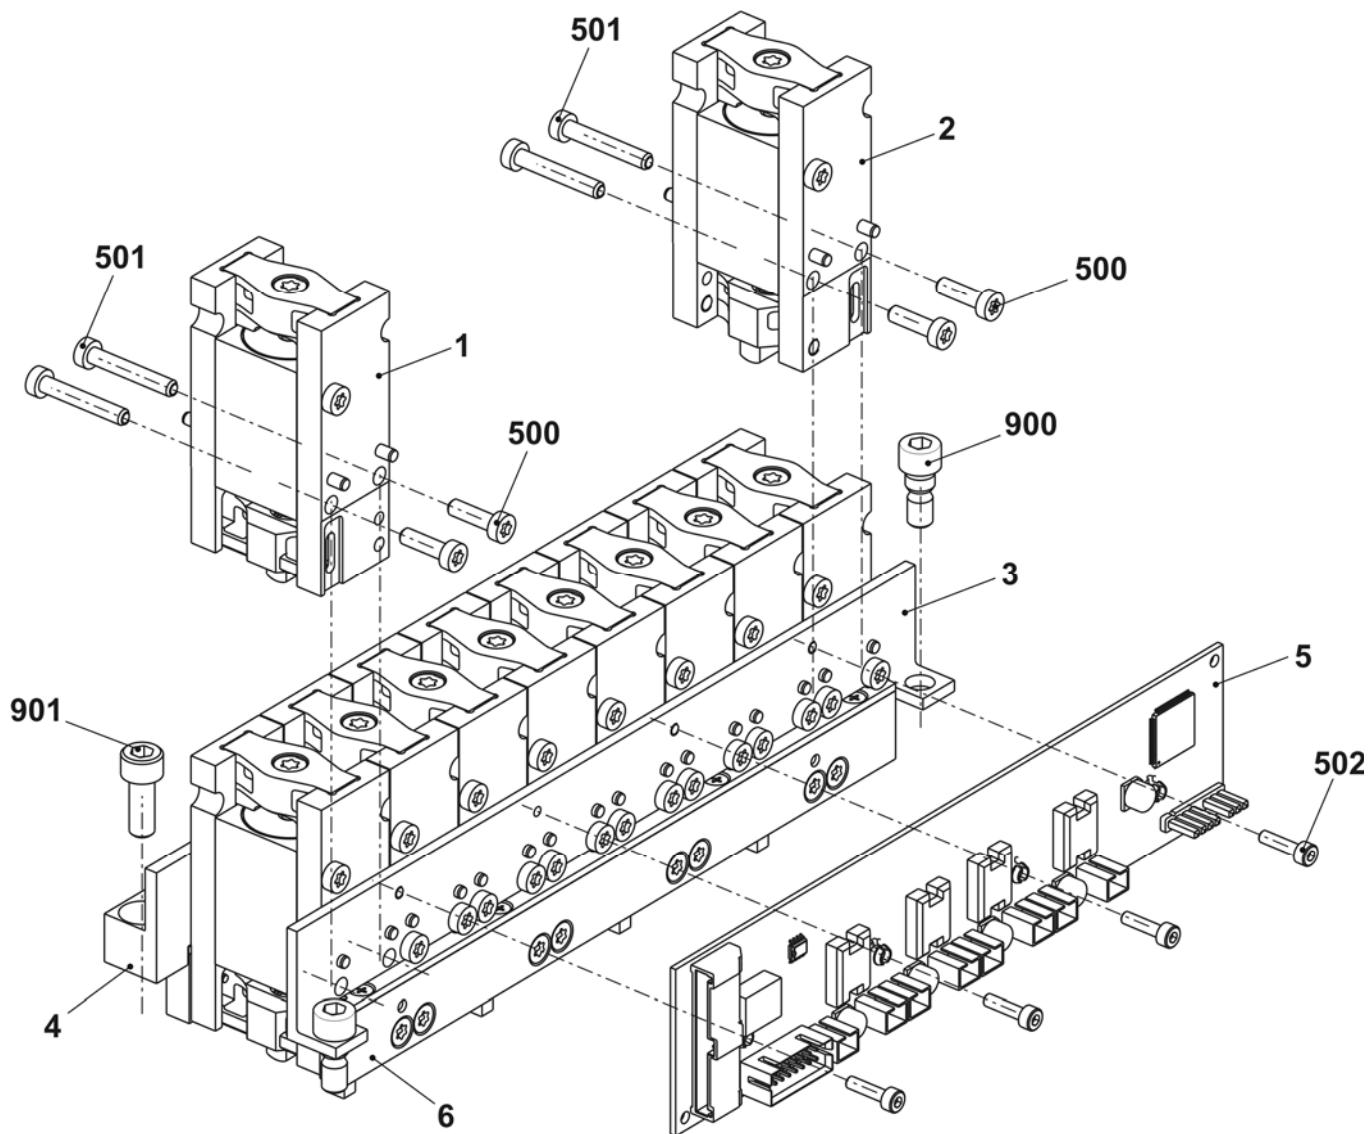

Friction feed wheel on the left and on the right co.

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
ΣL	Friction feed wheel on the left co. 16-fold	244 991	ΣR	Friction feed wheel on the right co. 16-fold	244 992
1	Friction feed wheel on the left	244 185	1	Friction feed wheel on the right	244 186
2	Support on the left	243 869	2	Support on the right	244 142
501	Countersunk screw M8x25	023 027	501	Countersunk screw M8x25	023 027
502	Cap screw M6x16	020 135	502	Cap screw M6x16	020 135
503	Countersunk screw M5x8	239 408	503	Countersunk screw M5x8	239 408

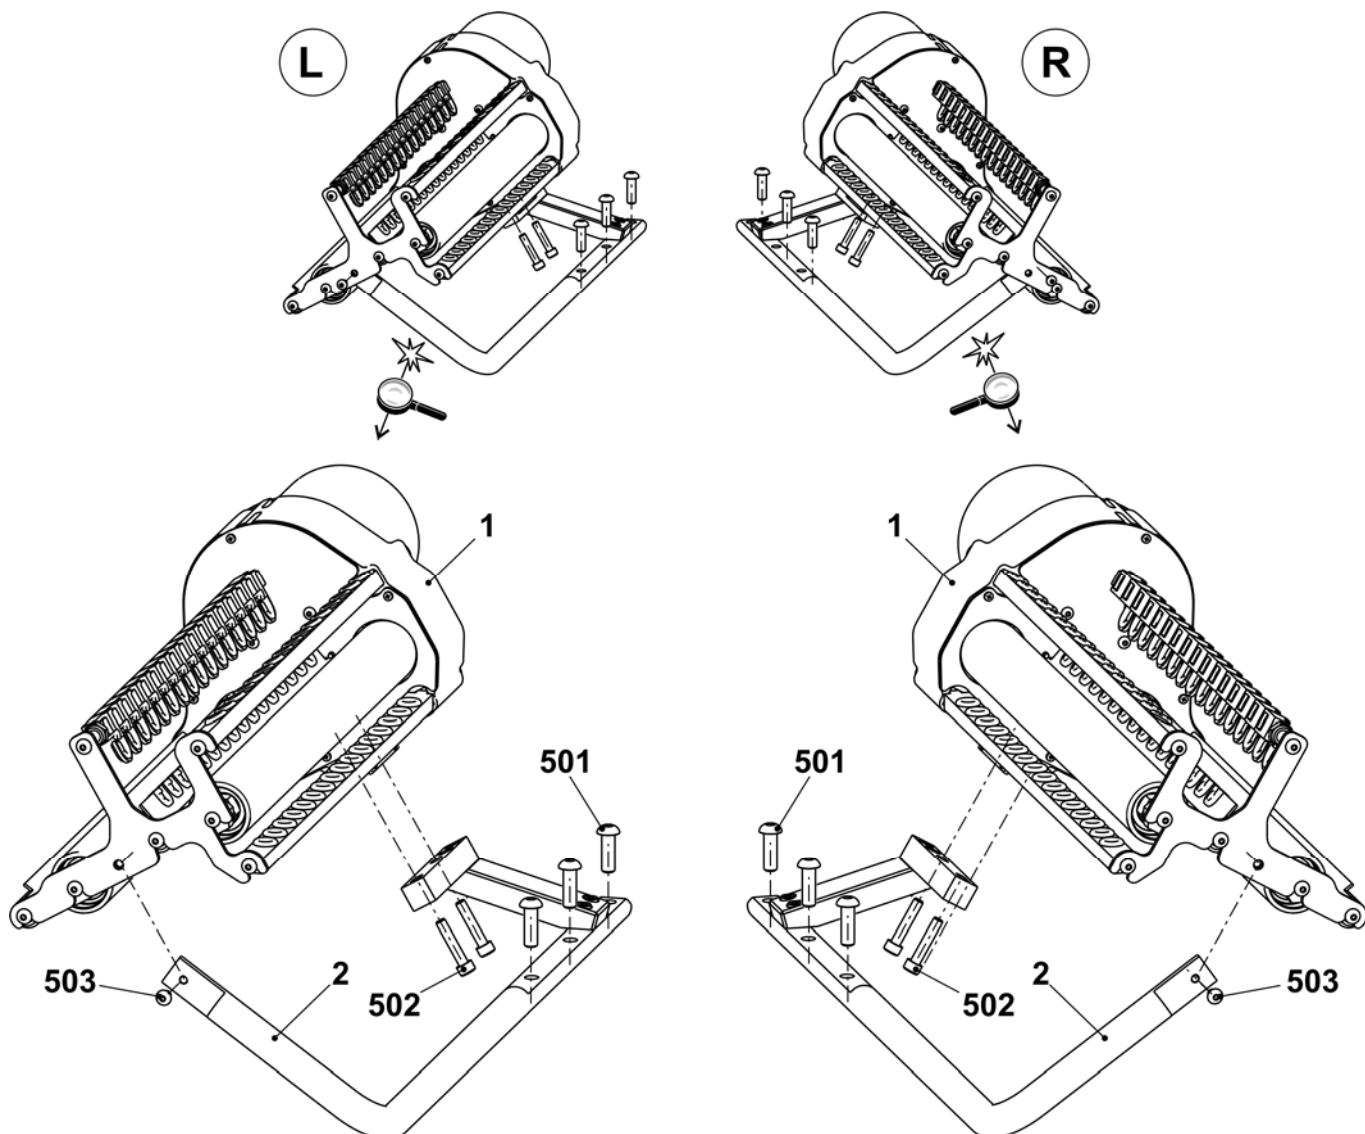


Friction feed wheel on the left

<i>Pos</i>	<i>Designation</i>	<i>ID</i>	<i>Pos</i>	<i>Designation</i>	<i>ID</i>
Σ	Friction feed wheel on the left co. 16-fold	244 185	10	Cover	251 098
1	Housing	240 368	11	Bush	221 391
2	Friction roller complete	243 860	12	Ribbed V-belt pulley	221 268
3	Three-phase A.C. motor 3x42V complete	219 800	13	Ribbed V-belt	206 927
	3a Three-phase A.C. motor	220 161	14	Rod	243 868
	3b Microswitch	008 664	15	Cover	230 758
5	Yarn guide rod 16-fold complete	244 576	18	Deflector complete 16-fold	250 102
6	Yarn guide rod 16-fold complete	244 578	19	Protective plate	251 096
	A6 Yarn guide rod 16-fold	244 577	500	Screw KB30x8	236 228
	6b Ceramic eyelet	240 640	501	Cap screw M20x10	244 736
7	Stop motion rail on the right complete	243 863	502	Cap screw M5x12	020 132
	A7 Stop motion rail on the right	243 864	503	Cap screw M5x16	022 726
	570 Slide bearing GFM-101214-07	023 627	504	Cap screw M5x25	023 523
	571 O-ring 10x1.3	244 895	506	Washer 5,3x22x2,5	023 219
8	Stop motion rail on the left complete	243 865	507	U-washer 5	020 901
	A8 Stop motion rail on the left	243 866	508	Shim ring 15x21x1	023 216
	8b Eyelet	230 662	510	U-washer 5	023 542
	580 Slide bearing GFM-101214-07	023 627	511	Countersunk screw M5x8	239 408
	581 O-ring 10x1.3	244 895	512	Countersunk screw M4x5	239 549
9	Strap	251 113	513	Countersunk screw M4x10	023 450


STOLL

THE RIGHT WAY TO KNIT

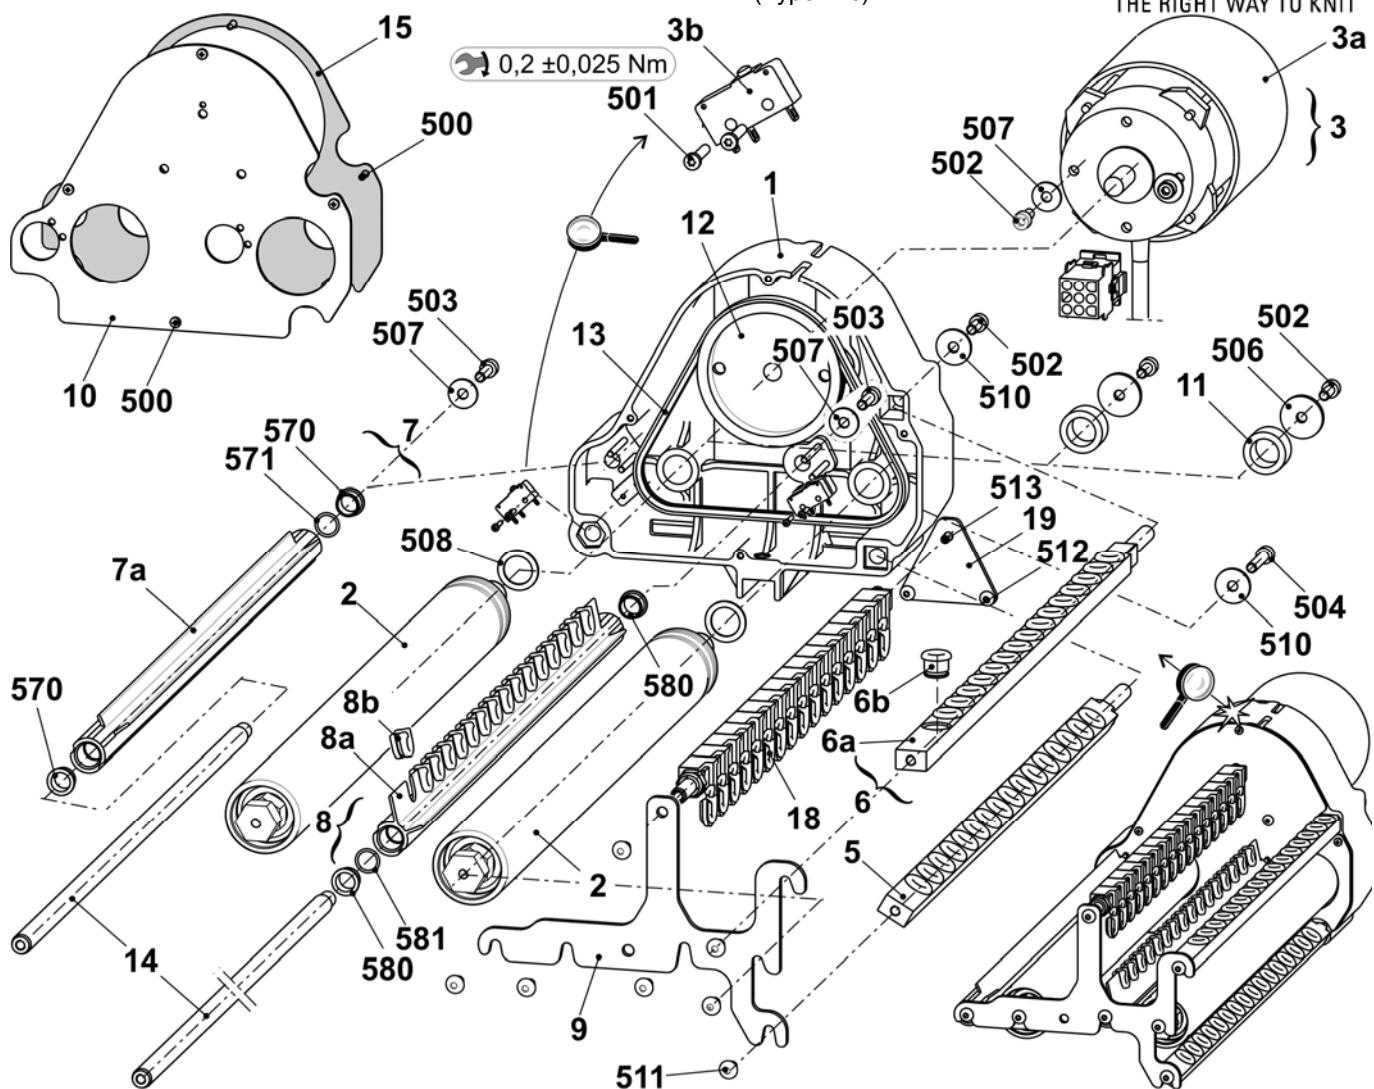


Friction feed wheel on the right

Pos	Designation	ID	Pos	Designation	ID
Σ	Friction feed wheel on the right co. 16-fold	244 186	10	Cover	251 098
1	Housing	240 368	11	Bush	221 391
2	Friction roller complete	243 860	12	Ribbed V-belt pulley	221 268
3	Three-phase A.C. motor 3x42V complete	219 800	13	Ribbed V-belt	206 927
3a	Three-phase A.C. motor	220 161	14	Rod	243 868
3b	Microswitch	008 664	15	Cover	230 758
5	Yarn guide rod 16-fold complete	244 772	18	Deflector complete 16-fold	250 102
6	Yarn guide rod 16-fold complete	244 578	19	Protective plate	251 096
A6	Yarn guide rod 16-fold	244 577	500	Screw KB30x8	236 228
6b	Ceramic eyelet	240 640	501	Cap screw M20x10	244 736
7	Stop motion rail on the right complete	243 863	502	Cap screw M5x12	020 132
A7	Stop motion rail on the right	243 864	503	Cap screw M5x16	022 726
570	Slide bearing GFM-101214-07	023 627	504	Cap screw M5x25	023 523
571	O-ring 10x1.3	244 895	506	Washer 5,3x22x2,5	023 219
8	Stop motion rail on the right complete	244 530	507	U-washer 5	020 901
A8	Stop motion rail on the right	244 531	508	Shim ring 15x21x1	023 216
8b	Eyelet	230 662	510	U-washer 5	023 542
580	Slide bearing GFM-101214-07	023 627	511	Countersunk screw M5x8	239 408
581	O-ring 10x1.3	244 895	512	Countersunk screw M4x5	239 549
9	Strap	251 113	513	Countersunk screw M4x10	239 450

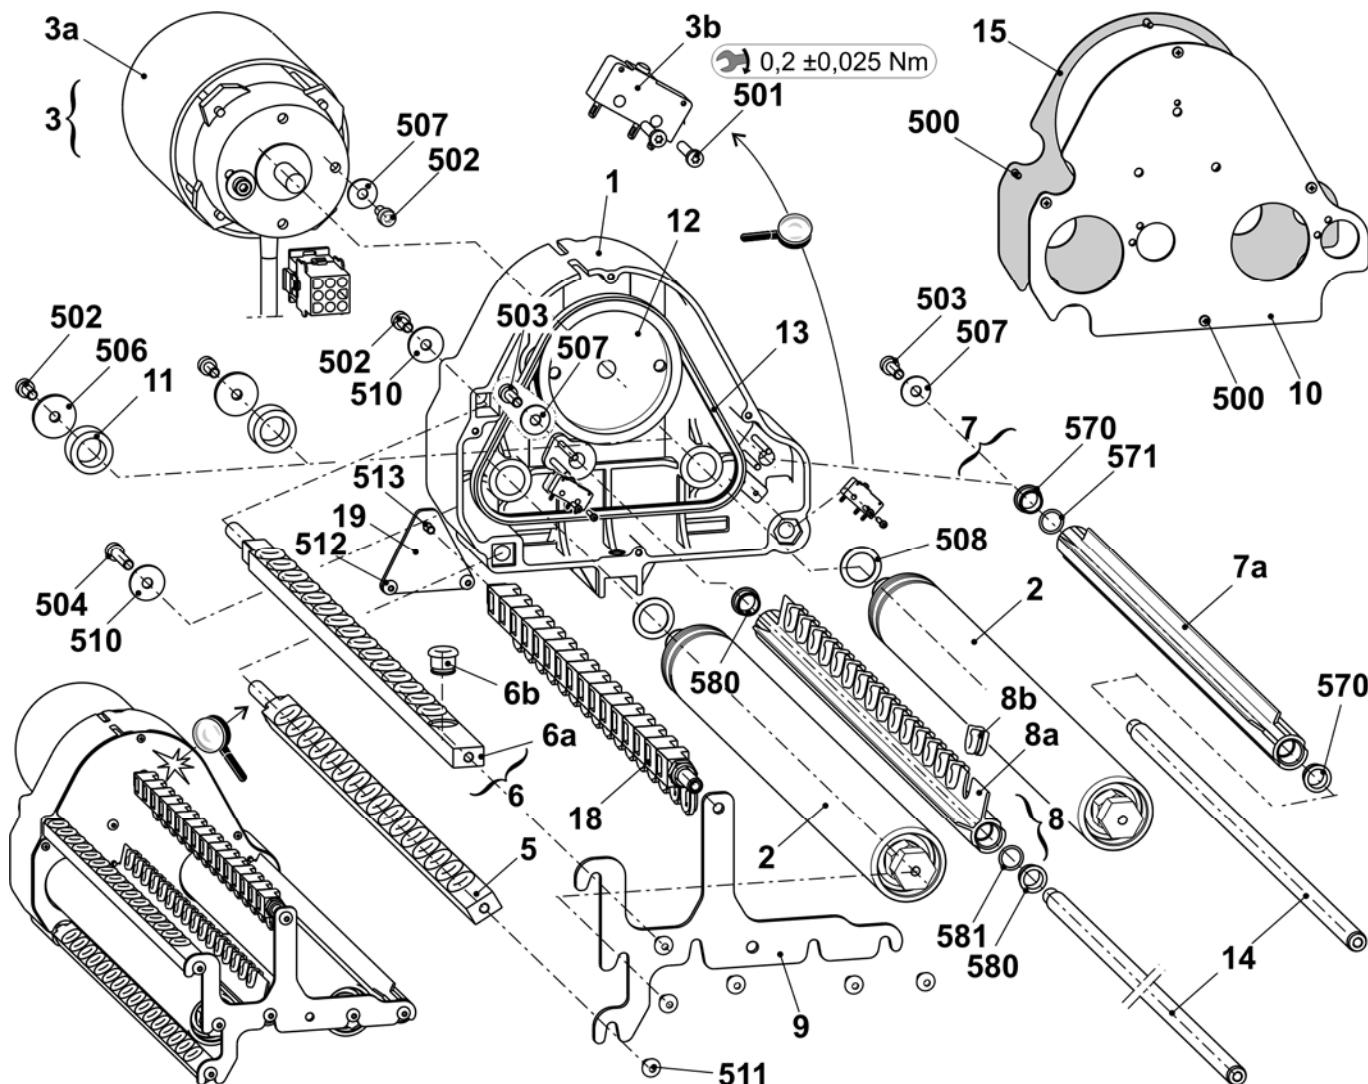


Additional bobbin board

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Additional bobbin board	242 742			
1	Additional bobbin board welded	242 741	4	Bobbin support	200 363
2	Positioning pin	202 777	500	Pan-head screw M4x30	023 681
3	Disk ø130	062 385	501	Washer 5.3x30x1.25	023 556

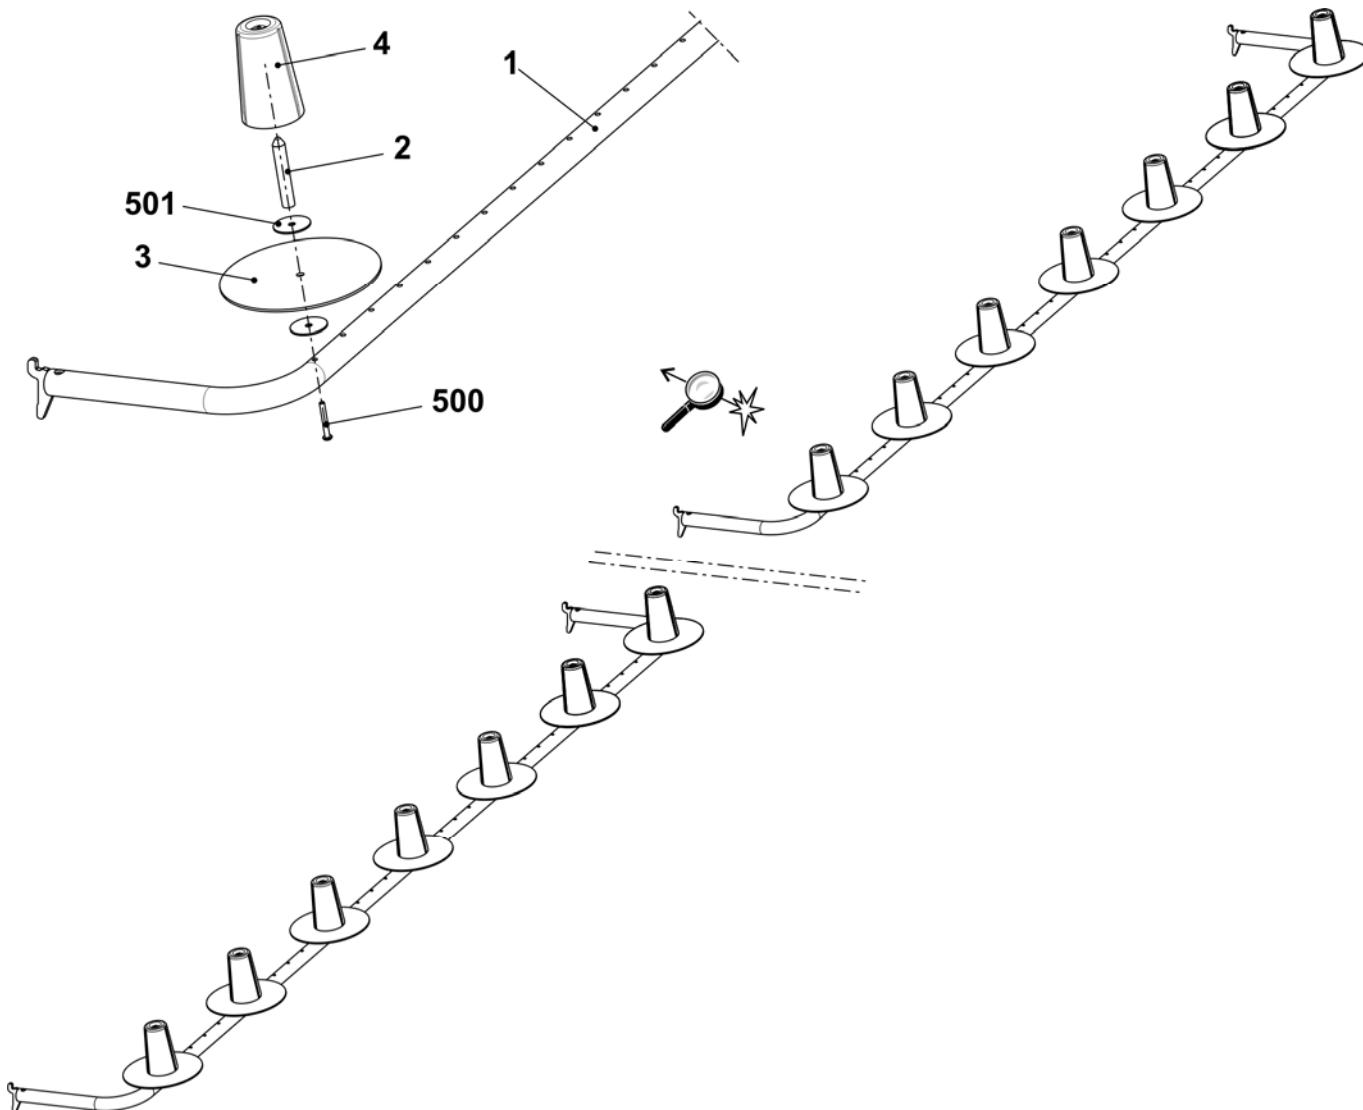


Yarn guide complete E5 IYC

Pos	Designation	ID	Pos	Designation	ID
Σ	Yarn guide complete E5 IYC E2,5,2 + E3,5,2 + E5,2	245 161			
1	Intarsia YC carriage complete 1+8 E5	250 319	4	Intarsia YC carriage complete 4+5 E5	250 322
	A1 Intarsia YC carriage 1+8	250 315	A4	Intarsia YC carriage 4+5	250 318
	1b Yarn carrier head 1+8 complete E5	244 076	4b	Yarn carrier head 3-6 complete E5	244 078
2	Intarsia YC carriage complete 2+7 E5	250 320	5	Limiter on the left with two eyelets	244 446
	2a IYC carriage 2+7	250 316	6	Limiter on the right with two eyelets	244 445
	2b Yarn carrier head 2+7 complete E5	244 077	C	Yarn guide angle	242 863
3	Intarsia YC carriage complete 3+6 E5	250 321	500	Countersunk screw M4x5	239 549
	3a Intarsia YC carriage 3+6	250 317	501	U-washer 4	020 870
	3b Yarn carrier head 3-6 complete E5	244 078			

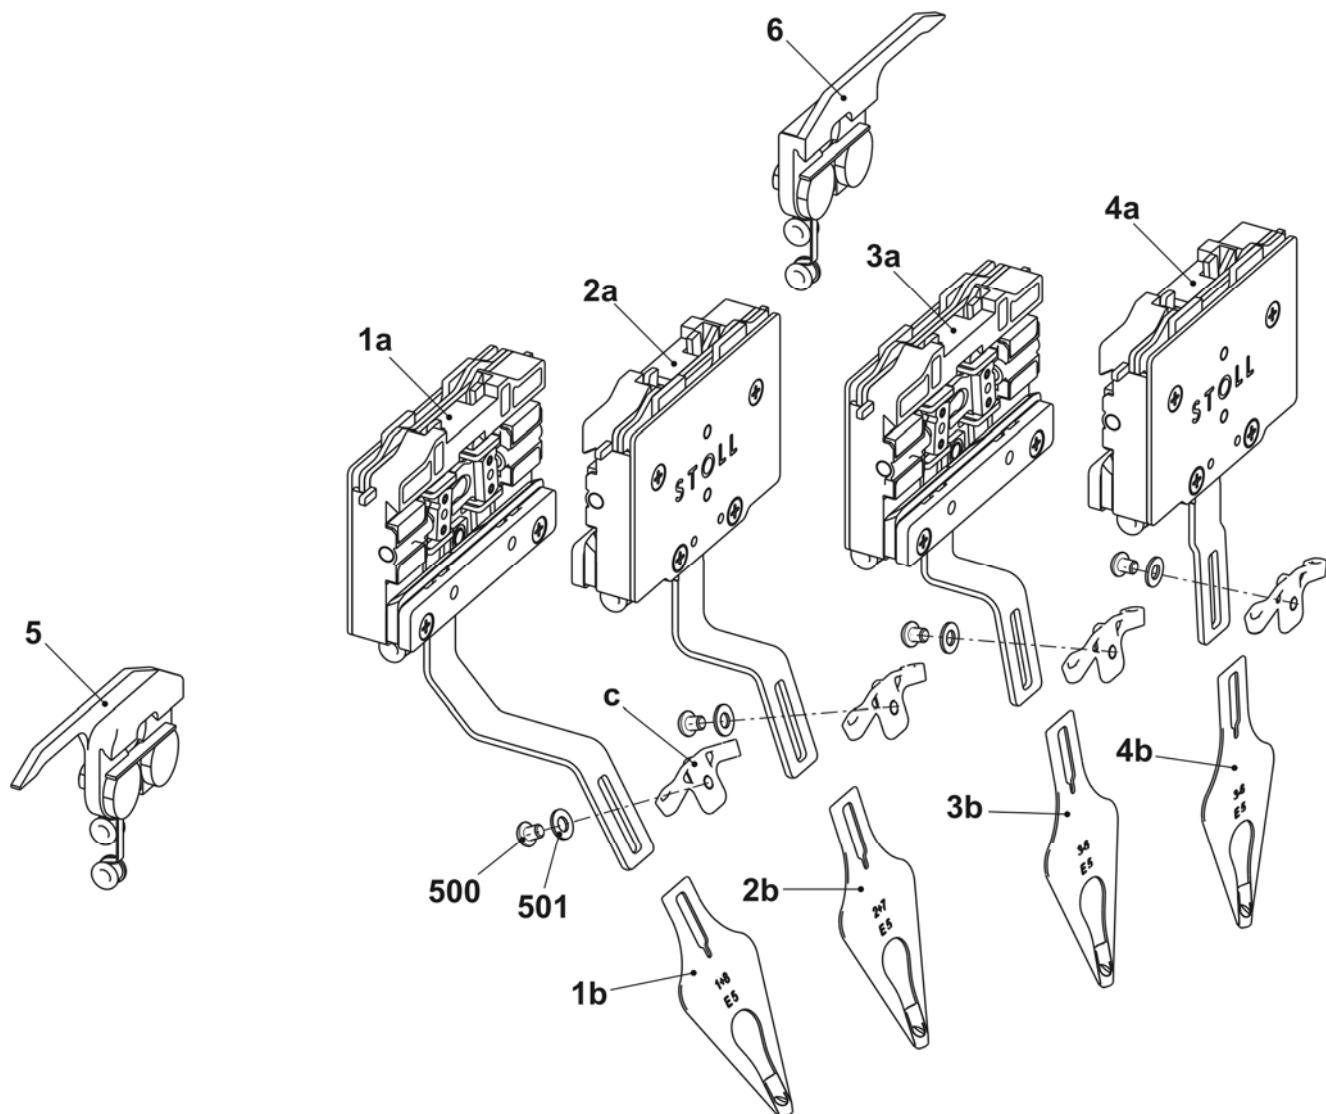


Yarn guide complete E7-8 IYC

Pos	Designation	ID	Pos	Designation	ID
Σ	Yarn guide complete E7-8 IYC E6.2	245 162			
1	Intarsia YC carriage complete 1+8 E7-8	250 323	4	Intarsia YC carriage complete 4+5 E7-8	250 326
	A1 Intarsia YC carriage 1+8	250 315		A4 Intarsia YC carriage 4+5	250 318
	1b Yarn carrier head 1+8 complete E7-8	244 082		4b Yarn carrier head 3+6 complete E7-8	244 084
2	Intarsia YC carriage complete 2+7 E7-8	250 324	5	Limiter on the left with two eyelets	244 446
	2a IYC carriage 2+7	250 316	6	Limiter on the right with two eyelets	244 445
	2b Yarn carrier head 2+7 complete E7-8	244 083	C	Yarn guide angle	242 863
3	Intarsia YC carriage complete 3+6 E7-8	250 325	500	Countersunk screw M4x5	239 549
	3a Intarsia YC carriage 3+6	250 317	501	U-washer 4	020 870
	3b Yarn carrier head 3+6 complete E7-8	244 084			

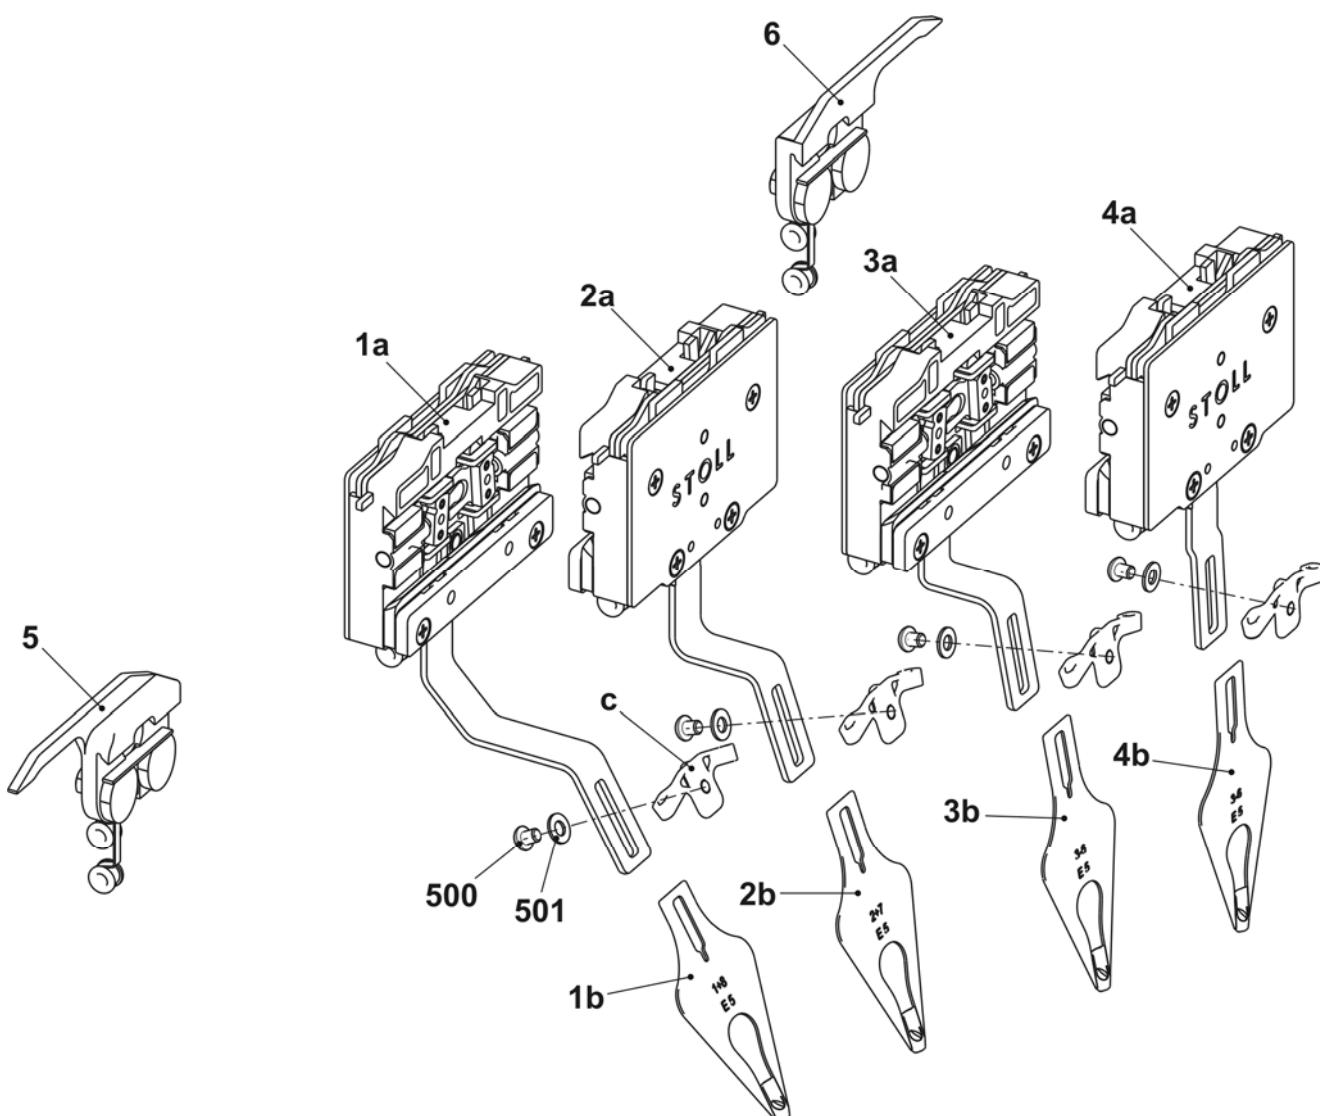

Yarn guide complete E10-14 IYC

Pos	Designation	ID	Pos	Designation	ID
Σ	Yarn guide complete E10-14 IYC E7.2 + E8.2 + E9.2	245 163			
1	Intarsia YC carriage complete 1+8 E10-14	250 327	4	Intarsia YC carriage complete 4+5 E10-14	250 330
A1	Intarsia YC carriage 1+8	250 315	A4	Intarsia YC carriage E10-14	250 318
1b	Yarn carrier head 1+8 complete E10-14	250 008	4b	Yarn carrier head 3-6 complete E10-14	250 010
2	Intarsia YC carriage complete 2+7 E10-14	250 328	5	Limiter on the left with two eyelets	244 446
2a	IYC carriage 2+7	250 316	6	Limiter on the right with two eyelets	244 445
2b	Yarn carrier head 2+7 complete E10-14	250 009	C	Yarn guide angle	242 863
3	Intarsia YC carriage complete 3+6 E10-14	250 329	500	Countersunk screw M4x5	239 549
3a	Intarsia YC carriage 3+6	250 317	501	U-washer 4	020 870
3b	Yarn carrier head 3-6 complete E10-14	250 010			

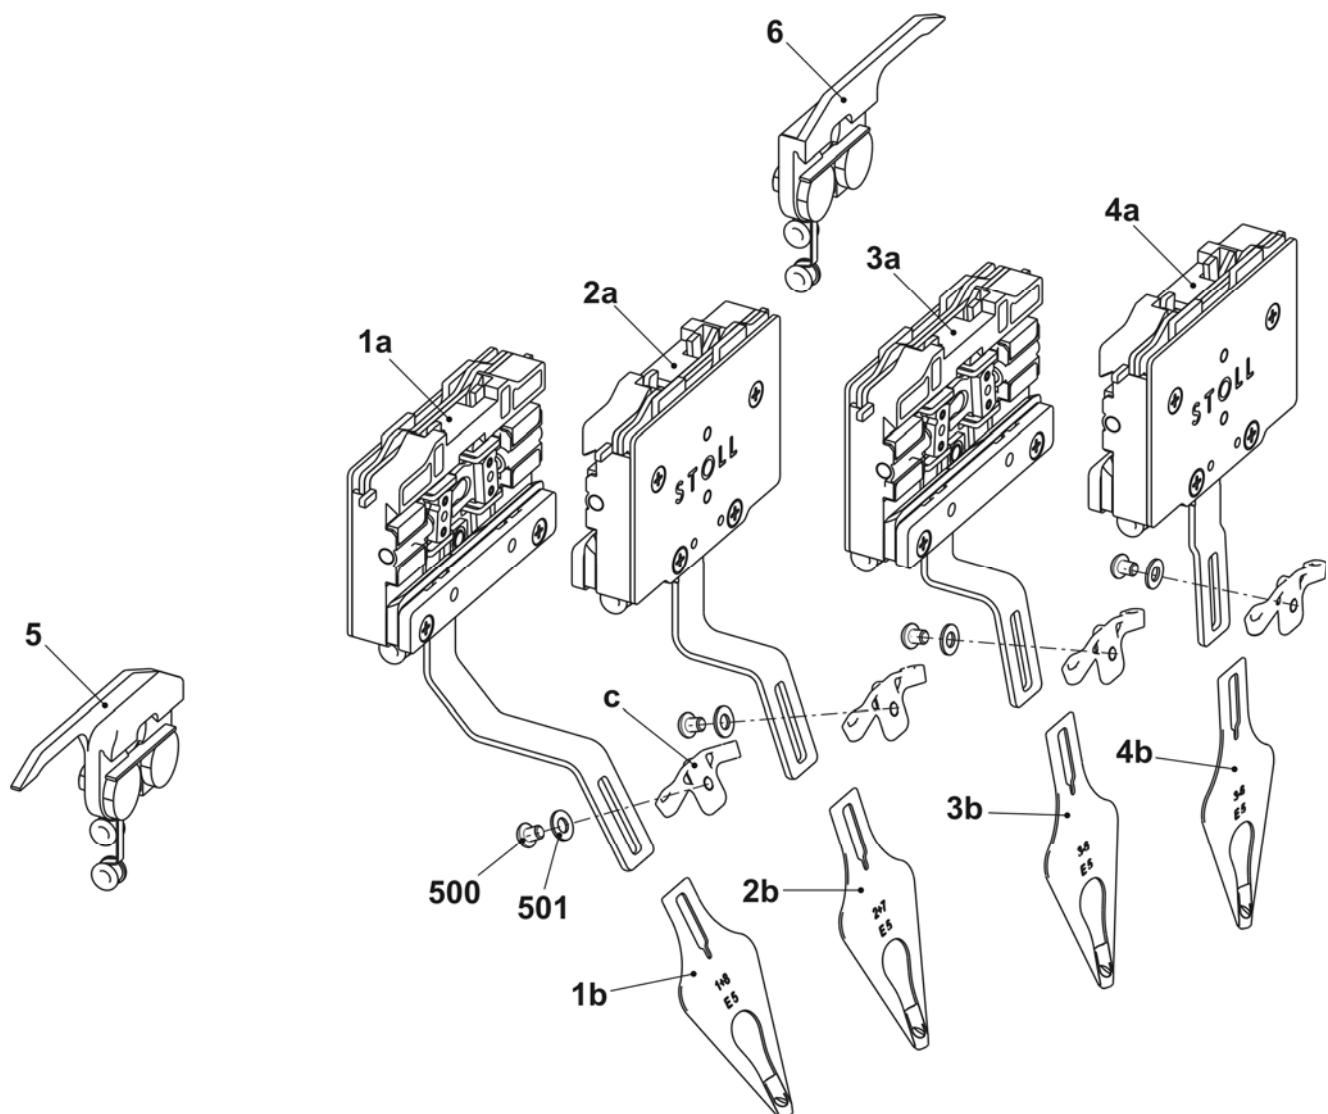

Yarn guide complete E16-18 IYC

Pos	Designation	ID	Pos	Designation	ID
Σ	Yarn guide complete E16-18 IYC	245 164			
1	Intarsia YC carriage complete 1+8 E16-18	250 331	4	Intarsia YC carriage complete 4+5 E16-18	250 334
	A1 Intarsia YC carriage 1+8	250 315	A4	Intarsia YC carriage 4+5	250 318
	1b Yarn carrier head 1+8 complete E16-18	250 011	4b	Yarn carrier head 3-6 complete E16-18	250 013
2	Intarsia YC carriage complete 2+7 E16-18	250 332	5	Limiter on the left with two eyelets	244 446
	2a IYC carriage 2+7	250 316	6	Limiter on the right with two eyelets	244 445
	2b Yarn carrier head 2+7 complete E16-18	250 012	c	Yarn guide angle	242 863
3	Intarsia YC carriage complete 3+6 E16-18	250 333	500	Countersunk screw M4x5	239 549
	3a Intarsia YC carriage 3+6	250 317	501	U-washer 4	020 870
	3b Yarn carrier head 3-6 complete E16-18	250 013			

