

Spare-parts catalog

CMS 520C (Type 629)

Component type 000

E3|E3,5|E4

Table of contents

1	Introduction	7
1.1	Order form	8
1.2	Search help	9
1.3	Torques	10
2	Carriage drive	11
2.1	Drive	12
2.1.1	Motor and belt drive	13
2.1.2	Tension bearing	14
2.2	Energy chain and plunger	15
3	Racking	17
3.1	Racking drive	18
4	Needle beds	19
4.1	Needle bed E3	20
4.1.1	Continuation needle bed E3	21
4.2	Needle bed E3,5	22
4.2.1	Continuation needle bed E3,5	23
4.3	Needle bed E4	24
4.3.1	Continuation needle bed E4	25
4.4	Needle beds, fixing elements	26
4.5	Left clamping/cutting bed	27
4.6	Clamping/cutting bed on the right	28
5	Carriage	29
5.1	Overview of carriage	30
5.2	Carriage	31
5.3	Carriage guide	32
5.4	Carriage cover	33
5.5	Needle cam	34
5.6	Continuation needle cam box	35
5.7	Jack cam box	36
5.8	Yarn carrier driving without guiding part	37
5.9	Yarn carrier driving with guiding part	38
5.10	Holding-down jack control on the right and left	39
5.11	Needle detector	40
5.12	Brush holder	41

6	Main take-down	43
6.1	Main take-down	44
6.1.1	Main take-down on the left	45
6.1.1.1	Swivel-mounted bearing	46
6.1.2	Main take-down on the right	47
6.1.2.1	Mounting plate	48
6.1.2.2	Floating axle	49
6.1.3	Main take-down in the middle	50
6.1.3.1	Stripper angle	51
6.1.3.2	Rear take-down roller	52
6.1.3.3	Front take-down roller	53
6.1.3.3.1	Front roller elements	54
6.1.3.3.2	Pressure angle rail	55
7	Auxiliary take-down	57
7.1	Auxiliary take-down	58
7.2	Right bearing of the auxiliary take-down	59
7.3	Left bearing of the auxiliary take-down	60
7.4	Motor	61
7.5	Angular sheet metal on the left and right complete	62
7.6	Yarn brake at clamping/cutting bed	63
8	Comb take-down	65
8.1	Comb take-down	66
8.2	Comb take-down on the left	67
8.3	Comb take-down on the right	68
8.3.1	Drive shaft of comb	69
8.3.2	Swivel lever comb take-down	70
8.4	Comb take-down in the middle	71
8.4.1	Comb unit E3 + E3.5 + E4	72
8.4.2	Switch lever comb take-down	73
9	Yarn delivery device	75
9.1	Yarn guide system with 24 FKE	76
9.2	Yarn guide on the left E3 E3,5 E4	77
9.2.1	Yarn tensioner on the left E3 E3,5 E4	78
9.2.2	Right tension axle E3 + E3,5 + E4	79
9.2.3	Yarn brake and yarn deflector	80
9.3	Yarn guide on the right E3 E3,5 E4	81
9.3.1	Yarn tensioners on the right E3 E3,5 E4	82
9.3.2	Right tension axle E3 E3,5 E4	83
9.4	Bobbin board	84
9.5	Yarn carrier and guide rails	85
9.6	Complete yarn carriers	86
9.7	Left friction feed wheel	87

9.8	Right friction feed wheel	88
10	Fluff absorption	89
10.1	Fluff absorption	90
10.1.1	Lint container	91
10.1.2	Hose set	92
10.1.3	Suction tube	93
11	Operation and control	95
11.1	Input unit	96
11.2	Starting unit	97
11.2.1	Bearing of the engaging rod	98
11.3	Signal light	99
11.4	Collecting area - control	100
11.5	Shock stop motion E3-4	101
11.6	Measuring device	102
12	Protective units	103
12.1	Lateral safety covers	104
12.2	Panelling	105
12.3	Rear panel	106
13	Electrical equipment	107
13.1	Circuit diagram (222) as PDF	108
13.2	Fuses	109
13.3	Trailing cable E5-8	110
13.4	Cable set installation	111
13.4.1	Loom of cables base 1	112
13.4.2	Loom of cables base 2	113
13.4.3	Loom of cables	114
13.4.4	Loom of cables comb	115
14	Control electronics	117
14.1	Control cabinet	118
15	Deliverable accessories	119
15.1	Tool	120
15.2	Lubricating stuff	121
15.3	Mechanical parts	122
16	Special attachments	123
16.1	Additional board (top, bottom)	124

16.2	Yarn carrier carriage	125
16.3	Yarn carrier carriage for ultra coarse yarns	126
16.4	Complete intarsia yarn carriers	127
16.4.1	Bow and head IYC	128
16.5	Yarn length measuring device	129
16.6	Feed wheel SFE	130

1 Introduction

Imprint

All rights reserved.

The utilisation of texts and pictures, also in extracts, without our agreement is unfavourable to the copyright.

Our products are being developed further continuously. They are therefore subject to technical modifications.

The indications of this catalog are without liability.

©

H. Stoll GmbH & Co.KG

Stollweg 1

D-72760 Reutlingen, Germany

Phone +49 (07121) 313-289

Fax: +49 7121 313-347

e-mail: spareparts@stoll.com

Notes for the order

This catalog serves to order spare parts.

It can only be applied to the machine type recorded on the title page.

When ordering spare parts we imperatively ask for the following indications as otherwise a delivery of spare parts is not possible:

1. Type of machine, gauge, no. of machine.
2. Page no., designation, ID, quantity.

Please use the order form!

Only genuine STOLL spare parts may be used for repairs.

1.1 Order form

Order form
Telefon +49 (7121) 313-289
Telefax +49 (7121) 313-347
e-mail: spareparts@stoll.com

H. Stoll GmbH & Co. KG
PO box 2544
D-72715 Reutlingen

Order number
Receipt date

Company
Name
Street
Postal code town
Phone
Fax
Customer no.
Shipping mode
Date of order
Machine type
Gauge
Machine no.
Sirix no.



Spare parts order

Page no.	Designation	Ident no.	Piece no.	Comment

DateSignature

1.2 Search help

In order to make the search of the spare parts easier, the following elements will be used in the spare parts catalog:

Symbol	Meaning
Σ	Indicates an assembly
	Position indicator with the position number (X).
	Indicates an element of another assembly.
	Indicates an assembly which is represented more detailed beside.
	Indicates an assembly which is represented on another page more detailed.
	Screw torques (z) deviating from the preferential row.
	Detail, represented enlarged in the direction of the arrow.
	Explosion representation, single elements enlarged.
	Indicates a group of parts.
	Indicates the left-hand side or view.
	Indicates the right-hand side or view.
	Indicates a section or a view in the viewing direction.


1.3 Torques

Drehmomente Torques Couples Coppias Momentos de rotación [Nm] ± 10 % (für $\mu_{ges} = 0,12$)		Festigkeitsklassen Property class Classes de résistance Classi di resistenza Clasas de resistencia		
		4,8	8,8	12,9
Regelgewinde Coarse-pitch thread Filetage à pas gros Filetto regolatore Filete regulador	M3	0,6	1,2	2,5
	M4	1,2	2,5	5
	M5	2,5	5	9
	M6	5	9	18
	M8		18	40
	M10		40	
	M12		80	

Preferential row of screw torques


- Torques are valid for:
Connection steel-steel, black, phosphatized, galvanized, rolled or cut thread as well as only for plain (head) supports.
- Torques are valid for:
protected screws with: lock washers, rib heads, coated and clamping screws and nuts. They are also not used for self-grooving threads.
- Torques differing from this preferential row of torques must be taken from the corresponding location in the drawings.

2 Carriage drive

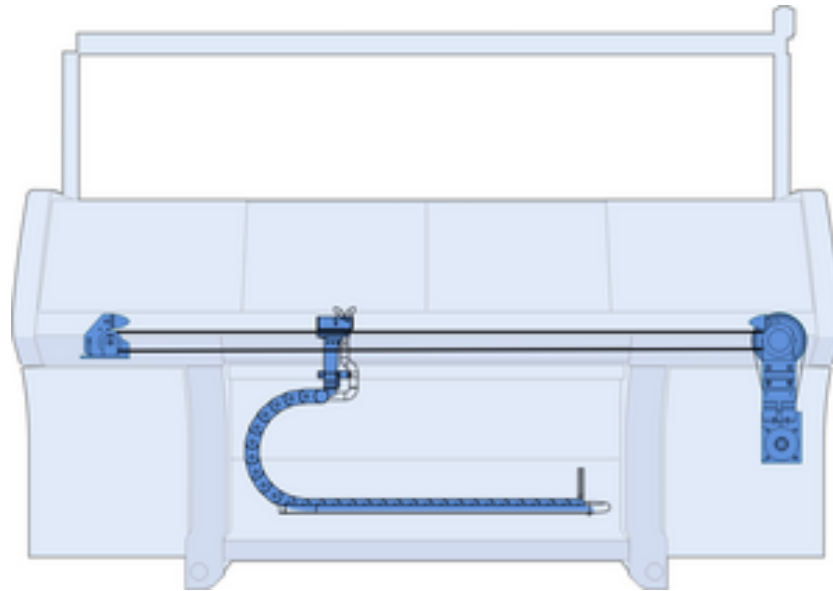


2.1 Drive

Pos	Designation	Id		Pos	Designation	Id
Σ	Drive unit			17	Parabolic spring	200 661
11	Drive unit complete	253 877		23	Ventilator complete	253 692
12	Tension bearing complete	251 581		523	Cap screwM8x12	023 138
14	Toothed belt50AT10/4670	253 890		905	NutM10x12	023 471
16	Distance pipe	222 099		907	Cap screwM10x25	020 157

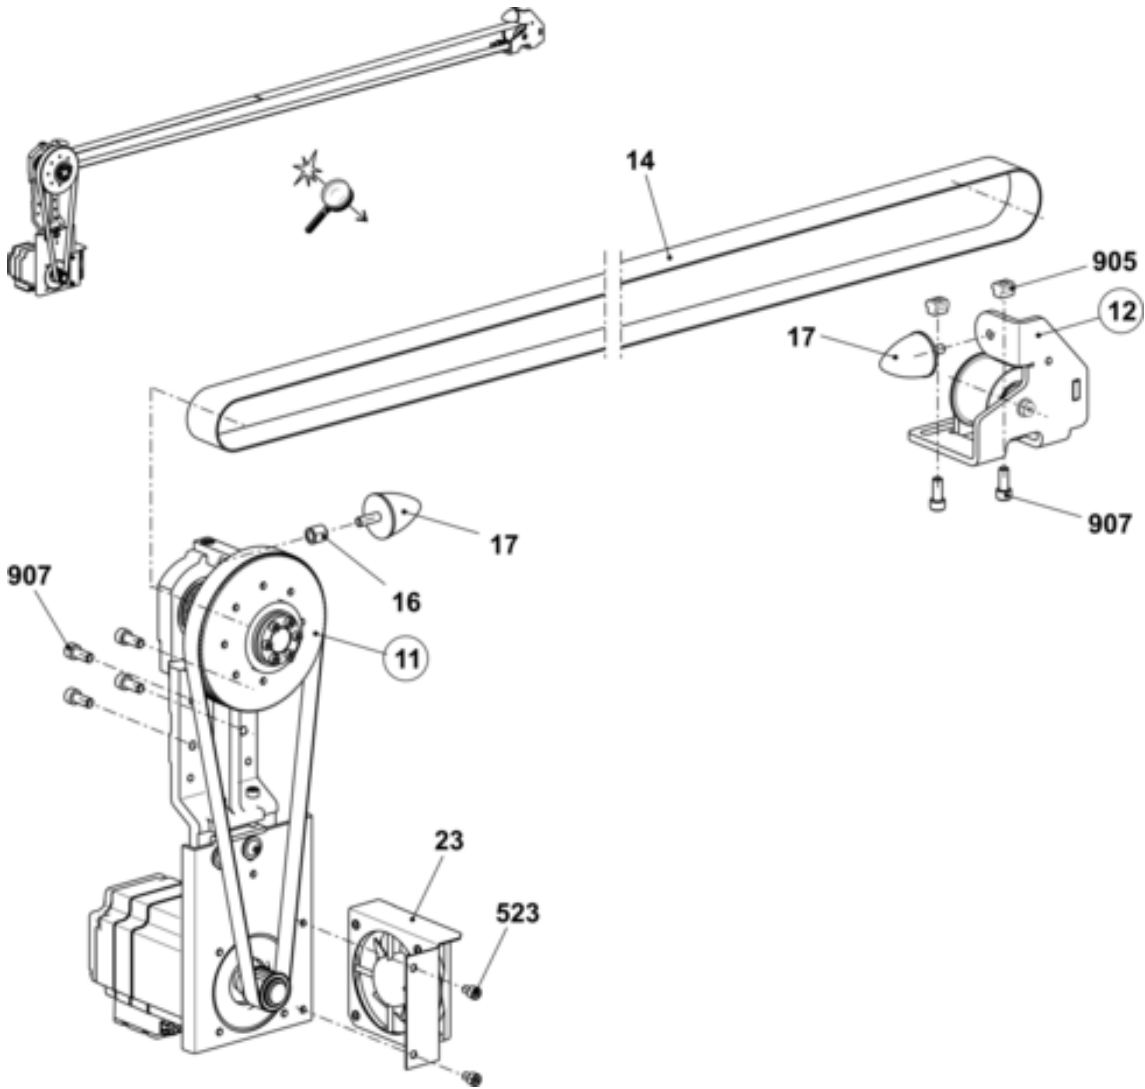

2.1.1 Motor and belt drive


Pos	Designation		Id		Pos	Designation		Id
Σ	Drive unit complete		253 877					
1	Drive unit		258 188			2d	Support of buffer	222 100
500	Countersunk screwM10X25		023 684			2e	Toothed belt	252 594
501	Disk10,5X25X2,5		022 178			520	Cap screwM8X35	020 144
2	Drive bearing complete		255 005			521	Locking ring68x2.5	022 914
	2a	Drive bearing	241 654			522	Grooved ball bearing 6207-2RS	022 915
	2b	Toothed belt pulley	240 616			523	Tension set 30X55	023 208
	2c	Pinion57 AT10 18	242 039			524	Cap screwM8X25 12.9	020 142

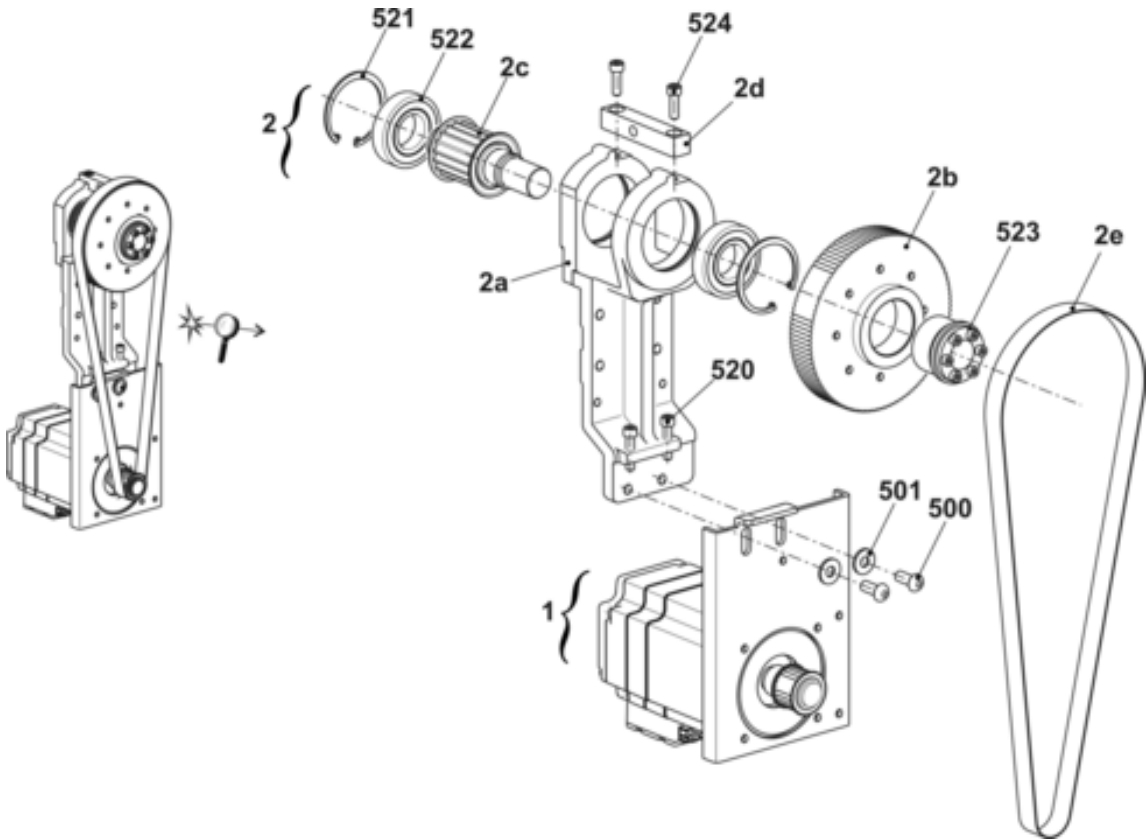

2.1 Drive


2.1.2 Tension bearing

Pos	Designation		Id		Pos	Designation		Id
Σ	Tension bearing complete		251 581					
1	Tension bearing		251 560			500	Grooved ball bearing625-6305-2RS	255 686
2	Tension roller complete		256 640			504	Locking ring 471-25x1,2	
	2a	Tension roller	255 684		501	Cap screwM10x25		023 751
	2b	Axle	251 579		502	U-washer		020 874

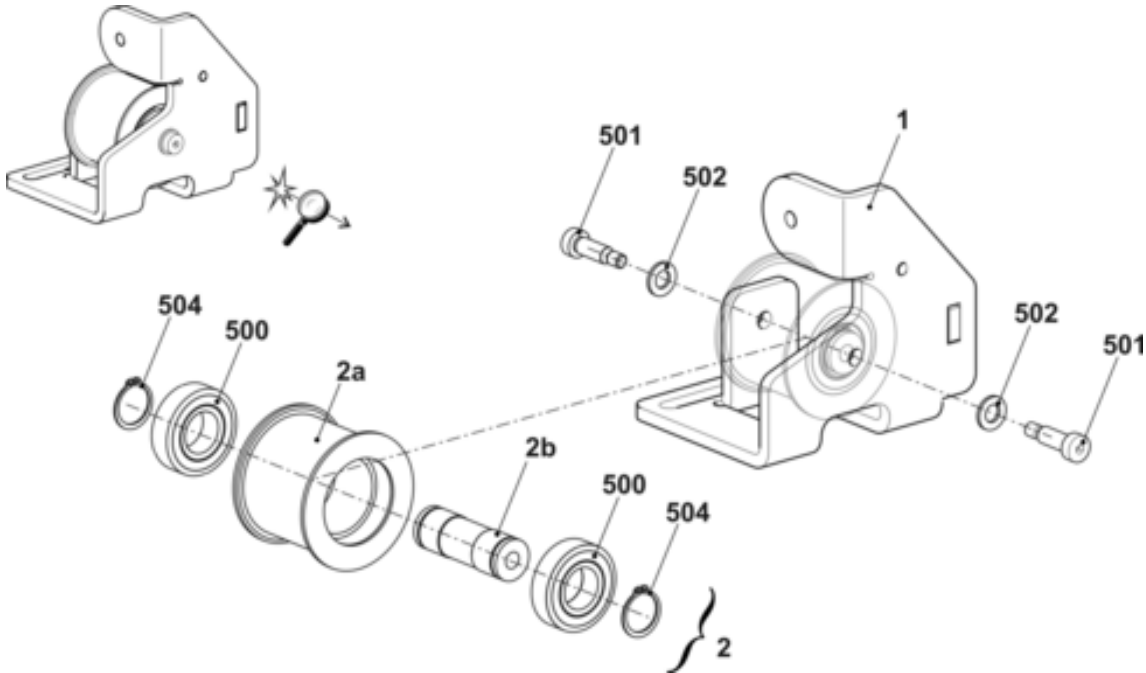

2.2 Energy chain and plunger


Pos	Designation	Id		Pos	Designation	Id
1	Energy chain 30 links	241 555		5	Continuation carriage driver complete	
4	Spacer	214 584		56	Cellular caoutchouc black	202 597
501	Cap screwM6x8	023 411		550	Cap screwM8x16 8.8	023 144
503	Cap screwM6x16	020 135		551	CirclipS6	022 752
5	Carriage driver complete	241 430		552	Cap screwM8x30	020 143
51	Carriage driver	241 404		553	Cap screwM6x16	020 135
52	Cable driver	251 262		554	Cap screwM6x12	020 134
53	Clamping plate	226 111		555	Countersunk screwM5x6	023 284
54	Cover strip	230 698		556	Fixing element	026 489
55	Cable holder	204 688				

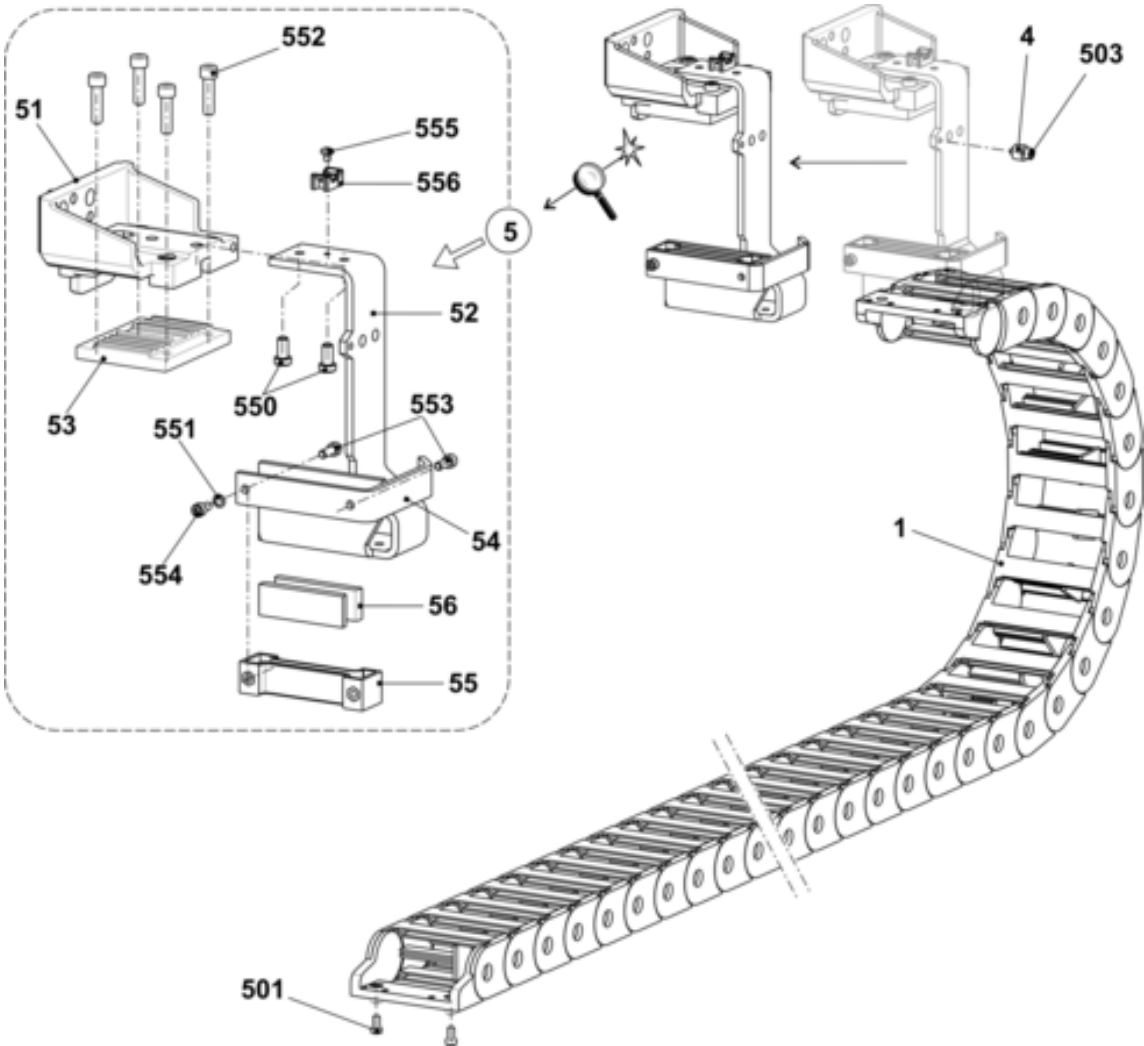

2.2 Energy chain and plunger

Notes:


3 Racking

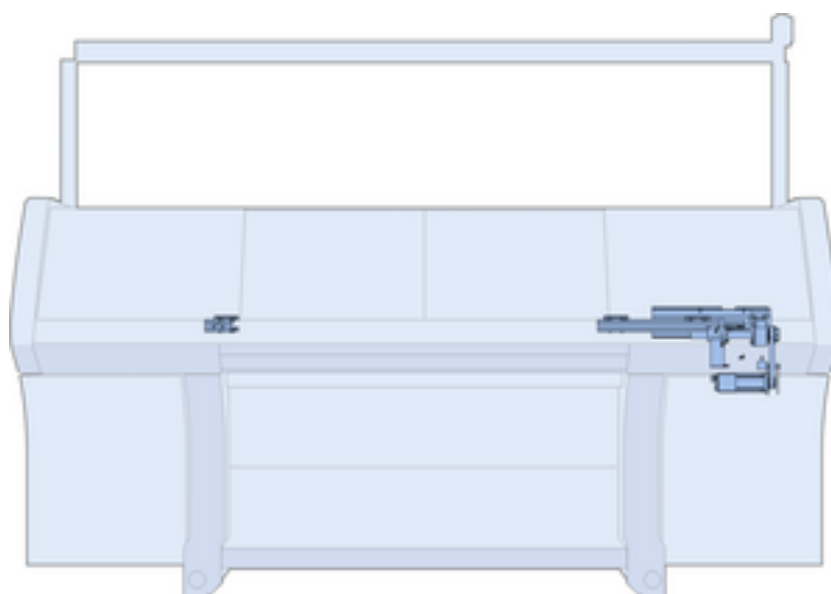


3.1 Racking drive

3.1 Racking drive

Pos	Designation	Id	Pos	Designation	Id
Σ	Racking				
1	Three-phase A.C. servo motor racking complete	258 192	505	U-washer8,4X20X3	022 175
2	Bearing	227 605	507	Shim 0,03x11x80	023 286
3	Spindle bearing	253 262	508	Shim 0,05x11x80	023 287
4	Card racking limit switch	229 396	509	Shim 0,03x15x85	023 162
5	Racking cover plate	240 721	510	Shim 0,05x15x85	023 163
6	Racking strip on the left	240 696	511	Shim 0,1x15x85	023 164
7	Racking strip	240 690	512	Shim0,2x15x85	023 170
8	Guide strip	206 382	518	Shim 0,03x15x75	023 395
9	Toothed belt150 S 5M 490	229 281	519	Shim 0,05x15x75	023 396
13	Switch plate	240 722	520	Shim 0,1x15x75	023 397
19	Stop screw	221 386	521	Shim 0,2x15x75	023 398
501	Cap screwM6x16	023 116	900	Cap screwM6x12	022 795
503	Countersunk screwM6x10	023 183	901	Countersunk screwM6x10	023 183
504	Cap screwM8x25	020 142	902	Cap screwM8x30	020 143

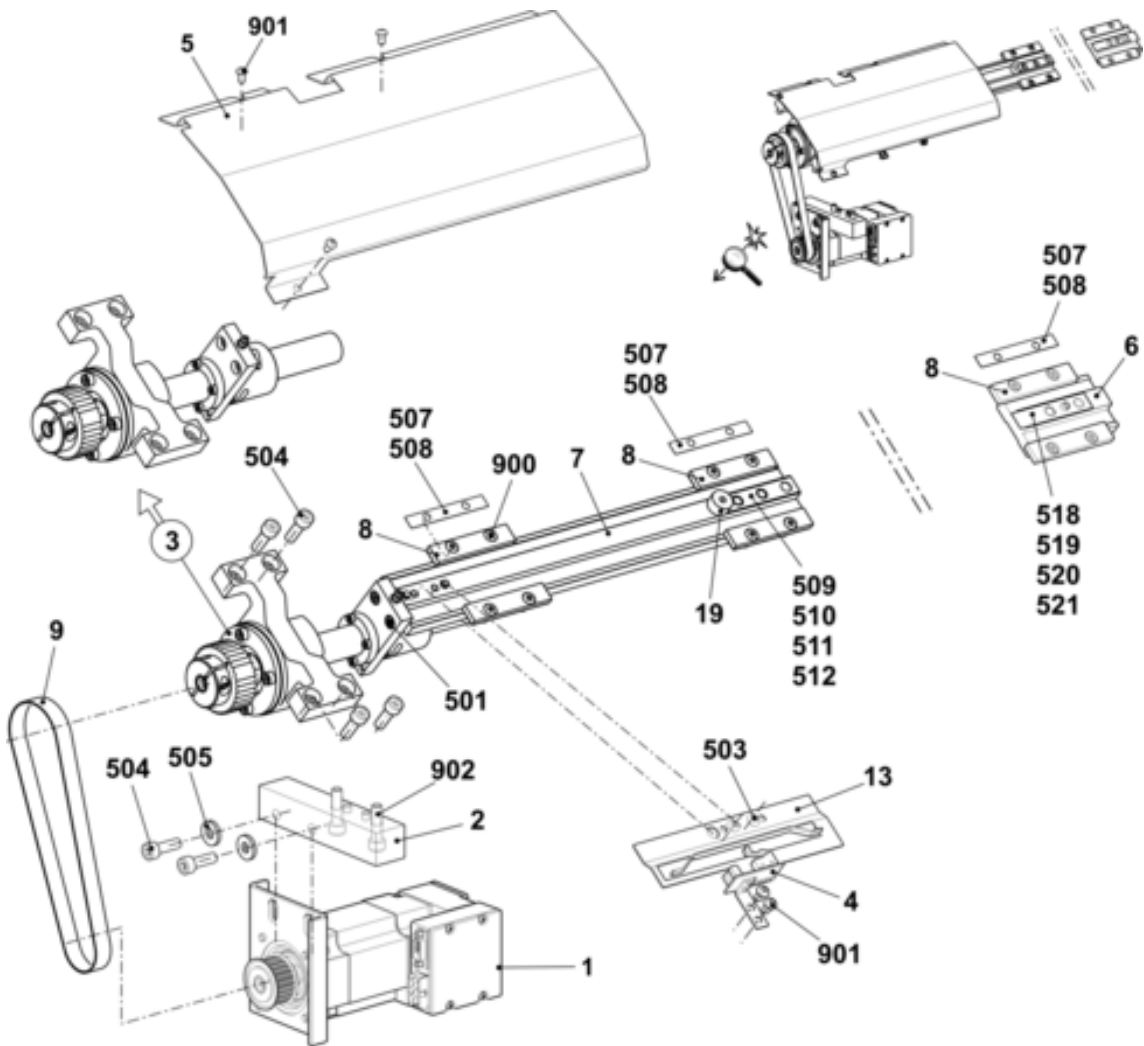


4 Needle beds

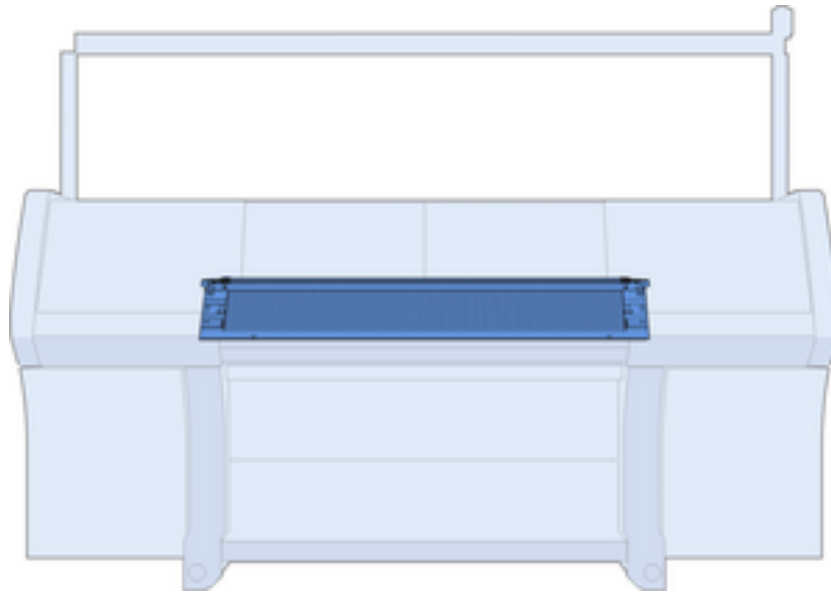

4.1 Needle bed E3


4.1 Needle bed E3

Pos	Designation		ID No.		Pos	Designation		ID No.	
Σ	Needle bed complete at the front and rear E3		243 178						
1	Needle bed complete at the front and rear EPT E3		243 175		1	120	Support		241 339
	101	Needle bed at the front and rear E3	243 144			121	Eccentric		204 603
	102	Holding-down jack bed front E3	243 147			502	Cap screw M6X14		022 658
	103	Holding-down jack bed rear E3	243 150		2	Needle E3-4		213 389	
	104	Selection jack bed at the front E3	243 155		3	Coupling part E3-4		213 348	
	105	Selection jack bed at the rear E3	243 158		4	Intermediate slider E3-4		218 799	
	109	Needle rail on the left	213 998		5	Selection jack E3-4		213 372	
	110	Needle rail on the right	213 999		6	Selector spring E4-8		200 690	
	111	Cover rail at the front E3	213 724		7	Holding-down jack E3		206 894	
	112	Cover rail at the rear	213 981		8	Fixed wire D=1.0 1294 mm		213 717	
	113	Spring slide	243 153		40*	Disk brush		235 612	
	115	Cover rail	213 762		43*	Adjusting bolt		206 348	
	116	Cover rail	213 763		540*	Cap screw M5x12		020 032	

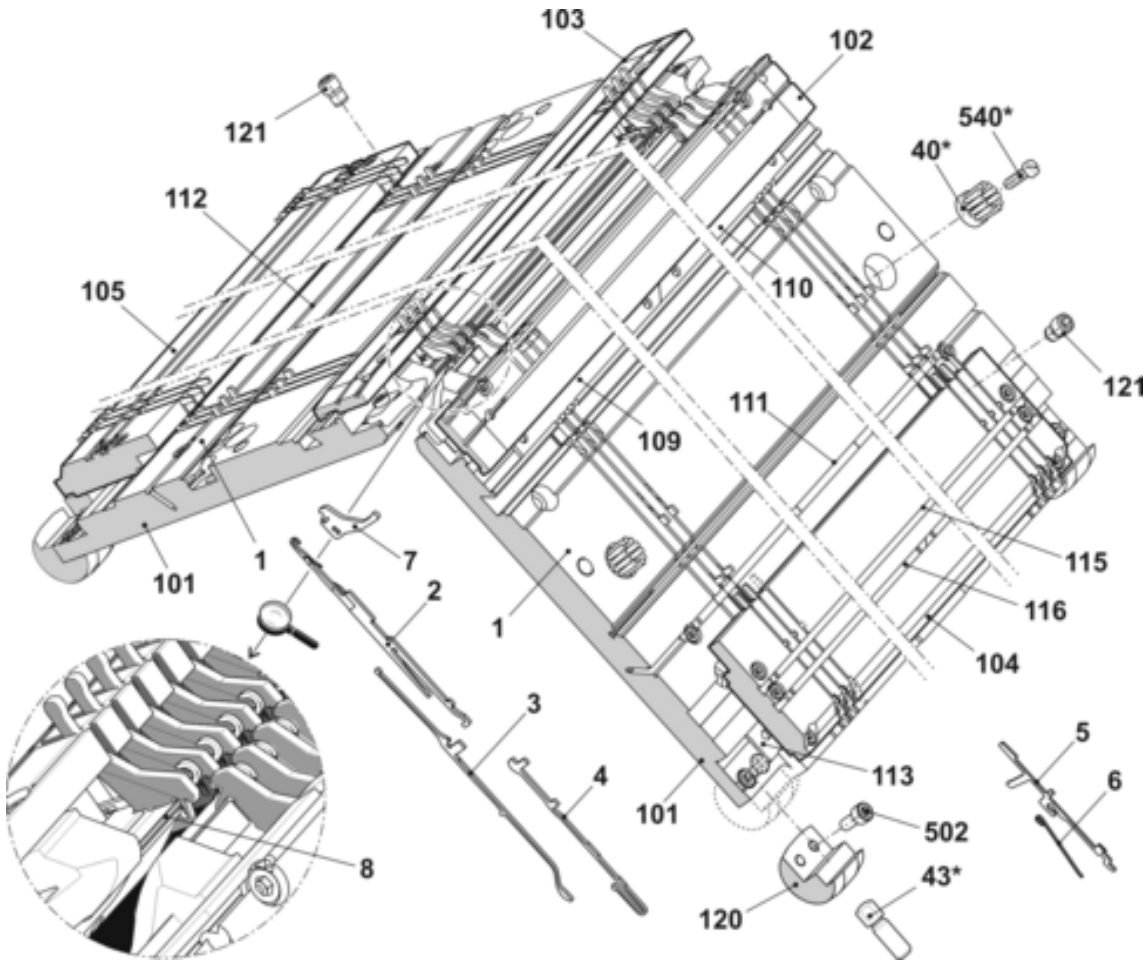

4.1.1 Continuation needle bed E3


Pos	Designation	ID No.		Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear EPT E3	243 175		504	Cap screw M5x22	023 193
6	Limiter on the left E4-E8	205 343		505	Cap screw M5x12-8.8	022 943
7	Limiter on the right E4-8	205 344		507	Sprung thrust piece B-M10	023 177
8	Holding-down jack slide	213 712		508	Shim 0.02x18.5x34	023 194
18	Fixed wire D=2.8 1290mm	213 983		509	Shim 0.03x18.5x34	023 195
19	Spring steel wire D=2.0 1286 mm	213 996		510	Shim 0.05x18.5x34	023 196
500	Cap screw M5x10	022 918		511	Shim 0.1x18.5x34	023 197
501	Cap screw M5x20	020 133		512	Shim 0.2x18.5x34	023 253
503	Cap screw M5x8-8.8	023 154		513	Countersunk head screw M3x25-10.9	023 447

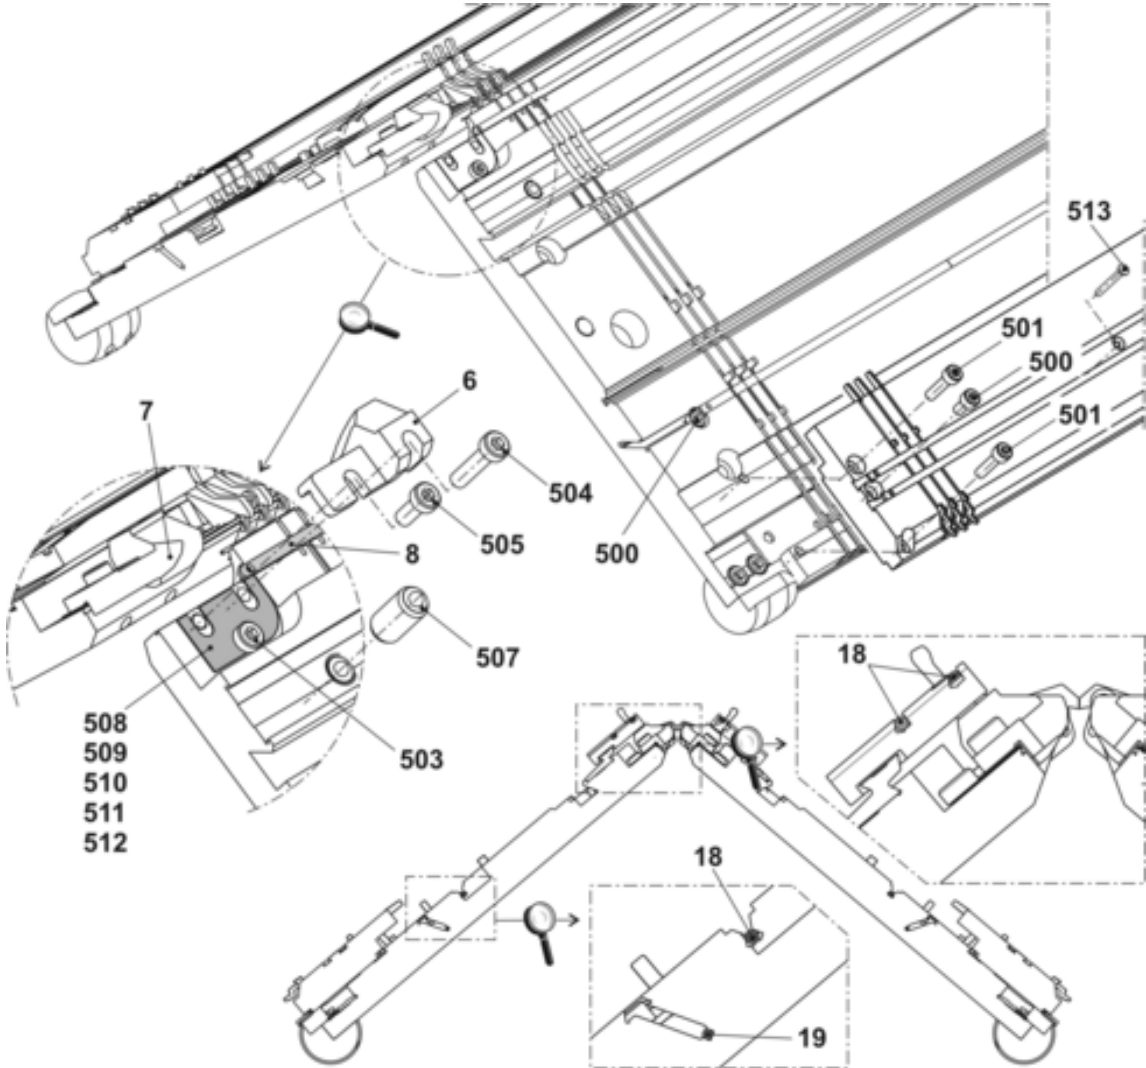

4.2 Needle bed E3,5


4.2 Needle bed E3,5

Pos	Designation		ID No.		Pos	Designation		ID No.
Σ	Needle bed complete at the front and rear E3,5		243 179					
1	Needle bed at the front and rear EPT E3,5		243 176		1	120	Support	241 339
	101	Needle bed at the front and rear E3,5	243 145			121	Eccentric	204 603
	102	Holding-down jack bed front E3,5	243 148			502	Cap screw M6X14	022 658
	103	Holding-down jack bed rear E3,5	243 151		2	Needle E3-4		213 389
	104	Selection jack bed at the front E3,5	243 156		3	Coupling part E3-4		213 348
	105	Selection jack bed at the rear E3,5	243 159		4	Intermediate slider E3-4		218 799
	109	Needle rail on the left	213 998		5	Selection jack E3-4		213 372
	110	Needle rail on the right	213 999		6	Selector spring E4-8		200 690
	111	Cover rail at the front E3,5	213 725		7	Holding-down jack E3,5		205 089
	112	Cover rail at the rear	213 981		8	Fixed wire D=1.0 1294 mm		213 717
	113	Spring slide	243 153		40*	Disk brush		235 612
	115	Cover rail	213 762		43*	Adjusting bolt		206 348
	116	Cover rail	213 763		540*	Cap screw M5x12		020 032

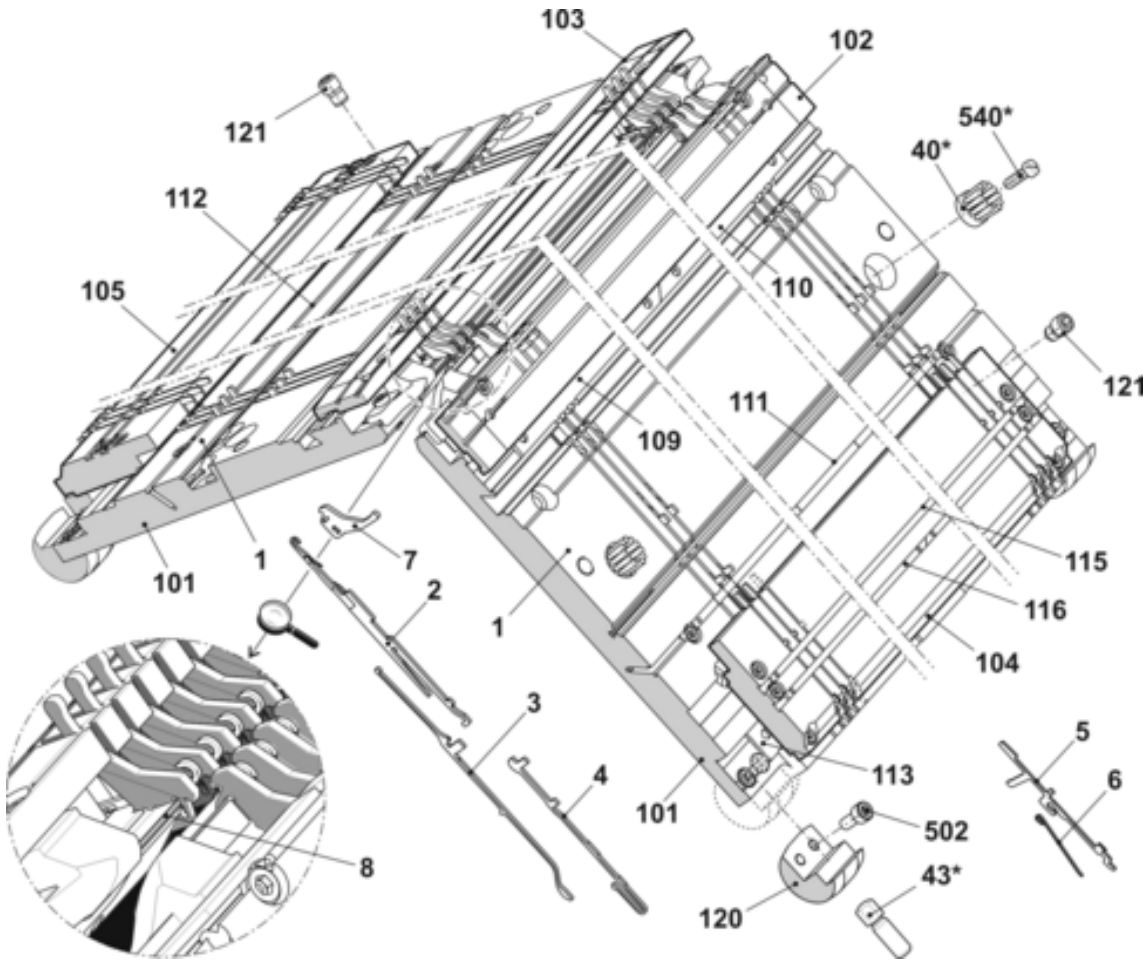

4.2.1 Continuation needle bed E3,5


Pos	Designation	ID No.		Pos	Designation	ID No.
Σ	Needle bed at the front and rear EPT E3,5	243 176		504	Cap screw M5x22	023 193
6	Limiter on the left E4-E8	205 343		505	Cap screw M5x12-8.8	022 943
7	Limiter on the right E4-8	205 344		507	Sprung thrust piece B-M10	023 177
8	Holding-down jack slide	213 712		508	Shim 0.02x18.5x34	023 194
18	Fixed wire D=2.8 1290mm	213 983		509	Shim 0.03x18.5x34	023 195
19	Spring steel wire D=2.0 1286 mm	213 996		510	Shim 0.05x18.5x34	023 196
500	Cap screw M5x10	022 918		511	Shim 0.1x18.5x34	023 197
501	Cap screw M5x20	020 133		512	Shim 0.2x18.5x34	023 253
503	Cap screw M5x8-8.8	023 154		513	Countersunk head screw M3x25-10.9	023 447

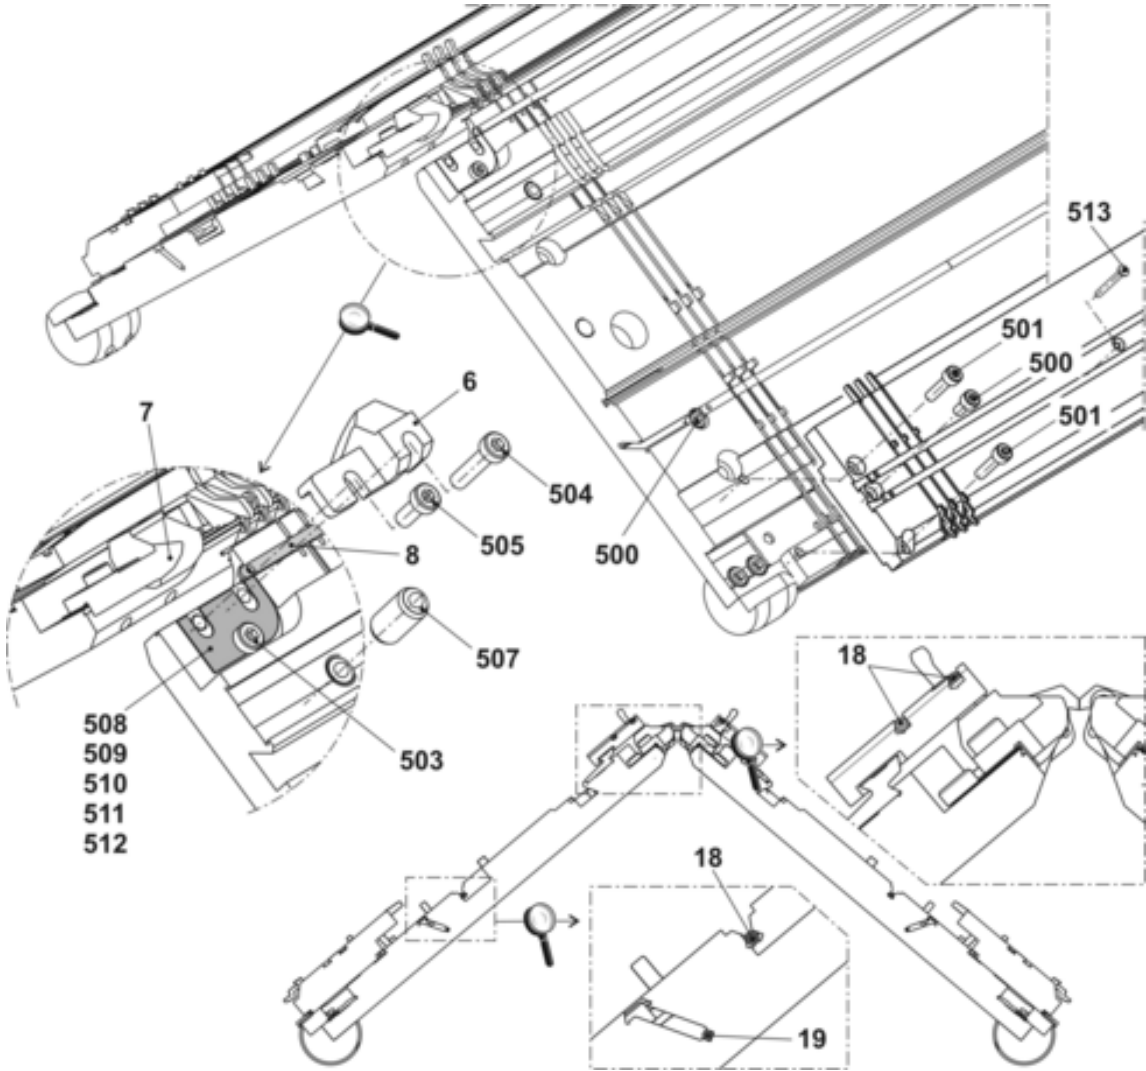

4.3 Needle bed E4


4.3 Needle bed E4

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle bed complete at the front and rear E4	243 180			
1	Needle bed at the front and rear EPT E4	243 177	1	120 Support	241 339
101	Needle bed at the front rear E4	243 146	121	Eccentric	204 603
102	Holding-down jack bed front E4	243 149	502	Cap screw M6X14	022 658
103	Holding-down jack bed rear E4	243 152	2	Needle E3-4	213 389
104	Selection jack bed at the front E4	243 157	3	Coupling part E3-4	213 348
105	Selection jack bed at the rear E4	243 160	4	Intermediate slider E3-4	218 799
109	Needle rail on the left	213 998	5	Selection jack E3-4	213 372
110	Needle rail on the right	213 999	6	Selector spring E4-8	200 690
111	Cover rail at the front E4	213 726	7	Holding-down jack E4	205 090
112	Cover rail at the rear	213 981	8	Fixed wire D=1.0 1294 mm	213 717
113	Spring slide	243 153	40*	Disk brush	235 612
115	Cover rail	213 762	43*	Adjusting bolt	206 348
116	Cover rail	213 763	540*	Cap screw M5x12	020 032

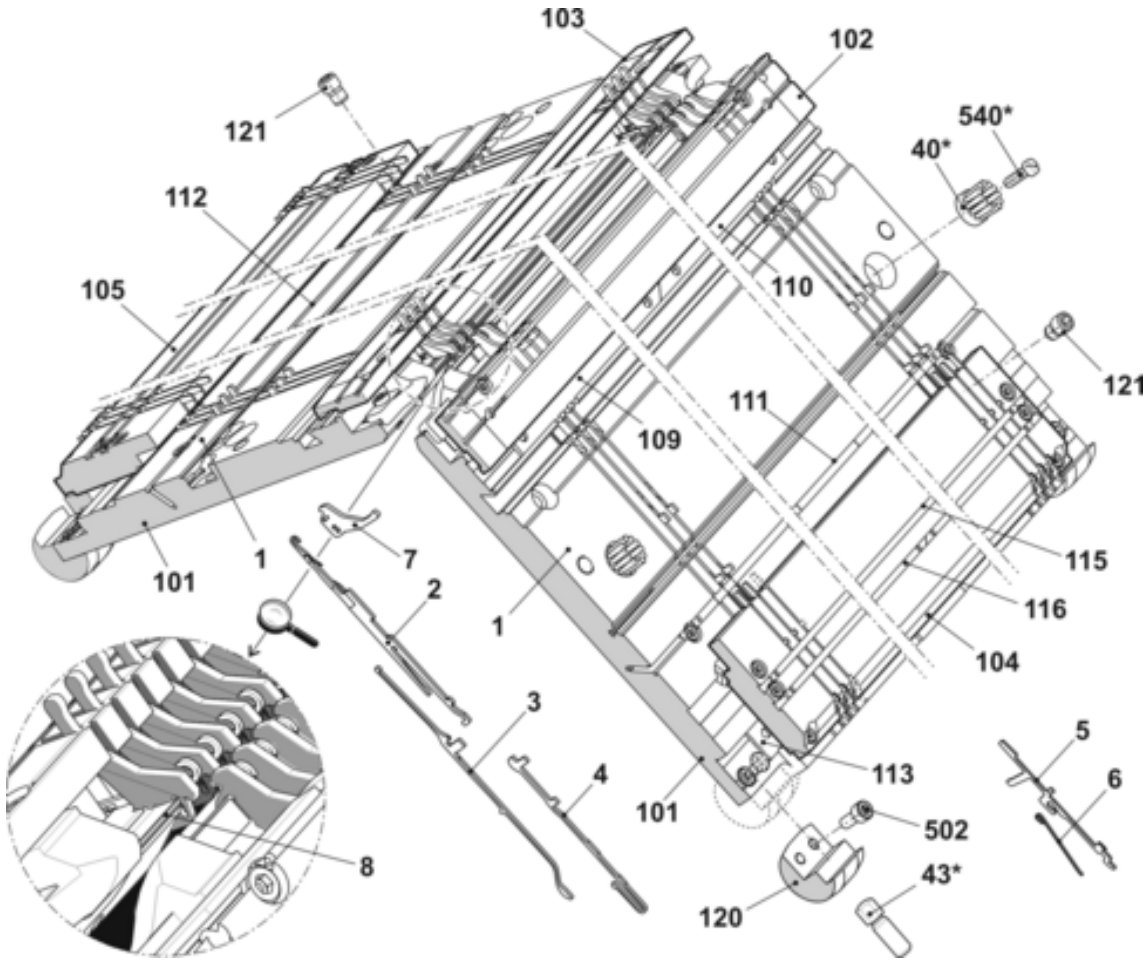


4.3.1 Continuation needle bed E4

Pos	Designation	ID No.		Pos	Designation	ID No.
Σ	Needle bed at the front and rear EPT E4	243 177		504	Cap screw M5x22	023 193
6	Limiter on the left E4-E8	205 343		505	Cap screw M5x12-8.8	022 943
7	Limiter on the right E4-8	205 344		507	Sprung thrust piece B-M10	023 177
8	Holding-down jack slide	213 712		508	Shim 0.02x18.5x34	023 194
18	Fixed wire D=2.8 1290mm	213 983		509	Shim 0.03x18.5x34	023 195
19	Spring steel wire D=2.0 1286 mm	213 996		510	Shim 0.05x18.5x34	023 196
500	Cap screw M5x10	022 918		511	Shim 0.1x18.5x34	023 197
501	Cap screw M5x20	020 133		512	Shim 0.2x18.5x34	023 253
503	Cap screw M5x8-8.8	023 154		513	Countersunk head screw M3x25-10.9	023 447

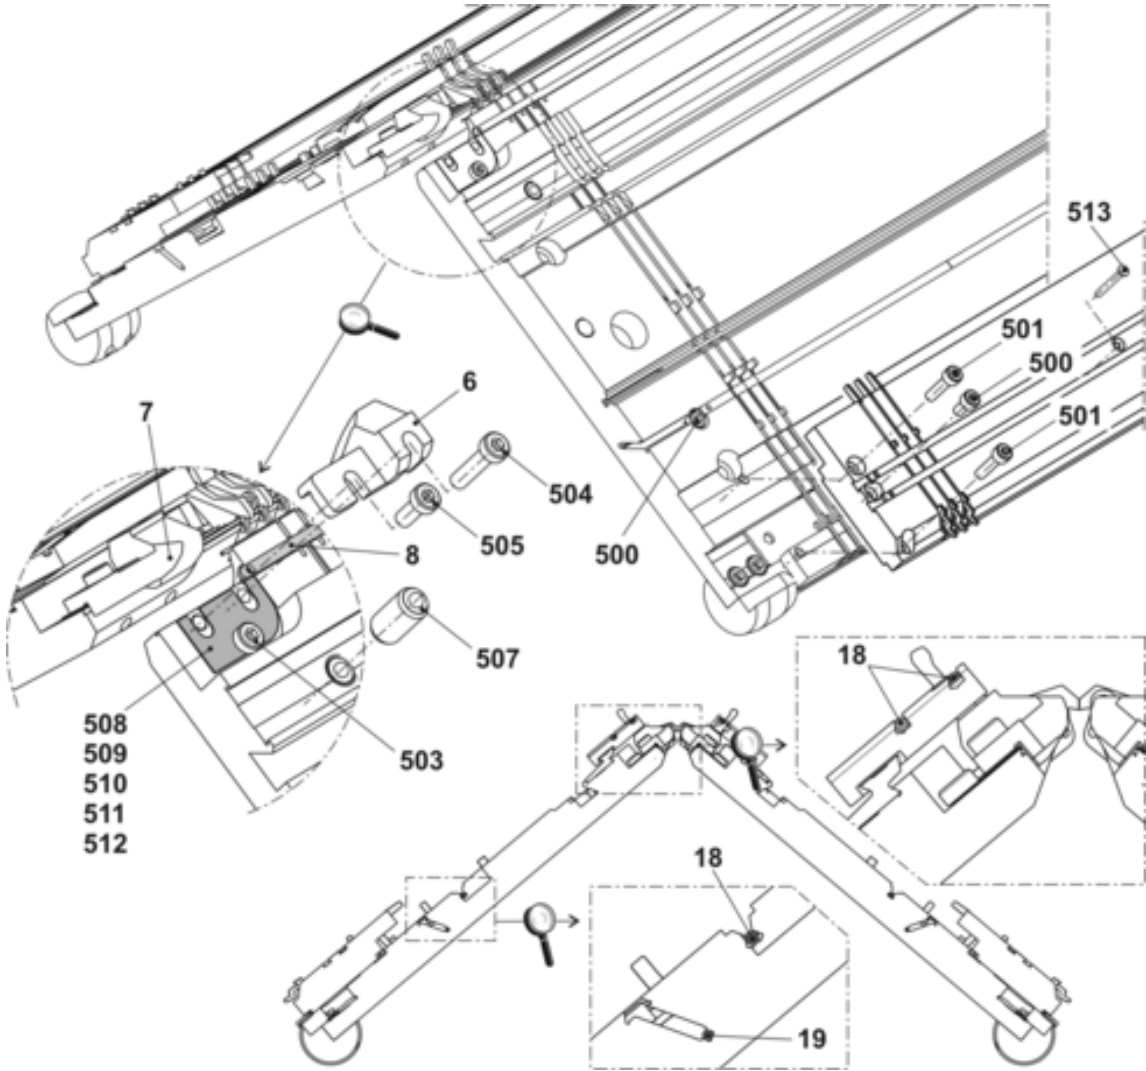


4.4 Needle beds, fixing elements

Pos	Designation	Id		Pos	Designation	Id
Σ	Fixing elements					
500	Cap screw M8x25	020 142		501	U-washer	214 040

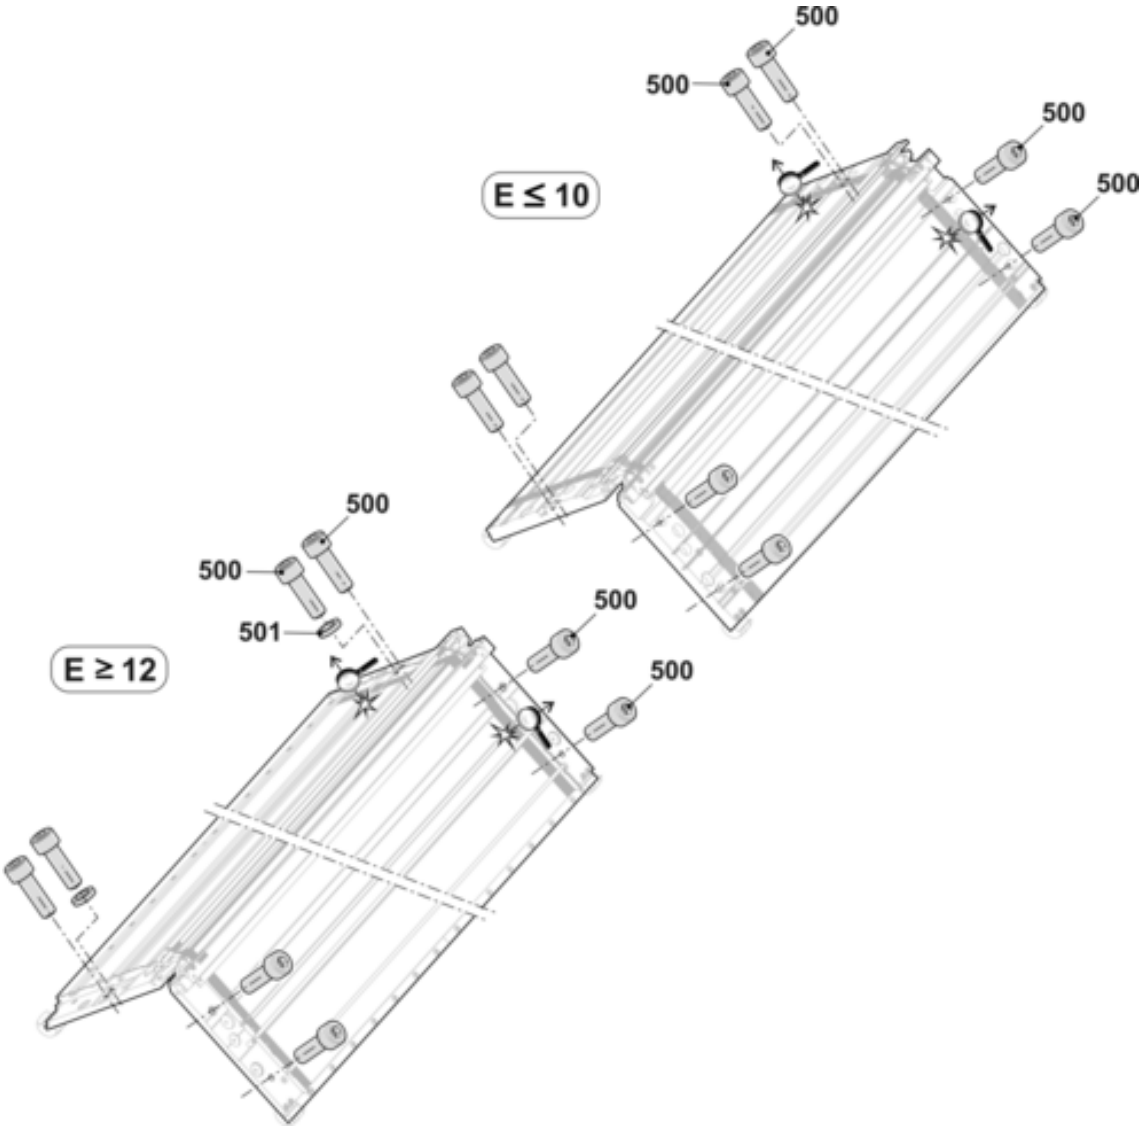

4.5 Left clamping/cutting bed


Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Left clamping/cutting bed E3-4	245 339			
1	Guide plate EPT on the left E3-4	245 345	10	Clamp on the left complete	210 462
1b	Cover rail	211 358	11	Coupling part E3-4	213 348
1c	Cover rail	216 105	12	Intermediate slider E3-4	218 799
1d	Cover rail	209 224	13	Selection jack E3-4	213 372
1e	Fixed wire	215 927	14	Selector spring E4-8	200 690
F 1	Bolt	208 094	500	Cap screw M4x10	023 136
1g	Axle	211 349	501	Cap screw M4x16	020 131
1h	Guide pin	211 351	503	Hexagon nut M4	023 046
1i	Selection jack bed at the left E3-4	215 906	504	U-washer 4	020 870
1j	Spring slide	215 908	505	Washer 4.3x7x0.5	022 153
511	Setting pin 5x12	021 988	507	Circlip 3.2	021 019
5	Cover on the left complete E3-4	215 925	508	Tension spring 4x0.55x18.9	023 392
6	Catch hook on the left E3-4	215 887	509	Compression spring 0.8x4x26.3	023 333
7	Slider	215 827	510	Ball 5	023 309
8	Tuck needle on the left E3-4	215 879	520*	Cap screw M6x25	023 335
9	Blade	210 422	521*	Washer 7.6x11.6x1.	023 334

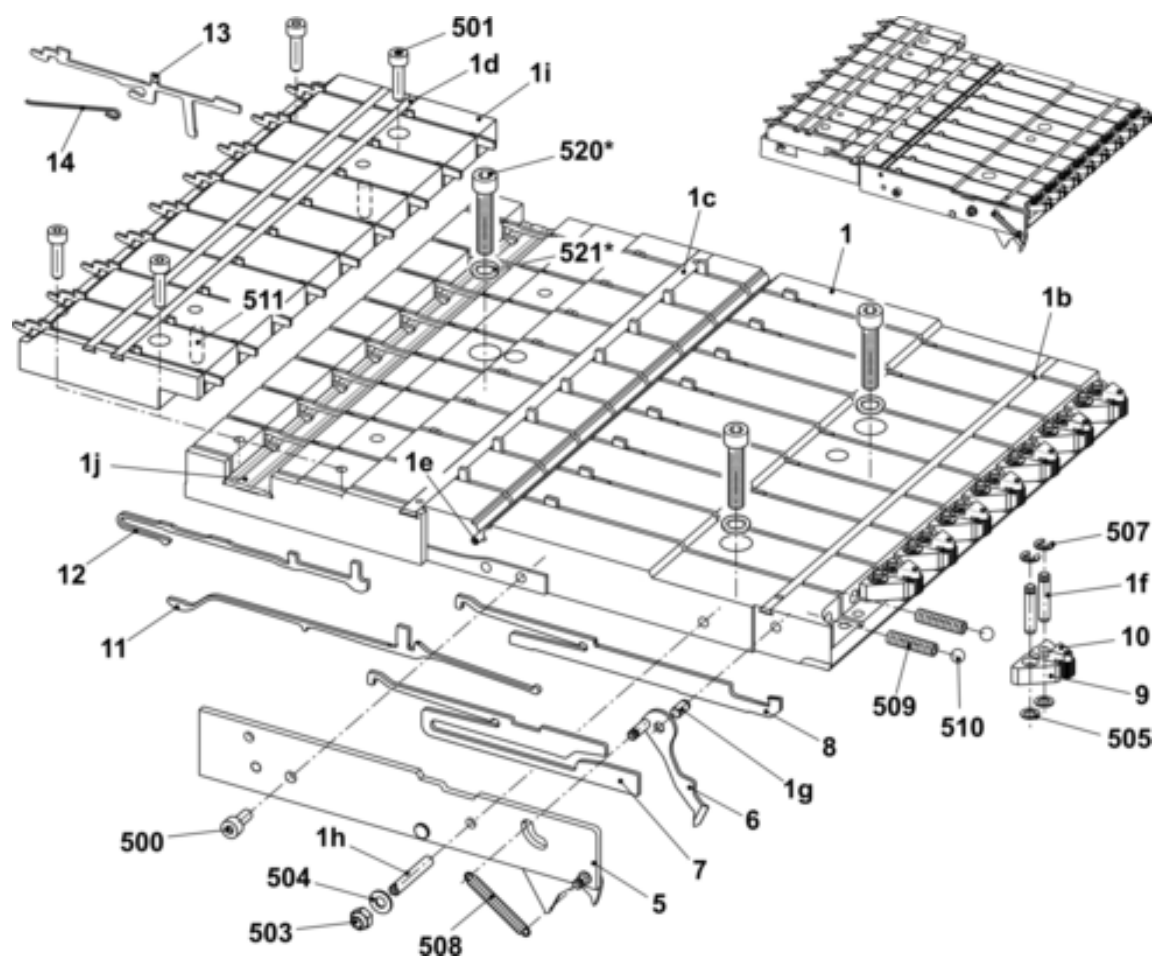


4.6 Clamping/cutting bed on the right

4.6 Clamping/cutting bed on the right

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Clamping/cutting bed on the right E3-4	245 340			
1	Guide plate EPT on the right E3-4	245 346	10	Clamp on the right complete	210 464
1b	Cover rail	211 358	11	Coupling part E3-4	213 348
1c	Cover rail	216 105	12	Intermediate slider E3-4	218 799
1d	Cover rail	209 224	13	Selection jack E3-4	213 372
1e	Fixed wire	215 927	14	Selector spring E4-8	200 690
F 1	Bolt	208 094	500	Cap screw M4x10	023 136
1g	Axle	211 349	501	Cap screw M4x16	020 131
1h	Guide pin	211 351	503	Hexagon nut M4	023 046
1i	Selection jack bed on the left E3-4	215 907	504	U-washer 4	020 870
1j	Spring slide	215 908	505	Washer 4.3x7x0.5	022 153
511	Setting pin 5x12	021 988	507	Circlip 3.2	021 019
5	Cover on the left complete E3-4	215 926	508	Tension spring 4x0.55x18.9	023 392
6	Catch hook on the right E3-4	215 888	509	Compression spring 0.8x4x26.3	023 333
7	Slider	215 827	510	Ball 5	023 309
8	Tuck needle on the right E3-4	215 874	520*	Cap screw M6x25	023 335
9	Blade	210 422	521*	Washer 7.6x11.6x1.	023 334

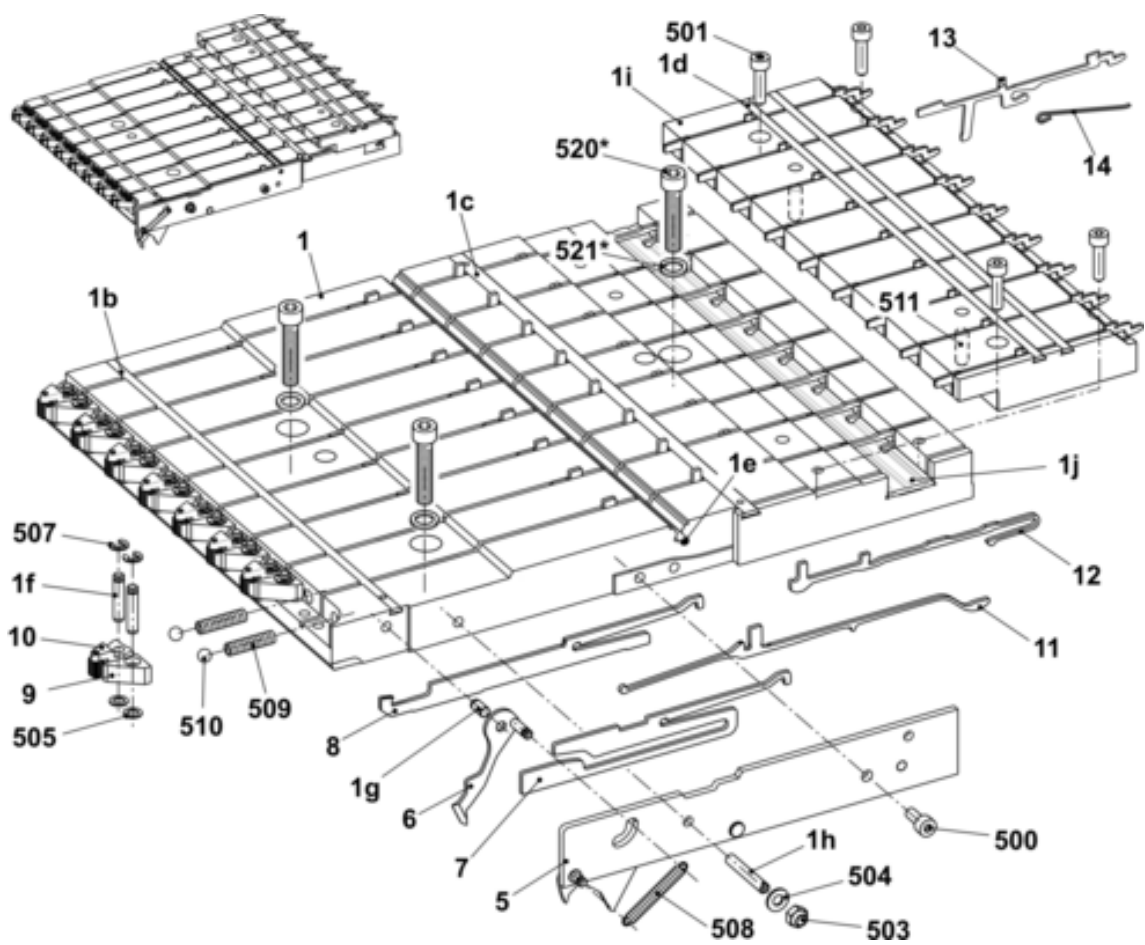


5 Carriage

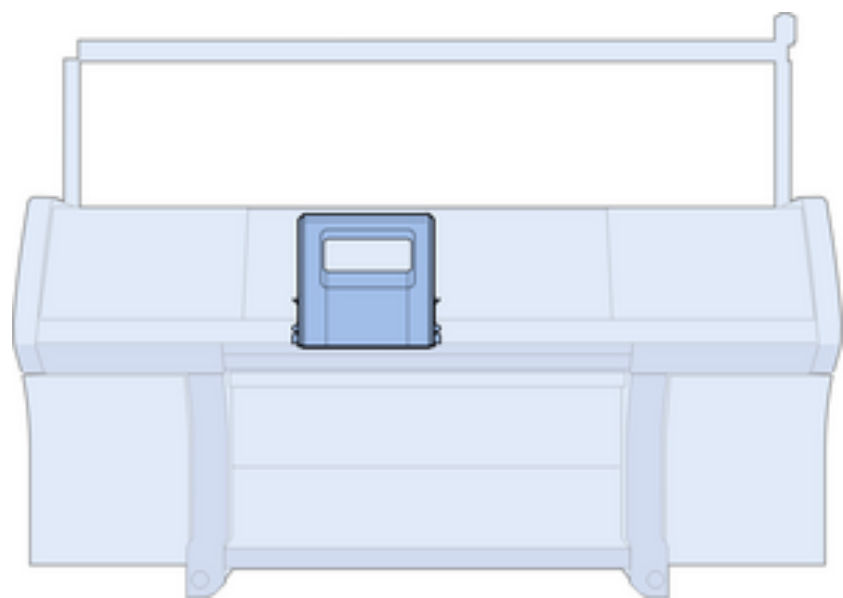

5.1 Overview of carriage


5.1 Overview of carriage

Pos	Designation	Id		Pos	Designation	Id	
Σ	Carriage complete E3-4	256 647		14	Selection system complete E2-8	216 218	
2	Needle cam complete	214 808		15	Wiper (felt)	241 411	
3	Jack cam box complete	214 809		25	Motor unit complete (AT=714946)		214 946
4	YC driving outside complete	241 080			25a	Gear rack at the top	214 290
5	YC driving in the middle complete	241 081			25b	Gear rack in the middle	214 291
7	Holding-down jack control on the right	214 717			25c	Gear rack at the bottom	214 292
8	Holding-down jack control on the left	214 800			520	Screw M4x40	023 095
12	Carriage assembly 2 cam boxes complete	256 499		27	Distributor 520C		253 666

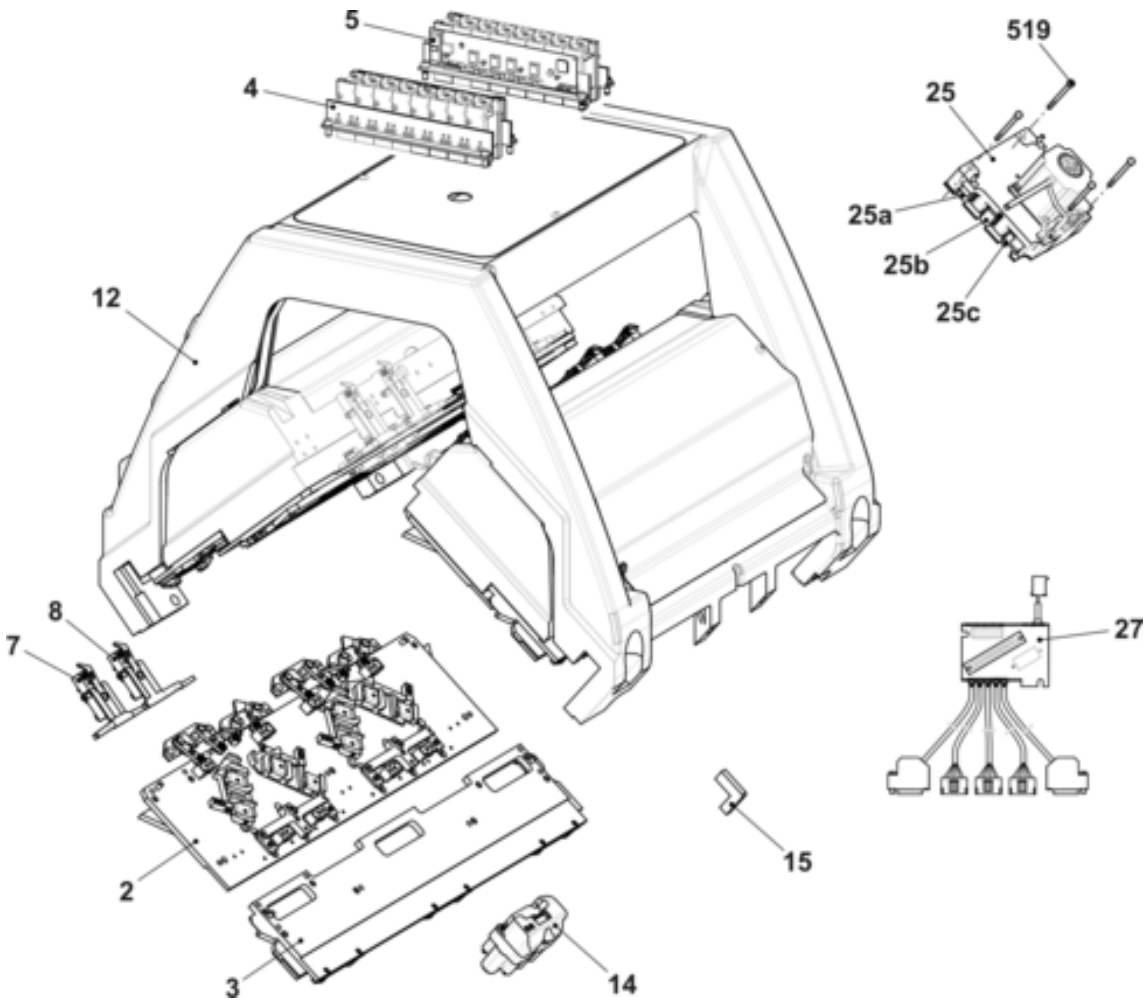


5.2 Carriage

Pos	Designation	Id		Pos	Designation	Id
Σ	Carriage assembly 2 cam boxes 520C	256 499		9	Bush	209 275
1	Carriage frame, 2 cam boxes	256 505		10	Bush	209 274
2	Carriage part, 2 cam boxes	243 100		13	Locating bolt linking spot	244 179
4	Shim	225 312		500	Cap screw M8x30	020 143
5	Dowel screw	211 750		515	Threaded bushing	041 863
8	Bush	207 546		520	Circlip	021 022

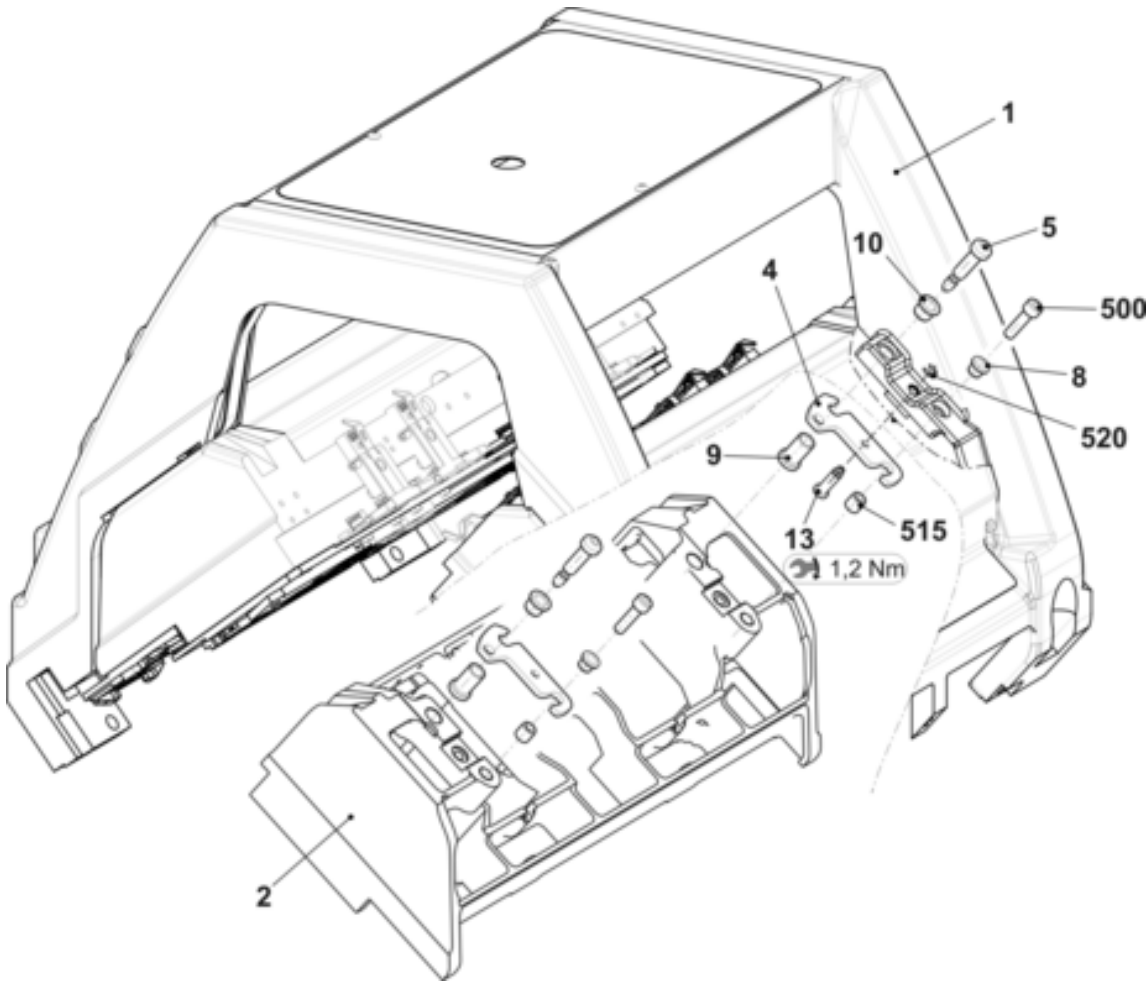


5.3 Carriage guide

Pos	Designation		ID No.		Pos	Designation		ID No.
6	Bearing bolt eccentric 0.5		242 060		508	Nut M10		023 316
7	Bearing bolt eccentric 0.5		240 624		510	Shim ring 12x18x1		023 315
12	Bolt complete with bearing		244 283		511	Adjusting washer 10x16x1		023 260
	525	Roller 10x32x9	242 071		518	Grooved ball bearing 62201-2RS		241 408
	526	Adjusting washer 10x16x2	023 600		519	Grooved ball bearing 62300-2RS1		242 070

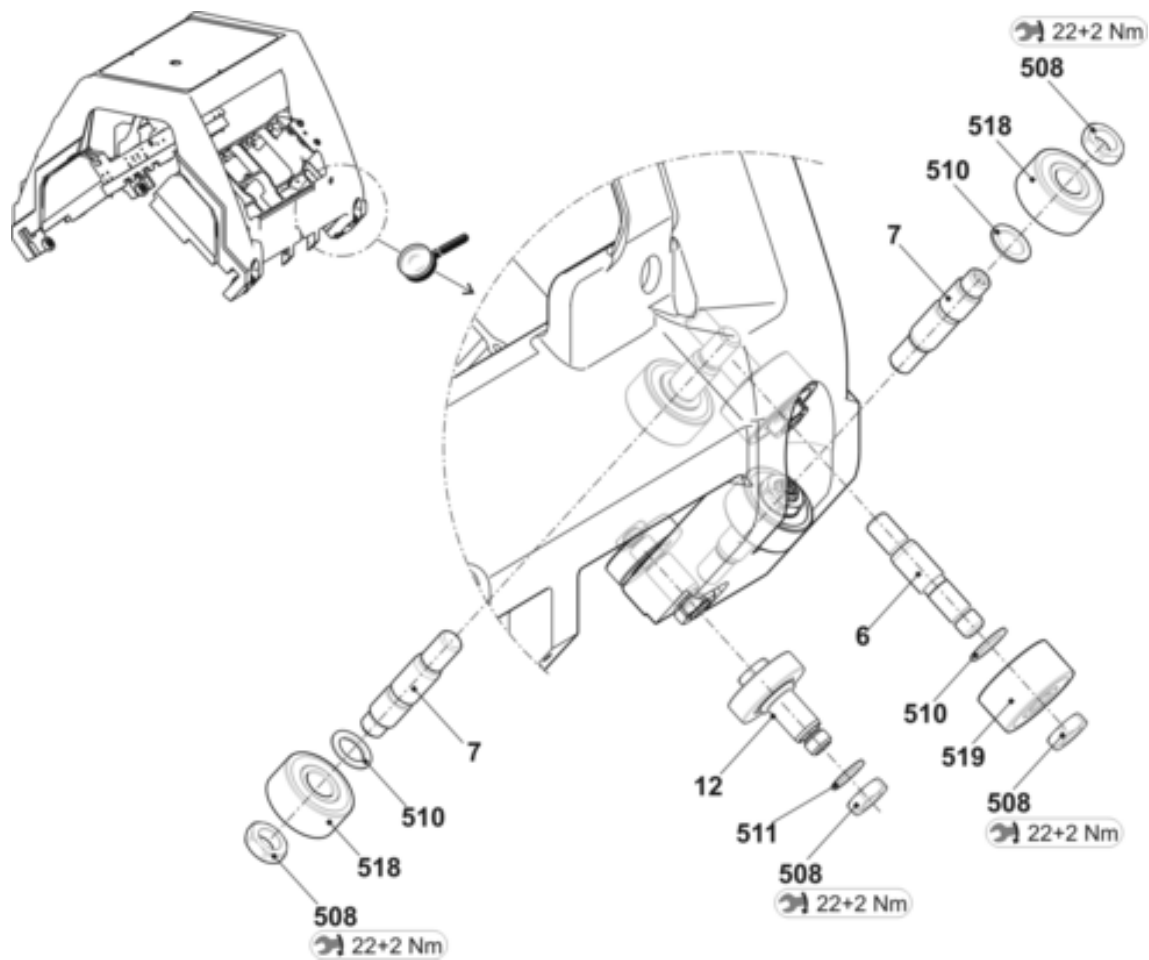


5.4 Carriage cover

Pos	Designation	Id	Pos	Designation	Id
1	Carriage cover at the top 3 cam boxes complete	257 100			
	1a Carriage cover at the top 2 cam boxes 6Z	256 510	16	Bolts	212 392
2	Carriage cover at the rear complete	257 171	17	Bolt at the rear	243 171
	2a Carriage cover at the rear 520C	256 770	19	Cover plate on the left	250 274
3	Carriage cover at the front complete	257 170	20	Cover plate on the right	250 275
	3a Carriage cover at the front 520C	256 769	38	Guide plate at the rear on the left	245 323
1,2,3	10 Locating bolt	242 382	39	Guide plate at the rear on the right	245 324
	500 Hexagon nut M6	257 088	504	Compression spring 0.48x7.02x17.29	023 654
	501 Serrated lock washer 6.4	022 385			
	502 U-washer 6.1x9x0.5	023 554			
	503 O-ring 3x2	242 420			

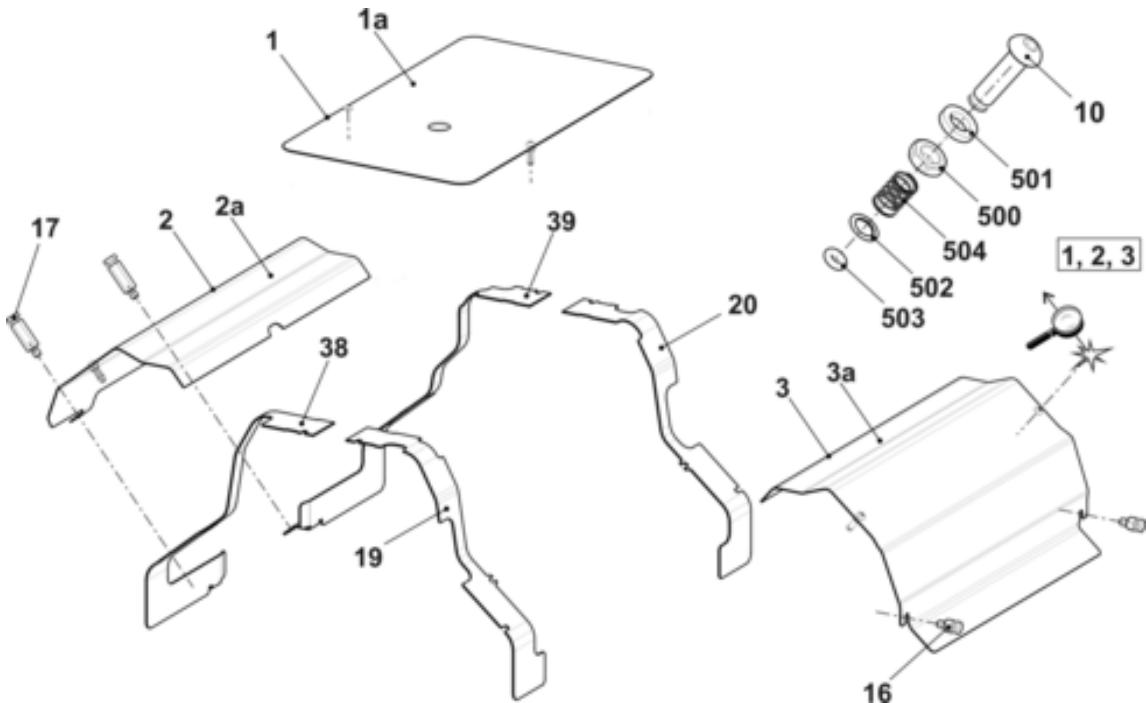


5.5 Needle cam

Pos	Designation		Id		Pos	Designation		Id
Σ	Needle cam complete (at the top)		214 808					
1	Needle cam plate E3-4		214 899		26	Slider		210 953
21	Loop sinking cam on the left complete		214 657		28	Slider on the left complete		214 248
22	Loop sinking cam on the right complete		214 656			28a	Slider on the left E3-4	241 758
23	Rod guide element on the left		214 477			28b	Connecting rod CMS320	214 186
	23a	Rod guide element on the left	214 475			28c	Axle	252 742
	23b	Spring rod	214 476			28d	Jack sheet metal on the left	214 193
	530	Cap screw M4x8	020 091			580	Adjusting washer 4x8x0.5	023 384
	531	Washer 4.3x7x0.5 soft	022 153		29	Slider on the right complete		214 271
	532	Circlip 3.2	021 019			29a	Slider on the right E3-4	241 759
	533	Compression spring 0.55x4.95x74.8	023 344		30	Spacer		214 603
24	Rod guide element on the right		214 478		33	Bow E3-4		216 225
	24a	Rod guide element on the right	214 473		502	Adjusting washer5x10x0.5		023 348
25	Switching piece		214 322		503	Locking ring 5x0.6		023 347

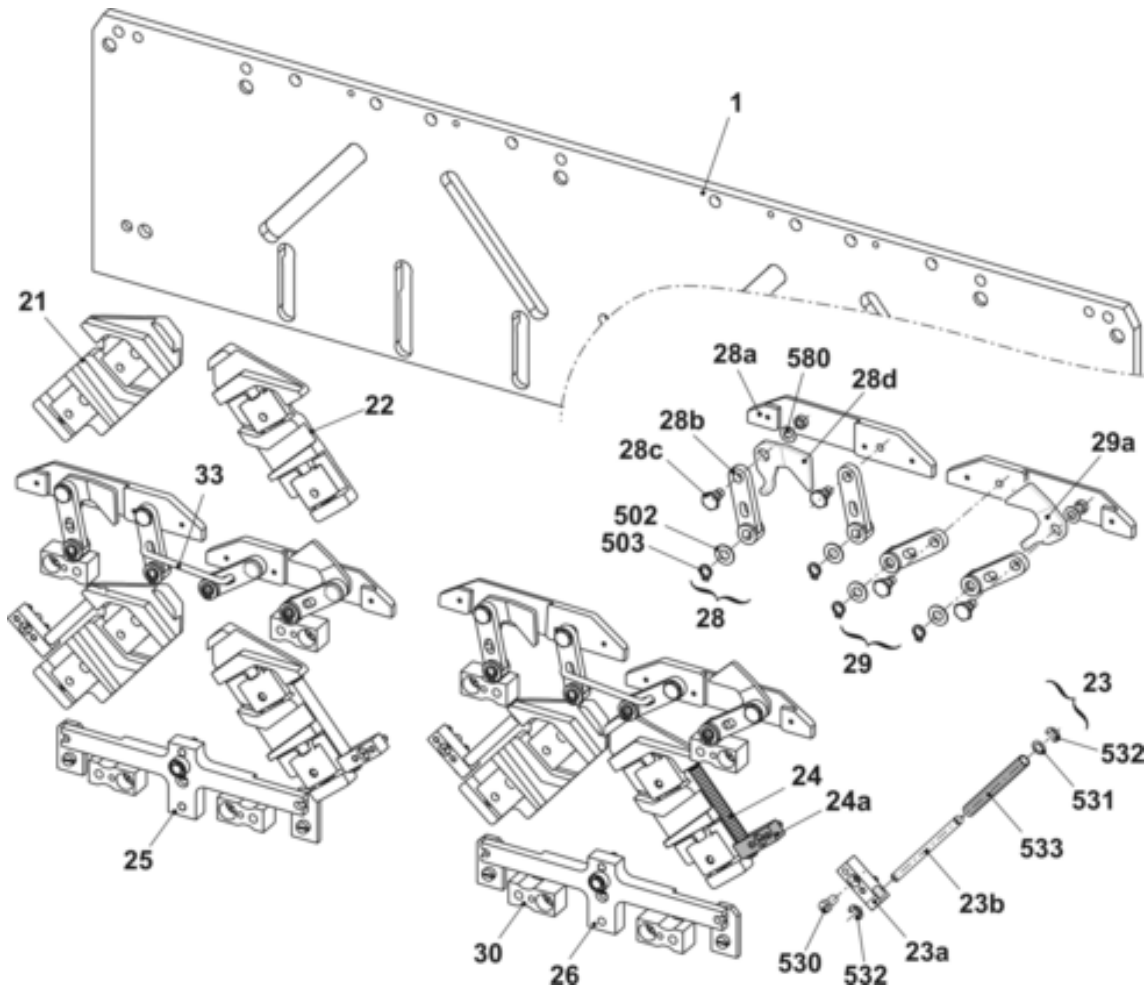

5.6 Continuation needle cam box


Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Needle cam box complete (at the bottom)	214 808	13	Knitting raising cam plate	214 286
2	Entry cam on the left E3-4	214 850	14	Raising cam without split	216 012
3	Entry cam on the right E3-4	214 851		Knitting raising cam with split (Accessories)	216 011
4	Entry cam in the middle E3-4	214 852	15	Receiving cam	214 190
5	Entry cam	214 579	16	Tuck limit cam E3-4	218 047
6	Knitting position cam E3-4	220 179	17	Limit cam on the left E3-4	218 048
7	Pressure strip E3-4	214 663	18	Limit cam on the right E3-4	218 049
8	Pressure part take-over on the left E3-4	216 008	19	Pointer E3-4	218 050
9	Pressure part take-over on the right E3-4	216 009	20	Screw	214 576
10	Tuck pressure part E3-4	216 130	31	Limit cam at the bottom E3-4	215 994
11	Stitch cam on the left E3-4	214 895	500	Cap screw M4x8	020 091
12	Stitch cam on the right E3-4	214 896	501	Countersunk screw M3x6-4.8	020 286

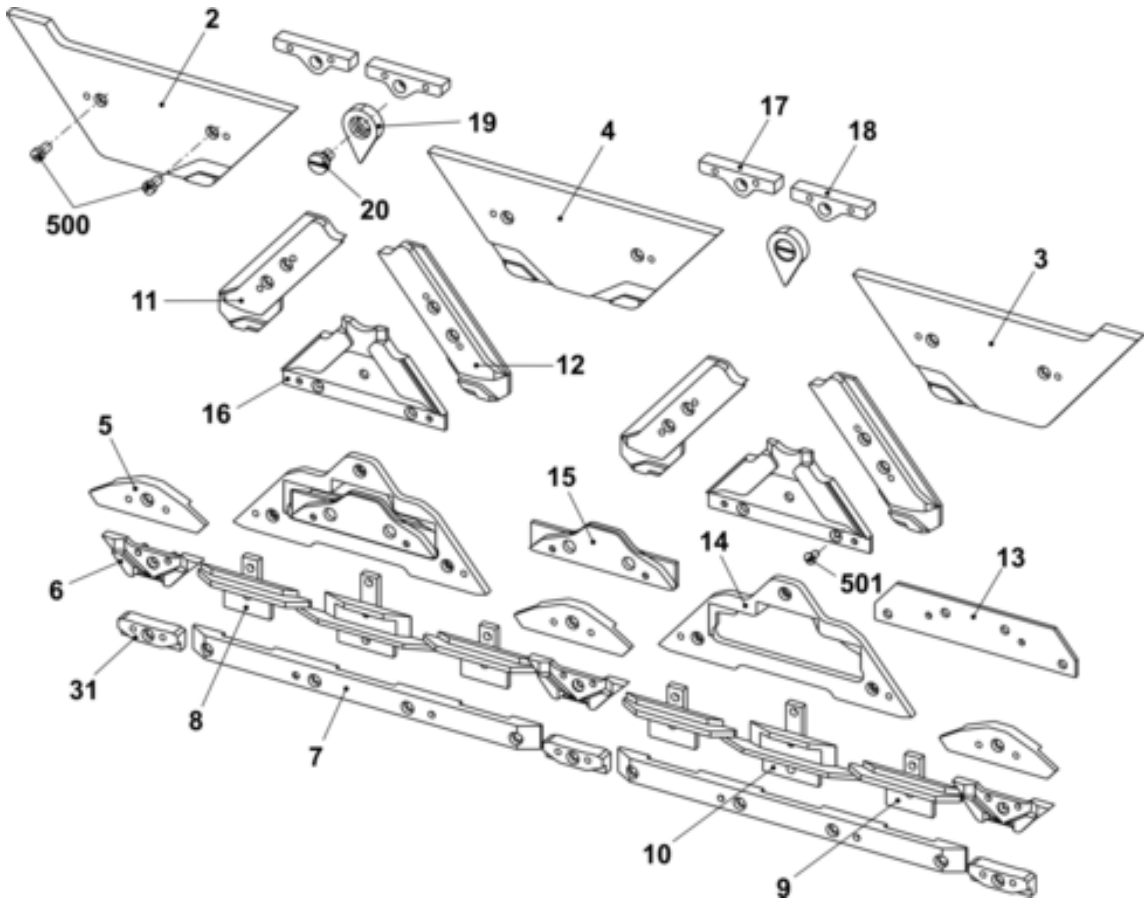

5.7 Jack cam box


5.7 Jack cam box

Pos	Designation	ID No.		Pos	Designation	ID No.
Σ	Jack cam box complete	214 809		9	Cam on the right E3-4	213 938
1	Jack cam box plate	214 900		12	Selector cam on the left	213 868
2	Cam on the left	214 594		13	Selector cam on the right	213 870
3	Cam on the right	214 596		14	Selector cam	213 869
4	Cam on the left	214 586		15	Offering cam	210 185
5	Cam on the right	214 587		500	Cap screw M4x8	020 091
6	Cam on the left E3-4	213 911		501	Countersunk screw M3x4	023 142
7	Cam on the right E3-4	213 915		502	Shim 0.1x12x75	022 830
8	Cam on the left E3-4	213 920		503	Shim 0.2x12x75	022 831

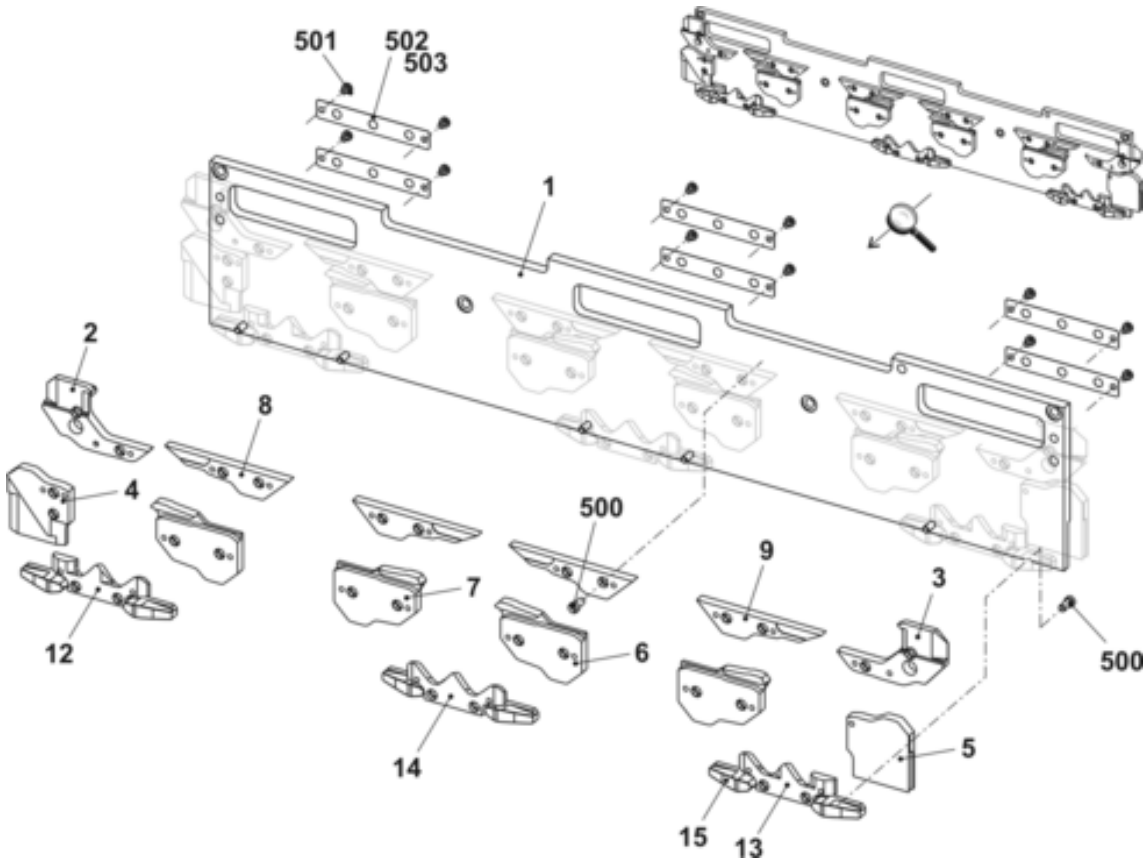


5.8 Yarn carrier driving without guiding part

Pos	Designation	Id		Pos	Designation	Id
Σ	YC driving outside complete	241 080				
1	Yarn carrier plunger complete	242 214		500	Cap screw M4x14-I-Torx	242 279
2	Support angle for jack	241 038		501	Cap screw M3x12-12.9	022 648
3	Card yarn carrier final stages	300 960		900	Cap screw M6X14	022 658
4	Support angle for YC driving	242 903		901	Shoulder screw	231 899

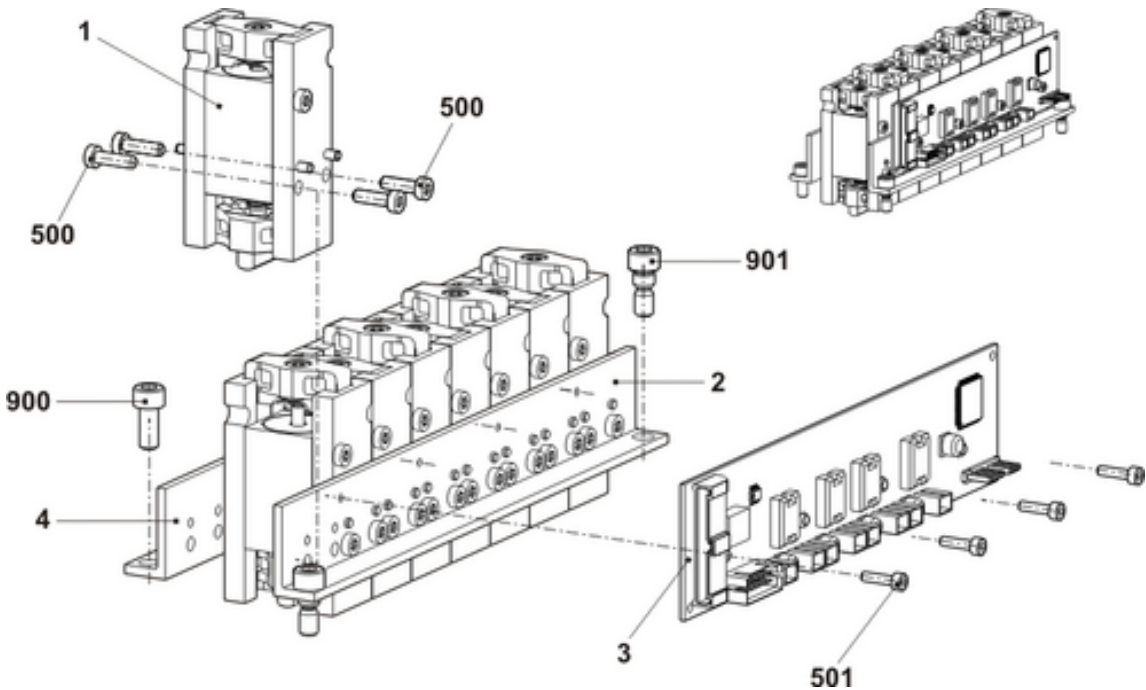


5.9 Yarn carrier driving with guiding part

Pos	Designation	Id		Pos	Designation	Id
Σ	YC driving in the middle complete	241 081				
1	Yarn carrier plunger complete	242 214		500	Cap screw M4x14-I-Torx	242 279
2	Support angle for jack	241 038		501	Cap screw M3x12-12.9	022 648
3	Support angle for YC driving	241 044		502	Screw KB60 x 20	243 625
4	Card yarn carrier final stages	300 960		900	Cap screw M6X14	022 658
5	Guide part	239 972		901	Shoulder screw	231 899

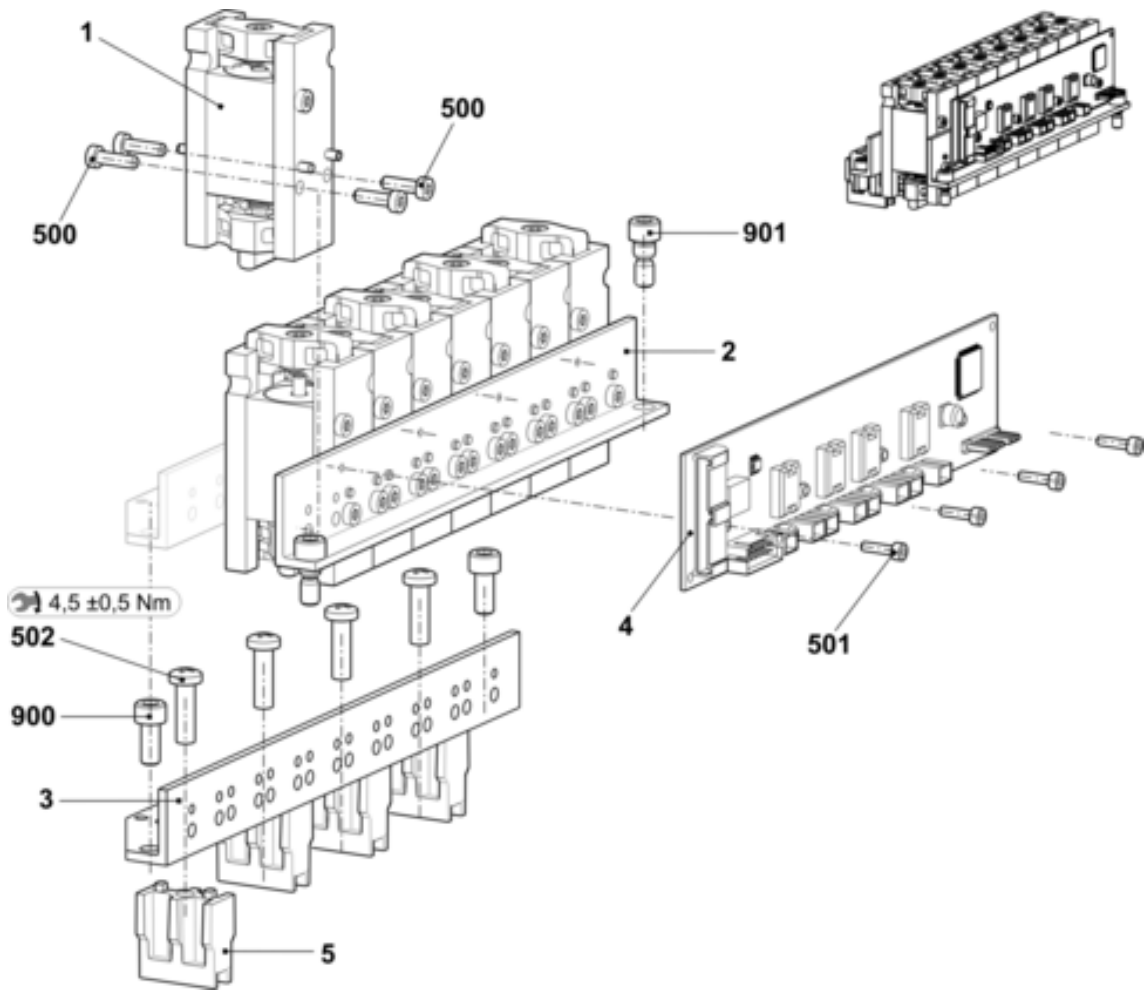


5.10 Holding-down jack control on the right and left

Pos	Designation	Id		Pos	Designation	Id
1	Holding-down jack control on the right	214 717		2	Holding-down jack control on the left	214 800
500*	Cap screw M5x20	020 133		500*	Cap screw M5x20	020 133

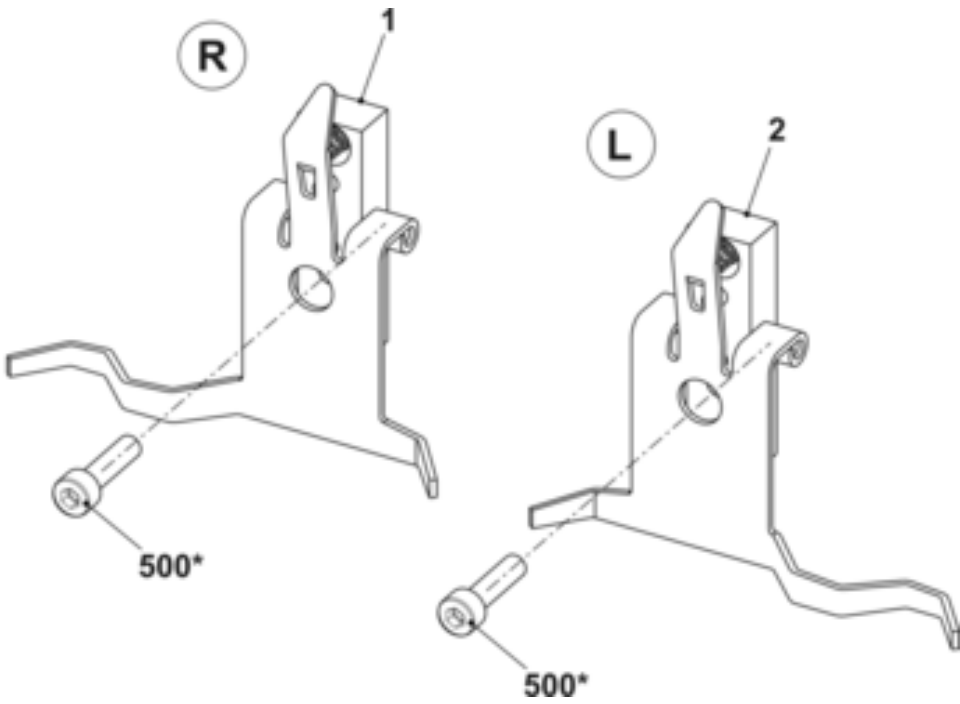


5.11 Needle detector

Pos	Designation		Id		Pos	Designation		Id
Σ	Needle detector E3 E4		237 675					
1	Needle detector pre-assembled		221 773		2	Sensor pre-assembled		237 674
	11	Cable of needle detector complete	221 207			21	Sensor	220 839
	12	Retainer	220 464			22	Angle	237 668
	13	Bolts	258 390			500	Countersunk screw M4x6	023 427
	14	Switch rocker	220 637		500	Countersunk screw M4x6	023 427	
	510	Countersunk screw M5x10	023 247					
	511	Circlip	021 018					
	512	Countersunk screw M2x8	258 310					
	513	Setscrew M5x20	023 526					
514	Compression spring 4.3x0.45x10	021 398						

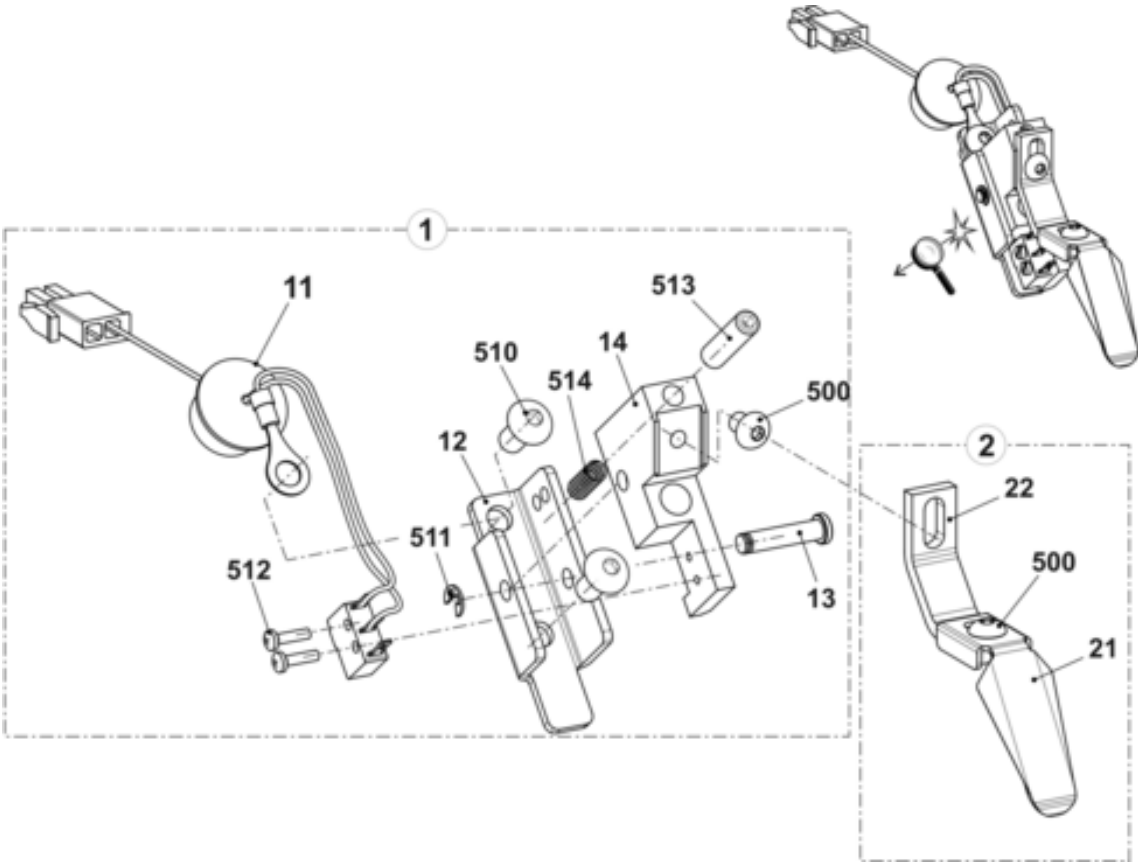


5.12 Brush holder

Pos	Designation	ID No.		Pos	Designation	ID No.
Σ	Brush holder complete	214 710				
1	Brush holder	213 009		500	Countersunk head screw M4x12	023 062
2	Brush clamp	213 010		501	Hexagon nut M8x5	023 750
3	Threaded rod	209 740		502	Shim ring 5x10x0.5	023 348
4	Needle brush E2-4	061 407		503	Locking ring 5x0.6	023 347

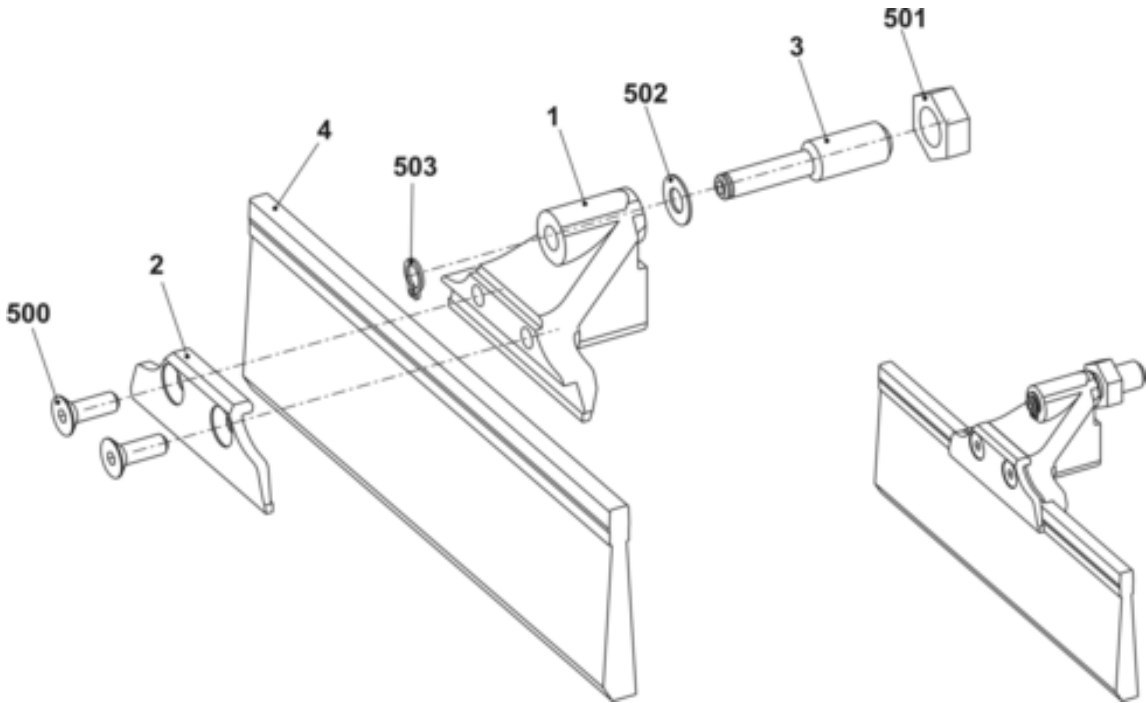


Notes:

6 Main take-down

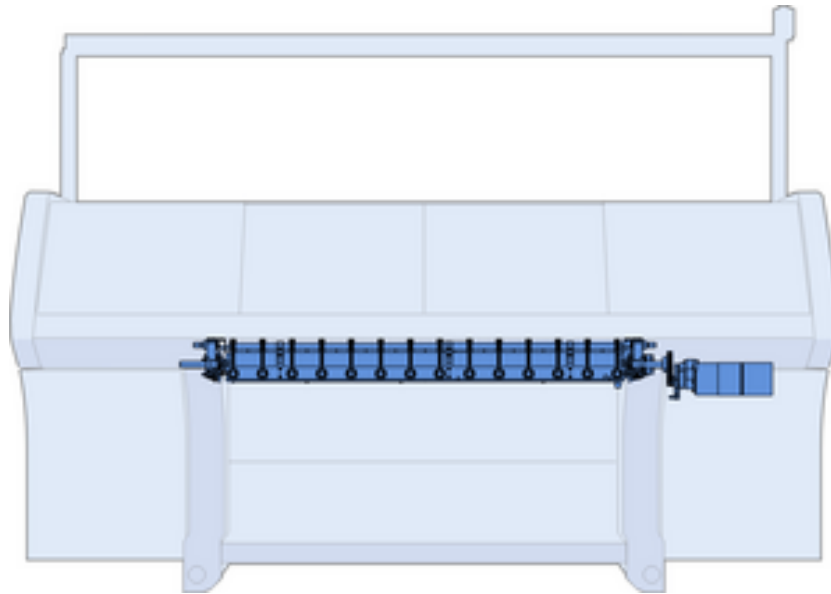


6.1 Main take-down

Pos	Designation	Id	Pos	Designation	Id
Σ	Main take-down		2	Main take-down on the right	253 852
1	Main take-down on the left	253 851	3	Main take-down in the middle E5-14	253 525

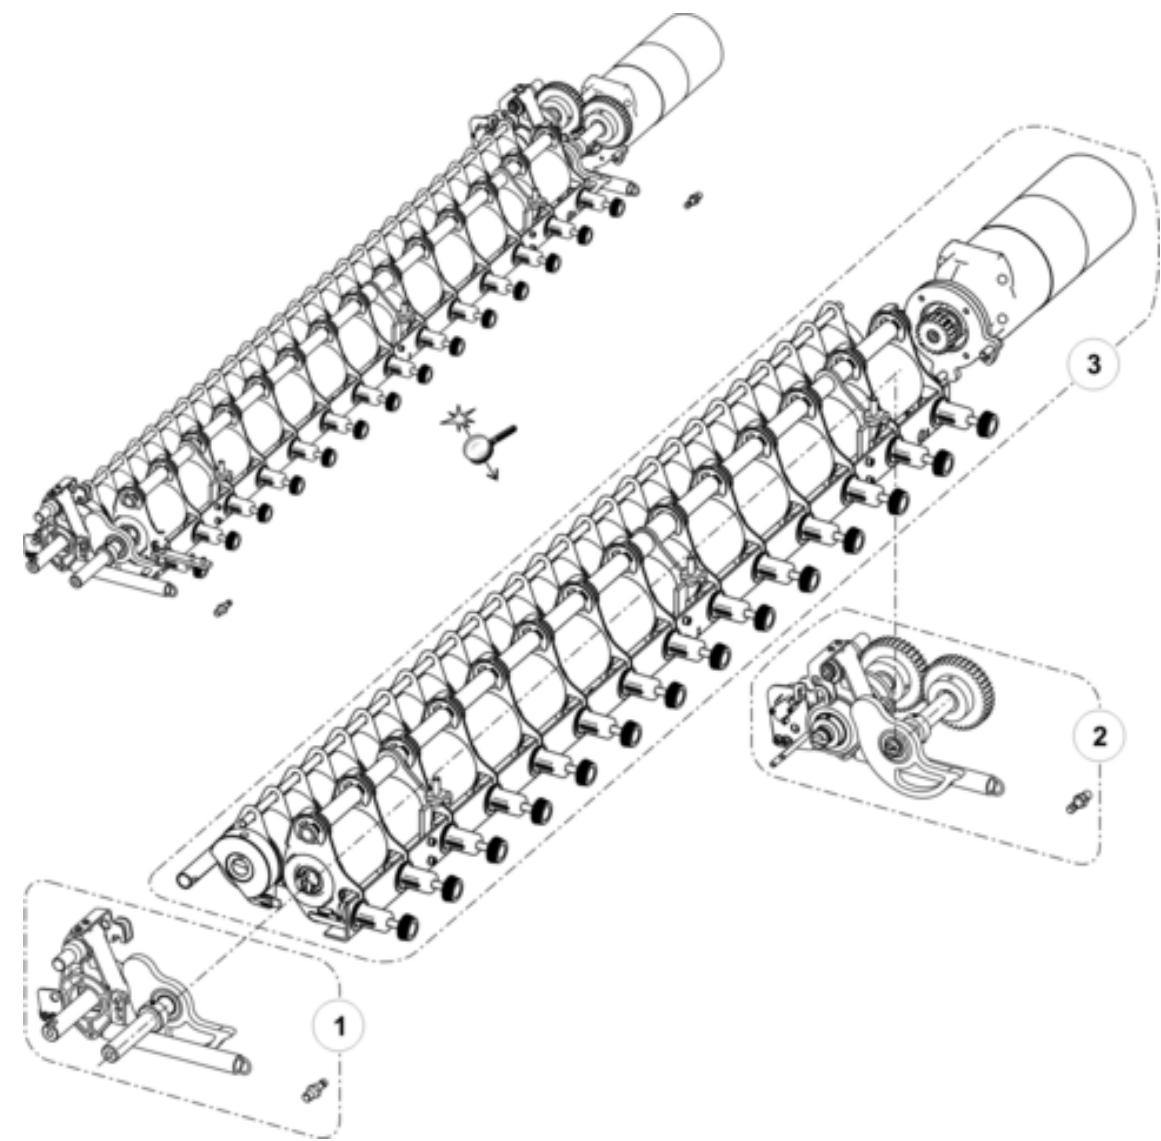

6.1.1 Main take-down on the left


Pos	Designation	Id		Pos	Designation	Id
Σ	Main take-down on the left	253 851				
2	Bearing race complete	244 459		17	Spring bolt	221 143
3	Shaft on the left at the rear	221 012		19	Stop point	252 503
5	Bolt	208 538		500	Screw 50x15	251 728
7	Mounting plate on the left complete	231 725		504	U-washer 18	023 295
9	Swivel-mounted bearing	251 761		505	Locking ring 18x1.2	020 955
10	Floating axle on the left	251 984		511	Cap screw M6x12	020 134

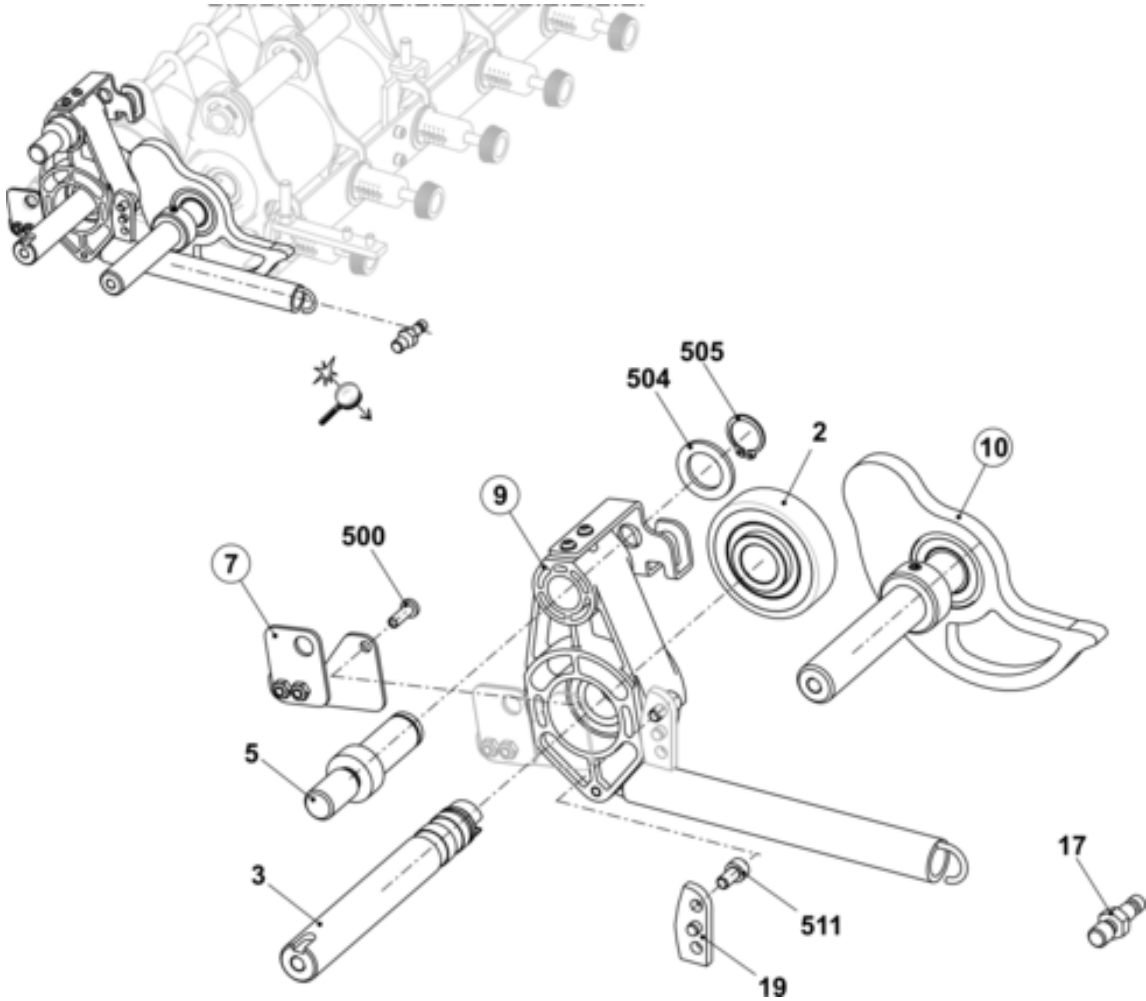

6.1 Main take-down


6.1.1.1 Swivel-mounted bearing

Pos	Designation	Id		Pos	Designation	Id
Σ	Swivel-mounted bearing	251 761				
1	Swivel-mounted bearing	241 996		500	Screw M35x10	251 729
2	Sheet metal support	251 749		504	Circlip 4	021 020
3	Axle	251 758		505	Tension spring 8x0.9x75	240 217

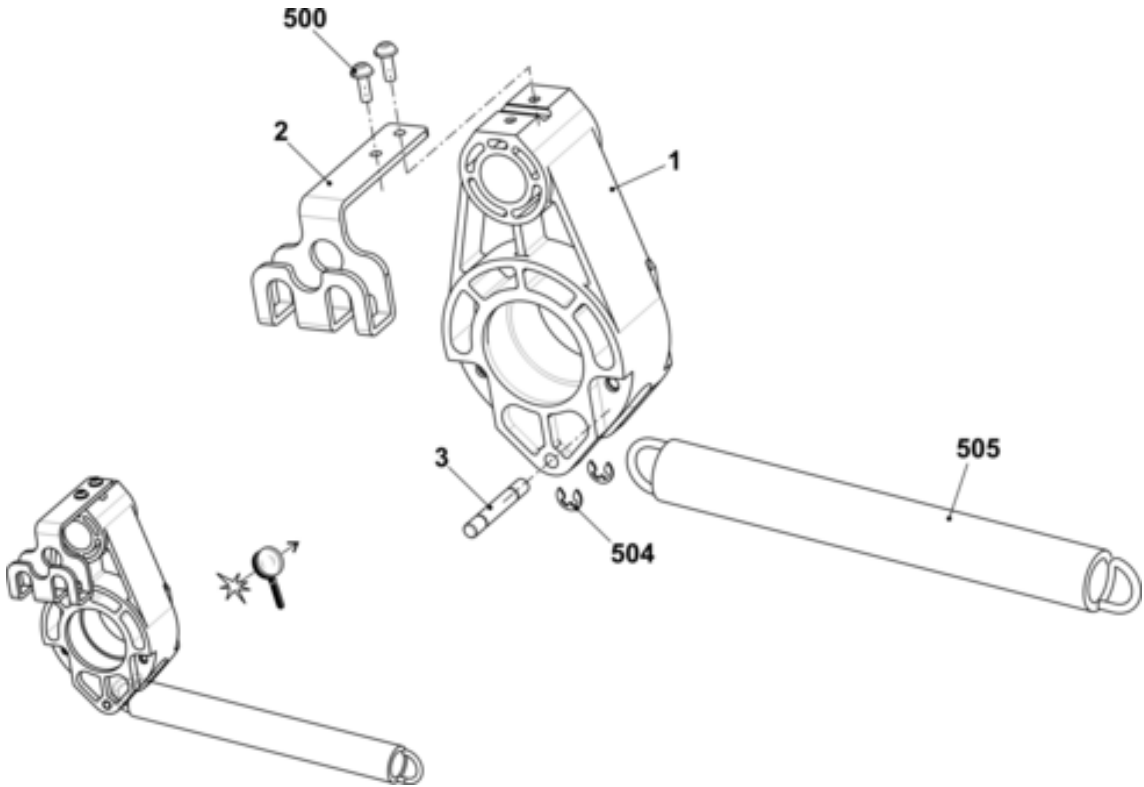

6.1.2 Main take-down on the right


Pos	Designation	Id		Pos	Designation	Id
Σ	Main take-down on the right	253 852				
1	Clutch set	251 677		20	Threaded bushing	222 522
2	Bearing race complete	244 459		500	Screw 50x15	251 728
5	Bolt	208 538		504	U-washer 18	023 295
8	Mounting plate on the right complete	240 069		505	Locking ring 18x1.2	020 955
9	Swivel-mounted bearing	251 761		511	Cap screw M6x12	020 134
10	Floating axle on the right	251 985		515	Microswitch Xgk2-s21 250	210 510
17	Spring bolt	221 143		516	Cap screw M3x20	023 221
19	Stop point	252 503		517	U-washer 3	023 657

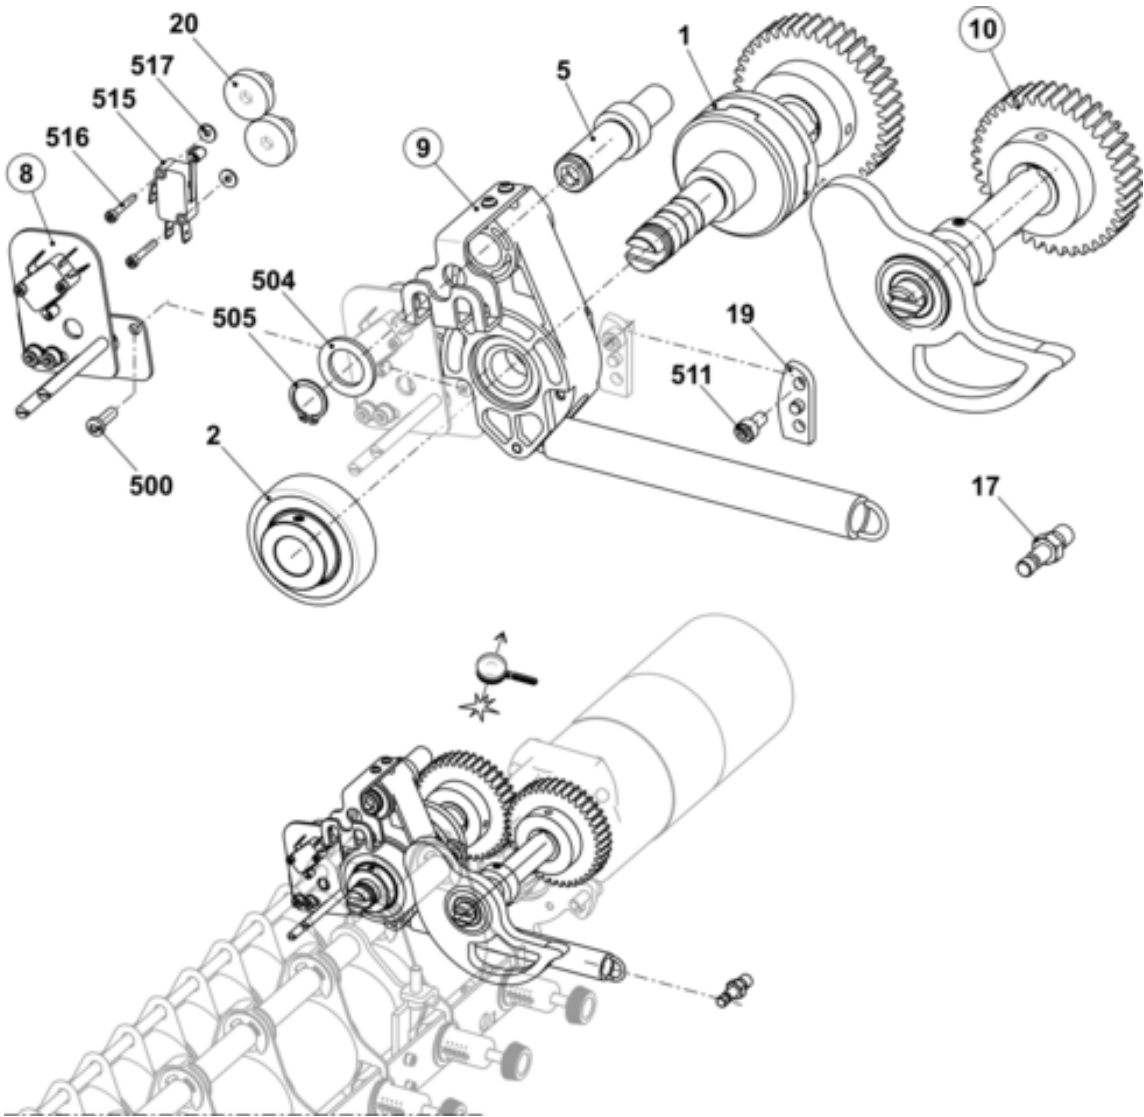

6.1 Main take-down


6.1.2.1 Mounting plate

Pos	Designation	Id		Pos	Designation	Id
Σ L	Mounting plate on the left complete	231 725		Σ R	Mounting plate on the right complete	240 069
1	Mounting plate on the left	231 541		1	Mounting plate on the right	240 068
2	Retaining plate on the left	231 539		2	Setscrew	240 067
500	Countersunk screw M5x10	023 247		3	Retaining plate on the right	240 066
501	Serrated lock washer J6.4	022 489		500	Hexagon nut M4-6	022 536
				501	Microswitch	026 259
				502	Cap screw M3X16	022 583
				503	Cap screw M5x8	244 278
				504	U-washer 5-200	020 871

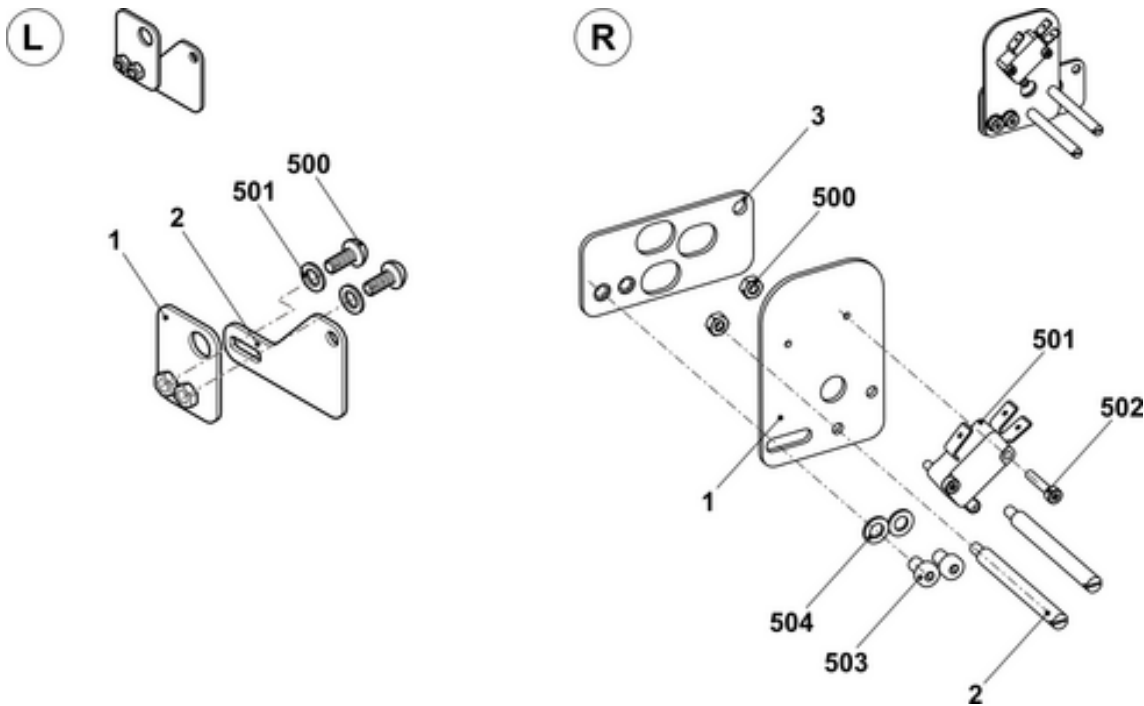

6.1.2.2 Floating axle


Pos	Designation	Id		Pos	Designation	Id
Σ L	Floating axle on the left	251 984		Σ R	Floating axle on the right	251 985
1	Shaft on the left at the front	221 013		1	Eccentric	251 959
2	Eccentric	251 959		2	Shaft on the right	223 393
500	Set collar	020 938		3	Gear wheel Z=40, M=2	213 744
502	Fitting freewheel ZZ6203L	023 294		500	Fitting freewheel ZZ6203L	023 294
900	Set screw M6x8	022 684		501	Set collar	020 938
				502	Set screw M6x8	022 684
				503	Feather key A 6x6x25	023 017

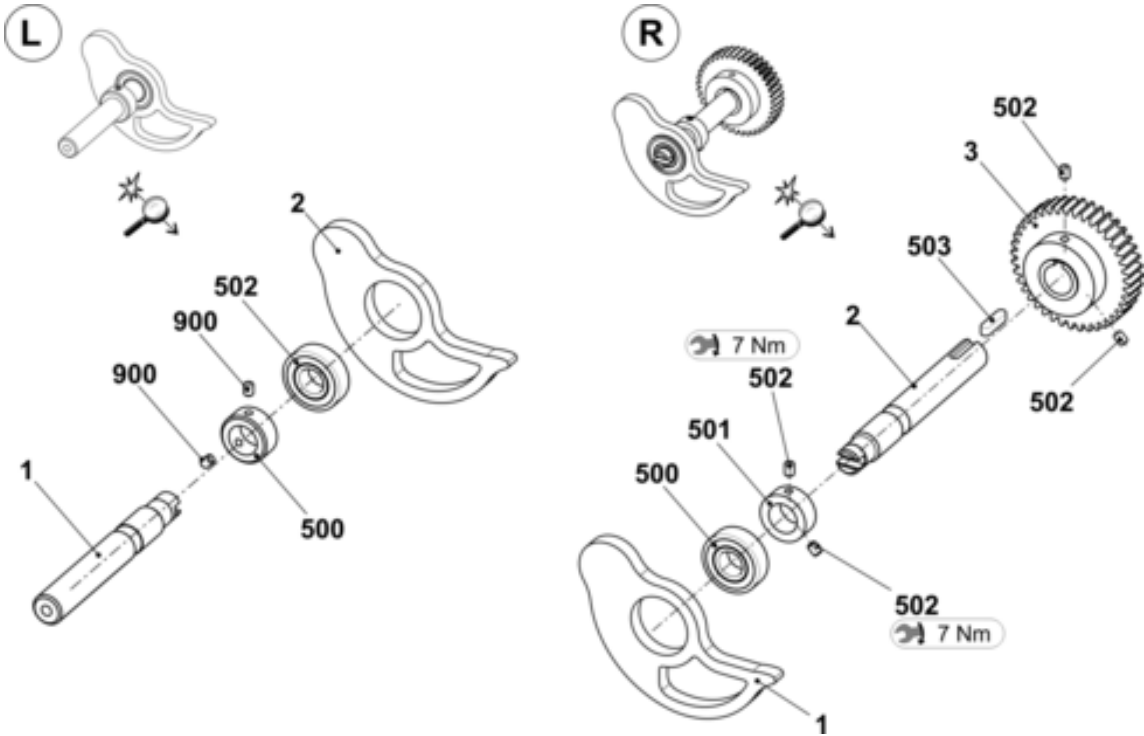

6.1 Main take-down


6.1.3 Main take-down in the middle

Pos	Designation	Id		Pos	Designation	Id
Σ	Main take-down in the middle E5-14	253 525		20	Connection cable winding plate	241 703
4	Stripper angle at the rear complete	240 125		509	Cap screw M8x25	020 142
12	Motor take-down unit complete	253 803		18*	Stop point	253 432
13	Take-down roller at the rear complete E7-14	253 853		512*	U-washer 6	020 881
15	Take-down roller at the front complete	241 426		513*	Countersunk screw M6x16	023 124

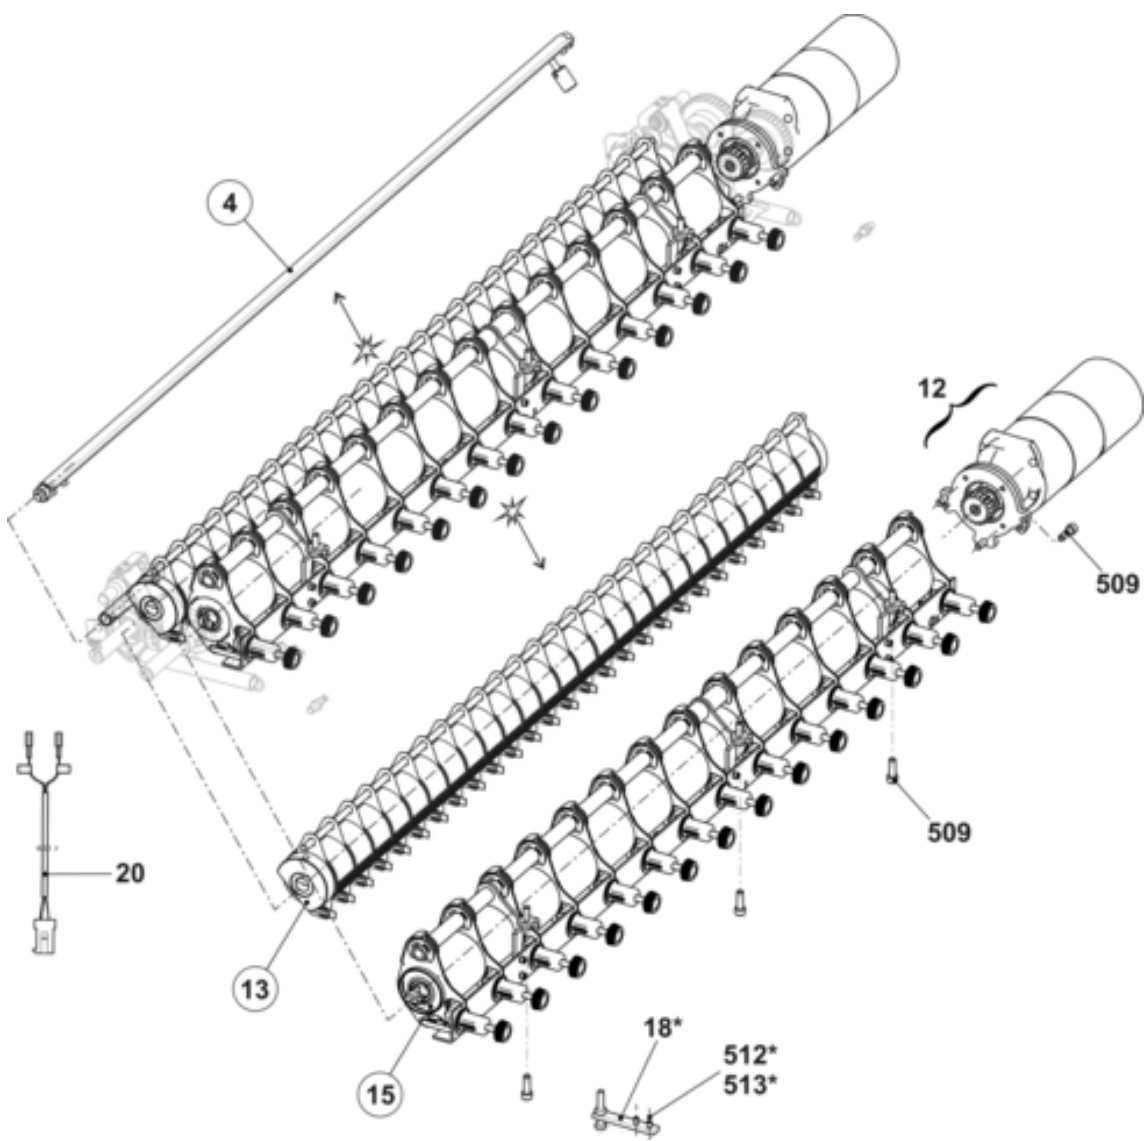

6.1.3.1 Stripper angle


Pos	Designation	Id		Pos	Designation	Id
Σ	Stripper angle at the rear complete	240 125				
1	Stripper angle	240 126		5	Adjustment weight	229 248
2	Shaft	240 127		500	Cap screw M5x8	023 319
3	Cam	209 278		501	Set collar	020 934
4	Bolt	228 310		502	Set screw M5x6	022 738

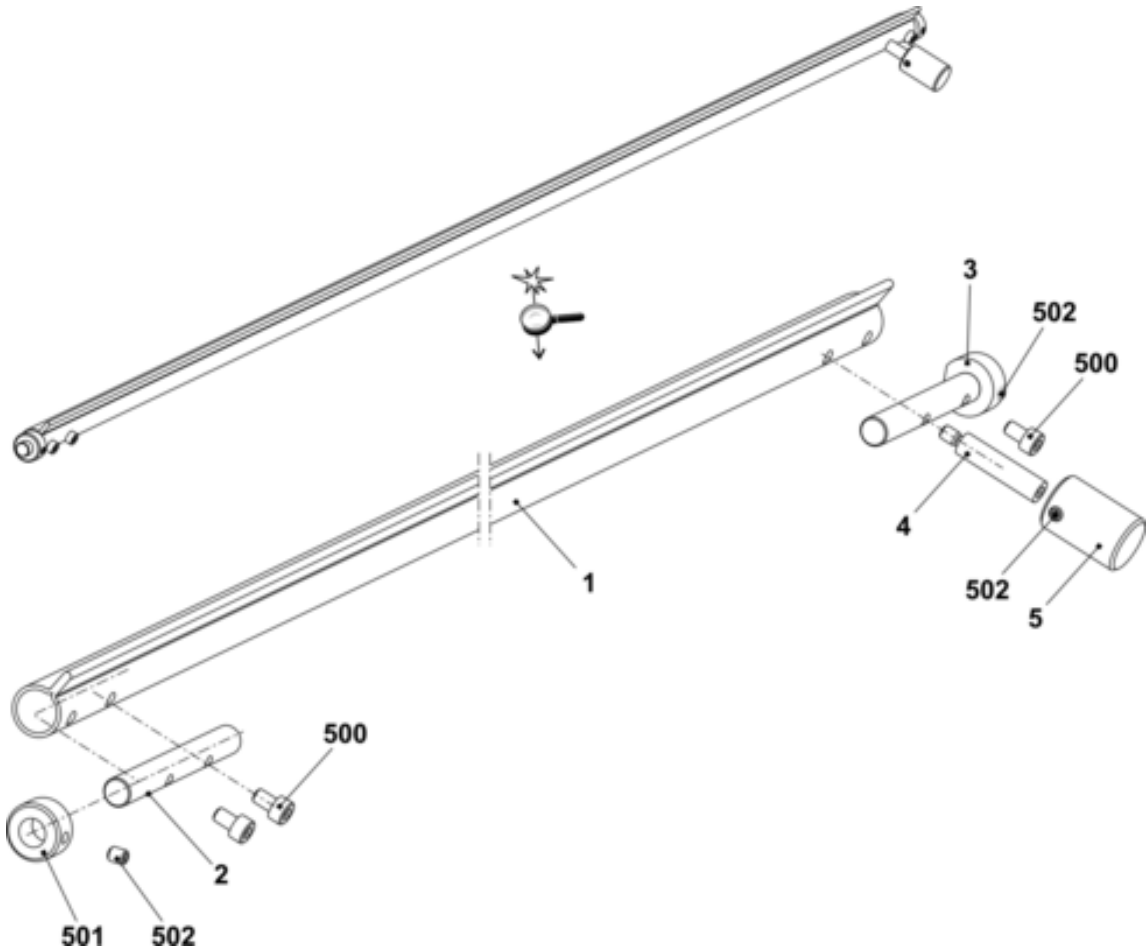

6.1 Main take-down


6.1.3.2 Rear take-down roller

Pos	Designation	Id		Pos	Designation	Id
Σ	Take-down roller at the rear complete E5-14	253 853				
1	Ring on the left	250 573		7	Roller E5-14	206 770
2	Stop ring on the left	204 369		8	Spacer slide	222 062
3	Shaft	221 011		9	Brush	225 819
4	Stripper	241 612		12	Rod	253 301
5	Spacer slide	240 104		500	Setting pin 6x32	020 685
6	Ring on the right	250 574		501	Set screw M10x15	020 635

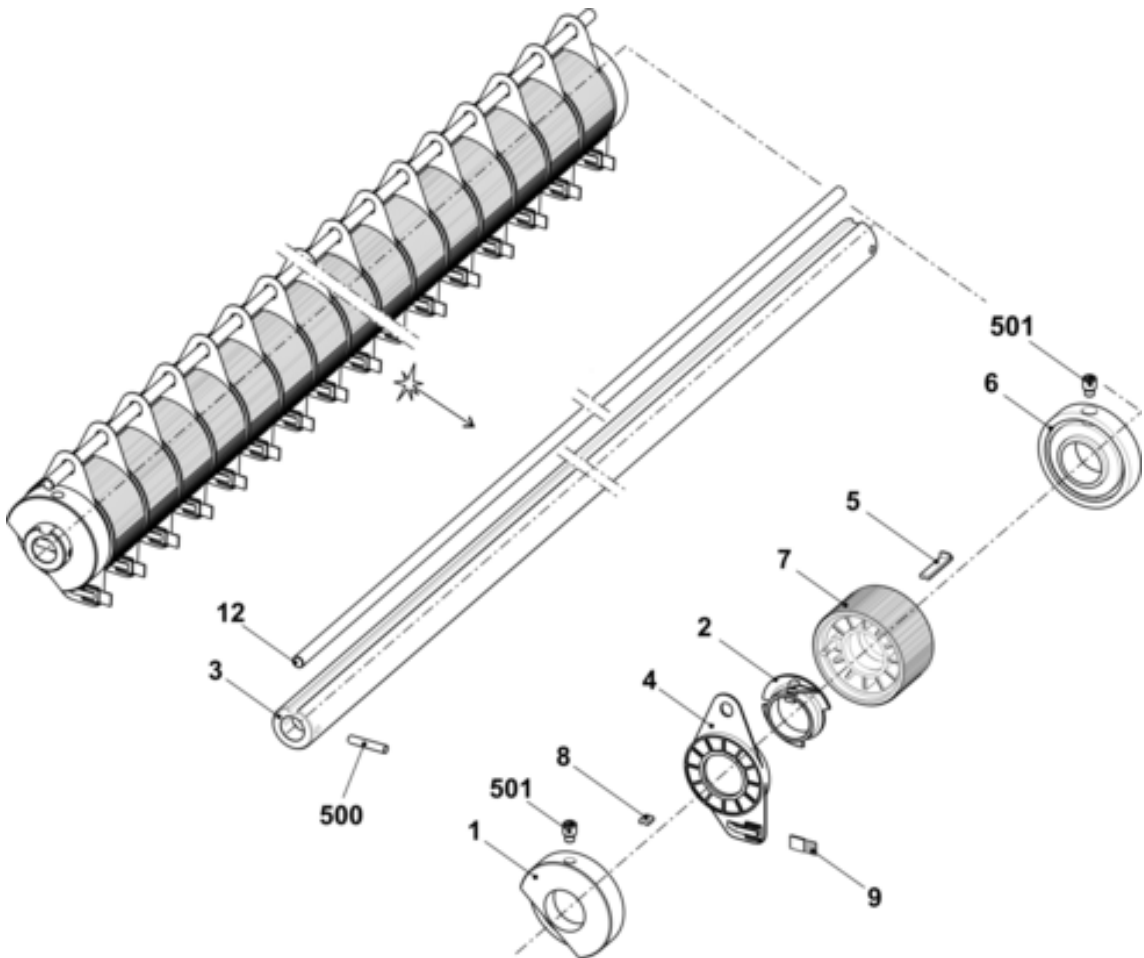

6.1.3.3 Front take-down roller


Pos	Designation	Id		Pos	Designation	Id
Σ	Take-down roller at the front complete	241 426		4	Fixed piece	221 935
1	Take-down roller at the front	221 243		500	Compression spring 1x10x30	023 741
2	Angle rail complete	241 425		501	Cap screw M5x12	020 132
3	Pressure sleeve	220 911		502	U-washer 5-200	020 880

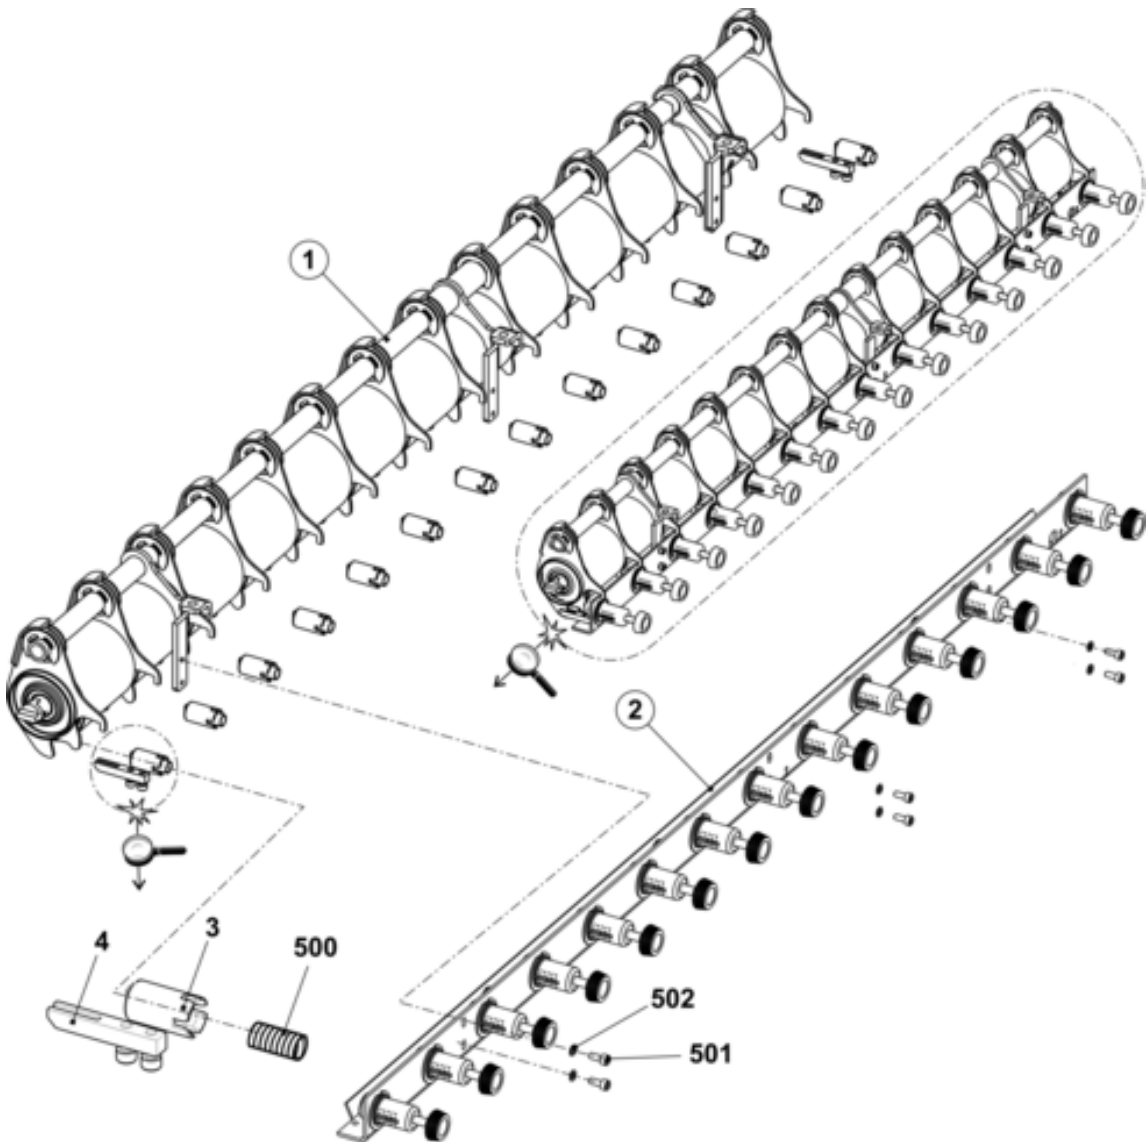

6.1 Main take-down


6.1.3.3.1 Front roller elements

Pos	Designation		Id		Pos	Designation		Id
Σ	Take-down roller at the front		221 243					
1	Bearing support on the left complete		221 225		4	Roller		220 905
	aa	Universal joint	221 137		5	Tube		221 092
	from	adaptor	221 132		6	Bearing support on the right complete		221 240
	b	Bearing support	220 913			aa	Universal joint	221 137
	c	Gear wheel	220 910			from	adaptor	221 132
	501	Spring dowel sleeve 4x20	023 551			b	Bearing support	220 913
	510	Cap screw M5x20	020 133			c	Gear wheel	220 910
	511	U-washer 5	023 542			501	Spring dowel sleeve 4x20	023 551
						510	Cap screw M5x20	020 133
2	Support		251 557			511	U-washer 5	023 542
3	Bearing support complete		221 241		7	Distance pipe on the right		253 407
	3b	Bearing support	220 913		8	Distance pipe on the left		253 408
	3a	Gear wheel	220 910		500	Circlip		021 025
	530	Hexagon nut M5	023 541					
	531	Washer 5-100hv	023 542					
	532	Cap screw M5x30	022 396					

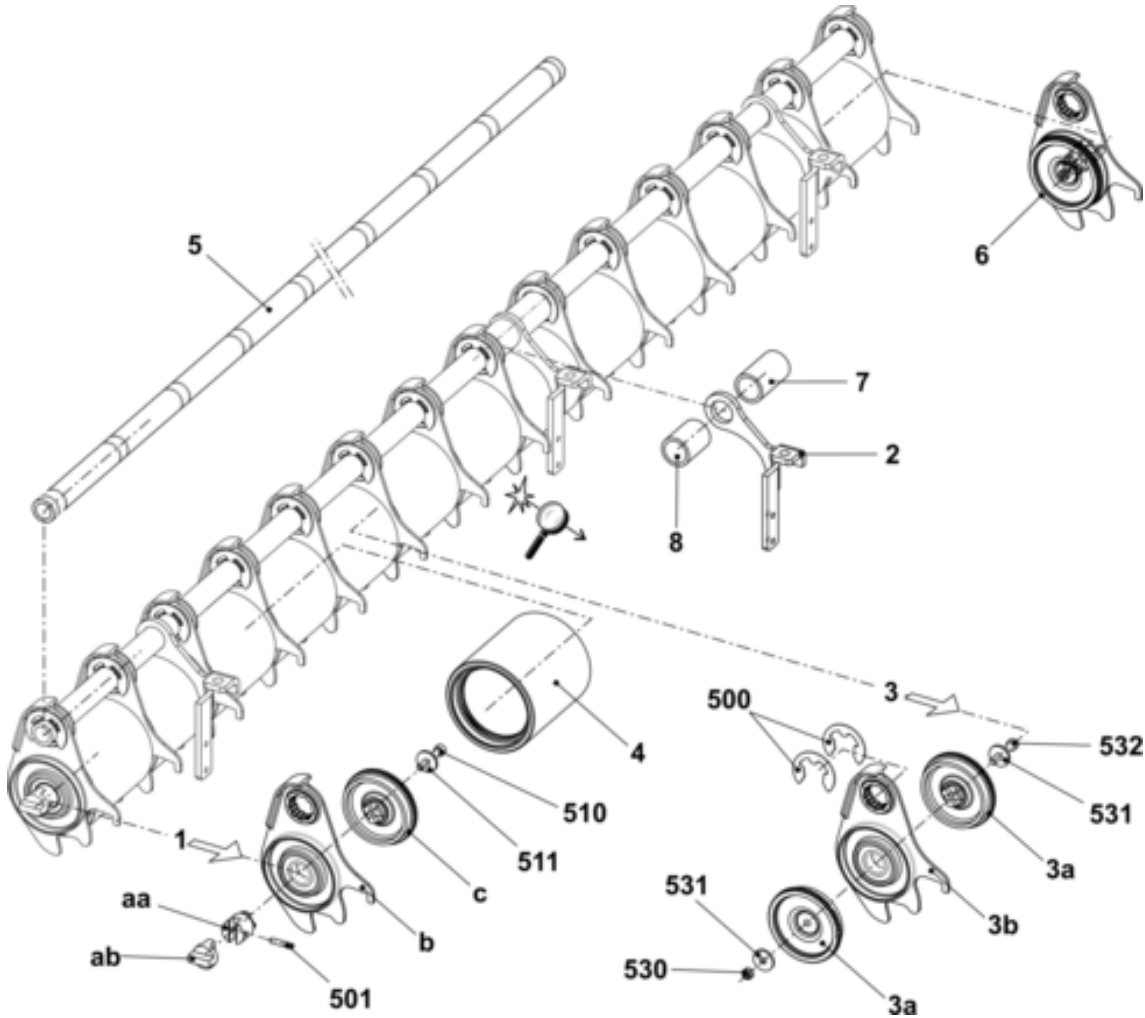


6.1.3.3.2 Pressure angle rail

Pos	Designation	Id		Pos	Designation	Id
Σ	Angle rail complete	241 425		500	U-washer 6-200	022 431
1	Switch complete with cable	221 265		501	Hexagon nut M5-8	023 541
2	Spring flange	242 327		502	Compression spring 0.8x9.2x27.5	023 537
3	Angle rail	241 773		503	Cap screw M2x12	023 522
4	Winding plate	221 101		504	U-washer 2-200	022 908
5	Locking ring	242 325		505	Shoulder screw M5x20x5	023 675

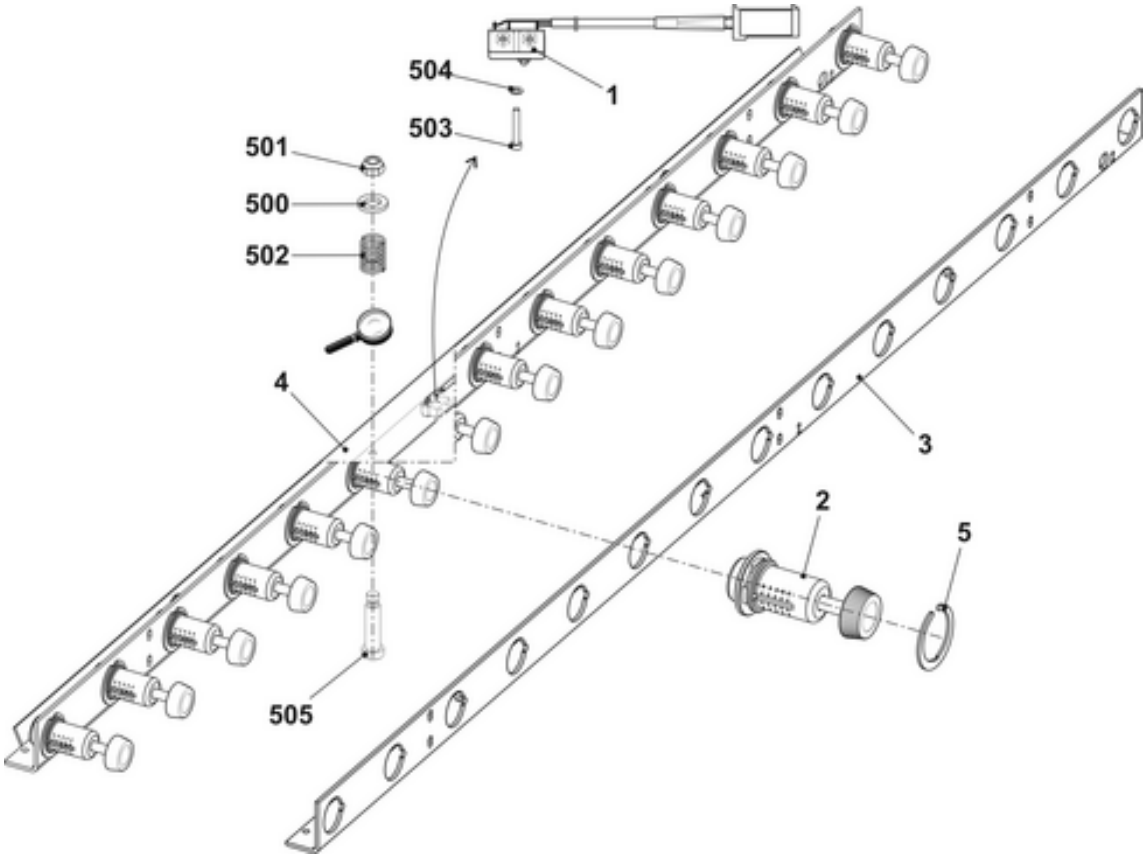


Notes:

7 Auxiliary take-down

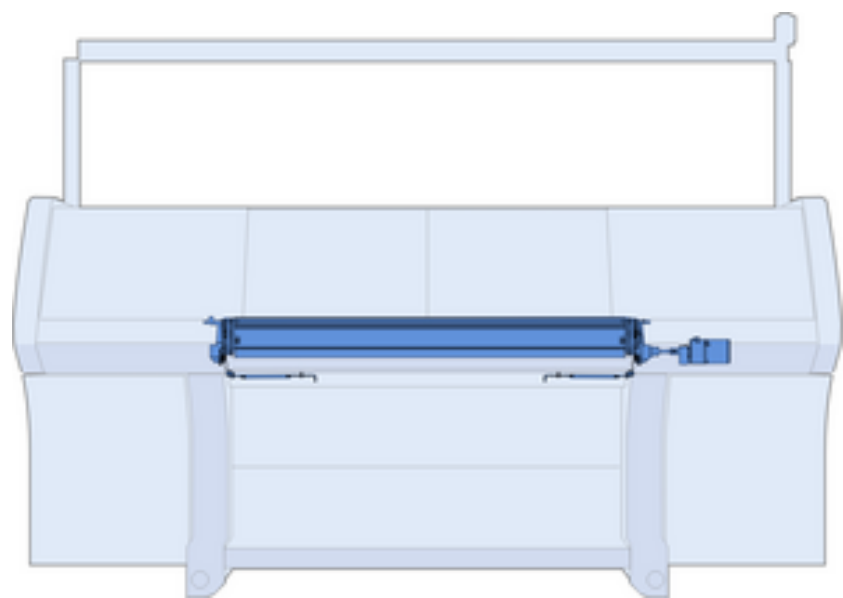


7.1 Auxiliary take-down

Pos	Designation	Id	Pos	Designation	Id
Σ	Auxiliary take-down		12	Lever at the front on the right	227 262
1	Bearing on the right complete	239 996	13	Lever at the rear on the left	227 261
2	Bearing on the left complete	239 999	14	Lever at the rear on the right	227 260
3	Take-down motor complete auxiliary take-down	214 449	15	Toothed belt disk complete	226 708
4	Guiding plate	213 362	16	Bolts	227 914
5	Metal angle on the left complete	225 013	17	Protective plate	225 754
6	Metal angle on the right complete	225 014	500	Cap screw M6X12	020 134
7	Shoulder screw	207 101	502	Shoulder screw M3x27x32	023 634
8	Detent plate	222 040	504	Set collar	020 934
9	Toothed belt 10T5/260	208 832	505	Stop disk	023 646
10	Take-down roller	224 891	506	Spring dowel sleeve 3x20	020 776
11	Lever at the front on the left	227 263	507	Sheet metal screw St4.8x22-	023 259

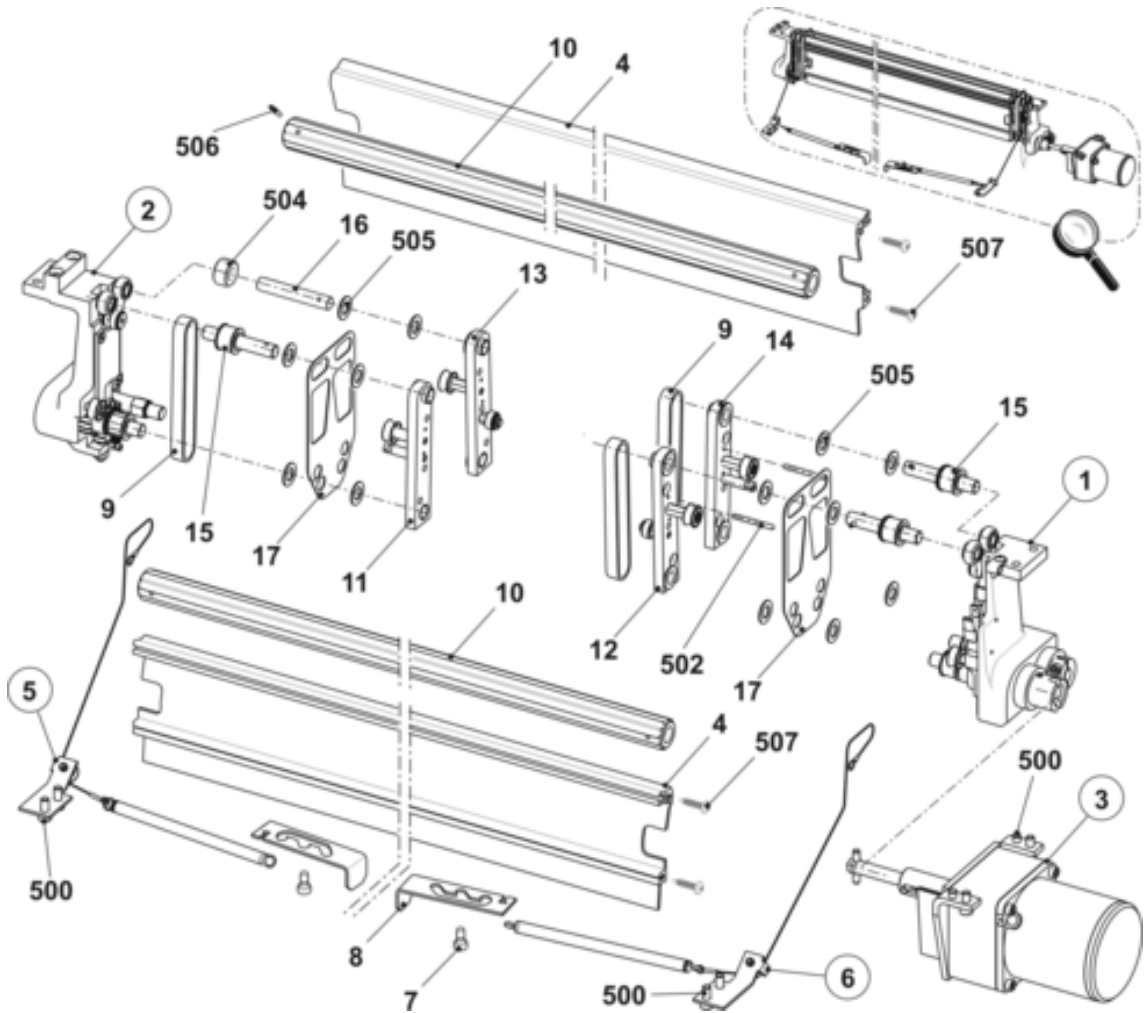

7.2 Right bearing of the auxiliary take-down


Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Bearing on the right complete	239 996			
1	Bearing block on the right	239 967	501	Cap screw M3x20	022 448
2	Cover	224 881	502	Countersunk screw M4x10	023 450
3	Drive shaft complete	227 857	503	Countersunk head screw M4x12	023 062
4	Drive shaft complete	227 853	504	Hexagon nut M6-6	020 836
6	Connecting rod complete	226 710	505	Threaded bolt with shoulder	243 226
61	Connecting rod	226 696	506	Shoulder screw M4x9x14	020 602
560	Slide bearing GFM-081014-06	023 358	507	Set screw M6x16-45	023 092
561	Needle roller bearing HK1010	023 664	508	Spiral pin 4x24	023 544
7	Gear wheel on the right complete	218 524	509	Adjusting washer 4x8x0.5	023 384
8	Gear rack on the right	239 218	510	Adjusting washer 10x16x1.5	023 261
9	Spacer	229 683	511	Locking ring 26x1.2	023 359
11	Sleeve	239 997	512	Cable clip 225/5.2	008 335
12	Collar bolt	210 551	513	Tension spring 7.5x0.7x28	023 595
13	Cable with switch auxiliary take-down okc	243 142	514	Grooved ball bearing 6000-2	022 599
15	Roller deflector	218 805	900	Gear wheel M=1.5, Z=20	213 880
16	Shoulder screw	239 215	901	Gear wheel M=1.5, Z=20	210 504
500	Shoulder screw M3x16	022 560	902	Sleeve	227 257

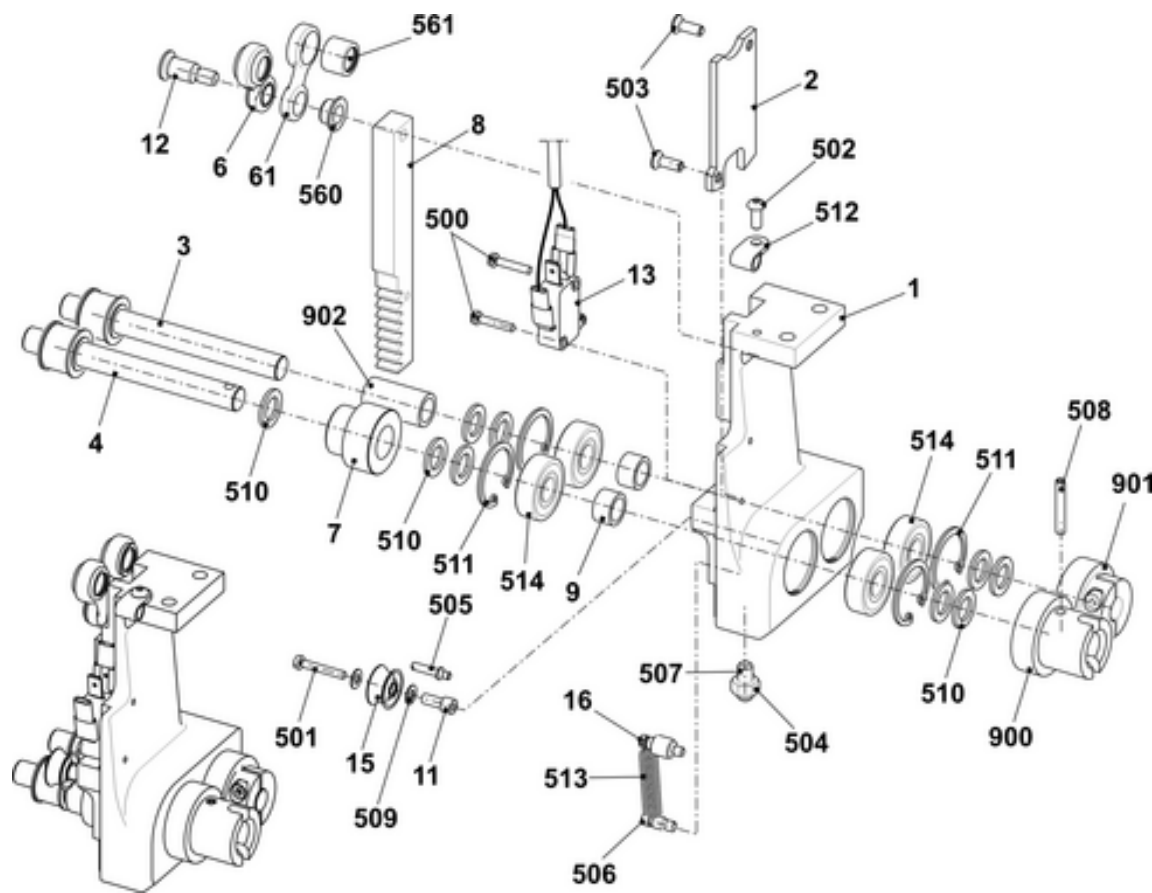

7.3 Left bearing of the auxiliary take-down


7.3 Left bearing of the auxiliary take-down

Pos	Designation	Id	Pos	Designation	Id
Σ	Bearing on the left	239 999	11	Sleeve	239 997
1	Bearing block on the left	240 001	12	Shoulder screw	239 215
2	Cover	224 881	500	Shoulder screw M4x9x14	020 602
3	Drive shaft complete	227 887	501	Hexagon nut M6-6	020 836
4	Collar bolt	210 551	502	Locking ring 26x1.2	023 359
5	Bolts	226 705	503	Threaded bolt with shoulder	243 226
6	Connecting rod complete	226 710	504	Cap screw M3X20	022 448
6a	Connecting rod	226 696	505	Shim ring 4x8x0.5	023 384
560	Slide bearing GFM-081014-06	023 358	506	Shim ring 10x16x1.5	023 261
561	Needle roller bearing HK1010	023 664	507	Countersunk head screw M4x12	023 062
7	Threaded spacer	229 683	508	Grooved ball bearing 6004-2Z	022 599
8	Gear wheel on the left complete	218 523	509	Setscrew M6x16-45	023 092
9	Gear rack on the left	239 216	510	Tension spring 7.5x0.7x28	023 595
10	Roller deflector	218 805			

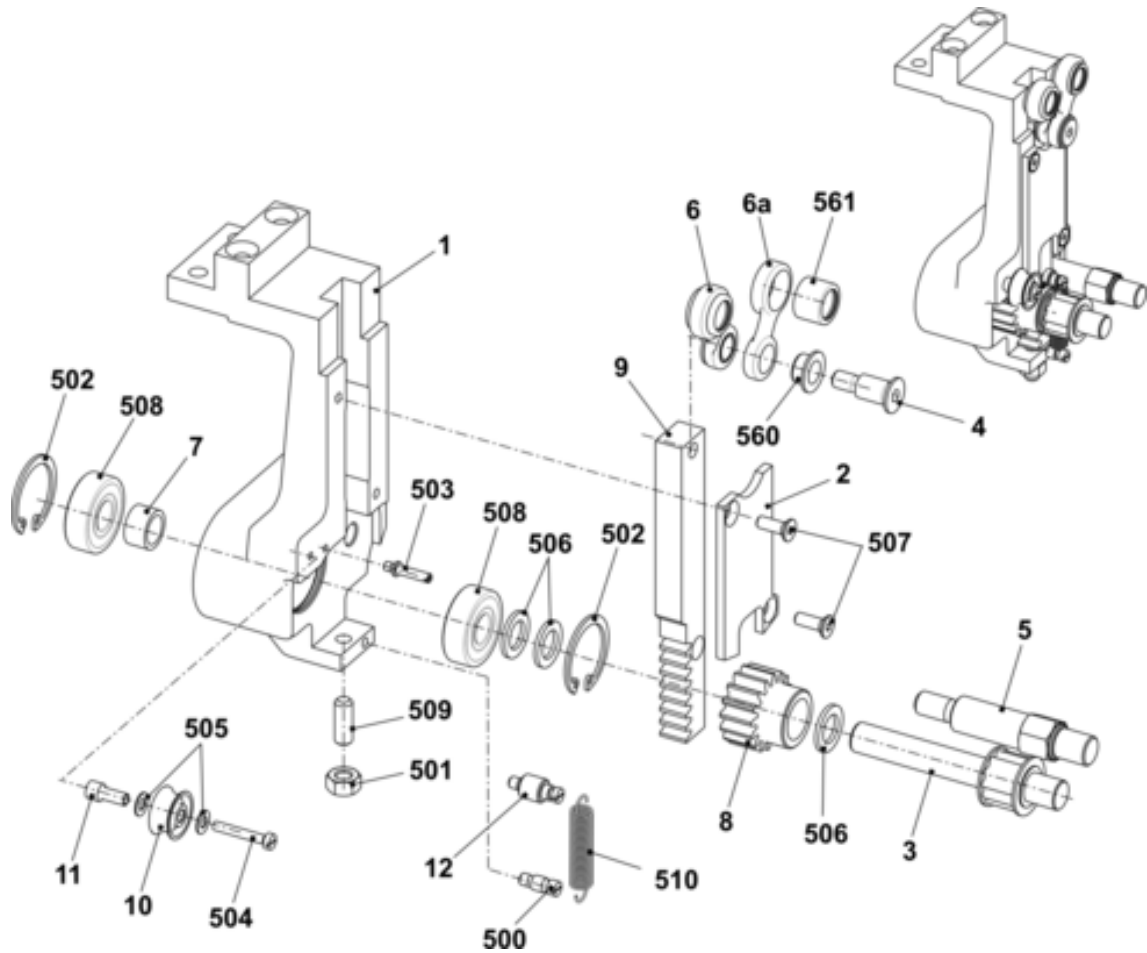

7.4 Motor


Pos	Designation	Id		Pos	Designation	Id
Σ	Motor auxiliary take-down complete	214 449		8	Shaft	219 025
1	Motor auxiliary take-down	213 871		500	Cap screw M3x6	022 589
2	Motor bracket	218 040		501	Set screw M6x10	023 543
3	Drive sleeve	219 024		502	Cap screw M5x55	023 321
4	Impulse disc	218 449		503	Compression spring 0.63x10.97x40	023 500
5	Gear 4GN36K	220 353		504	Adjusting washer 6x12x1	023 444
7	Photoelectric sensor Auxiliary take-down	217 462		508	Dowel pin 5x28	241 686

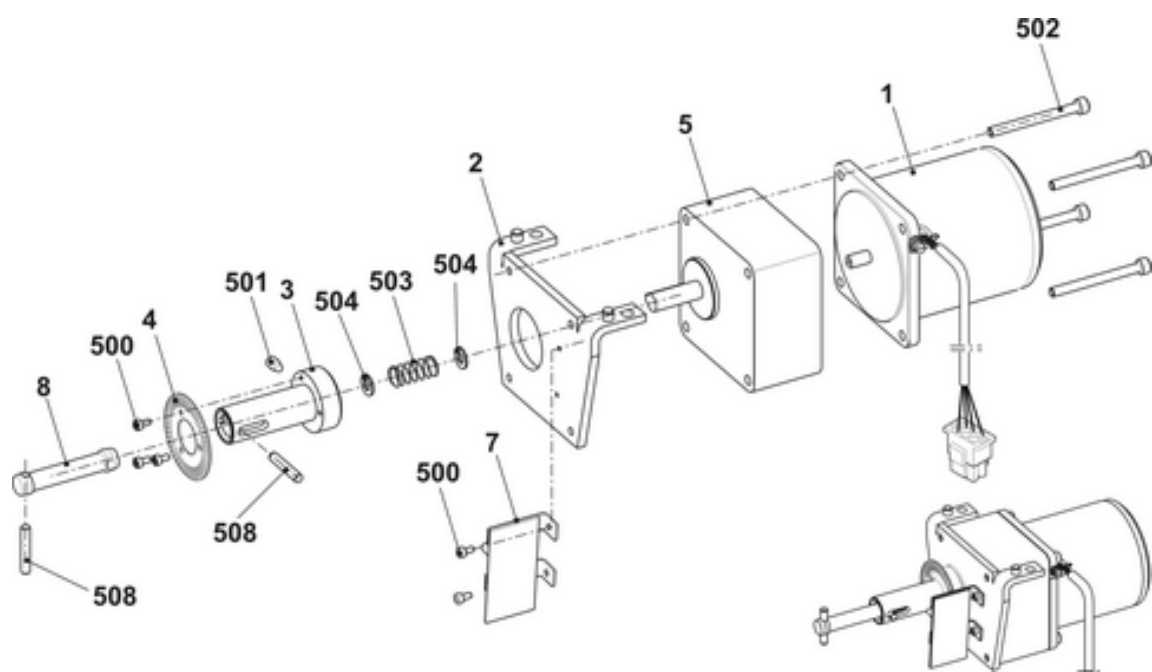

7.5 Angular sheet metal on the left and right complete


7.5 Angular sheet metal on the left and right complete

Pos	Designation	Id		Pos	Designation	Id
Σ L	Angular sheet metal on the left complete	225 013		Σ R	Angular sheet metal on the right complete	225 014
1	Angular sheet metal on the left	224 920		1	Angular sheet metal on the right	224 931
2	Roller deflector	218 805		2	Roller deflector	218 805
3	Fine rope	224 977		3	Fine rope	224 977
4	Sleeve	227 867		4	Sleeve	227 867
500	Shoulder screw M3x16	022 560		500	Shoulder screw M3x16	022 560
501	Hexagon nut M3-6	022 564		501	Hexagon nut M3-6	022 564
502	Adjusting washer 4x8x0.5	023 384		502	Adjusting washer 4x8x0.5	023 384
503	Spring washer A3	021 005		503	Spring washer A3	021 005
507	Tension spring 8x0,9x75	021 287		507	Tension spring 8x0,9x75	021 287

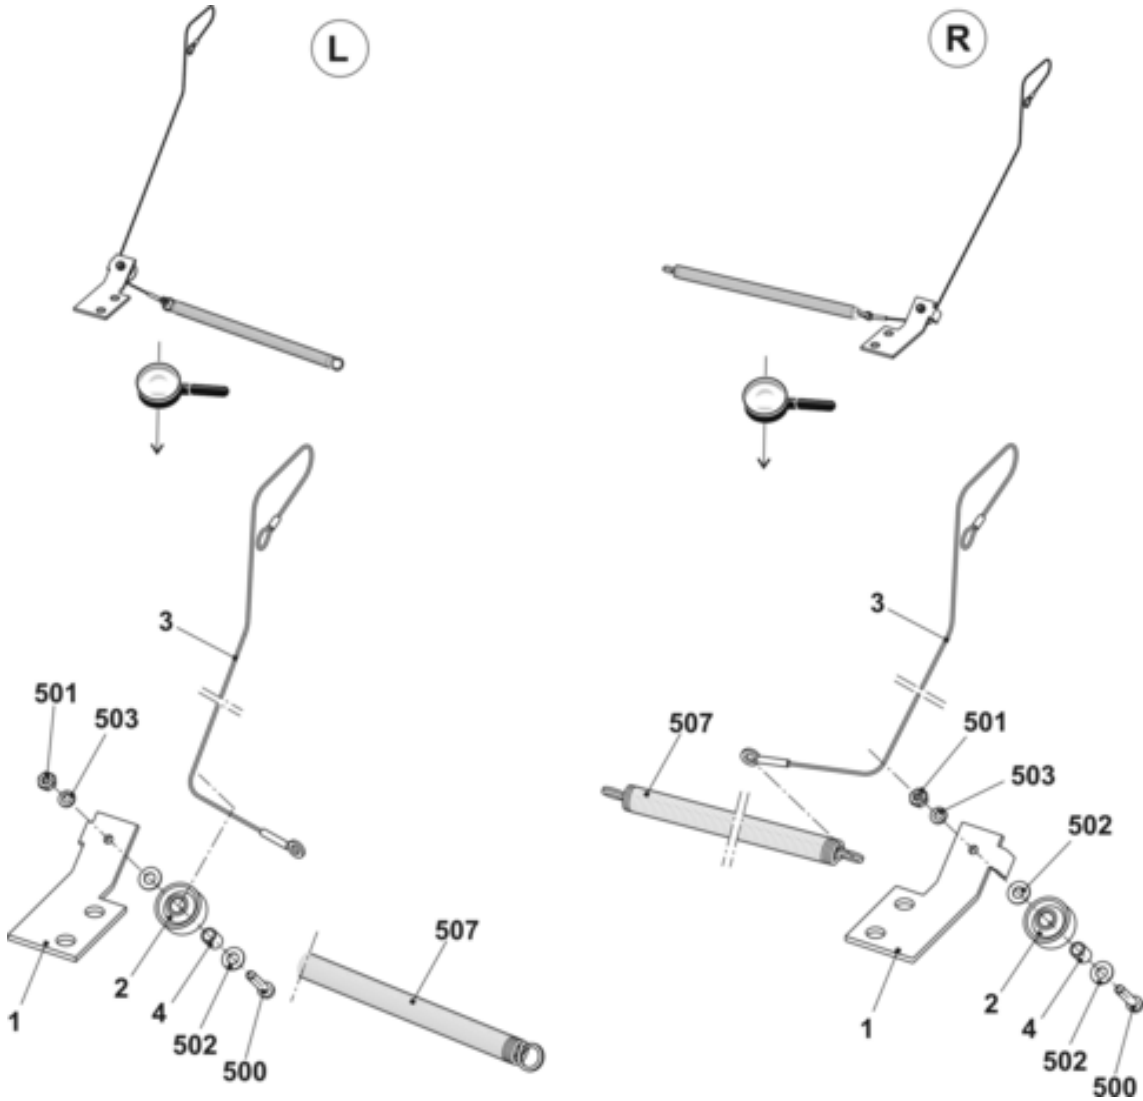

7.6 Yarn brake at clamping/cutting bed


Pos	Designation	Id		Pos	Designation	Id
Σ L	Yarn brake on the left	256 740		Σ R	Yarn brake on the right	256 715
1	Cover on the left	256 739		3	Cover on the right	256 714
2	Leaf spring	256 712		1	Leaf spring	256 712
3	Test clamping plate	256 713		2	Test clamping plate	256 713
500	Cap screw M4X6	023 067		500	Cap screw M4X6	023 067

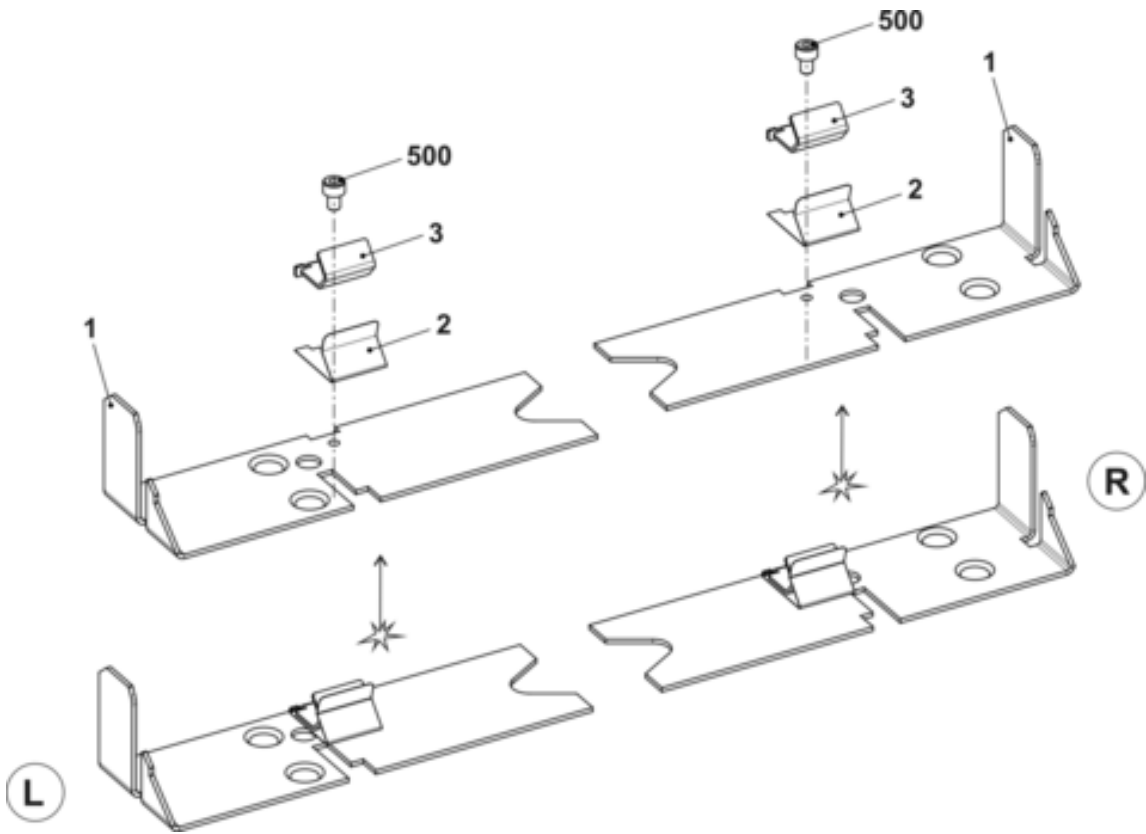

7.6 Yarn brake at clamping/cutting bed


Notes:

8 Comb take-down

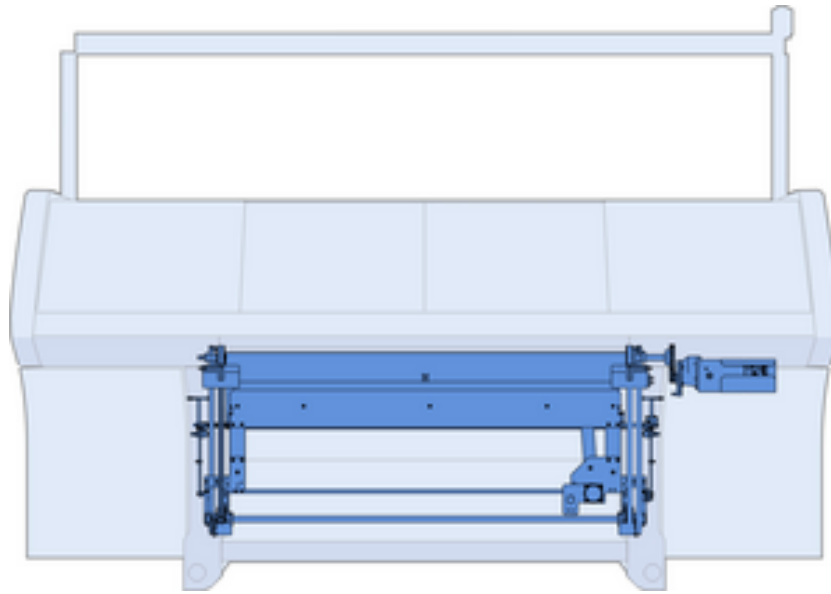


8.1 Comb take-down

Pos	Designation	Id		Pos	Designation	Id
Σ	Comb take-down			3	Remaining parts of comb take-down E3	253 622
1	Comb take-down on the left	256 834			Remaining parts of comb take-down E7 (E3,5)	253 587
2	Comb take-down on the right	256 835			Remaining parts of comb take-down E8 (E4)	253 588

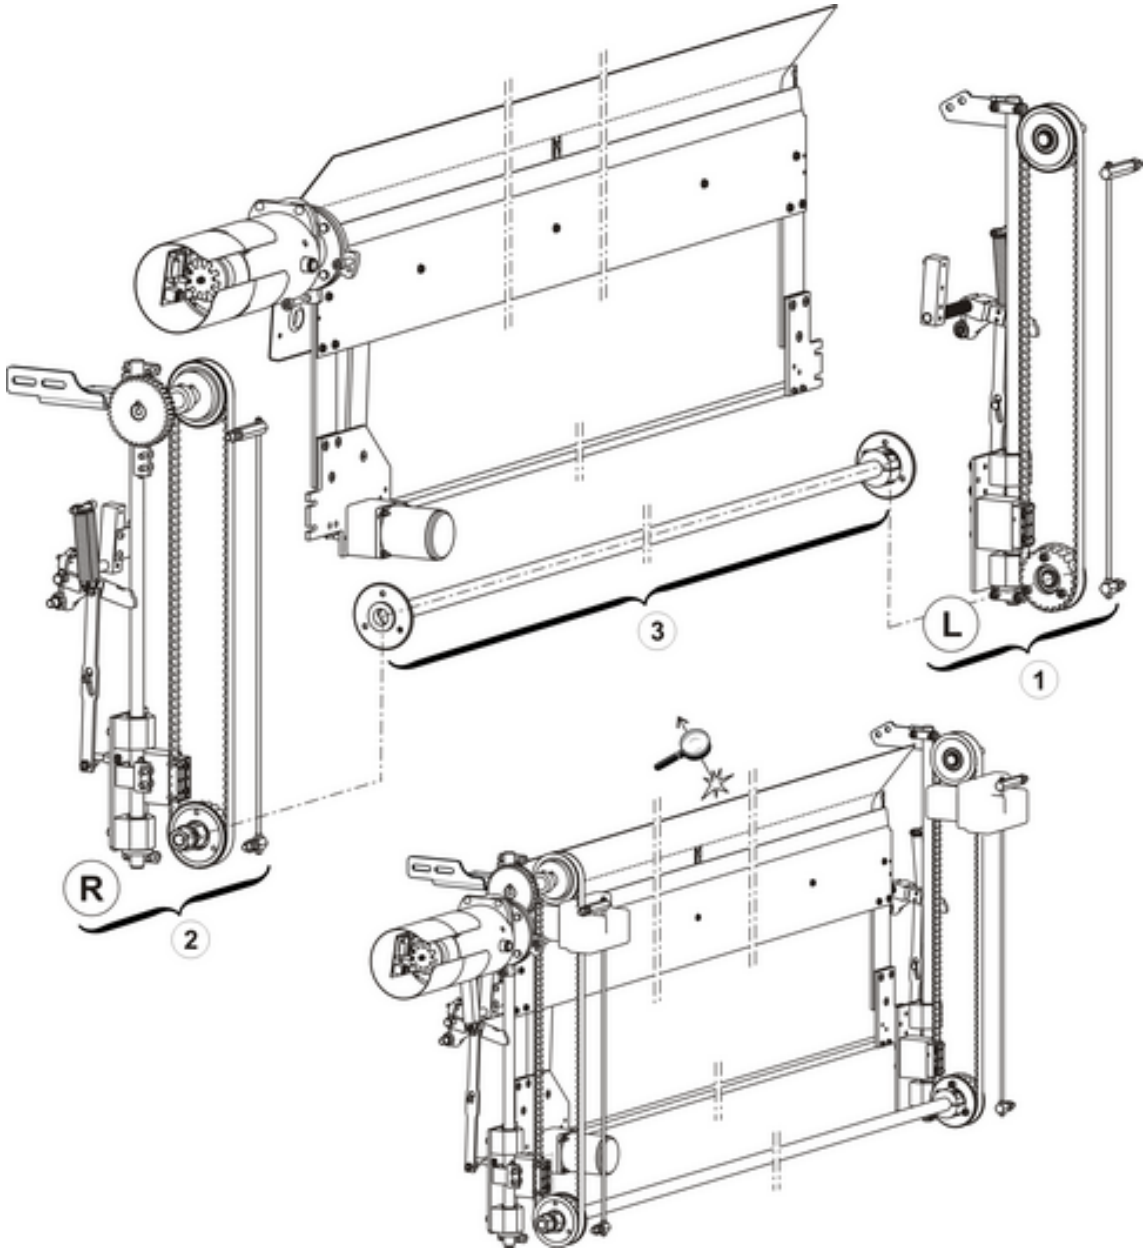

8.2 Comb take-down on the left


Pos	Designation	Id	Pos	Designation	Id
Σ	Comb take-down on the left	256 834			
1	Clamping part	209 379	528	Hexagon nut M8-6	020 838
2	Presser plate	241 967	34	Swivel lever on the left	252 859
3	Bolt	222 152	36	Clamping plate	227 159
5	Toothed belt 16T10/1300	240 065	500	Cap screw M8x25	020 135
6	Eccentric pin	222 320	507	Cap screw M6X65	240 162
11	Bolt	207 689	508	Cap screw M6x45	022 689
14	Toothed lock washer at the bottom complete	211 822	511	Hexagon nut M5-8	023 541
15	Toothed lock washer at the top complete	211 823	512	Hexagon nut M5-6	020 835
17	Stay bolt	222 315	513	Hexagon nut M6-6	020 836
18	Stay bolt	240 056	514	Hexagon nut M8-6	020 838
19	Threaded rod M5	240 057	515	Hexagon nut M16-6	020 845
25	Reflector complete	256 826	517	U-washer 16	020 876
26	Guide bar C35	206 560	524	Locking ring 17x1	023 299
27	Rubber buffer	206 561	530	Tension spring Din2097 15x1.50x70.94	251 614
28	Comb guide on the left	255 425	531	Cap screw M6x12	020 134
28a	Driving bolt	255 427	540*	Countersunk screw M5x10	023 247

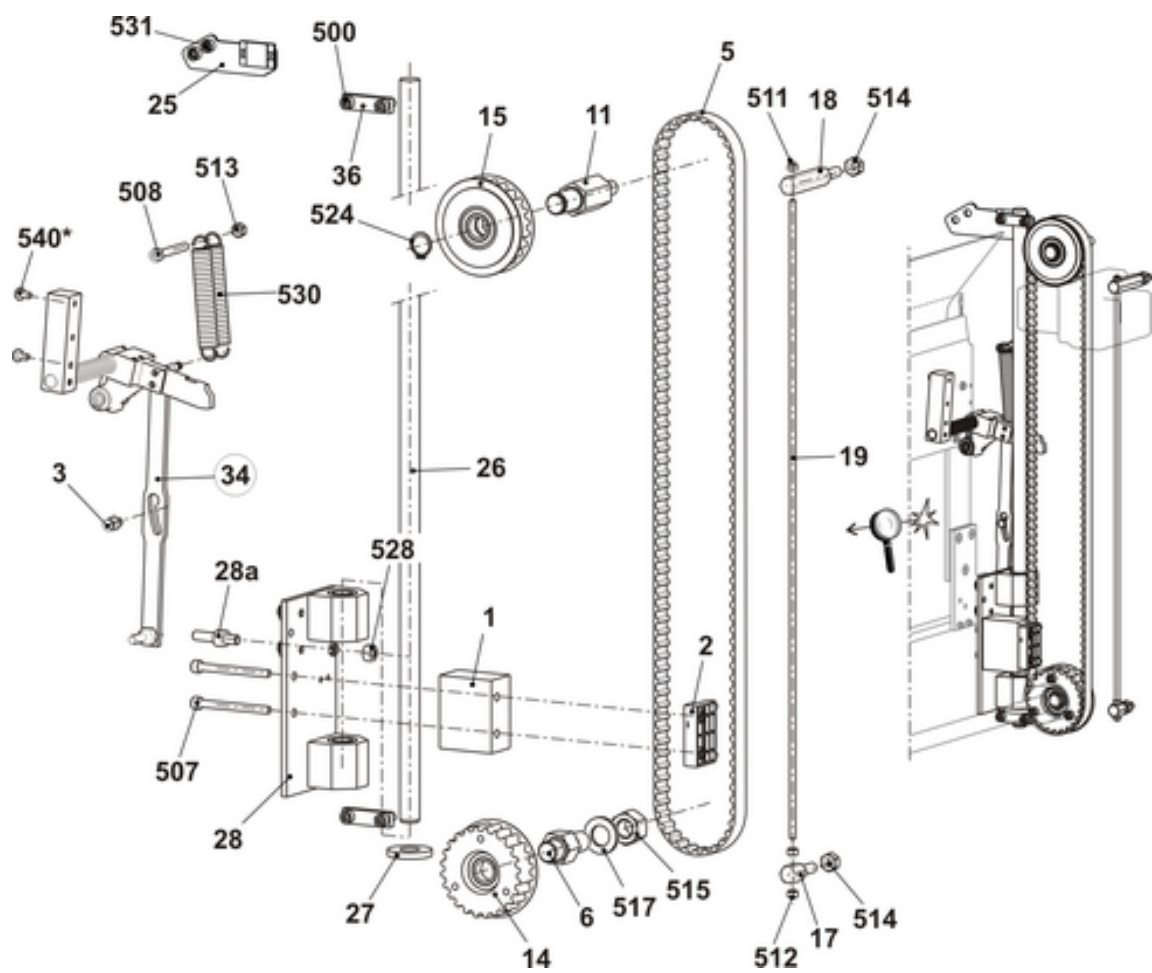

8.3 Comb take-down on the right


8.3 Comb take-down on the right

Pos	Designation	Id	Pos	Designation	Id
Σ	Comb take-down on the right	256 835			
1	Clamping part	209 379	529	Hexagon nut M8-6	020 838
2	Presser plate	241 967	33	Swivel lever on the right	252 858
3	Bolt	222 152	36	Clamping plate	227 159
5	Toothed belt 16T10/1300	240 065	500	Cap screw M8x25	020 135
6	Eccentric pin	222 320	507	Cap screw M6X65	240 162
12	Drive shaft comb complete	214 583	508	Cap screw M6x45	022 689
14	Toothed lock washer at the bottom complete	211 822	511	Hexagon nut M5-8	023 541
17	Stay bolt	222 315	512	Hexagon nut M5-6	020 835
18	Stay bolt	240 056	513	Hexagon nut M6-6	020 836
19	Threaded rod M5	240 057	514	Hexagon nut M8-6	020 838
22	Proximity switch inductive at the top	231 516	515	Hexagon nut M16-6	020 845
23	Proximity switch inductive at the bottom	231 520	517	U-washer 16	020 876
24	Photoelectric sensor complete	256 825	530	Tension spring 15x1.50x70.94	251 614
26	Guide bar C35	206 560	531	Cap screw M6x12	020 134
27	Rubber buffer	206 561	532	U-washer 6	020 872
29	Comb guide on the right	255 424	533*	Shim 0.2x12x27	023 735
29a	Driving bolt	255 427	534*	Shim 0.5x12x27	023 736
29b	Angle	240 112	540*	Countersunk screw M5x10	023 247

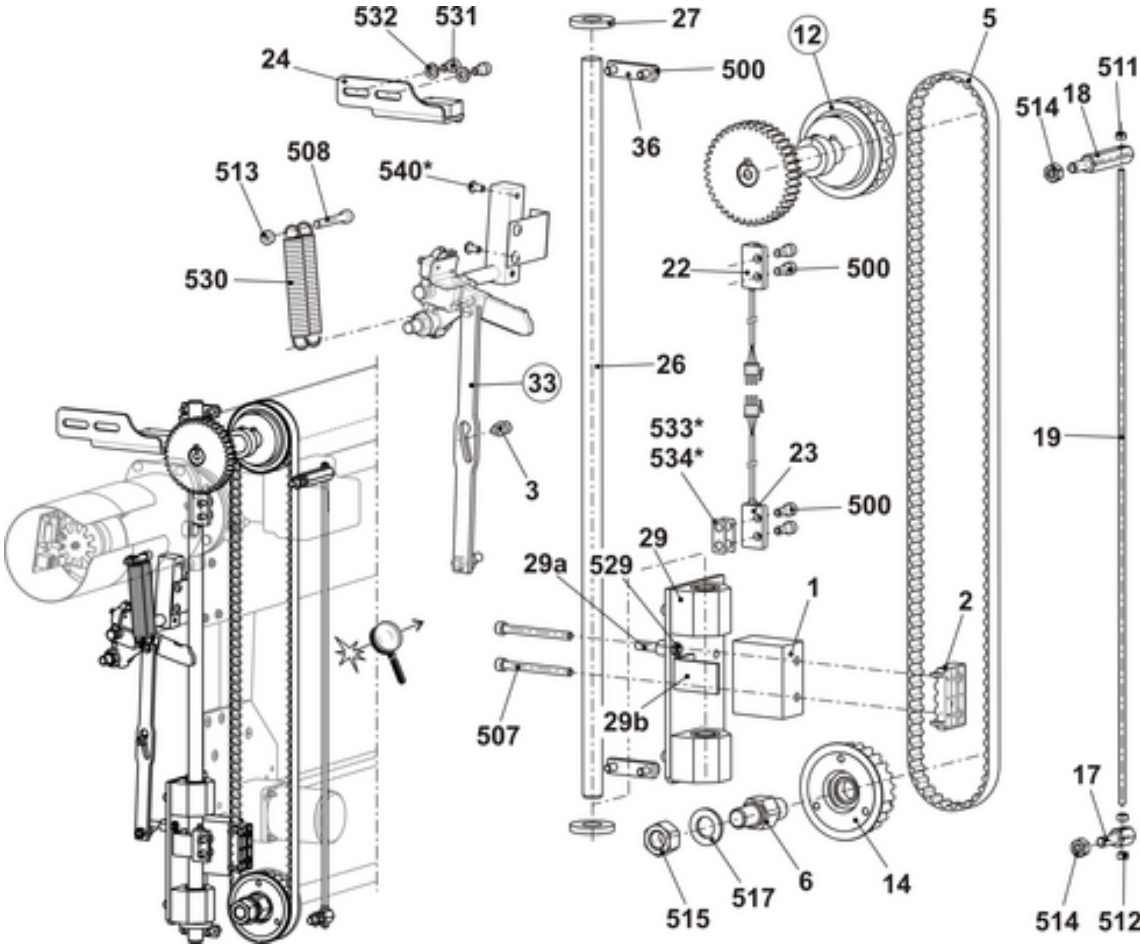

8.3.1 Drive shaft of comb


Pos	Designation	Id		Pos	Designation	Id
Σ	Drive shaft comb complete	214 583				
1	Shaft	213 969		500	Feather key A 6x6x25	023 017
2	Gear wheel Z=40, M=2	213 744		502	Setscrew M6x8	022 684
	Always order position 502 additionally			503	Setscrew M6x12	023 898
3	Toothed belt disc at the top	206 394		504	Set collar	020 938
	Always order position 503 additionally					

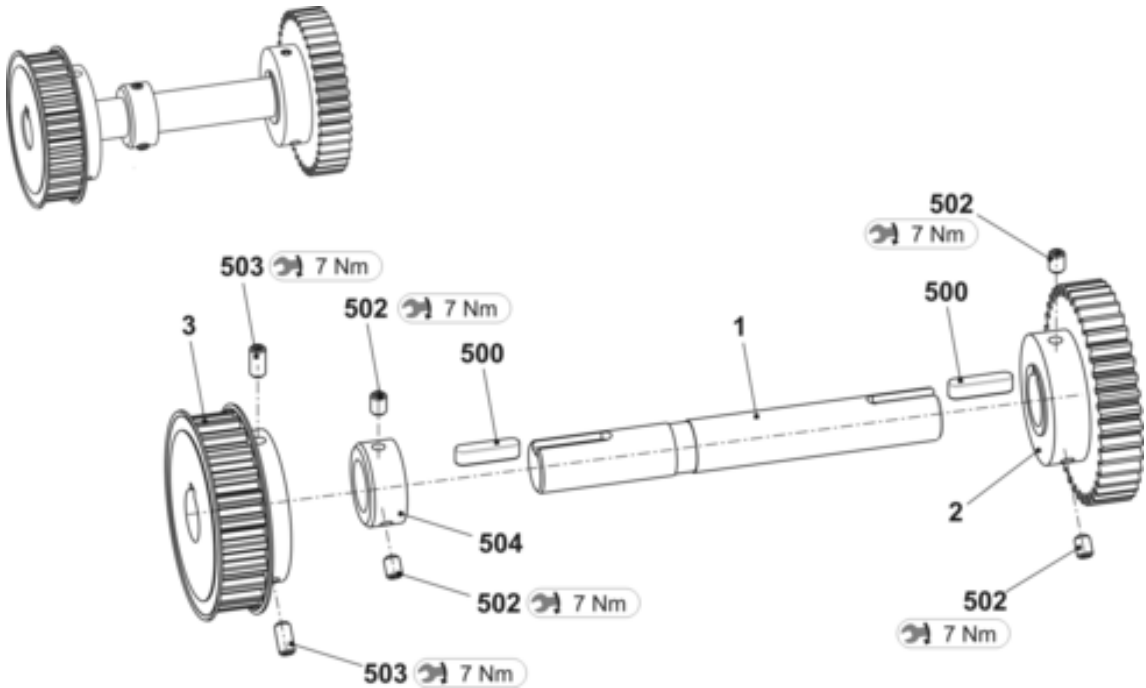

8.3 Comb take-down on the right


8.3.2 Swivel lever comb take-down

Pos	Designation	Id		Pos	Designation	Id
Σ L	Swivel lever on the left	252 859		Σ R	Swivel lever on the right	252 858
1	Support	252 780		1	Support	252 780
2	Shaft	223 994		2	Shaft	238 339
4	Plunger	255 650		3	Microswitch	026 259
5	Swivel lever	239 248		4	Plunger	255 650
6	Bolt	214 053		5	Swivel lever	239 248
7	Eccentric bolt	255 651		6	Bolt	214 053
500	Compression spring 1,4x13,6x93	023 572		7	Angle	224 009
501	Spring dowel sleeve ISO8752-5x20	020 794		8	Angle	238 304
502	Dowel pin 5x22	023 716		9	Eccentric bolt	255 651
504	Shoulder screw M5x29x35	251 618		500	Countersunk screw M5x10	023 247
505	Shoulder screw M5x5.8x6.2	023 365		501	Spring dowel sleeve 5x20	020 794
507	U-washer 10	020 884		502	Dowel pin 5x22	023 716
508	Locking ring	020 950		503	Spring dowel sleeve 5x12	020 793
509	Shoulder screw M5x12x18	020 539		504	Shoulder screw M5x29x35	251 618
511	Hexagon nut M8-6	020 838		505	Shoulder screw M5x5.8x6.2	023 365
				506	Cap screw M4x8	022 501
				507	U-washer 10	020 884
				508	Locking ring 10x1	020 950
				509	Shoulder screw M5x12x18	020 539
				510	Shoulder screw M3x16	022 583
				511	U-washer 3	020 877
				513	Hexagon nut M8-6	020 838

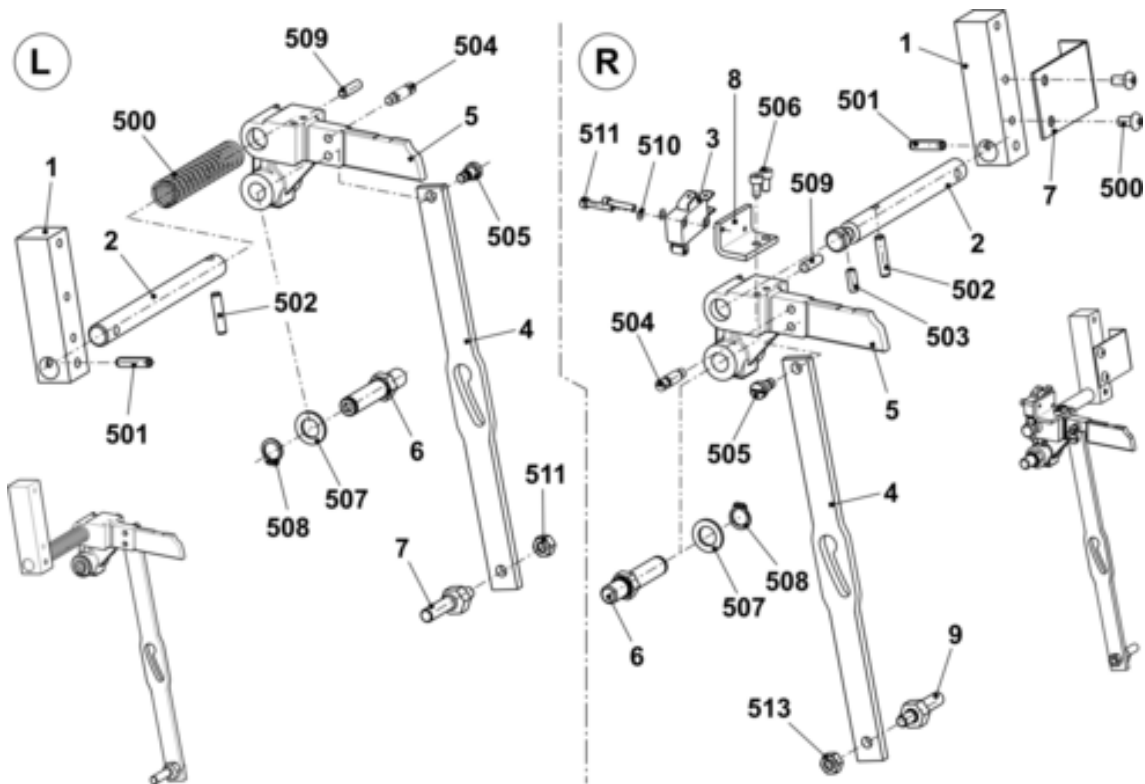

8.4 Comb take-down in the middle


Pos	Designation	Id		Pos	Designation	Id
Σ	Comb take-down in the middle			31	Comb unit	
	E3	253 622			E3	243 626
	E7 (E3,5)	253 587			E3,5+7 (E3,5)	241 531
	E8 (E4)	253 588			E4+8 (E4)	241 532
8	Flange	207 695		32	Motor take-down unit complete	253 803
9	Shaft long	213 968		35	Guide plate	252 828
500	Cap screw M6x16	020 135		502	Cap screw M8x25	020 142
501	Countersunk screw M5x10	023 247		525	Serrated lock washer J6.4	022 489

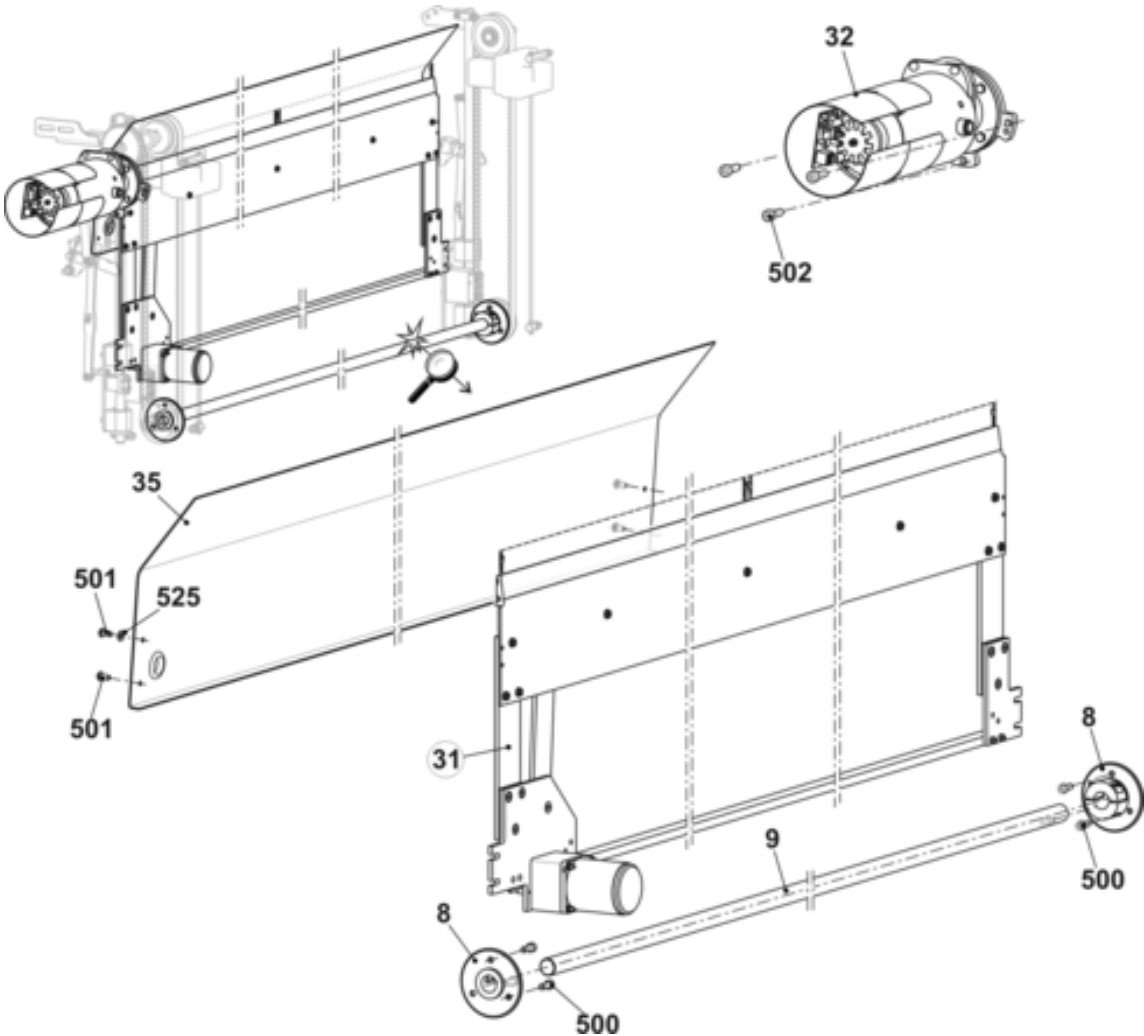

8.4 Comb take-down in the middle


8.4.1 Comb unit E3 + E3.5 + E4

Pos	Designation	ID No.	Pos	Designation	ID No.
	Comb unit				
	E3	243 626	7	Collar bolt complete	211 036
	E7 (E3,5)	241 531	8	Cross slider	213 429
	E8 (E4)	241 532	9	Cover rail	222 866
1	Hook bed		10	Plunger	205 678
	E3	221 190	11	Switch lever complete	240 060
	E7	221 194	15	Stabilizator	215 253
	E8	221 195	500	Cap screw M4x30	023 290
2	Closer E3-8	230 105	502	Countersunk head screw M5x12	023 340
3	Body E3-8	230 093	504	Hexagon nut M4-8	023 046
4	Cover rail E3-14	213 428	505	Hexagon nut M5-04	020 854
5	Hook slider		508	U-washer 5	020 871
	E3	220 992	510	Cap screw M4x35	023 550
	E3,5	220 993	511	Circlip	022 774
	E4	220 994			

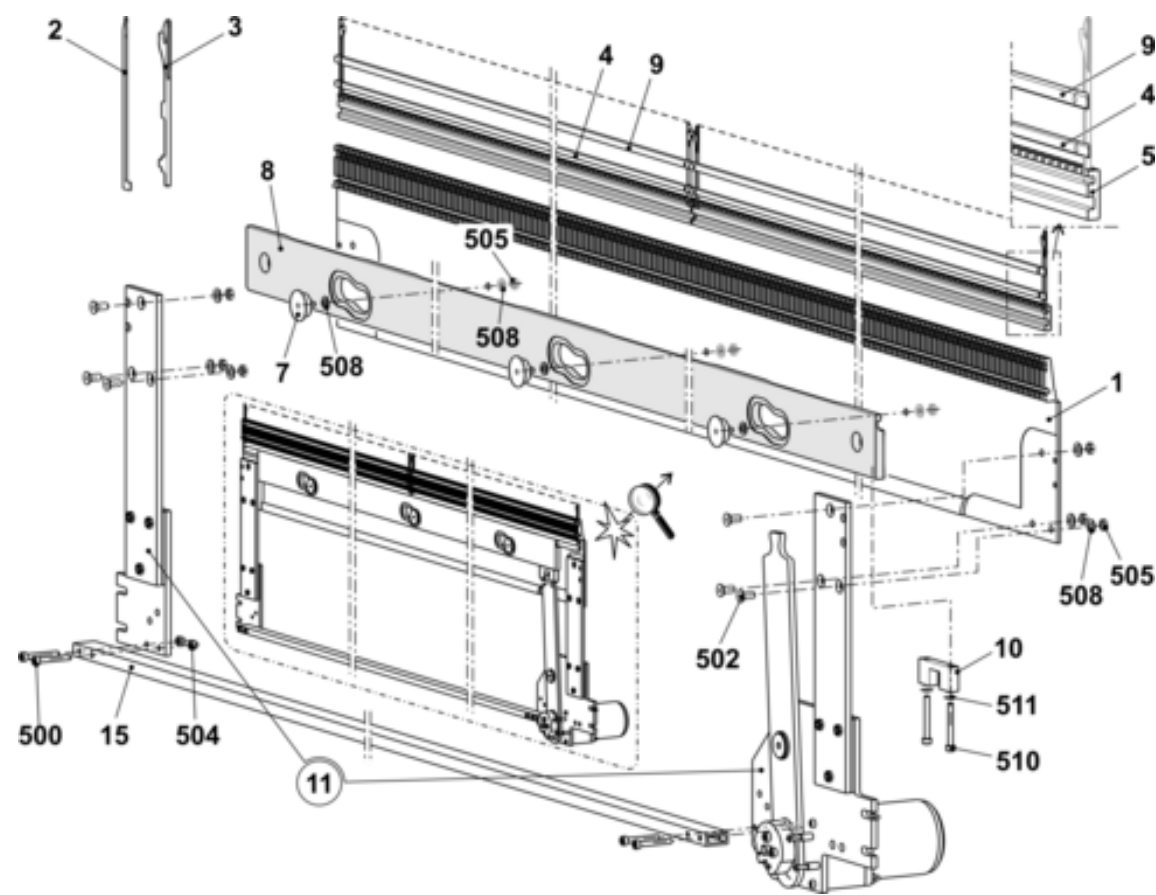

8.4.2 Switch lever comb take-down


Pos	Designation	Id		Pos	Designation	Id
Σ	Switch lever complete	235 690		500	Cap screw M3x25	023 093
1	Screwing plate on the right	232 968		501	Cap screw M4x20	023 171
2	Screwing plate on the left	240 059		502	Cap screw M4x16	023 123
3	Lever	215 228		504	Countersunk screw M6x12	023 435
4	Bearing bolt	215 675		505	Countersunk screw M5x16	023 417
5	Eccentric	205 681		506	Adjusting washer 16x22x2	023 449
6	Tension lifter	215 287		507	Shim ring 4x8x1	023 260
13	Intermediate plate	213 980		510	Hexagon nut M5	020 854
14	Retaining plate	218 977		511	Collar bearing 10x16x22	022 841
15	Motor comb hook with 2 phases	244 635		515	Threaded spacer	210 488

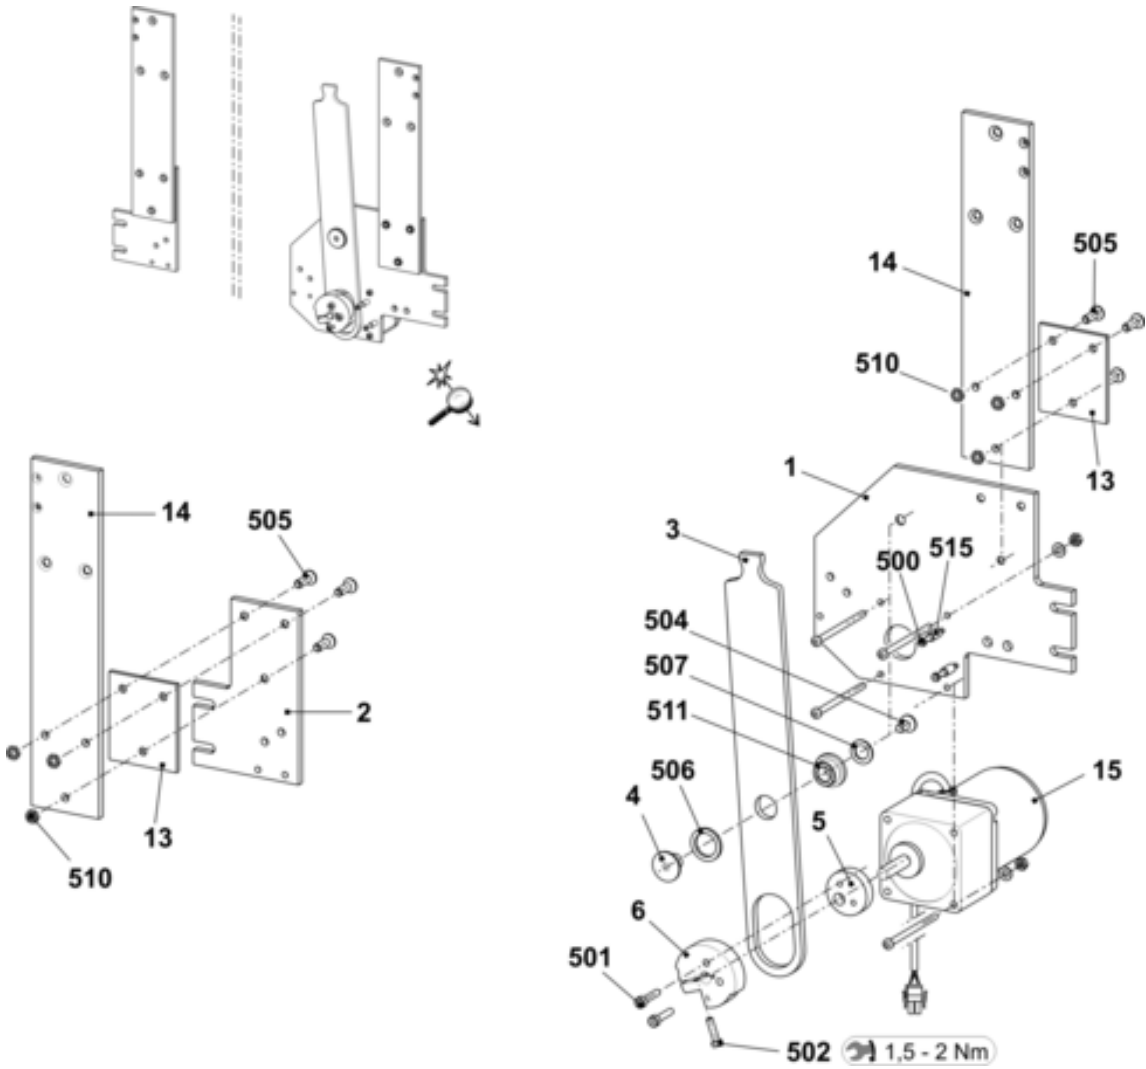

8.4 Comb take-down in the middle

Notes:


9 Yarn delivery device

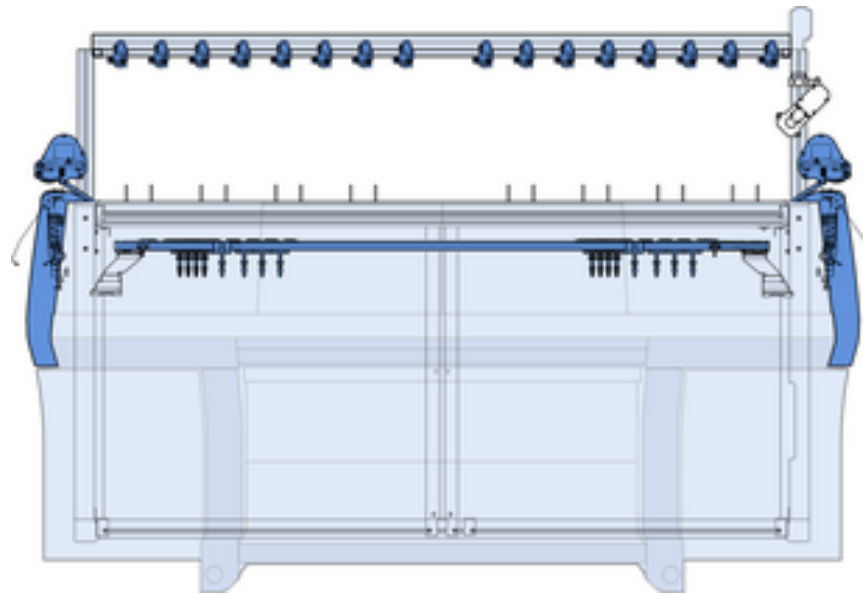

9.1 Yarn guide system with 24 FKE


9.1 Yarn guide system with 24 FKE

Pos	Designation	ID No.		Pos	Designation	ID No.
Σ	Yarn guide system 24 FKE 50"	241 549				
1	Support	243 110		10	Support on the right	243 603
2	Yarn control device (FKE)	237 124		11	Sliding block	228 851
3	Connection cable FKE 50" ECO	254 056		501	Self-locking screw M6x12	023 415
4	Yarn guide bar	240 324		502	Screw M6x20	023 721
5	Support on the right	251 629		503	Ribbed lock washer M6-10	023 414
6	Support on the left	251 630		505	U-washer 6	022 431
7	Support	239 295		506	Pan-head screw M8x16	023 113
8	Yarn guide bracket complete	241 581		507	Square nut M8	023 269
9	Support on the left	243 602	508	Serrated lock washer	023 388	

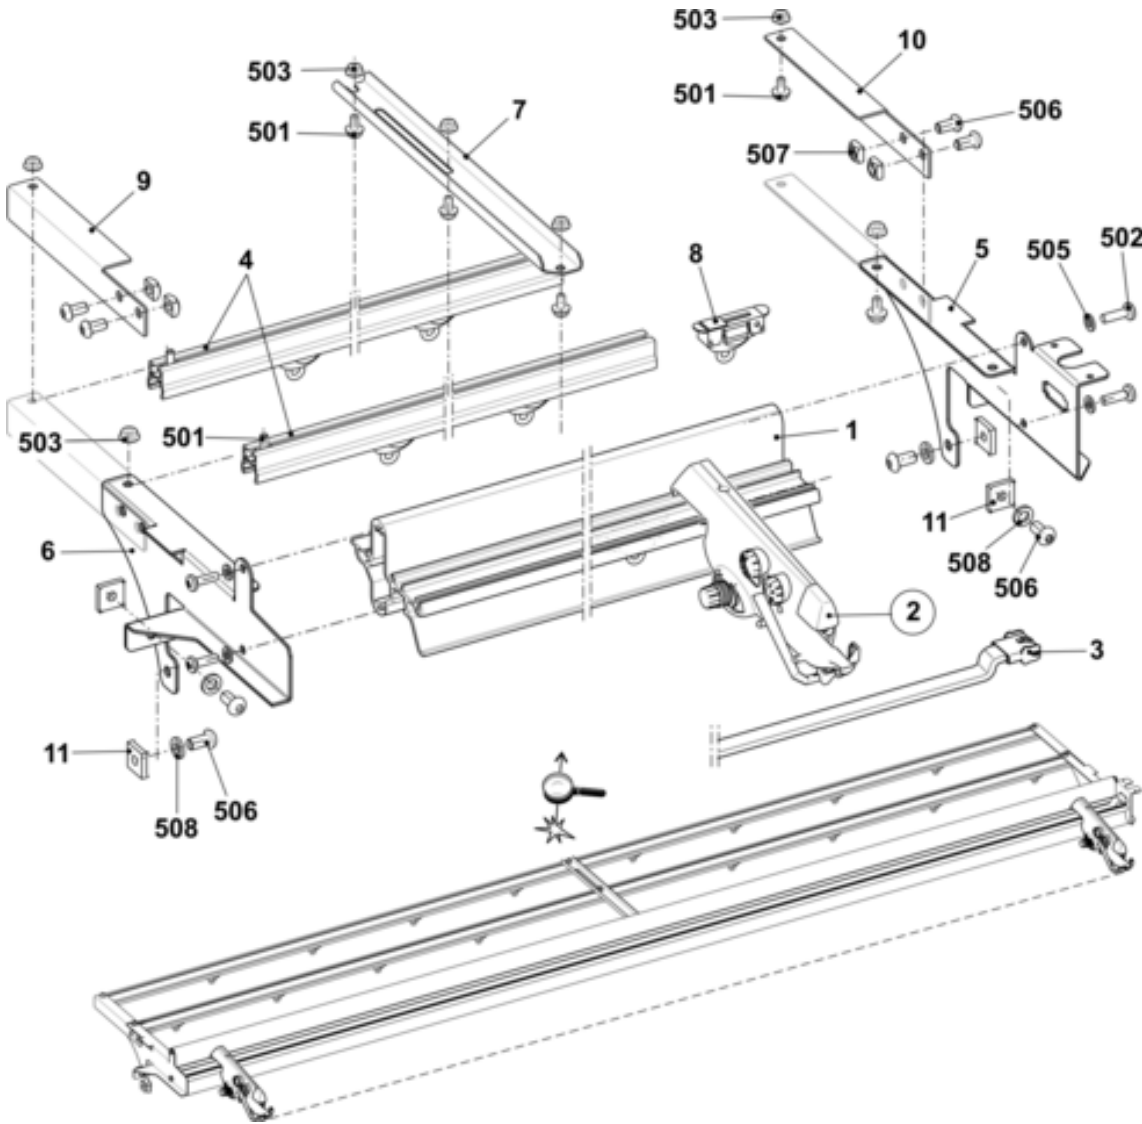

9.2 Yarn guide on the left E3 | E3,5 | E4


Pos	Designation	Id	Pos	Designation	Id
Σ	Safety door on the left E3 E4 E5	241 271	13	Yarn brake not adjustable	244 356
5	Yarn brake complete	244 347	14	Clamping bow	244 409
6	Shaft	241 318	15	Ground cable	244 404
7	Yarn tensioner on the left complete E3 - E5	241 363	501	Ceramic eyelet	240 640
8	Cover	240 783	502	Compression spring 0.90x5.40x13.60	241 360
9	Wire bow on the left	241 370	504	U-washer	022 537
10	Yarn deflector	242 011	510	Screw KB60 x 20	237 682
11	Connection cable yarn tensioner	240 808	512	Flat connector 2x45° M6	243 117

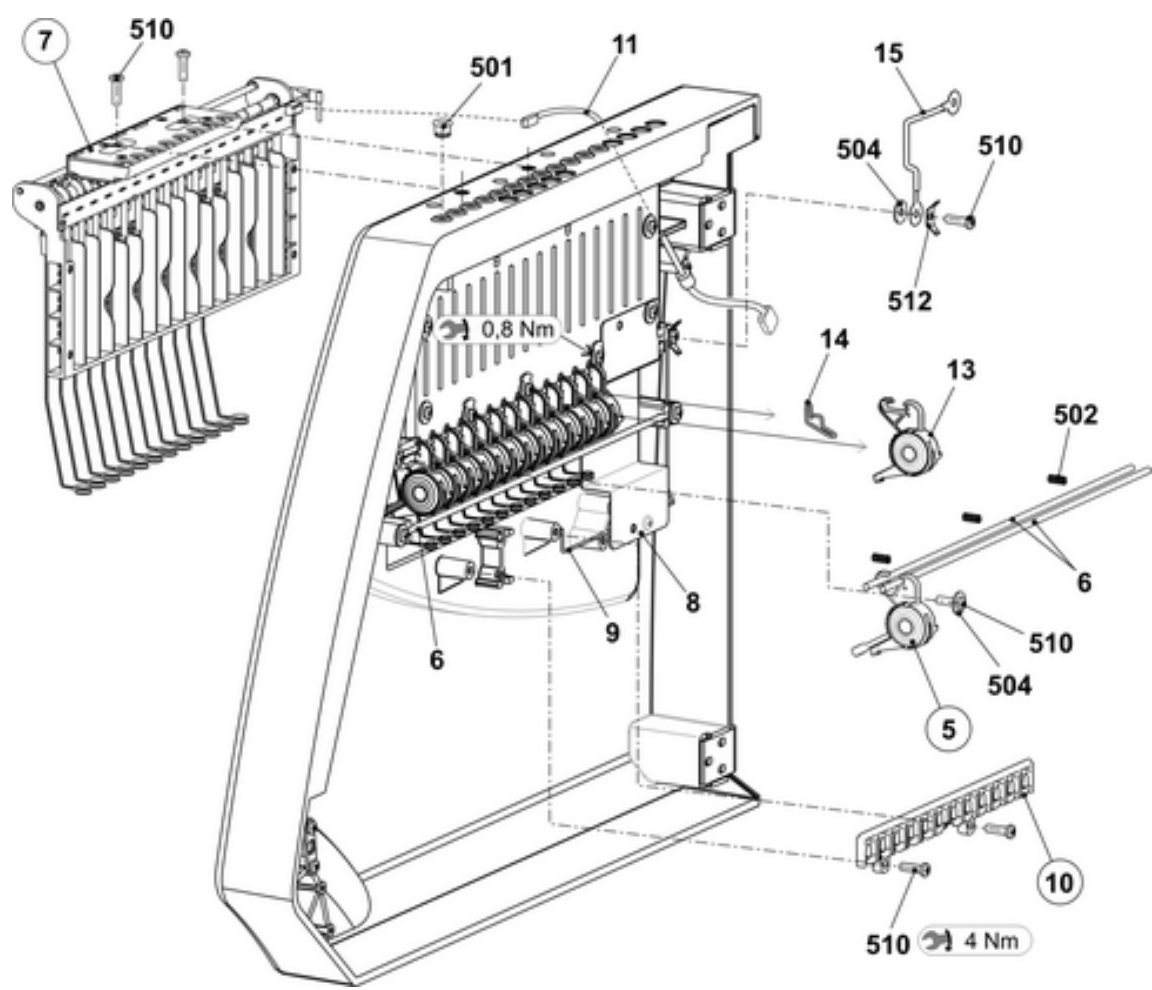

9.2 Yarn guide on the left E3 | E3,5 | E4


9.2.1 Yarn tensioner on the left E3 | E3,5 | E4

Pos	Designation	Id		Pos	Designation	Id
Σ	Yarn tensioner on the left E3 - E5	241 363				
1	Card yarn tensioner 16-fold on the left	241 345		8	Grounding plate of tension axle	243 121
2	Tension axle on the left complete E3 – E8	241 366		9	Ground cable yarn tensioner	243 105
3	Housing	241 367		500	Screw KB 30x8	236 228
4	Slider	241 694		501	Circlip	021 022
5	Stop point	241 368		502	Tension spring 5.05x0.55x53 (E3-E5)	023 502
6	Border	242 268		503	Circlip	021 020
7	Spacer	242 048		504	Countersunk screw M4x12	241 914

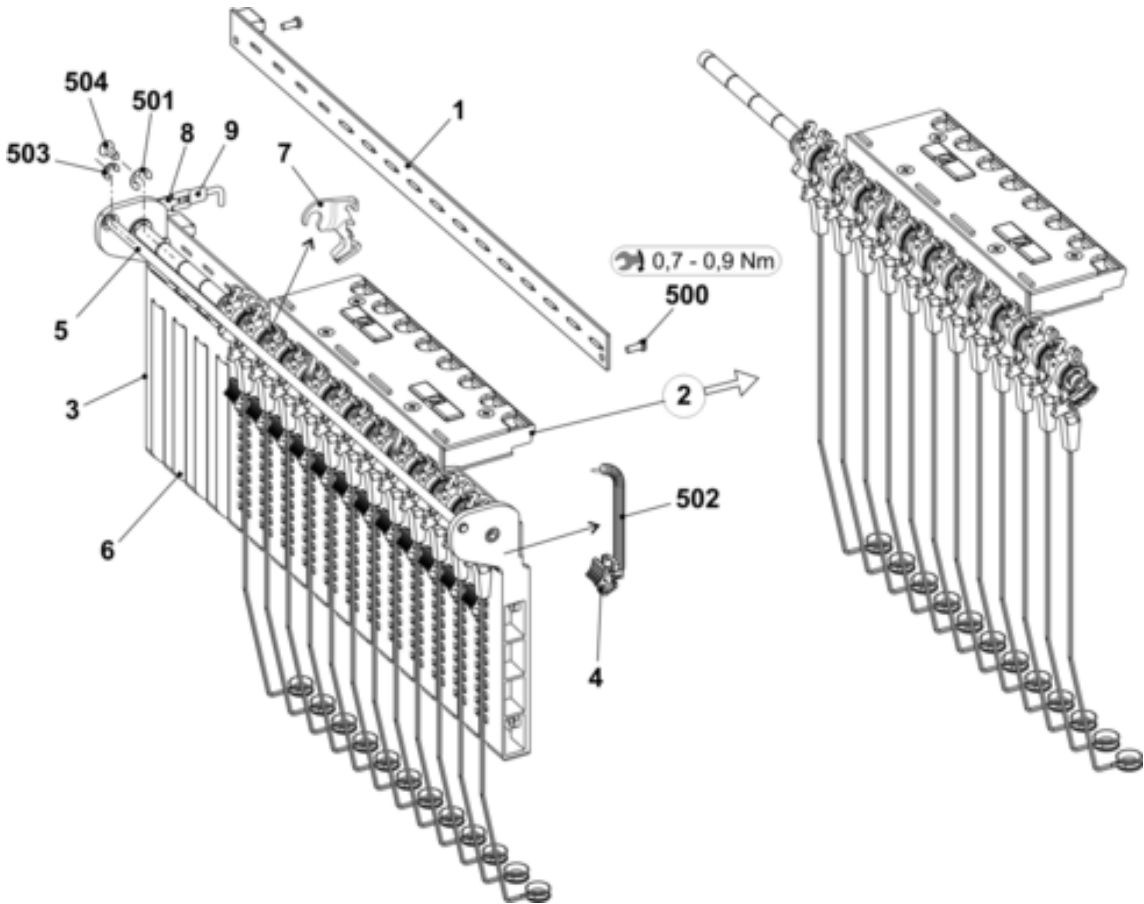


9.2.2 Right tension axle E3 + E3,5 + E4

Pos	Designation	ID No.		Pos	Designation	ID No.
Σ	Tension axle on the left complete			5	Thread clamp AKF	238 695
	E3 – E8	241 366		51	Housing AKF	238 689
1	Axle	243 107		52	Cover AKF	237 926
2	Tension arm pre-assembled E3 – E8	242 770		53	Sheet metal at the bottom (housing AKF)	240 719
6	Wire bow	238 694		54	Lever AKF	238 692
500	Adjusting washer4x8x0 8x14x0,5	023 501		55	Thrust piece AKF	238 690
501	Circlip	021 022		56	Slider AKF	238 691
502	Grooved pin 2x6	243 172		57	Wire bow	238 694
				58	Wire	237 940
				551	Screw KB 35x12	237 681
				552	Screw KB 40x8	236 227
				553	Compression spring 0.30x4.50x18.50	241 437
				554	Grooved pin 2x6	243 172

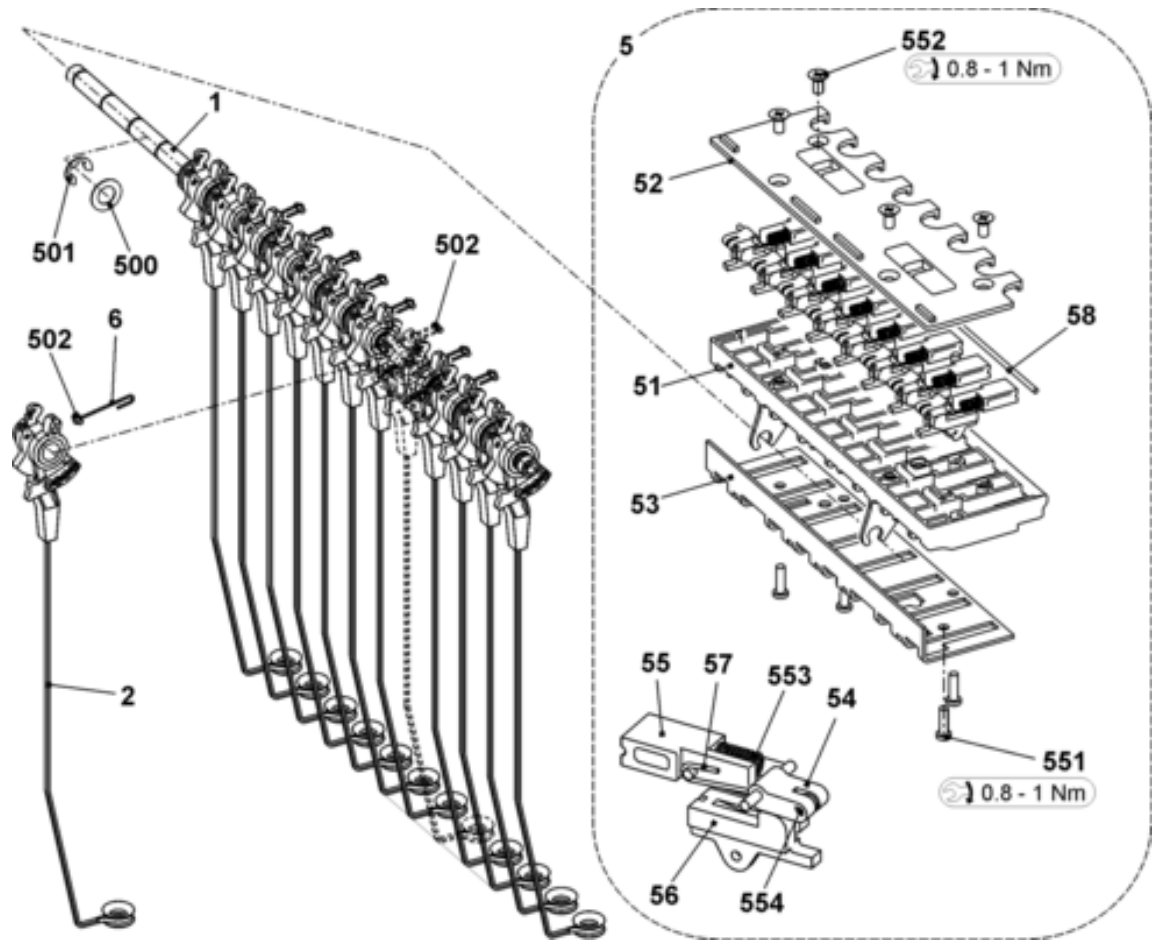


9.2.3 Yarn brake and yarn deflector

Pos	Designation	Id		Pos	Designation	Id
A	Yarn brake complete	244 347		B	Yarn deflector	242 011
1	Support	240 607		1	Support yarn deflector	242 009
2	Slider	240 606		2	Ceramic eyelet open	240 733
3	Brake disk	244 355				
4	Ceramic eyelet open	243 778				
500	Compression spring 0.65x20.15x14.80	241 361				
501	O-ring 11x2	241 434				

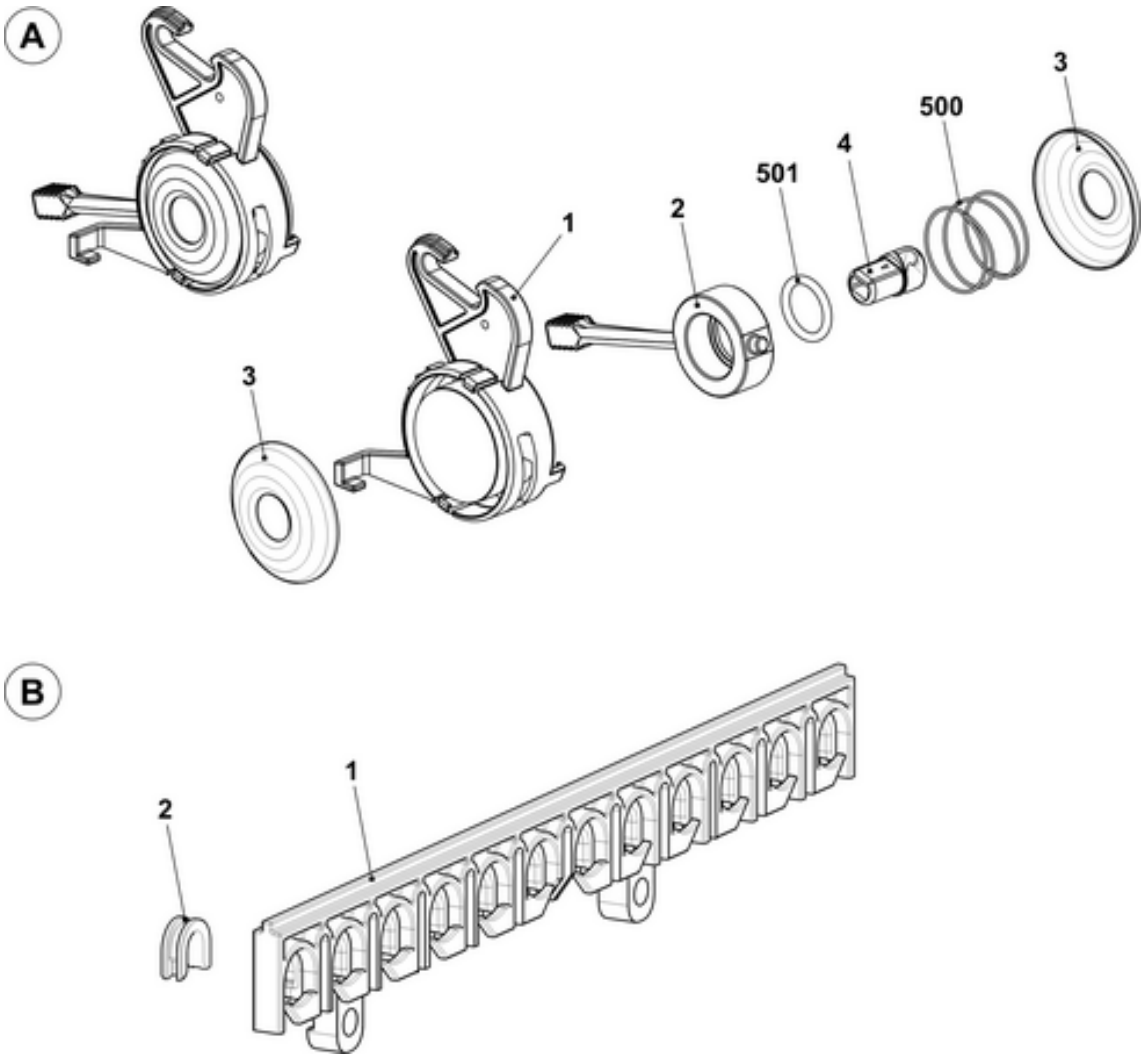

9.3 Yarn guide on the right E3 | E3,5 | E4


Pos	Designation	Id	Pos	Designation	Id
Σ	Right safety cover				
	E3 E4 E5	241 274	13	Yarn brake not adjustable	244 356
5	Yarn brake complete	244 347	14	Clamping bow	244 409
6	Shaft	241 318	15	Ground cable	244 404
7	Yarn tensioner on the right complete E3 - E5	241 382	501	Ceramic eyelet	240 640
8	Cover	240 783	502	Compression spring 0.90x5.40x13.60	241 360
9	Wire bow on the right	241 369	504	U-washer	022 537
10	Yarn deflector	242 011	510	Screw KB60 x 20	237 682
11	Connection cable yarn tensioner	240 808	512	Flat connector 2x45° M6	243 117

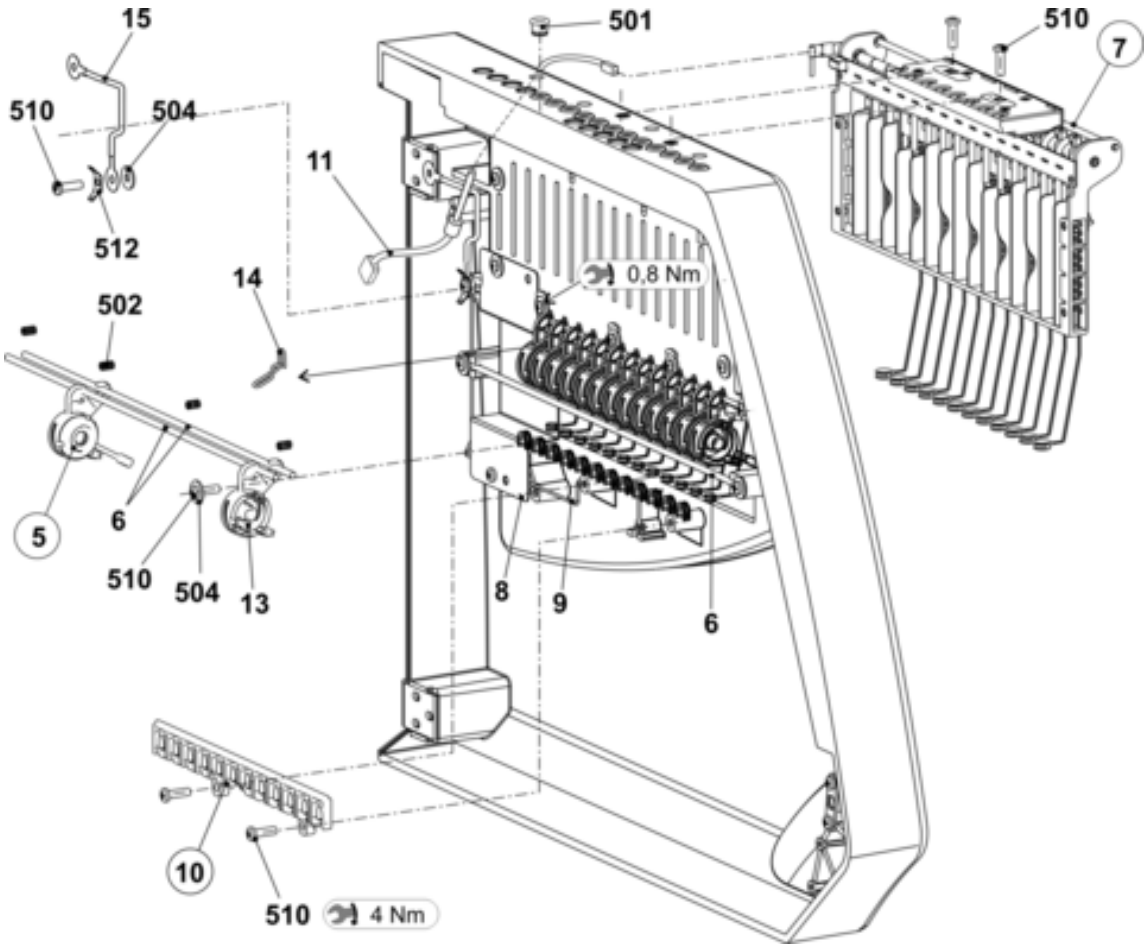

9.3 Yarn guide on the right E3 | E3,5 | E4


9.3.1 Yarn tensioners on the right E3 | E3,5 | E4

Pos	Designation	Id		Pos	Designation	Id
Σ	Yarn tensioner on the right E3 - E5	241 382				
1	Card yarn tensioner 16-fold on the right	241 346		8	Grounding plate of tension axle	243 121
2	Tension axle on the right complete E3 – E8	241 379		9	Ground cable yarn tensioner	243 105
3	Housing	241 367		500	Screw KB 30x8	236 228
4	Slider	241 694		501	Circlip	021 022
5	Stop point	241 368		502	Tension spring 5.05x0.55x53 (E3-E5)	023 502
6	Border	242 268		503	Circlip	021 020
7	Spacer	242 048		504	Countersunk screw M4x12	241 914

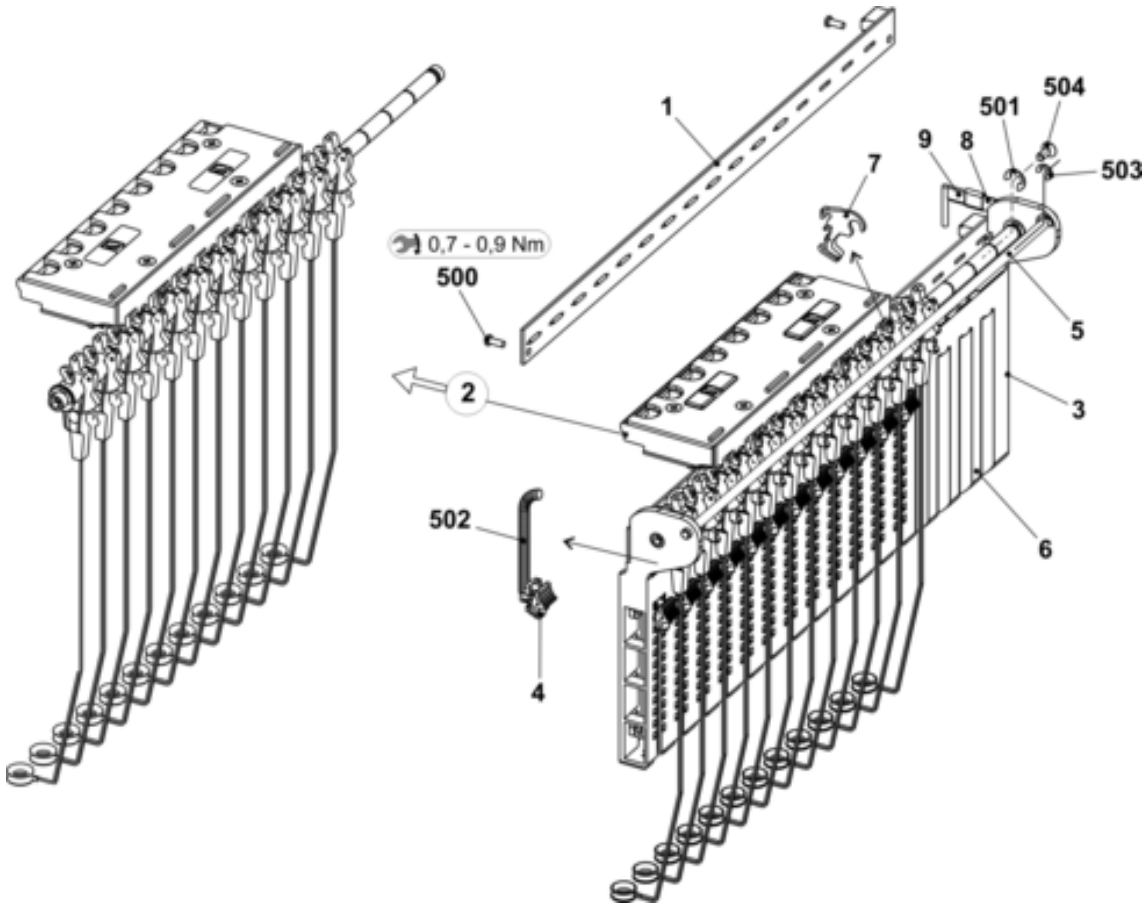

9.3.2 Right tension axle E3 | E3,5 | E4


Pos	Designation	Id		Pos	Designation	Id
Σ	Tension axle on the right complete			5	Thread clamp AKF	238 695
	E3 – E8	241 379		51	Housing AKF	238 689
1	Axle	243 107		52	Cover AKF	237 926
2	Tension arm pre-assembled E3 - E8	242 770		53	Sheet metal at the bottom (housing AKF)	240 719
6	Wire bow	238 694		54	Lever AKF	238 692
500	Shim ring 8x14x0.5	023 501		55	Pressure peace AKF	238 690
501	Circlip	021 022		56	Slider AKF	238 691
502	Grooved pin 2x6	243 172		57	Wire bow	238 694
				58	Wire	237 940
				551	Screw KB 35x12	237 681
				552	Screw KB 40x8	236 227
				553	Compression spring 0.30x4.50x18.50	241 437
				554	Grooved pin 2x6	243 172

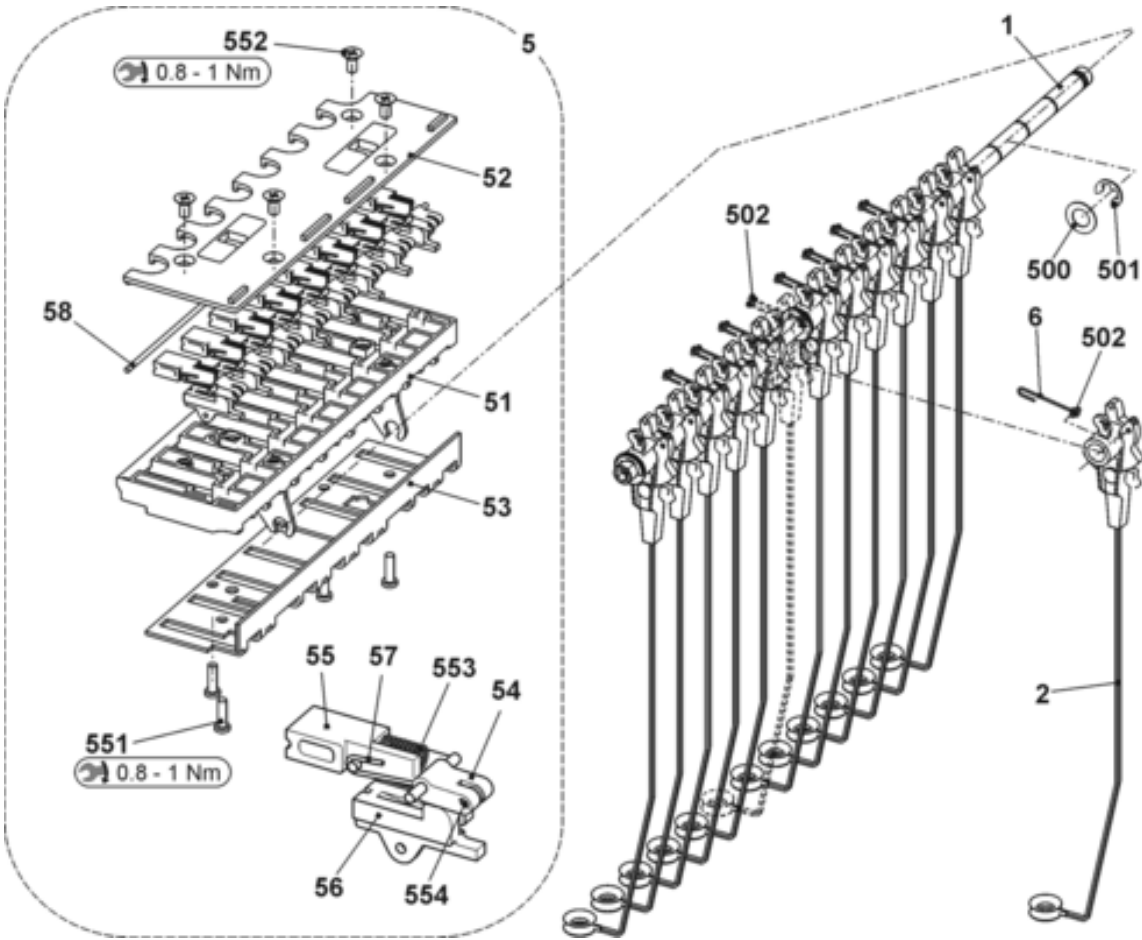

9.4 Bobbin board


9.4 Bobbin board

Pos	Designation	Id	Pos	Designation	Id
Σ	Table complete 50"	240 241			
1	Table	251 244	18	Positioning pin	204 819
4	Support element	228 594	24	Energy chain display 38 links	253 888
10	Magnet switch protective hood	219 983	31	Cable USB extension	253 706
11	Magnet switch protective hood	220 159	508	Countersunk screw M3x8	023 251
13	Guide rail at the top complete	257 485	520	U-washer	020 901
17	Lamp at the top complete	222 509	20*	Support of left feed wheel	250 966
	17a	Lamp 230 V 50/60 Hz	21*	Support of right feed wheel	250 967
	17b	Clamping bow	22*	Sliding block	228 851
	17c	Cellular caoutchouc 40x20	520*	Countersunk screw M8x16	023 113
	17d	Lamp support	521*	Countersunk screw M8x18	251 331

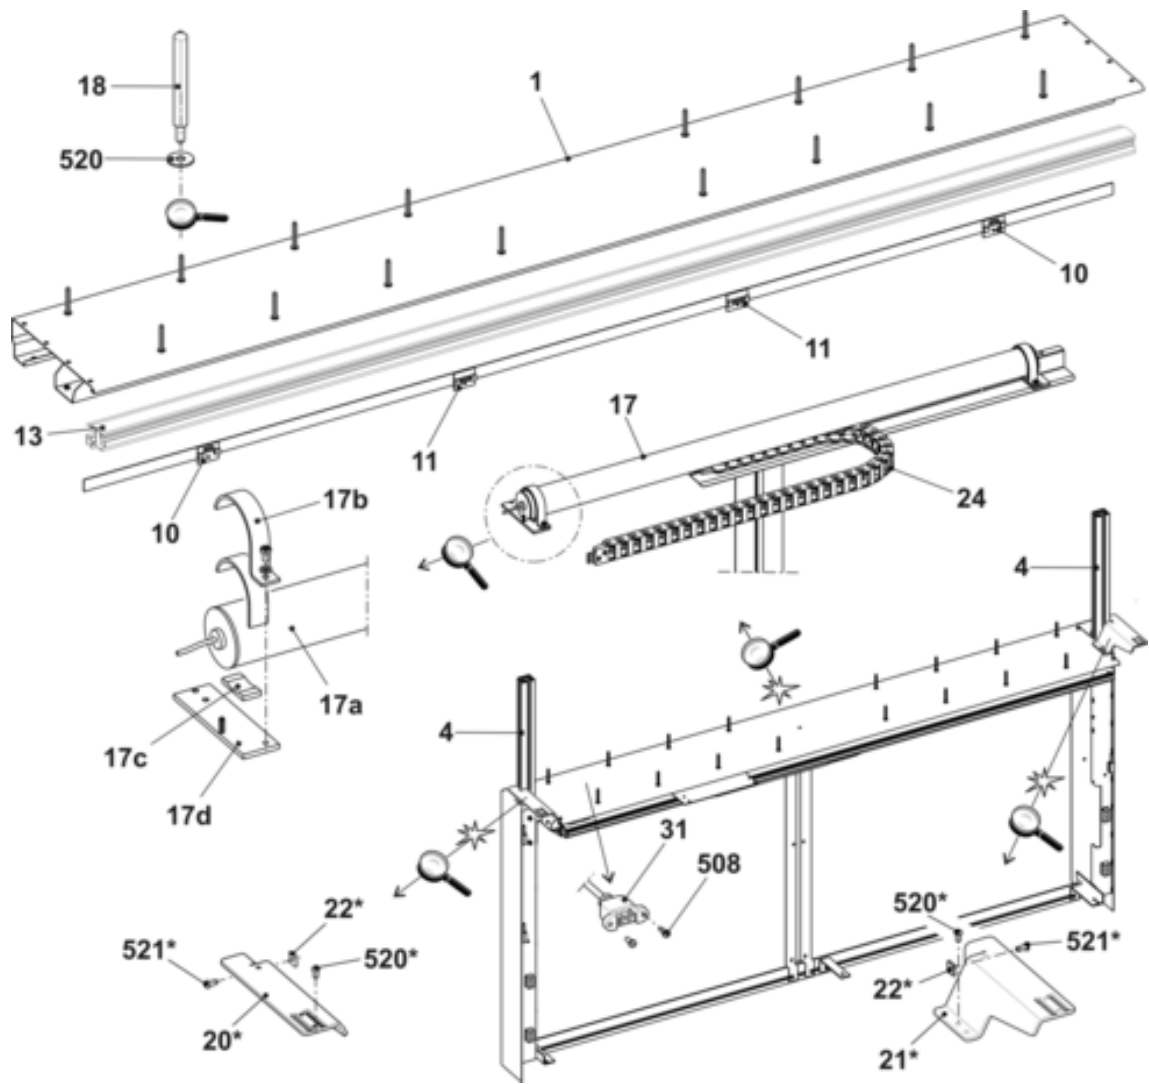


9.5 Yarn carrier and guide rails

Pos	Designation	Id	Pos	Designation	Id
Σ	Yarn guide complete E3 E4	215 663			
1	YC bow 1+8 complete E3-4	216 266	6	Limiter on the right	244 098
	1a Yarn guide star	202 146	7	Slider with eyelet	230 709
2	YC bow 2+7 complete E3-4	216 267	9*	Yarn carrier bar 50"	242 959
3	YC bow 3+6 complete E3-4	216 268	10	YC carriage complete	241 887
4	YC bow 4+5 complete E3-4	216 269	13	Shim 0.03x11x80	213 035
5	Limiter on the left	244 099	500	Hexagonal screw M5x10	020 351

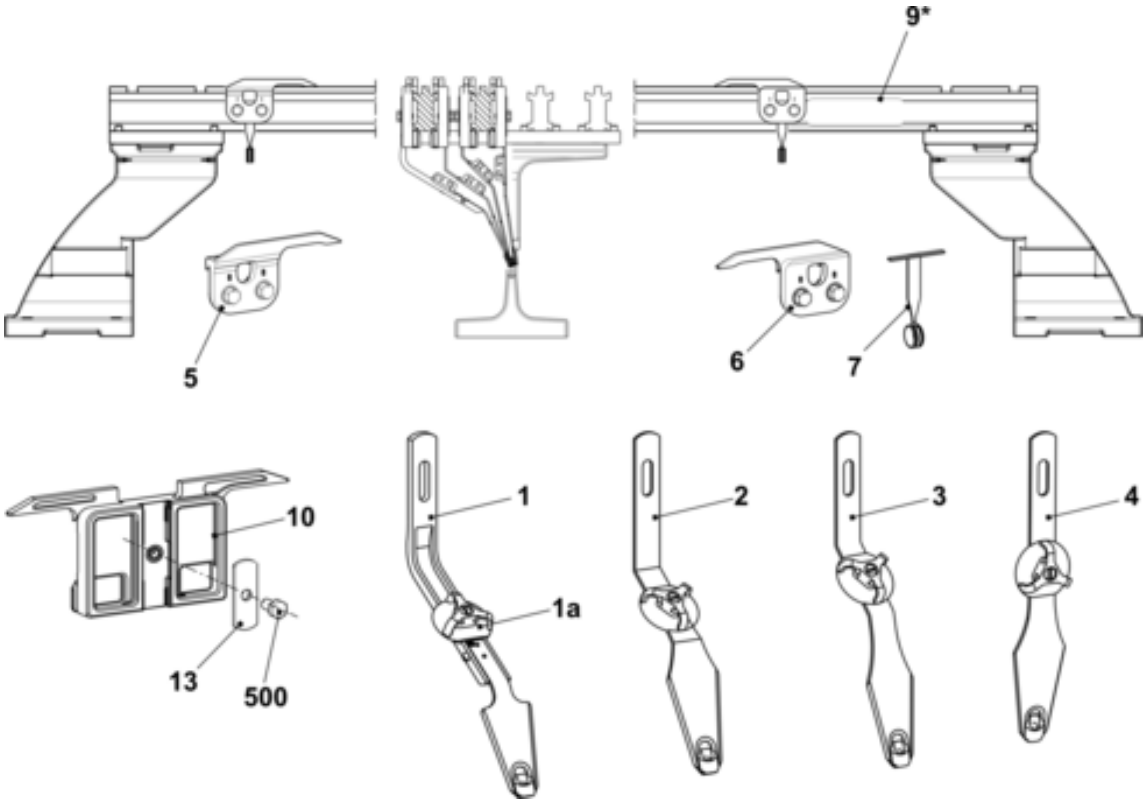


9.6 Complete yarn carriers

Pos	Designation	Track	Id		Pos	Designation	Track	Id
1	YC carriage complete E3-4	1+8	217 486		3	YC carriage complete E3-4	3+6	217 488
2	YC carriage complete E3-4	2+7	217 487		4	YC carriage complete E3-4	4+5	217 489

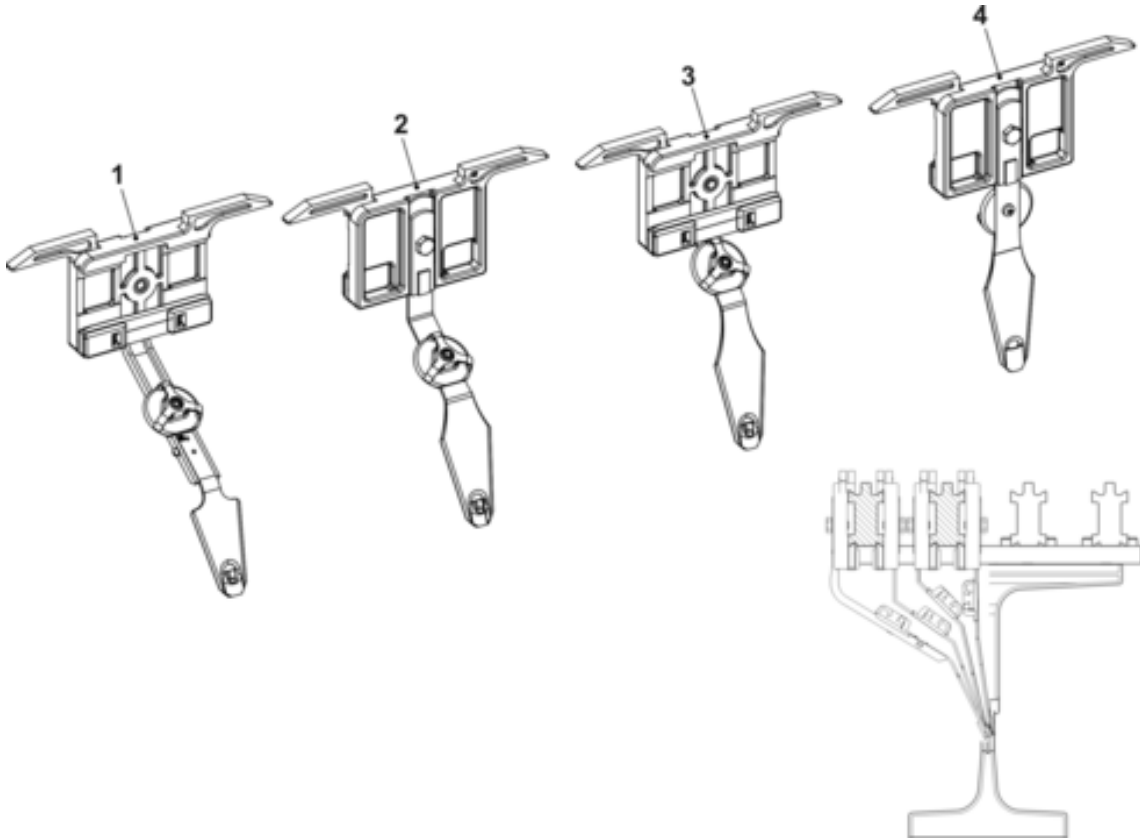

9.7 Left friction feed wheel


Pos	Designation	Id	Pos	Designation	Id
Σ	Friction feed wheel on the left complete	243 571	14	Ribbed V-belt pulley	221 268
1	Housing	240 368	15	Ribbed V-belt pulley V3J 406	206 927
2	Friction roller complete	231 704	16	Rod	221 319
3	Three-phase A.C. motor complete	219 800	18	Cover	230 758
3a	Microswitch	008 664	19	Knurled srew	223 361
4	Deflector complete 8-fold	250 089	20	Rod	230 658
4a	Support rail	250 055	21	Grounding plate	256 622
4b	Eyelet holder complete	250 077	22	Spring plate	256 702
540	Spring dowel sleeve 4x15	020 783	500	Screw KB 30x8	236 228
541	Hexagon nut M8-8	022 843	501	Screw 20x10	244 736
7	Yarn guide rod complete	239 431	503	Cap screw M5x12	020 132
570	Eyelet 8	021 504	504	Cap screw M5X16	022 726
8	Stop motion rail on the right complete	230 690	506	Screw KB 40x14	241 358
9	Stop motion rail on the left complete with eyelets	230 683	507	Screw KB 40x25	241 595
9b	Eyelet	230 662	509	Washer 6.1x9x0.5	023 219
590	Slide bearing	023 627	510	U-washer 5	020 901
11	Strap	221 316	512	Adjusting washer 15x21x1	023 216
12	Cover	251 098	514	U-washer 4,3	020 908
13	Bush	221 391	517	Pan-head screw M4x8	023 579

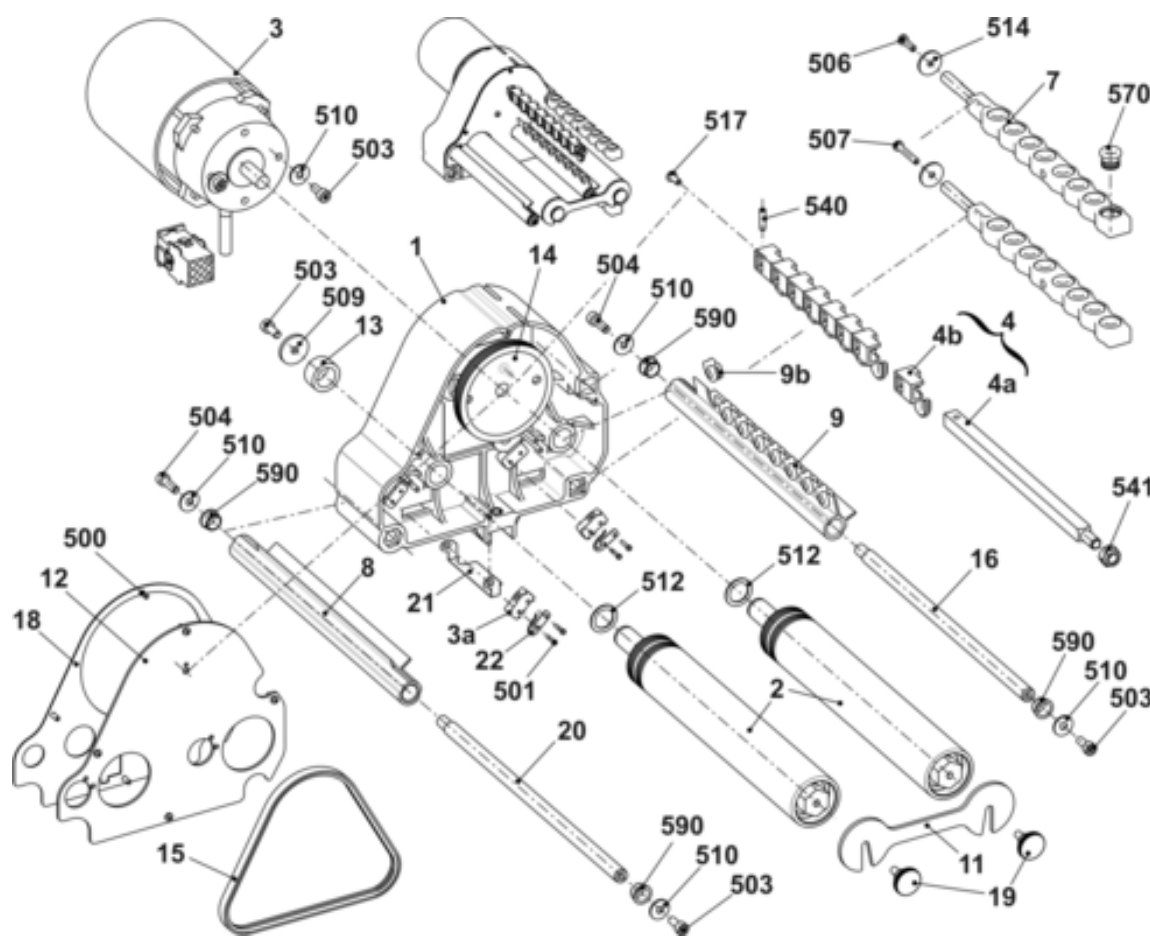


9.8 Right friction feed wheel

9.8 Right friction feed wheel

Pos	Designation	Id	Pos	Designation	Id
Σ	Friction feed wheel on the right complete	243 572	14	Ribbed V-belt pulley	221 268
1	Housing	240 368	15	Ribbed V-belt pulley V3J 406	206 927
2	Friction roller complete	231 704	16	Rod	221 319
3	Three-phase A.C. motor complete	219 800	18	Cover	230 758
	3a Microswitch	008 664	19	Knurled screw	223 361
4	Deflector complete 8-fold	250 089	20	Rod	230 658
	4a Support rail	250 055	21	Grounding plate	256 622
	4b Eyelet holder complete	250 077	22	Spring plate	256 702
	540 Spring dowel sleeve 4x15	020 783	500	Screw KB 30x8	236 228
	541 Hexagon nut M8-8	022 843	501	Screw 20x10	244 736
7	Yarn guide rod complete	239 431	503	Cap screw M5x12	020 132
	570 Eyelet 8	021 504	504	Cap screw M5X16	022 726
8	Stop motion rail on the right complete	230 690	506	Screw KB 40x14	241 358
9	Stop motion rail on the right complete with eyelets	230 682	507	Screw KB 40x25	241 595
	9b Eyelet	230 662	509	Washer 6.1x9x0.5	023 219
	590 Slide bearing	023 627	510	U-washer 5	020 901
11	Strap	221 316	512	Adjusting washer 15x21x1	023 216
12	Cover	251 098	514	U-washer 4,3	020 908
13	Bush	221 391	517	Pan-head screw M4x8	023 579

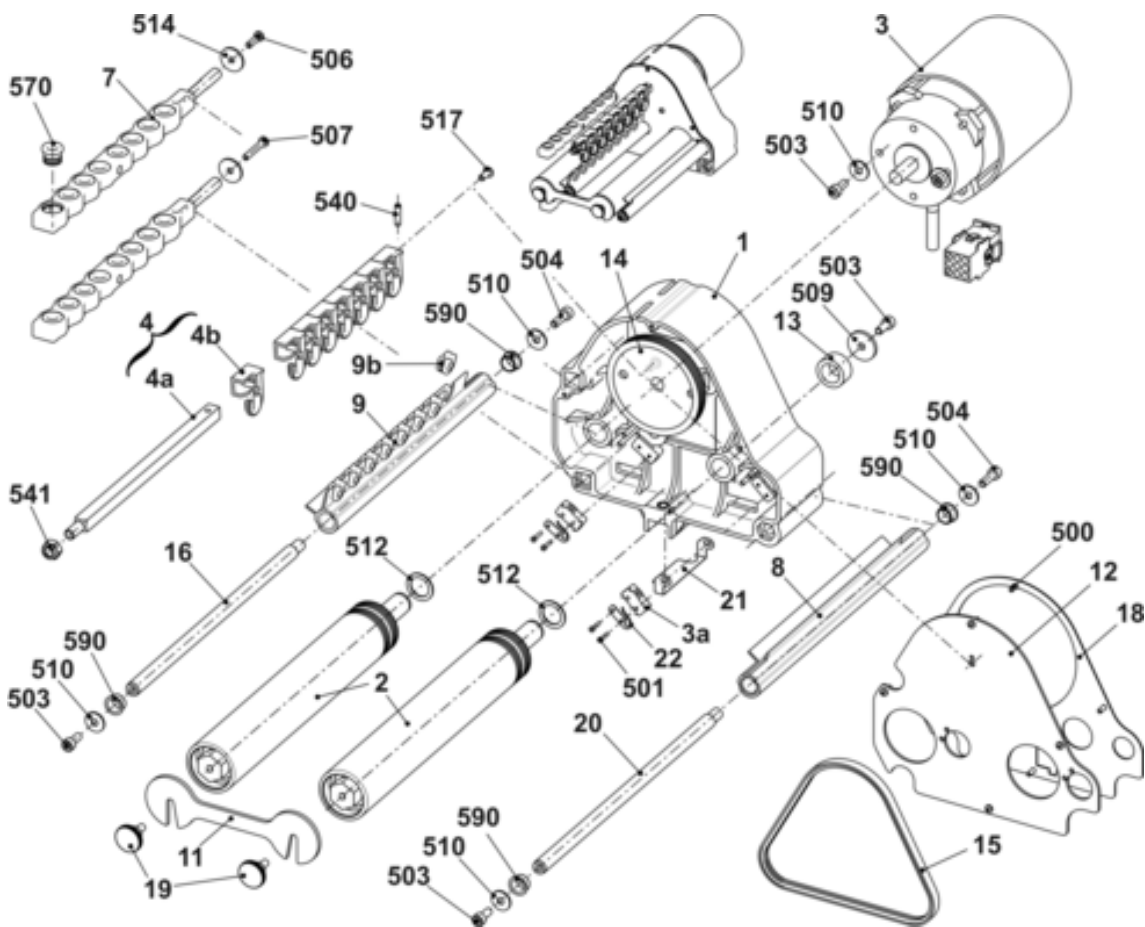


10 Fluff absorption

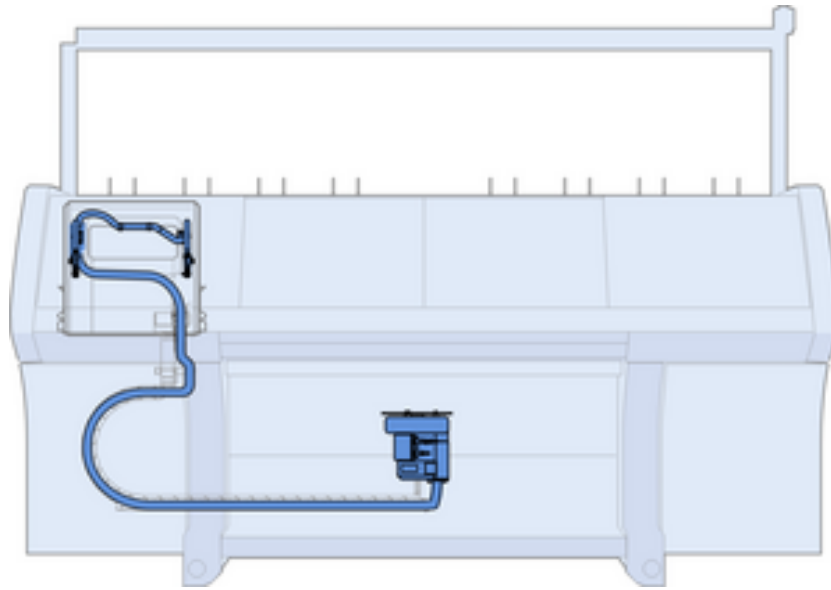


10.1 Fluff absorption

Pos	Designation	Id		Pos	Designation	Id
Σ	Fluff absorption			4	Lint container	245 024
1	Suction fan complete	251 332		5	Hose set complete	251 339
2	Suction hose 29x25x3000	252 627		550	Countersunk head screw M4x12	023 062
3	Cable clip	250 051		551	Cap screw M6x16	022 501

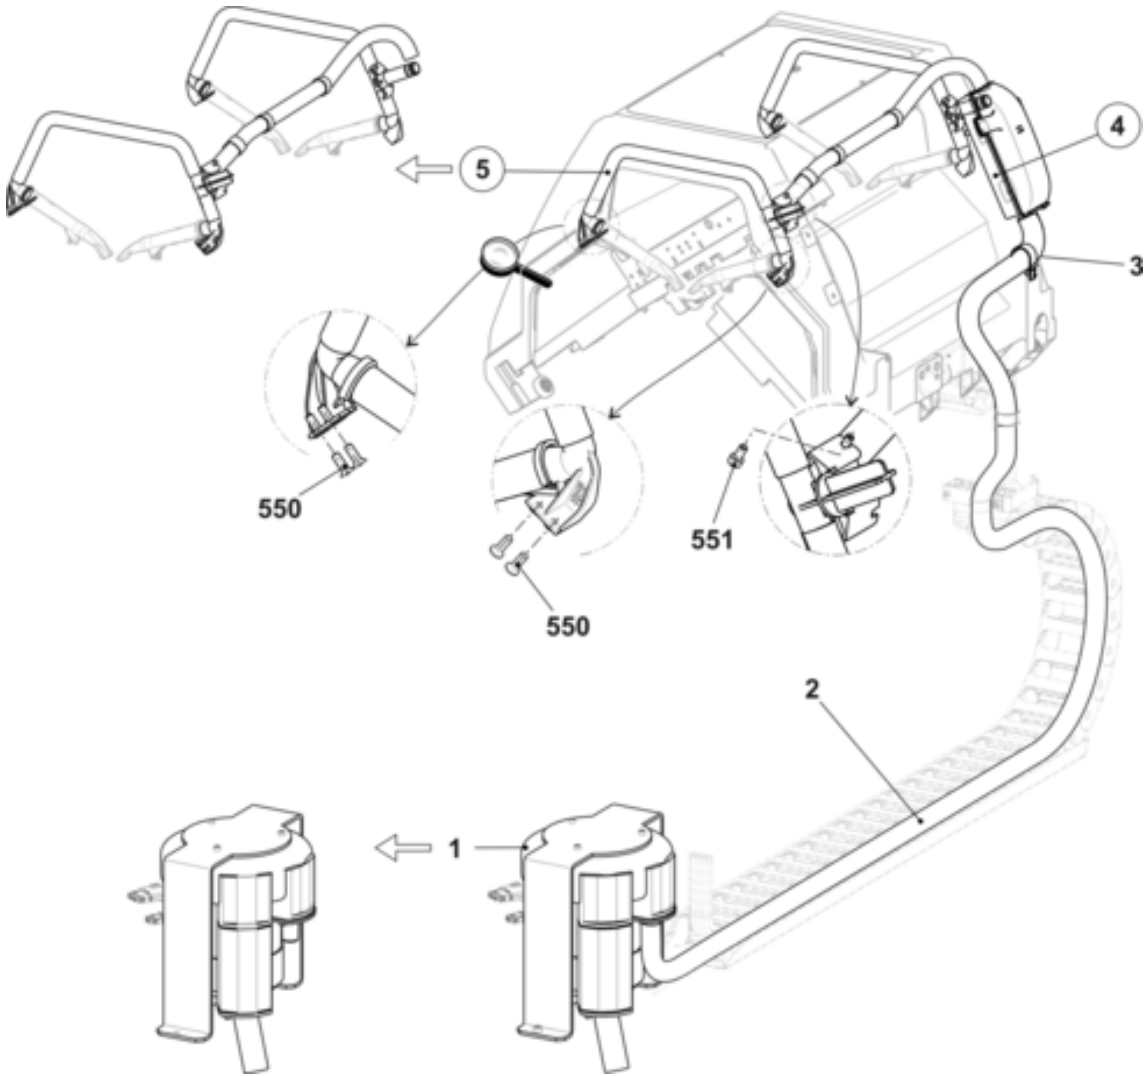

10.1.1 Lint container


Pos	Designation	Id		Pos	Designation	Id
Σ	Lint container			6*	Sealing plug	245 029
1	Lint container	245 024		10*	Cover with filter	251 335
5*	Sealing plug	245 028		501*	Cap screw M6x10	023 690

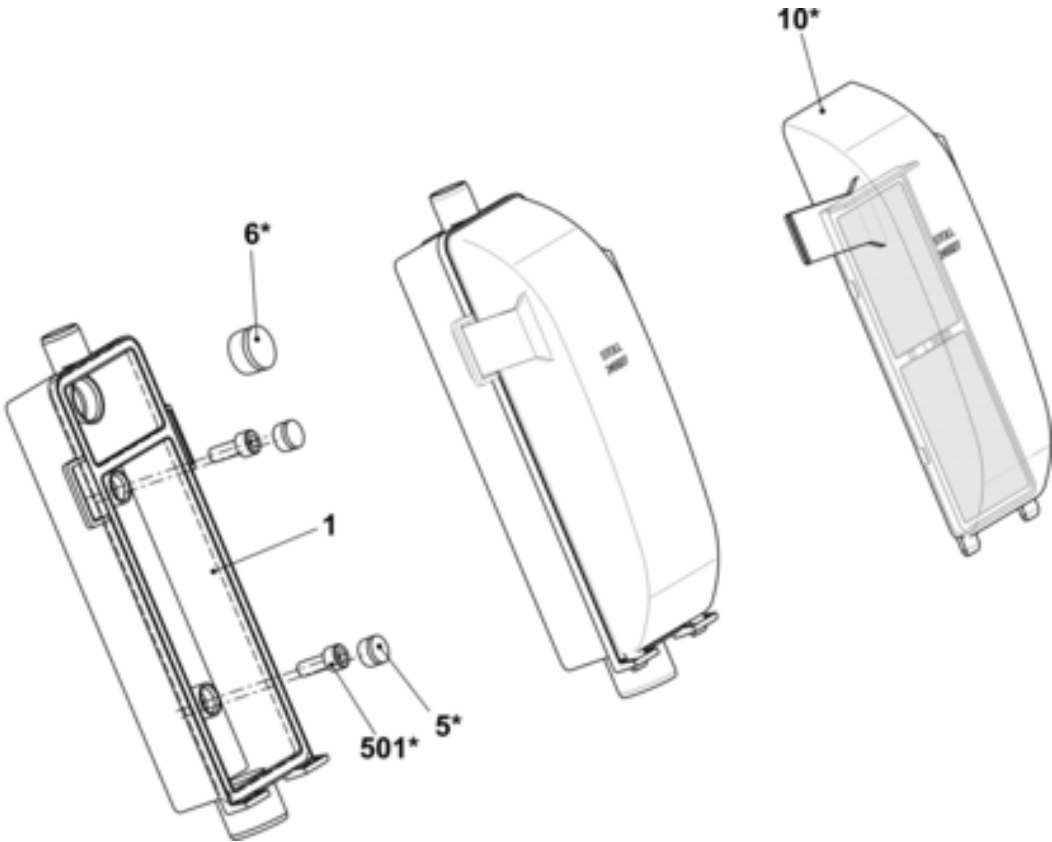

10.1 Fluff absorption


10.1.2 Hose set

Pos	Designation	Id		Pos	Designation	Id
Σ	Set of tubes complete 530/520C	251 339		500	Suction hose 20x16x400	244 983
1	Angle connection on the right	250 121		501	Suction hose 20x16x40	251 043
2	Angle connection on the left	251 101		502	Suction hose 20x16x570	251 044
3	T-piece FLENT	245 021		504*	Countersunk head screw M4x12	023 062
	530 O-ring 10x1.3	250 054		506*	Cable clip	250 051
4	Connection piece Flent	245 022		531*	Cap screw M6x16	022 501

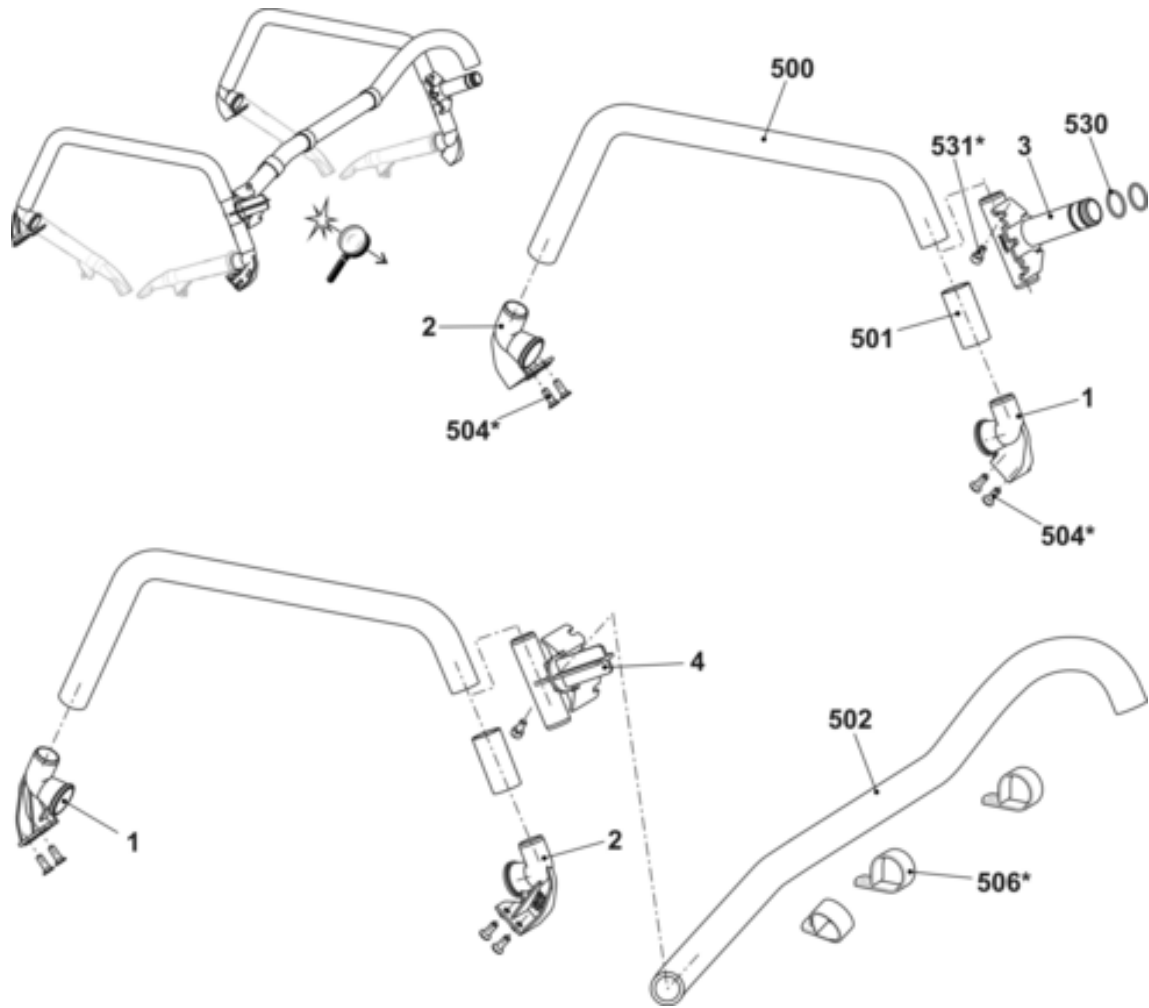


10.1.3 Suction tube

Pos	Designation	Id		Pos	Designation	Id
Σ	Suction tube complete E5-14	251 313				
1	Suction tube	255 605				
2	Bracket	255 628				
500	Screw KB30x6	241 424				

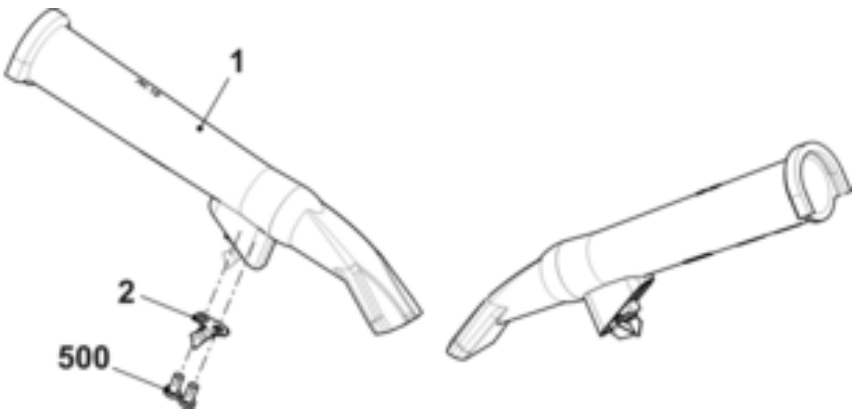

Notes:


11 Operation and control

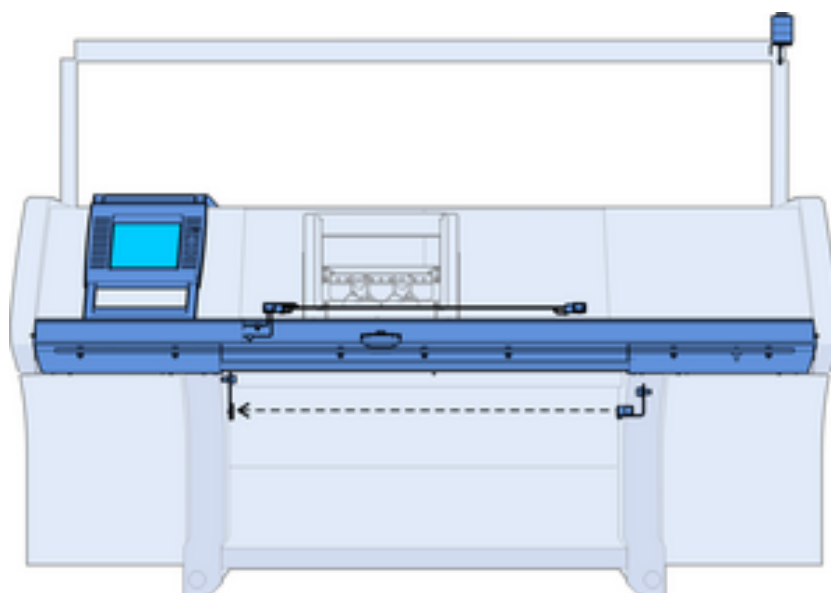

11.1 Input unit


11.1 Input unit

Pos	Designation	Ident No.		Pos	Designation	Ident No.
Σ	Input unit complete	240 194		6	Touch pen	242 812
1	Base frame	240 195		10*	Touch panel spare parts package	244 554
3	Bearing strip complete	240 198		502	U-washer	020 901
4	Display touch complete	250 298		503	Screw KB 50x12	240 359

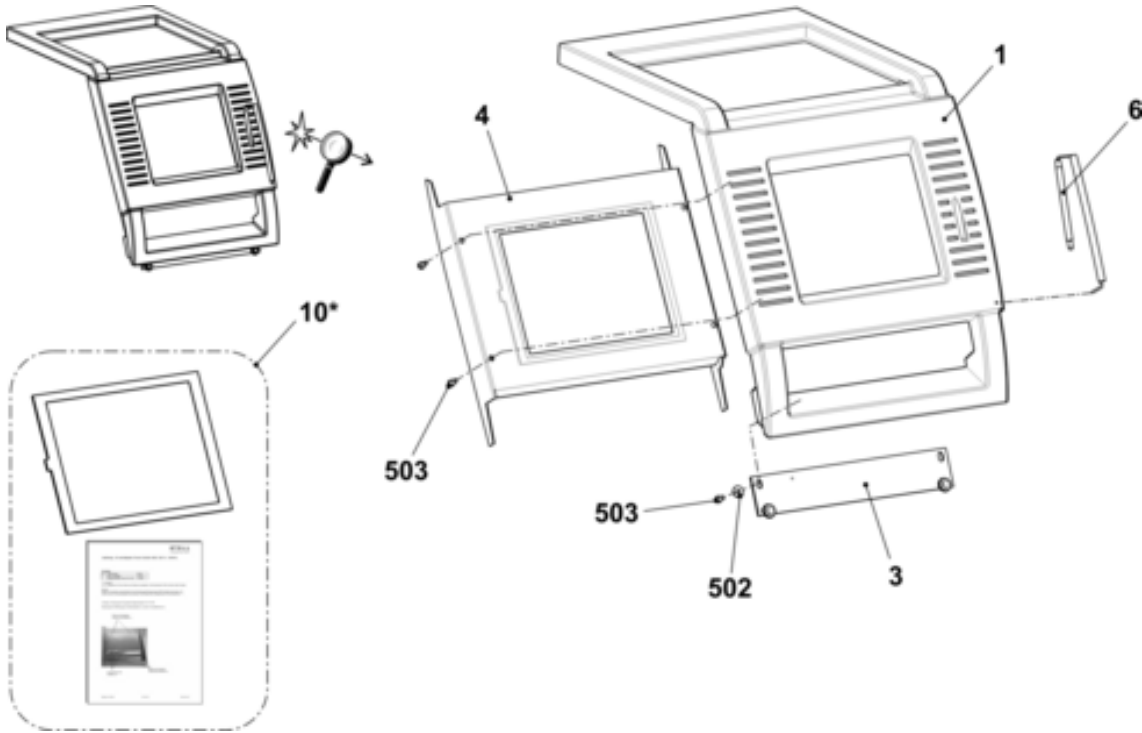

11.2 Starting unit


Pos	Designation	Id	Pos	Designation	Id
Σ	Starting unit complete	240 306	12	Sliding nut (sliding block)	225 099
1	Engaging rod	240 227	502	Screw M6x25	023 510
2	Bearing on the left complete	250 071	503	Cap screw M6x16	020 135
3	Guide rail at the bottom complete	257 309	504	Countersunk screw M5x14	023 588
6*	Cover plate on the right	250 931	506	Cap screw M6x12	020 134
7*	Cover plate on the left	250 932	507	Cap screw M6x20	020 136
8	Bearing on the right complete	252 964	508	U-washer	020 872
9	Switch with cable to protective hoods	223 350	511	Adhesive base	243 055
11	Fixing bolt	219 107	512	Cap screw M6x10	023 690

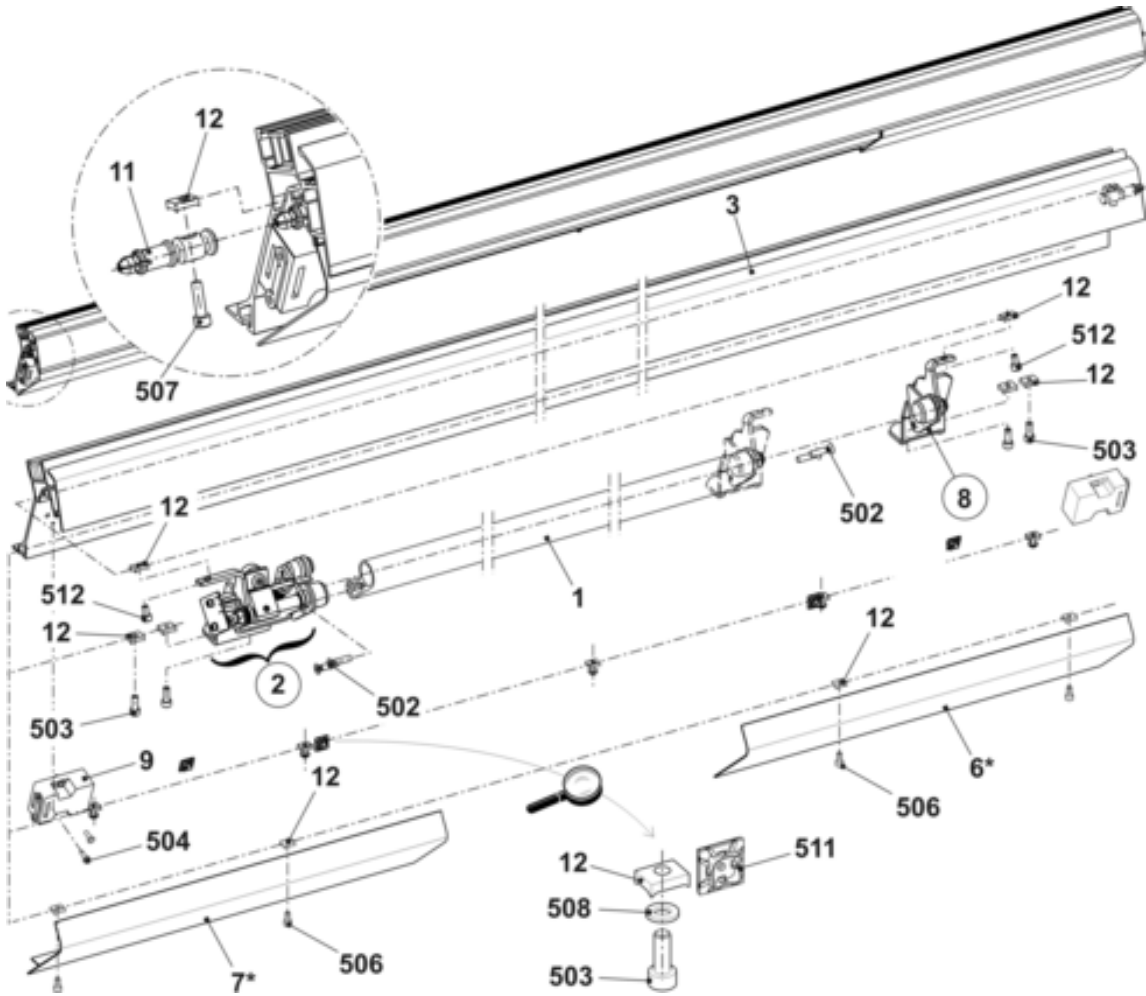

11.2 Starting unit


11.2.1 Bearing of the engaging rod

Pos	Designation	Id	Pos	Designation	Id
L	Bearing on the left complete	250 071			
1	Bearing on the left	245 218	505	Hexagon nut M8-6	020 838
1a	Clip bearing MCM12-04	023 639	506	Dowel pin 1.5x8	236 923
2	Support buffer	220 561	507	Spring dowel sleeve 6x20	023 719
2a	O-ring 14x4	023 237	508	Shoulder screw M4x24.8x7.7	240 299
3	Shaft on the left	245 219	509	Shoulder screw	251 316
4	Rotor	253 776	510	Shim ring 12x18x1	023 315
5	Switch flag	245 220	511	Locking ring 12x1	020 951
6	Spring pin	251 340	512	Compression spring 1.25x15x98.2	023 609
7	Disc	245 222	513	Compression spring 0.5x11x12	251 369
8	Shoulder screw	254 528			
9	Distance bolt	240 287	R	Bearing on the right complete	252 964
500	Cap screw M4x6	023 067	1	Bearing on the right	240 230
501	Cap screw M4x8	022 501	1a	Clip bearing MCM 12-04	023 639
502	Shim ring 4x8x1	023 369	2	Shaft on the right	242 888
503	Card engaging	240 167	500	Shim ring 12x18x1	023 315
504	Adhesive magnet direct current	026 233	502	Locking ring 12x1	020 951

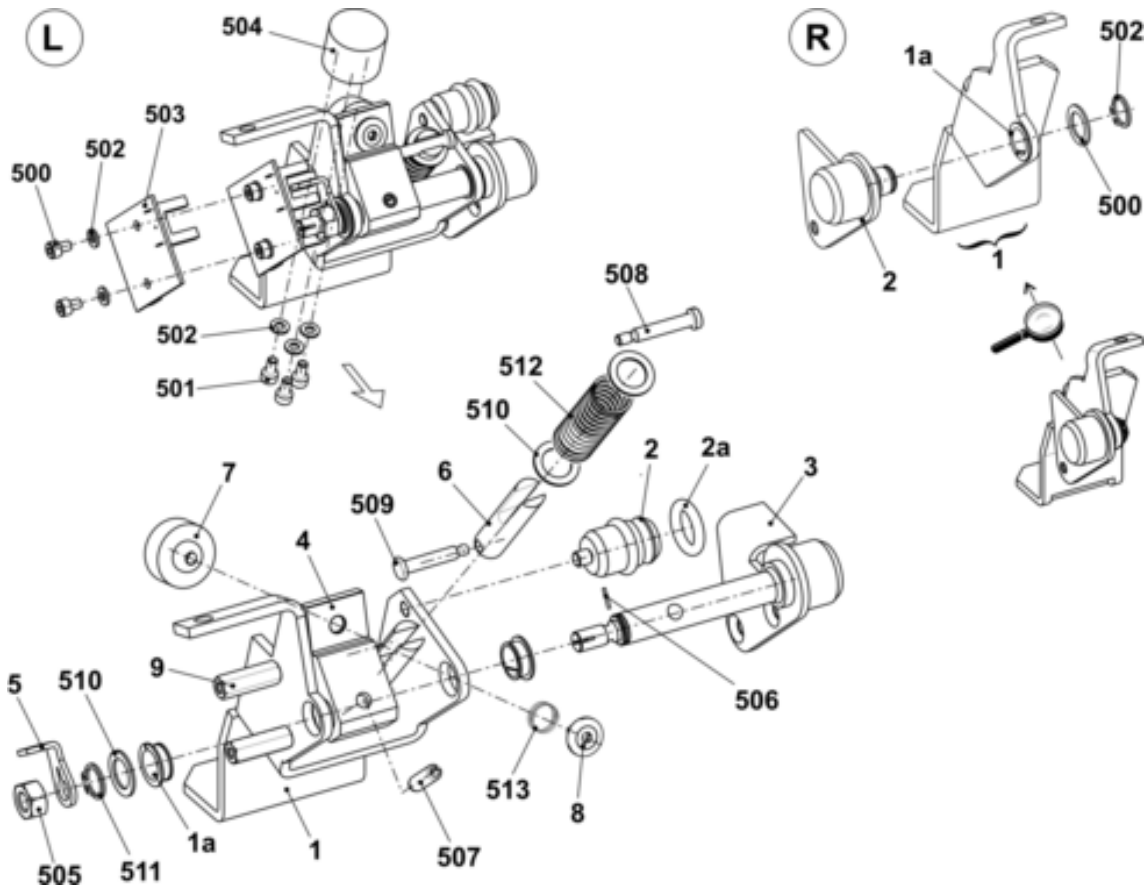


11.3 Signal light

Pos	Designation		Id		Pos	Designation		Id
Σ	Warning light LED		240 395					
	500	Countersunk screw M4x14	023 037					
	501	Serrated lock washer A4.3-FS	022 482					

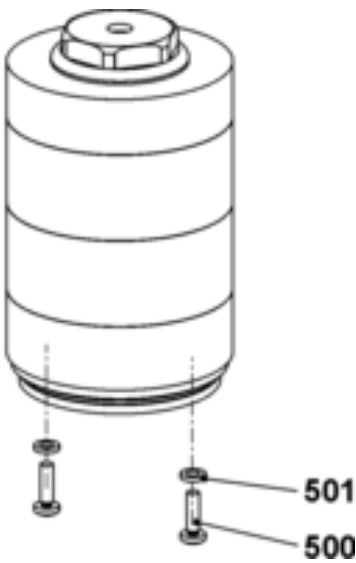


11.4 Collecting area - control

Pos	Designation	Id		Pos	Designation	Id
Σ	Reflector complete	256 826		Σ	Photoelectric sensor complete	256 825
1	Mounting plate reflector	256 675		1	Angle support photoelectric sensor	256 674
500	Blind rivet A3x8-Al	023 158		500	Cap screw M3x10	022 991
501	Reflector 20x20 mm	243 356		501	Photoelectric sensor WI100-P4330	243 355
900*	Cap screw M6x12	020 134		900*	Cap screw M6x12	020 134
				901*	U-washer 6	020 872

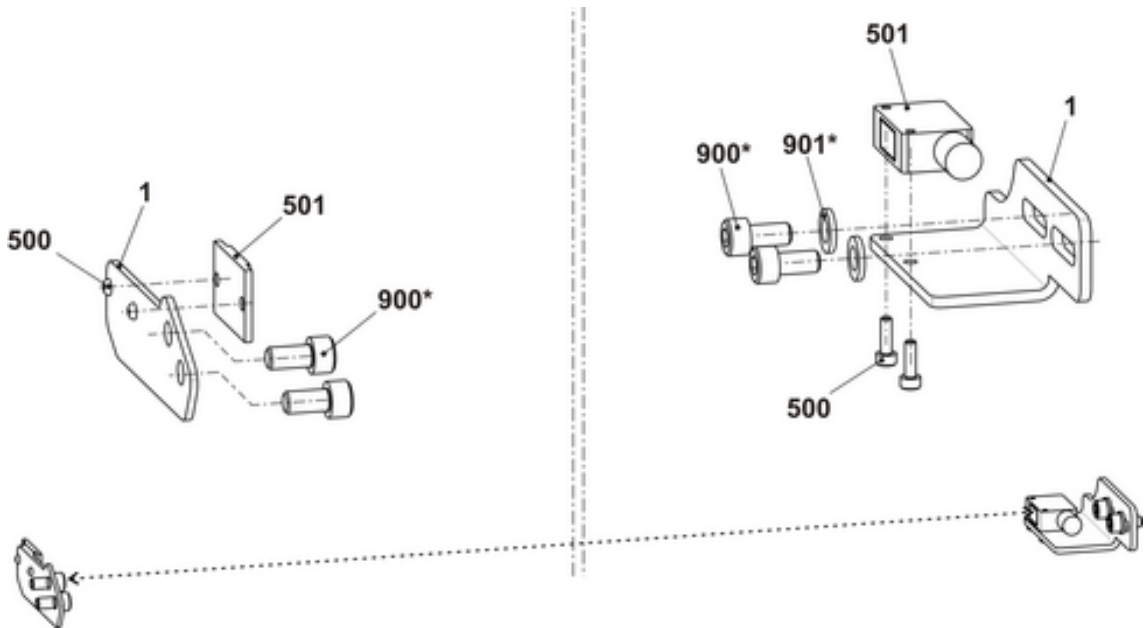


11.5 Shock stop motion E3-4

Pos	Designation	ID No.		Pos	Designation	ID No.
Σ	Shock stop motion complete E3-4	224 242		3	End plug piezo sensor	220 062
1	Shock stop motion (Piezo)	220 011		500*	Countersunk screw M4x8	023 036
2	Connecting cable piezo sensor	220 061		502*	Cable clip N-3B, 5 mm	210 729

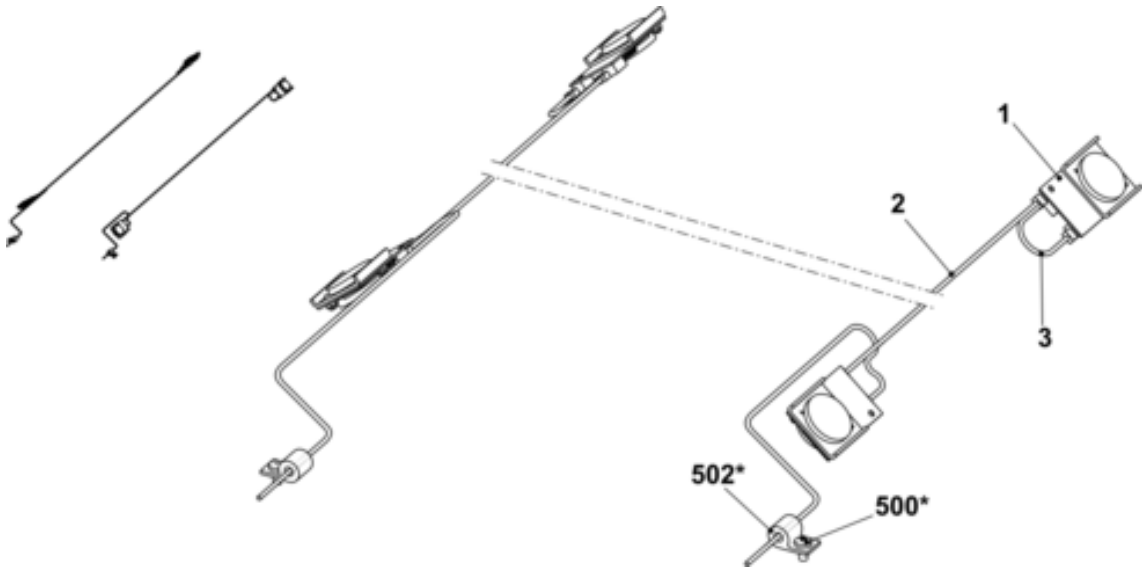


11.6 Measuring device

Pos	Designation	ID No.	Pos	Designation	ID No.
Σ	Measuring device				
1	Measuring bar	240 229	5	Measuring head complete	240 562
2	Guidance	251 676	501	U-washer	020 881
3	Stop point	209 289	502	Countersunk screw	241 603

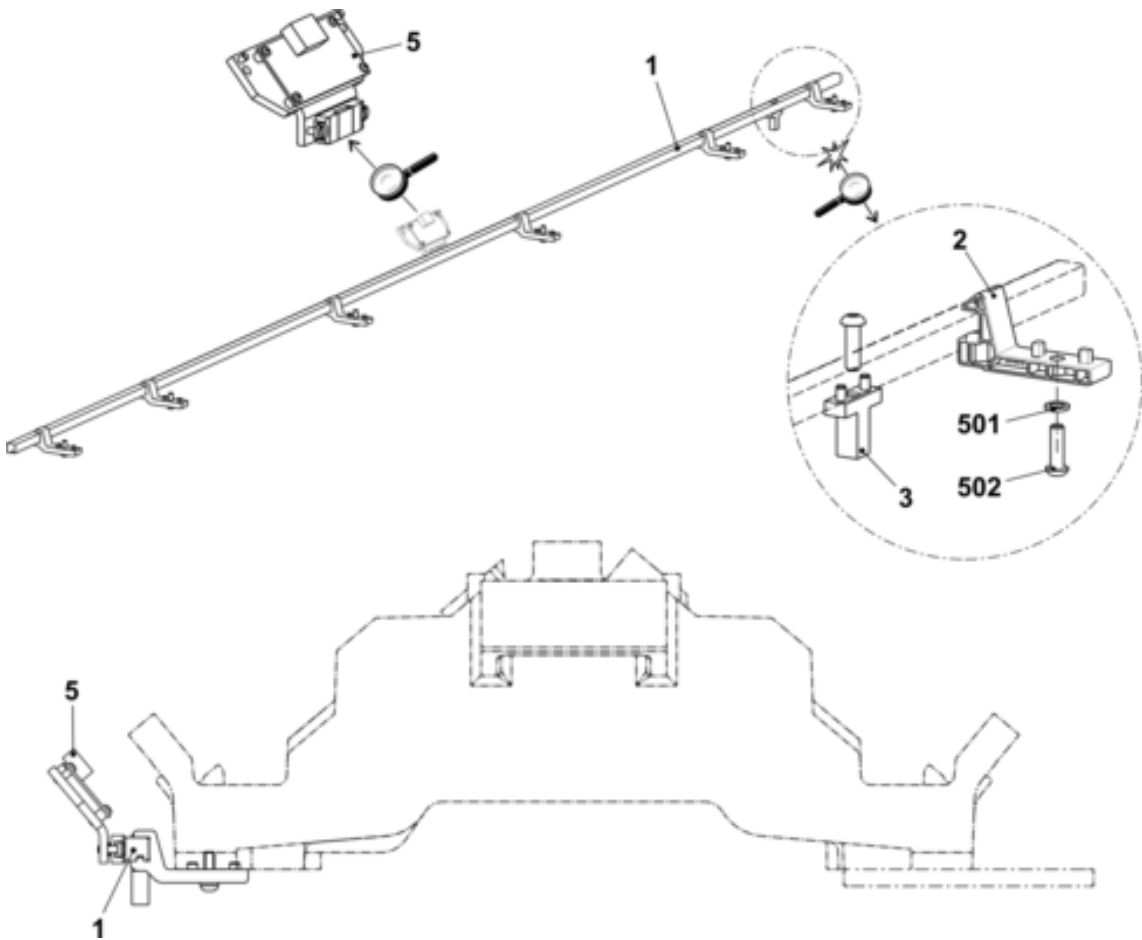


12 Protective units

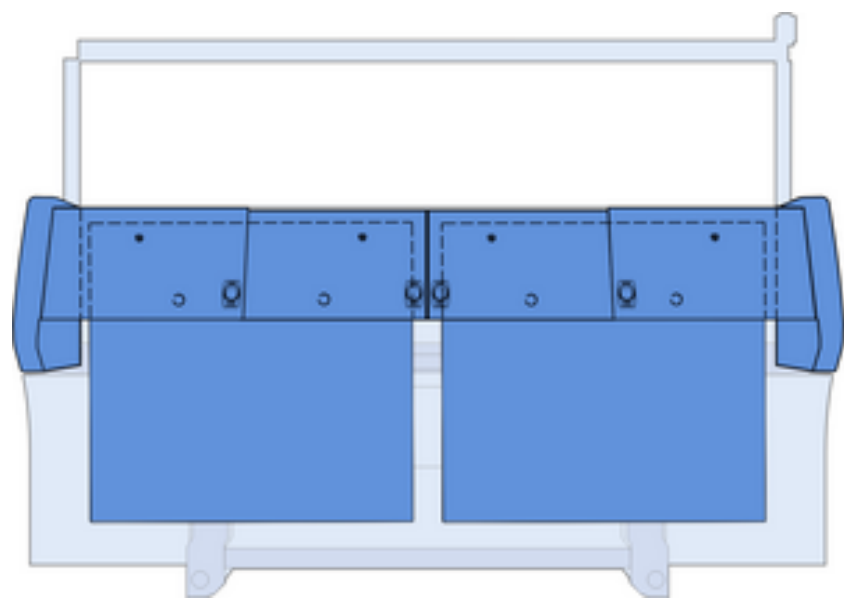


12.1 Lateral safety covers

Pos	Designation	Id		Pos	Designation	Id
Σ	Safety cover on the left			Σ	Safety cover on the right	
1	Safety cover on the left	250 562		1	Safety cover on the right	250 563
2	Hinge	241 994		2	Hinge	241 994
3	Plate	224 717		3	Plate	224 717
4	Locking plate	219 748		4	Locking plate	219 748
16	Operator AZ 15/16	255 492		16	Operator AZ 15/16	255 492
505	Screw KB 60x30	237 683		505	Screw KB 60x30	237 683
506	Screw KB40x14	241 358		506	Screw KB40x14	241 358
510	Screw KB 60x20	237 682		510	Screw KB 60x20	237 682

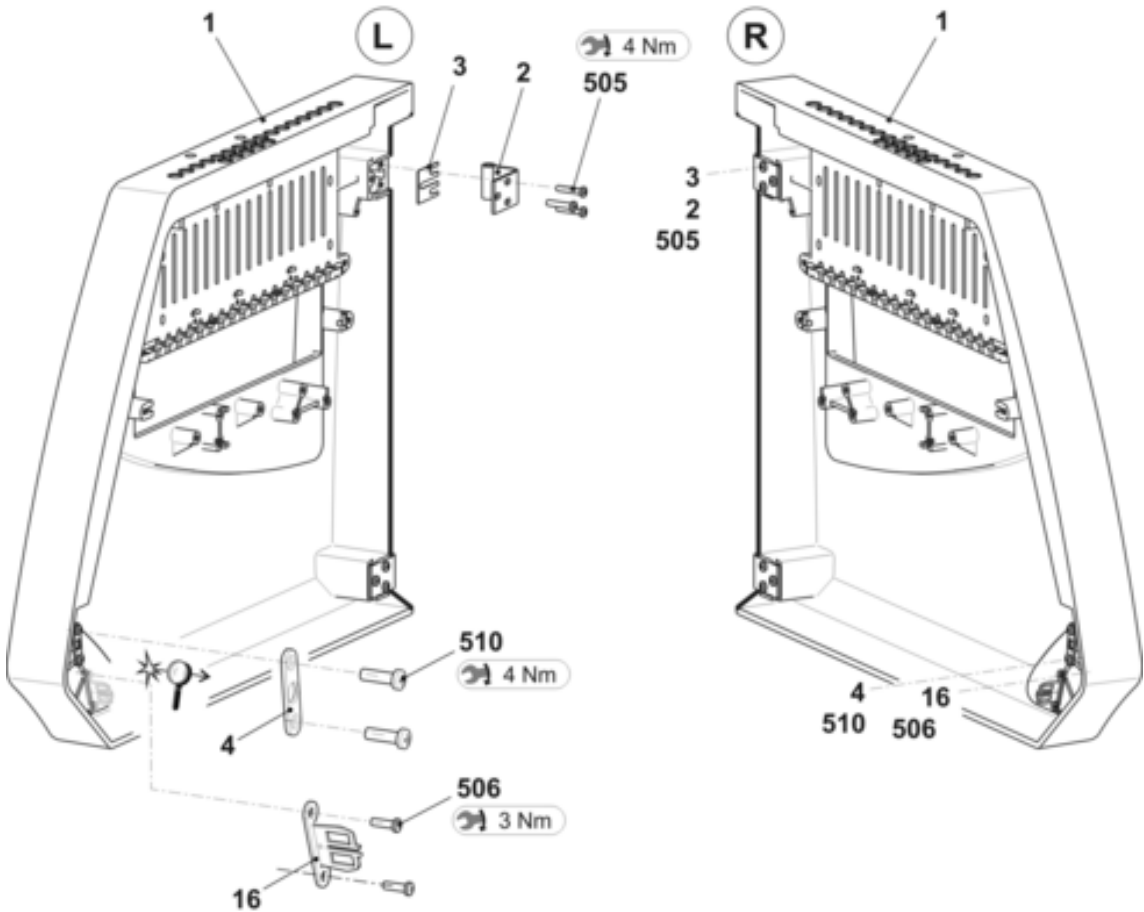


12.2 Panelling

Pos	Designation		Id		Pos	Designation		Id
1	Cover 1 complete		257 303		3	Cover 3 complete		257 305
	1a	Cover 1	257 296			3a	Cover 3	257 298
	1b	Inlet type handle	251 376			1b	Inlet type handle	251 376
	1c	Stripper	219 393			1c	Stripper	219 393
	1d	Magnet	204 666			1d	Magnet	204 666
2	Cover 2 complete		257 304		4	Cover 4 complete		257 306
	2a	Cover 2	257 297			4a	Cover 4	257 299
	1b	Inlet type handle	251 376			1b	Inlet type handle	251 376
	1c	Stripper	219 393			1c	Stripper	219 393
	1d	Magnet	204 666			1d	Magnet	204 666
5	Control unit panelling on the left complete		251 233		6	Control unit panelling on the right complete		251 234
	A5	Control unit panelling on the left	251 185			A6	Control unit panelling on the right	251 186
	5b	Side part	244 989			6b	Side part	244 989
	5c	Hinge	250 273			6c	Hinge	250 273
	5d	Strap	240 412			6d	Strap	240 412
	550	Screw KB 50x12	240 359			550	Screw KB 50x12	240 359
	551	Cap screw M8x25	020 135			551	Cap screw M8x25	020 135

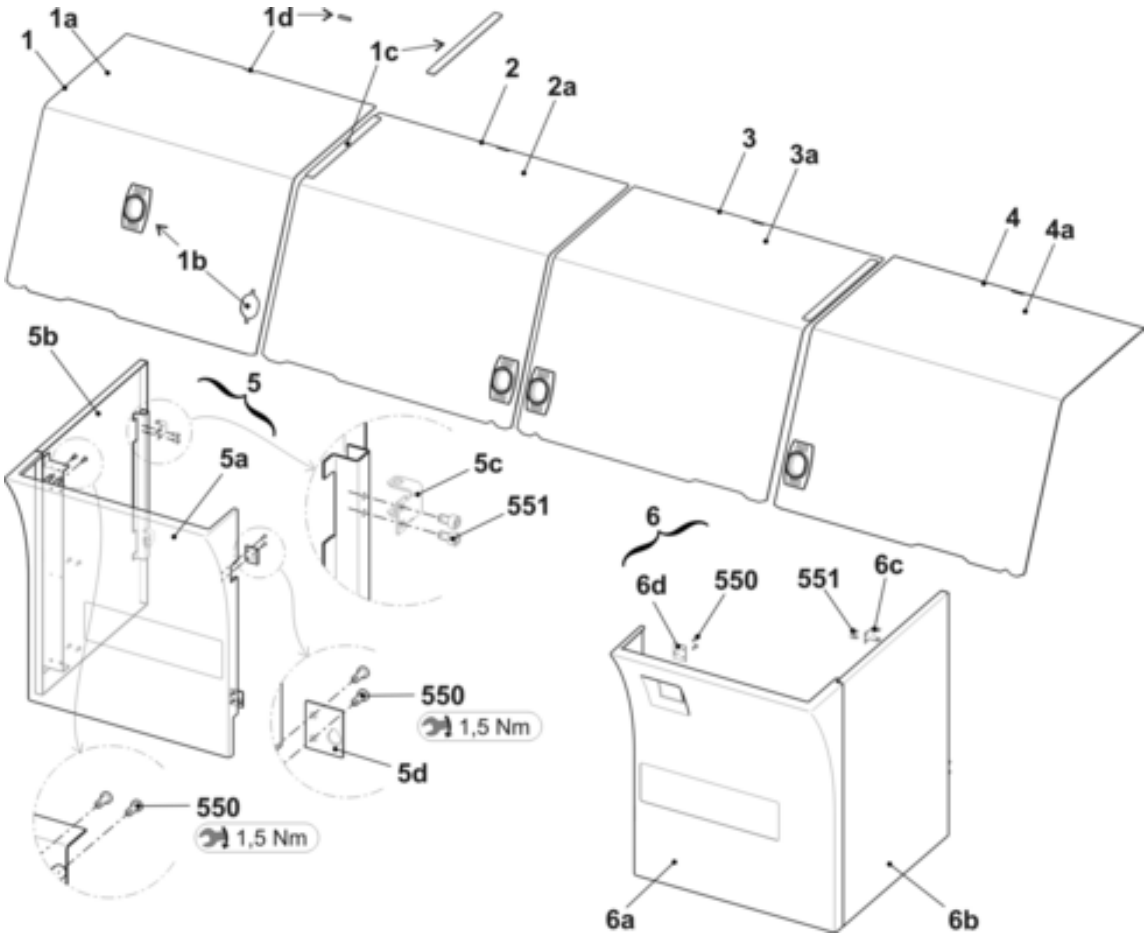


12.3 Rear panel

Pos	Designation	Id		Pos	Designation	Id
1	Panelling at the rear complete	257 668		1a	Panelling	257 662
				1b	Safety sash fastener	243 052

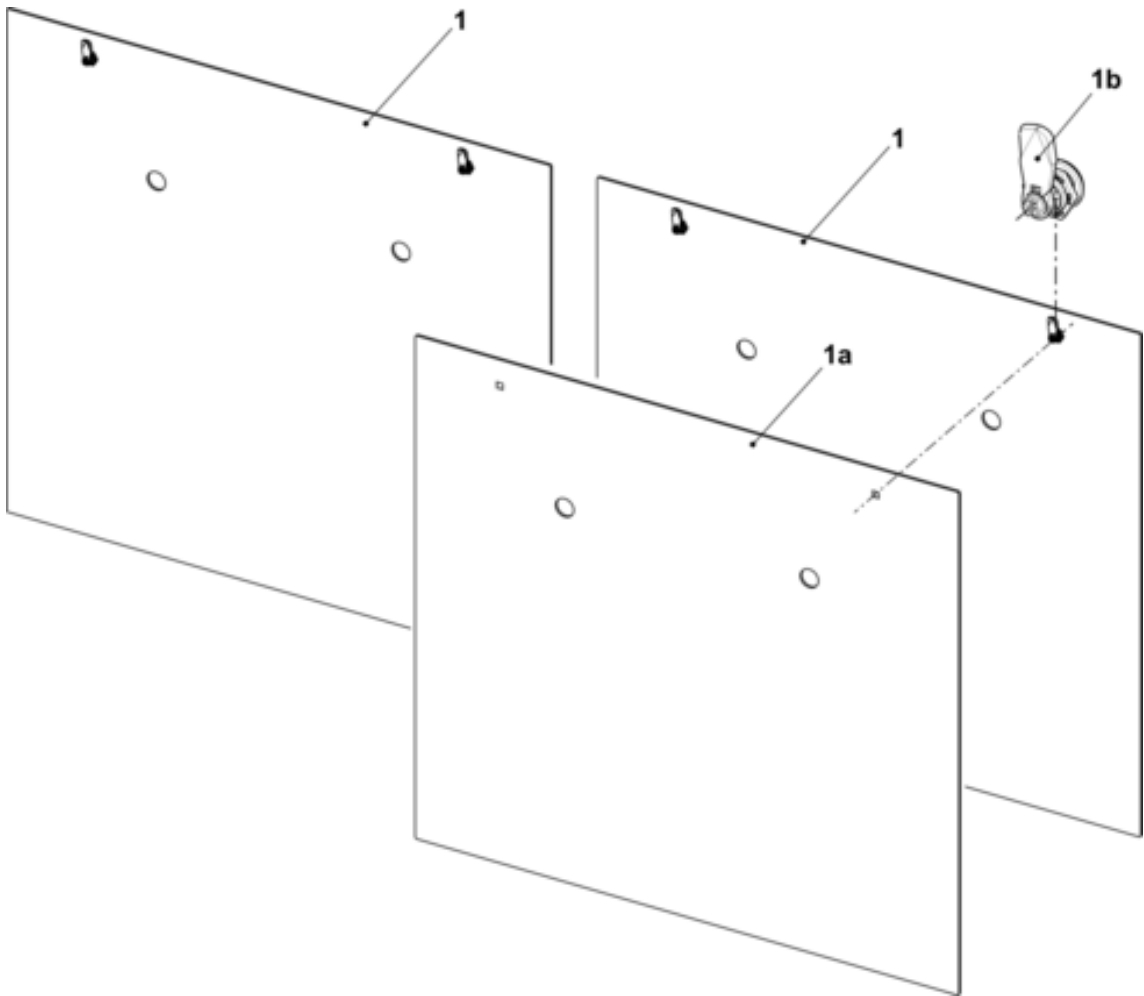


13 Electrical equipment

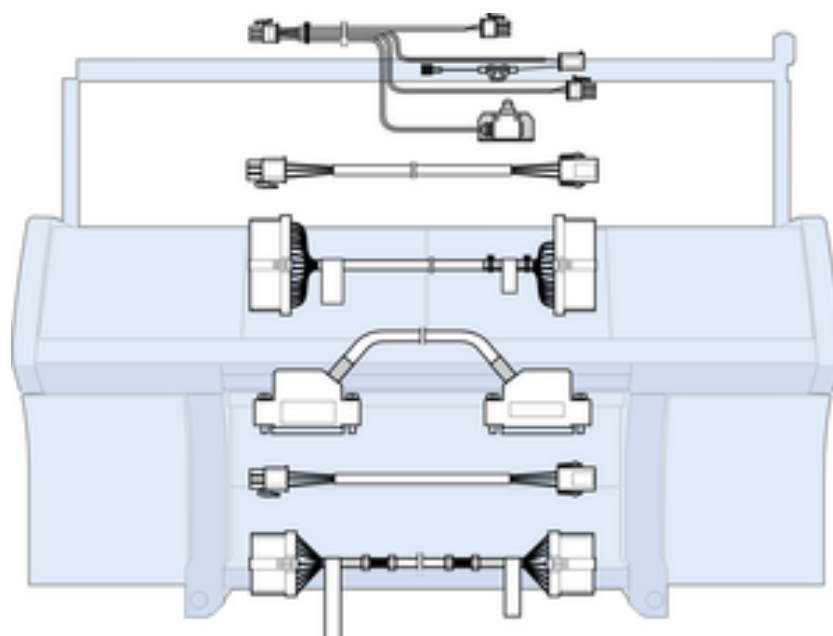


13.1 Circuit diagram (222) as PDF

Designation	Id	Marking
Circuit diagram 222 German	257 280	_DE
Circuit diagram 222 English	257 280	_GB
Circuit diagram 222 Chinese	257 280	_CN





You will find the circuit diagram 222 on the CMS documentation DVD with the ID 257 157

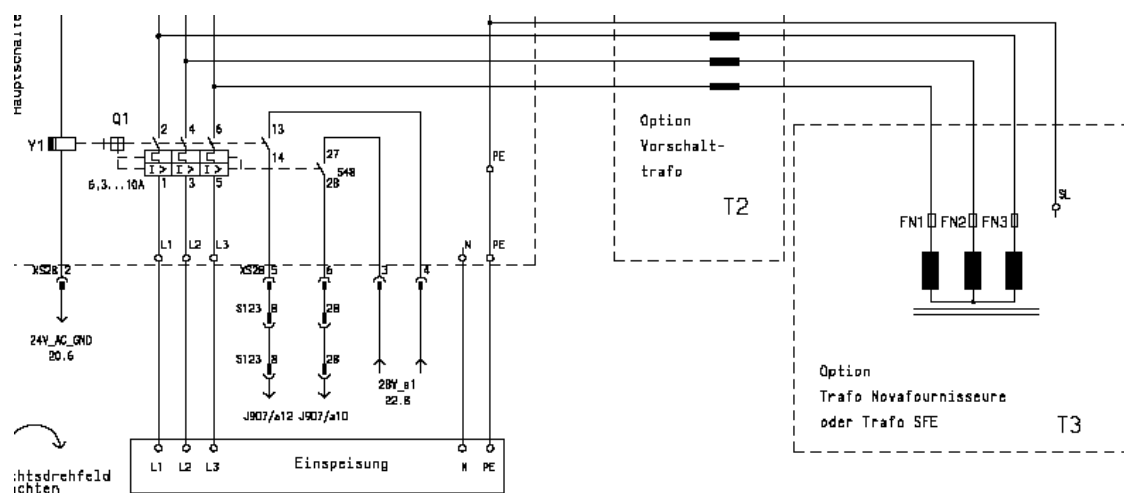

13.2 Fuses

Designation		Ident No.
	Fuse 1.0A F 5x20	008 748
	Fuse 3.15A T/440V 6.3x32	025 261
	Fuse 10A T/440V 6.3x32	025 258
	Fuse 2.5A T/440V 6.3x32	217 465
	Fuse 1.6A T/440V 6.3x32	236 229
	Fuse 6.3A T/440V 6.3x32	026 809
	Fuse 8A T/440V 6.3x32	241 866
	Fuse 12.5A T/440V 6.3x32	232 367

13.3 Trailing cable E5-8

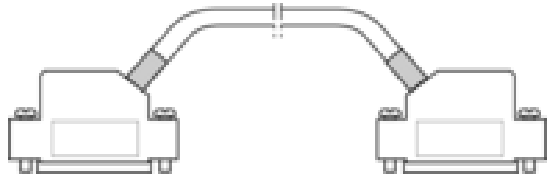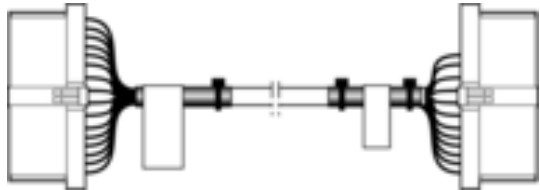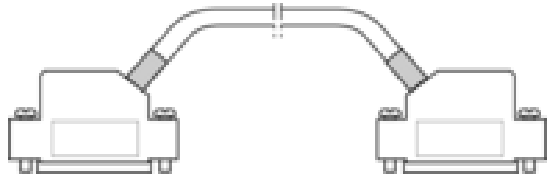
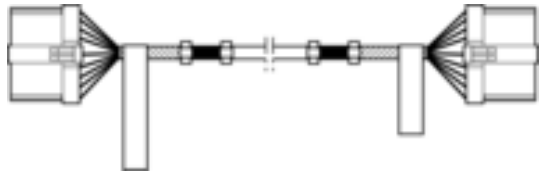
Designation		ID No.	Designation		ID No.
Σ	Trailing cable set 520 1IMP. BME2 E5-8	254 884			
	Cable carriage at the rear 520C BME2 XR332	255 054		Cable yarn carrier XR161	254 886
					
	Cable carriage at the front 520C BME2 XR333	254 888		Cable impulse giver at the rear XR136	255 050
					

13.4 Cable set installation







Designation		Id	Designation		Id
Σ	Cable set installation	253 618			
1	Loom of cables base 2	253 619	3	Loom of cables	253 621
2	Loom of cables base 2	240 257	4	Loom of cables comb	240 259
6	Cable switch main take-down 50"	252 541	7	Cable mains supply FKE lamp	252 587
					

13.4 Cable set installation

13.4.1 Loom of cables base 1



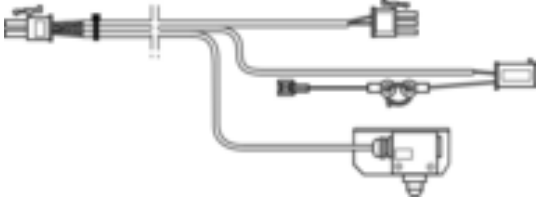
Designation		Id	Designation		Id
Σ	Loom of cables base 2	253 619			
	Cable Feed wheel on the left	240 464		Cable protective unit on the left	253 620
					
	Cable Engaging rod	252 538			
					

13.4.2 Loom of cables base 2

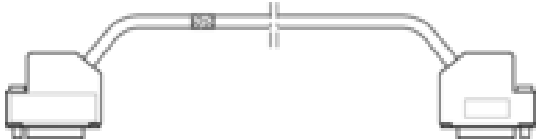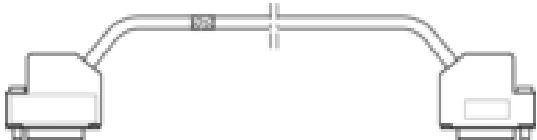
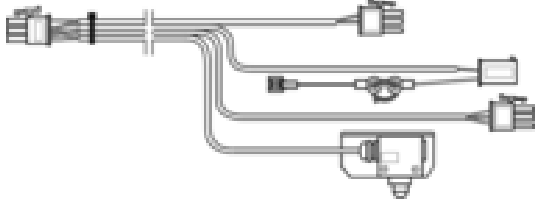

Designation		ID No.	Designation		ID No.
Σ	Loom of cables base 2 OKC	240 257			
	Cable motor HIAB OKC	240 291		Cable resolver drive OKC 3xx	240 296
					
	Cable limit switch racking OKC 3xx	240 292		Cable racking motor OKC 3xx	240 297
					
	Cable ventilator drive 3xx OKC	240 293		Cable resolver racking OKC 3xx	240 298
					
	Cable feed wheel on the right / on the left OKC	240 294		Cable protective unit on the right OKC	253 441
					
	Cable drive motor OKC 3xx	240 295			
					

13.4 Cable set installation

13.4.3 Loom of cables

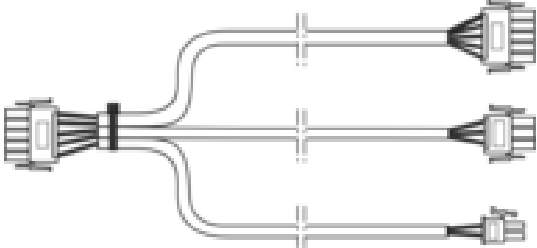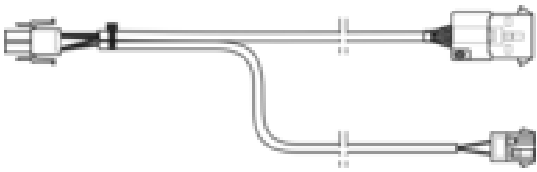Designation	Id		Designation	Id
Loom of cables	253 621			
Cable motor auxiliary take-down 50"	240 467		Cable power supply unit of mains supply	240 505
				
Cable impulse giver auxiliary take-down	240 468		Cable power supply lighting	236 572
				
Cable power supply WAZ/F	240 469		Cable switch auxiliary take-down 3xx okc	240 472
				
Cable power supply SERVO	240 502		Cable power supply FLENT	251 231
				

13.4.4 Loom of cables comb

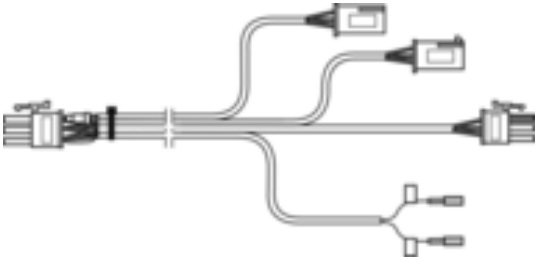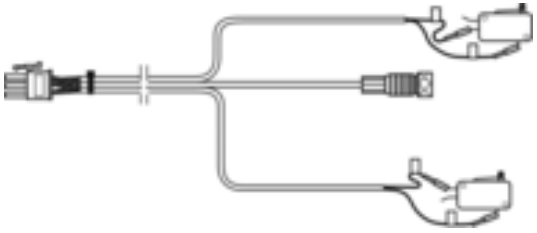Designation		Id	Designation		Id
Σ	Loom of cables comb	240 259			
	Cable motor comb hook	240 308		Cable switch comb	240 311
					
	Cable switch KAHA	240 309		Cable switch HAAB	240 312
					
	Cable motor comb	240 310			
					


Notes:

14 Control electronics




14.1 Control cabinet

Pos	Designation	Id		Pos	Designation	Id
Σ	Control unit on the right complete 520	254 852		6	Card BIO	301 007
1	Control unit without equipment	254 854		7	Card amplifier 4SM 7TE	300 943
2	Power supply unit CG54 with single channel	300 923		8	Card N-CPU 432	300 965
3	Battery plug-in unit	301 008		9	Card power CPU B	301 009
4	Card servo 6	301 000		10	Card IPC-P8X S 01	301 010
5	Card C-WAZ	301 006		521*	Axial blower Servo 5	229 059

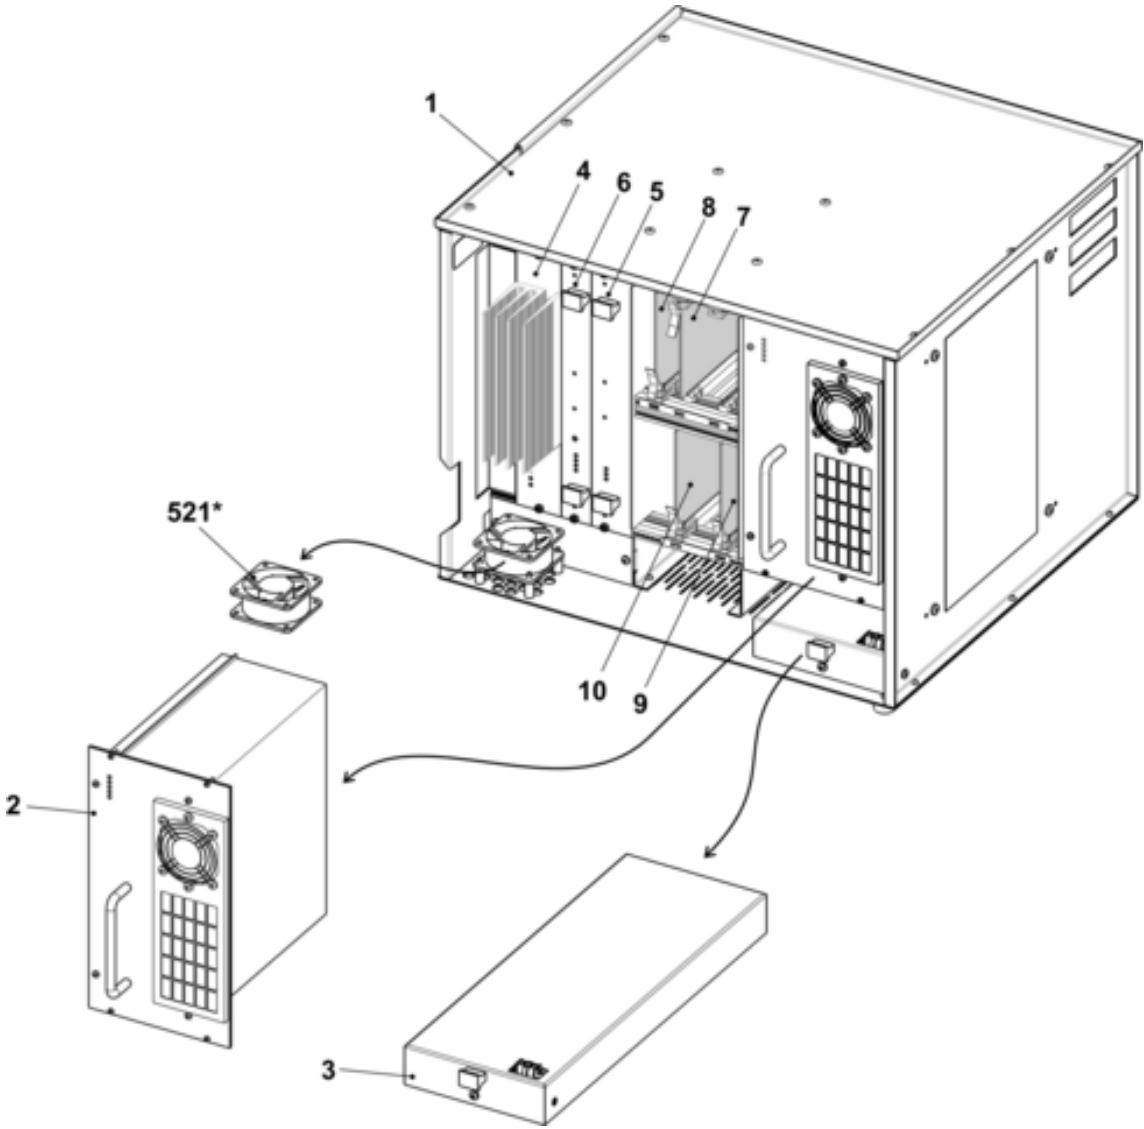

15 Deliverable accessories

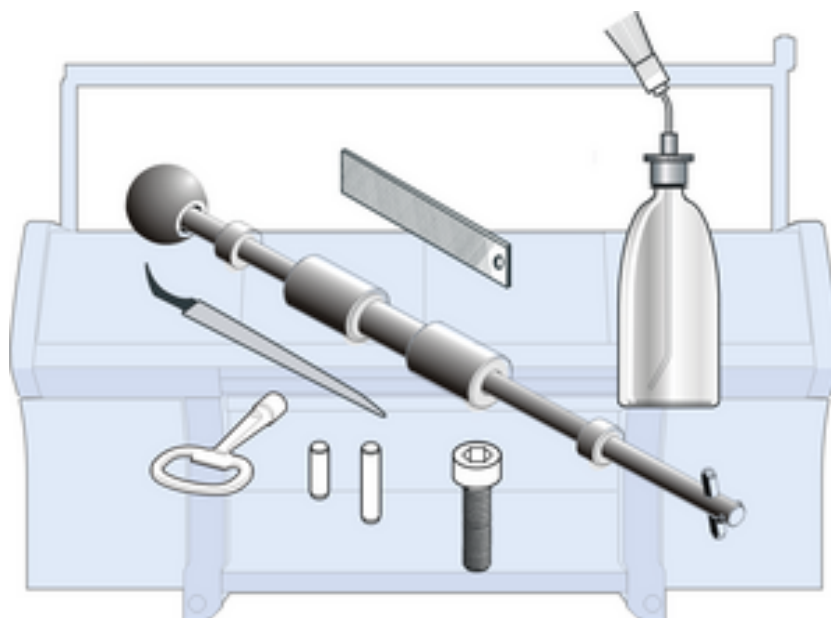


You can order the following tools, lubricants and expendables.
The following list does not correspond to the scope of delivery of the knitting machine.

15.1 Tool


15.1 Tool

Pos	Designation	Ident No.	Pos	Designation	Ident No.
1	Channel support E4	062 309	6	Groove file 0,45mm E16-18	006 169
	Channel support E5, E2,5.2	062 310		Groove file 1.25 mm E5-8, E3,5.2	006 170
	Channel support E7, E3,5.2	062 312		Groove file 0,90mm E10-12, E5.2 6.2	006 175
	Channel support E8	062 313		Groove file 0.73 mm E14, E7.2	006 173
	Channel support E10, E5.2	062 314		Groove file 0.45 mm E16-18, E9.2	006 179
	Channel support E12, E6.2	062 315	7	Key of switch cabinet	009 346
	Channel support E14, E7.2	218 069	8	Groove cleaner E4	031 232
	Channel support E16, E8.2	230 188		Groove cleaner E5	031 233
	Channel support E18, E9.2	230 189		Groove cleaner E6	031 234
	Channel support E20	230 190		Groove cleaner E7, E3,5.2	031 235
2	Channel chisel E14-20 (E5-14)	062 316		Groove cleaner E8	031 236
	Channel chisel E4-8 (E3,5.2)	062 317		Groove cleaner E10 (E5.2)	031 238
	Channel chisel E10-14	062 318		Groove cleaner E12 (E6.2)	031 240
3	Yarn guide on the left	227 071		Groove cleaner E14 (E7.2)	031 242
	Yarn guide on the right	227 070		Groove cleaner E16	225 111
4	Working hook	227 249		Groove cleaner E18 (E9.2)	225 112
5	Extraction hook	232 027		Groove cleaner E20	225 113
	5a Small pin	202 843	9	Measuring tape L=150 cm	228 180
	5b Pin	232 022	10	Tool kit	209 527

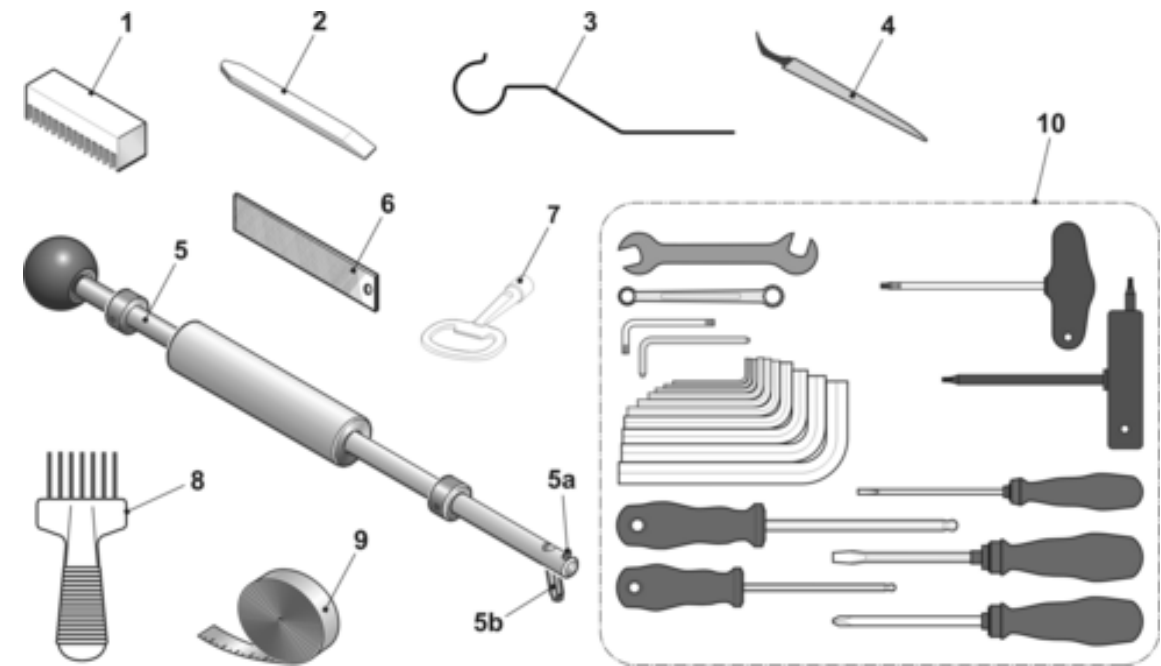

15.2 Lubricating stuff


Pos	Designation	Ident No.		Pos	Designation	Ident No.
1	Textile machines oil T46, 1l	230 614		4	Oil combifix	216 732
2	Grease OKS 475, 1kg	009 200		5	White grease paste OKS270	229 372
3	Grease OKS 475, 150g	005 351		6	Grease Staburags NBU 12/300KP	231 191

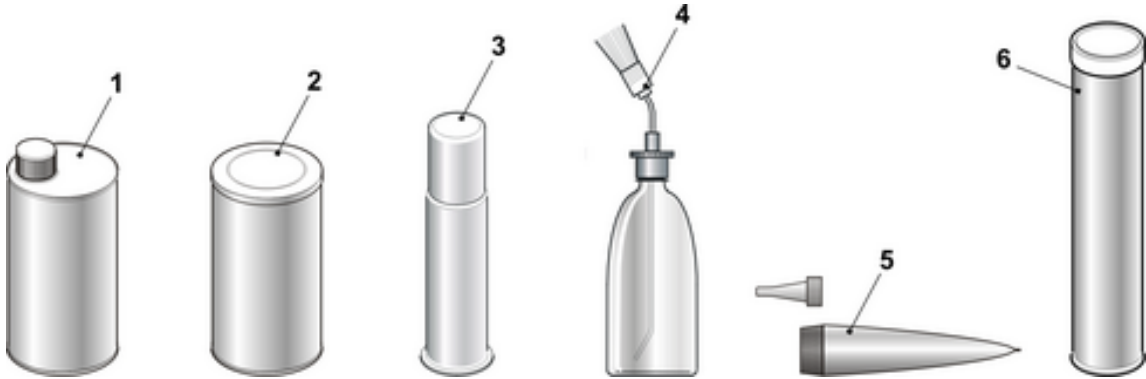


15.3 Mechanical parts

15.3 Mechanical parts

Pos	Designation	Ident No.		Pos	Designation	Ident No.
1	Cap screw M4x8	020 091		11	Cable binder 203x3.6 mm	025 815
2	Countersunk screw M3x6	020 286			Cable binder T50L	026 294
3	Cap screw M5x16	022 726			Cable binder 140x3.6mm	008 379
4	Cap screw M6x14	022 658			Cable binder 302x4.8mm	008 642
5	Set screw M16x50	023 235			Cable binder 92x2.4mm	008 378
6	Setting pin 3x7	020 643		12	Reusable tie ABV 232 320 mm	026 557
7	Setting pin 3x10	020 645				
8	Setting pin 3x12	020 647				
9	Setting pin 5x12	021 988				
10	Setting pin 5x18	022 622				

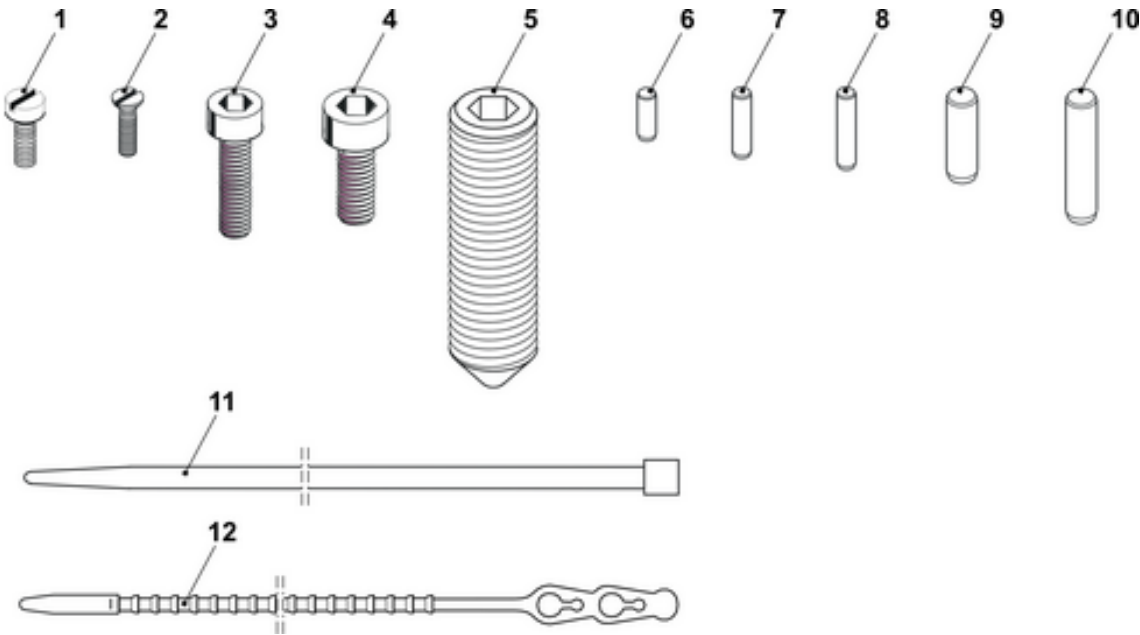


16 Special attachments

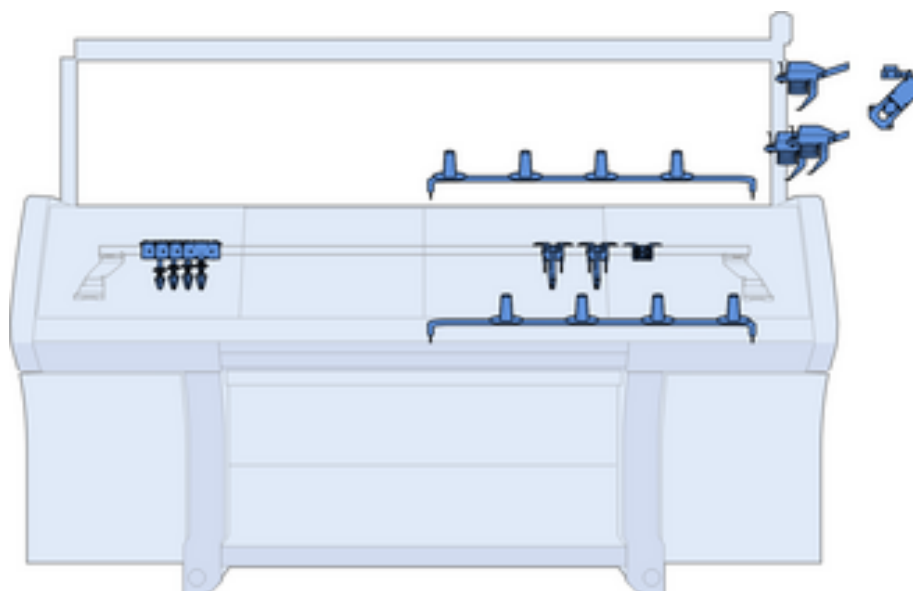

16.1 Additional board (top, bottom)


16.1 Additional board (top, bottom)

Pos	Designation		ID		Pos	Designation		ID
Σ	Additional board 50" IYC complete		244 424					
1	Additional bobbin board welded		243 608		5	550	Setting pin 3x12	020 647
2	Positioning pin		202 777			551	Eyelet	021 504
3	Disc D=130		062 385			552	Snap ring A12	020 996
4	Bobbin support		200 363		500	Countersunk screw M4x30		023 681
5	Yarn guide		243 765		501	Washer 5.3x30x1.25		023 556
	A5	Guiding part	243 623		502	Countersunk screw M4x25		023 511

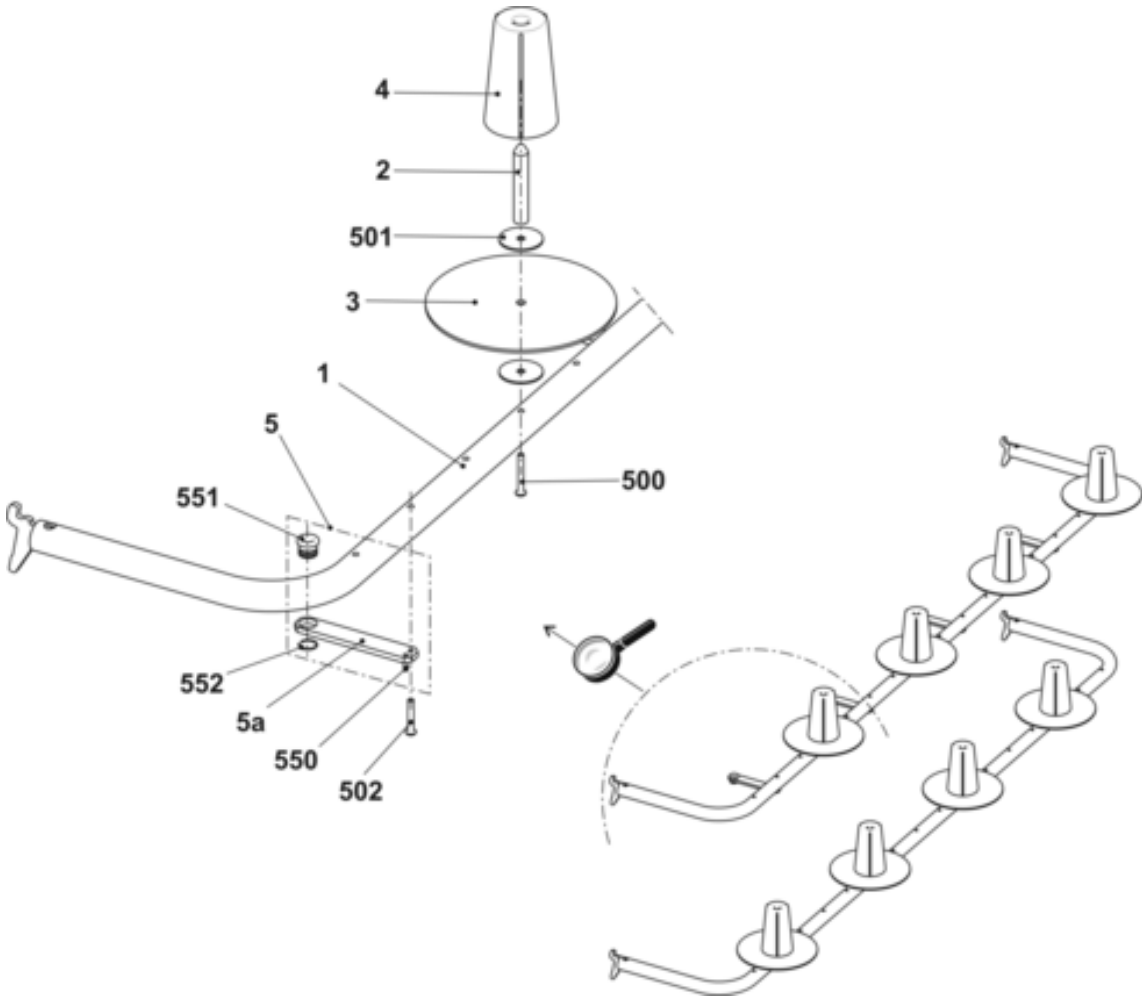

16.2 Yarn carrier carriage


Pos	Designation	ID No.		Pos	Designation	ID No.
1	Yarn carrier carriage 1+8 complete	217 486		3	Yarn carrier carriage 3+6 complete	217 488
2	Yarn carrier carriage 2+7 complete	217 487		4	Yarn carrier carriage 4+5 complete	217 489

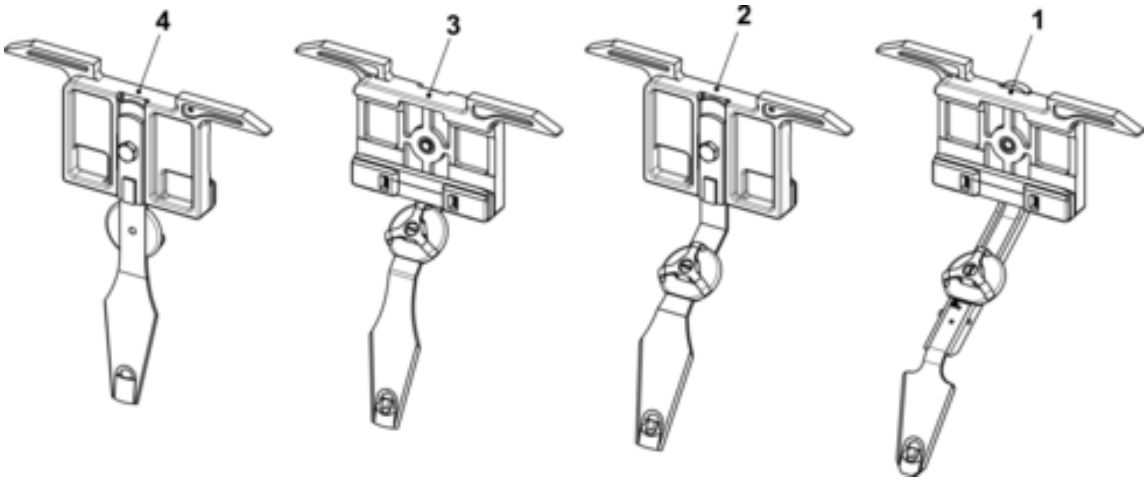

16.3 Yarn carrier carriage for ultra coarse yarns


16.3 Yarn carrier carriage for ultra coarse yarns

Pos	Designation	ID No.		Pos	Designation	ID No.
1	Yarn carrier carriage 1+8 complete	231 856		3	Yarn carrier carriage 3+6 complete	231 858
2	Yarn carrier carriage 2+7 complete	231 857		4	Yarn carrier carriage 4+5 complete	231 859

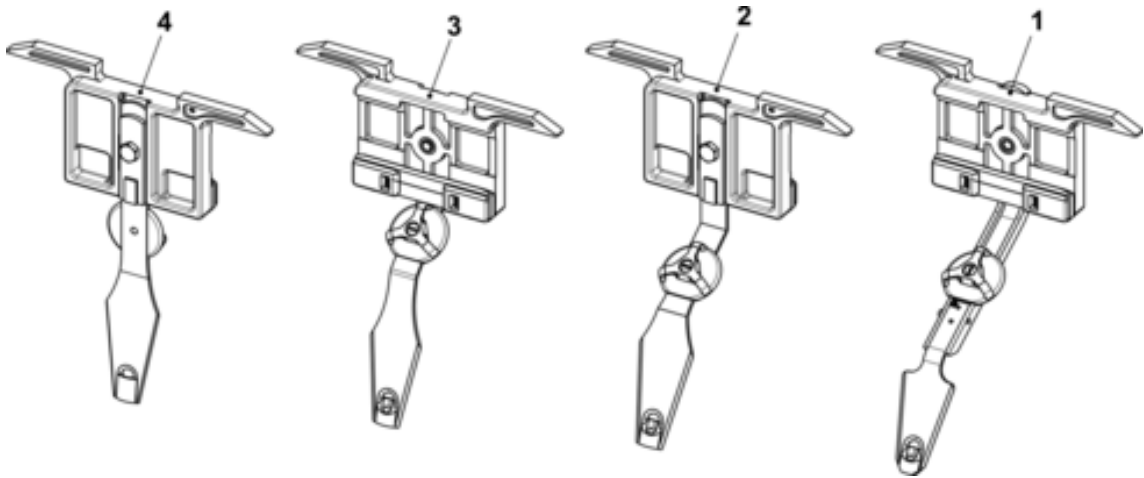

16.4 Complete intarsia yarn carriers


Pos	Designation	ID No.	Pos	Designation	ID No.
ΣA	Intarsia YC carriage 1+8 complete	213 773	10	Pressure roller	212 774
ΣB	Intarsia YC carriage 2+7 complete	213 774	11	Cover	213 392
ΣC	Intarsia YC carriage 3+6 complete	213 775	12	Clamping lever on the right	216 100
ΣD	Intarsia YC carriage 4 + 5 complete	213 776	13	Clamping lever on the left	216 101
1	Basic plate complete	213 408	14	Pressure plate 2.04	201 654
2	Slider	217 188		Pressure plate 2.06	208 924
3	Locking plunger	212 508	16	Spring pin	201 677
4	Sliding block	213 807	17	Lifter	212 547
5	YC bow x+y complete		18	Sliding part	213 391
7	Locating pin 3.3 (2+7/3+6)	212 504	21	Threaded bolt	213 399
	Locating pin 3.4 (1+8/2+7/3+6/4+5)	212 505	500	Countersunk head screw M4x6	022 994
8	Locating pin 3.3 (2+7/3+6/4+5)	212 504	502	Countersunk head screw M4x12.5	022 979
	Locating pin 3.4 (2+7/3+6/4+5)	212 505	506	Compression spring 4.0x0.7x25	022 969
	Locating pin 3.5 (1+8)	212 506	508	Compression spring 2.8x0.35x19	023 394
9	Thrust piece	212 773			

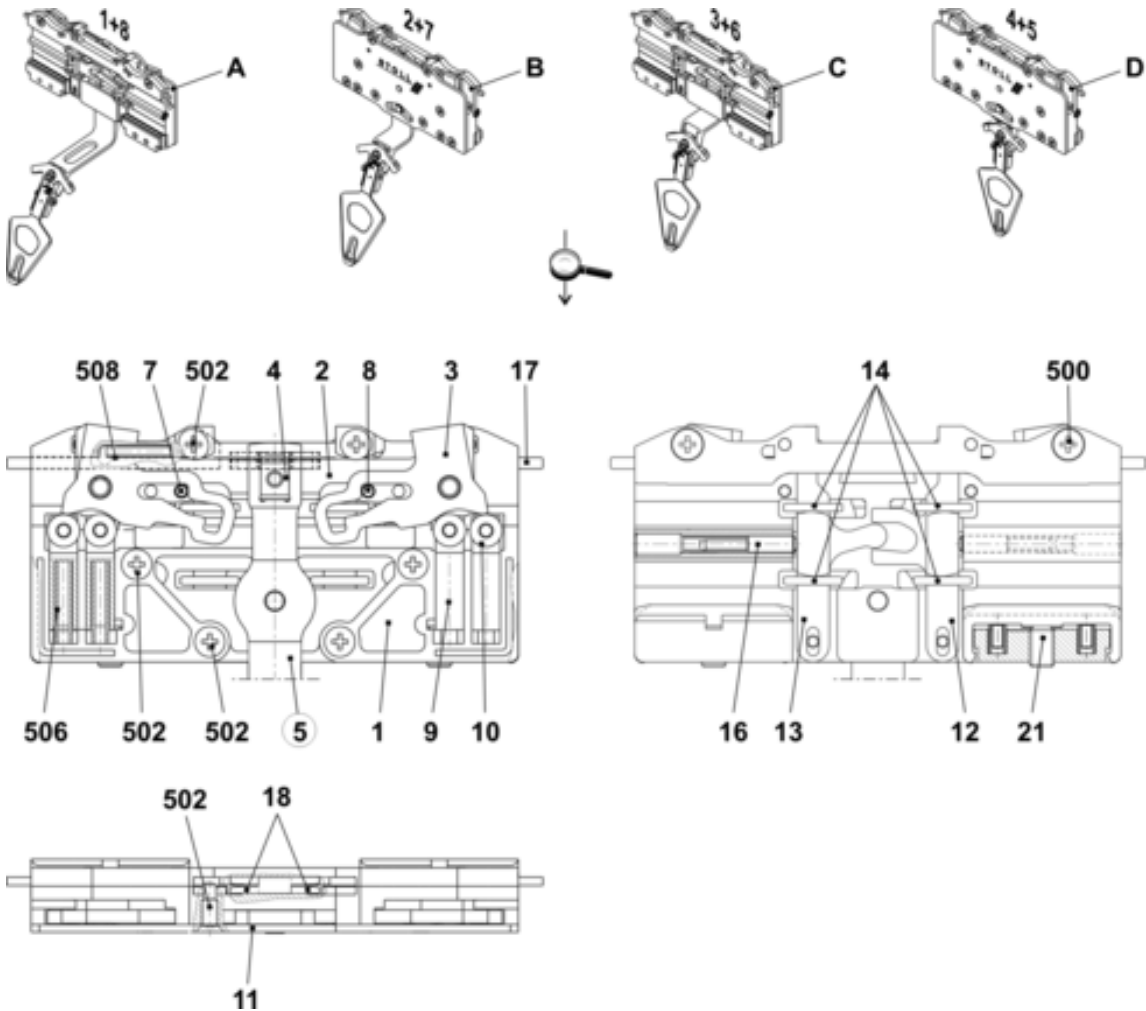

16.4 Complete intarsia yarn carriers


16.4.1 Bow and head IYC

Pos	Designation	ID No.		Pos	Designation	ID No.
Σ	Intarsia YC carriage 1+8 complete	213 773				
	Intarsia YC carriage 2+7 complete	213 774		5	YC head 1+8 complete	216 352
	Intarsia YC carriage 3+6 complete	213 775		6	YC head 2+7 complete	216 353
	Intarsia YC carriage 4 + 5 complete	213 776		7	YC head 3+6 complete	216 354
1	YC bow 1+8 complete	213 768		8	YC head 4+5 complete	216 355
2	YC bow 2+7 complete	213 769		a	Yarn guide angle	201 672
3	YC bow 3+6 complete	213 770		500	Cap screw M4x8	022 977
4	YC bow 4+5 complete	213 771		501	Circlip S4-FST	022 774

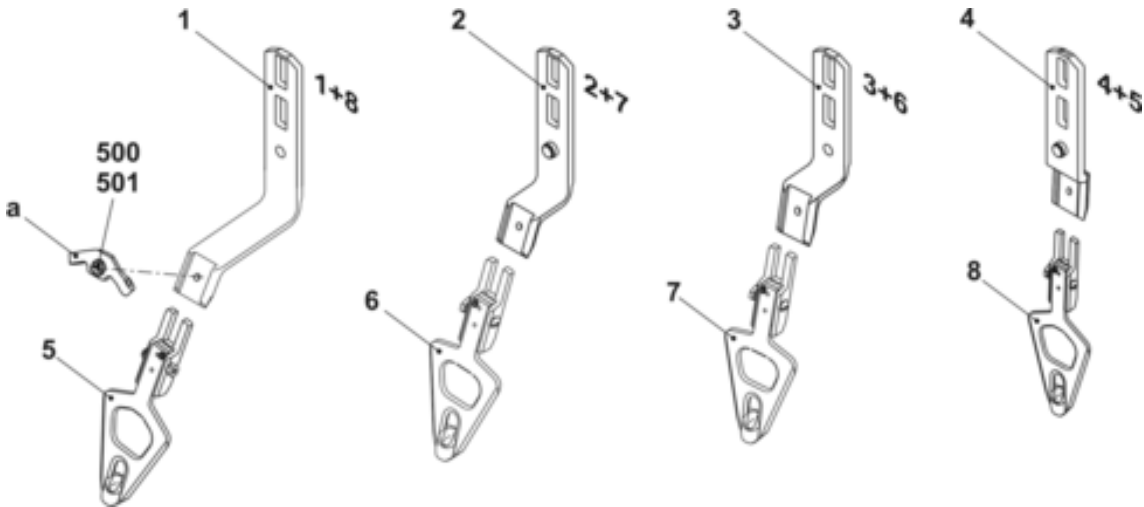

16.5 Yarn length measuring device

Pos	Designation	Id		Pos	Designation	Id	
Σ	Yarn length measuring device complete	228 943		10	Yarn length measuring device 3	236 275	
20	Cable length measuring device	236 718			11	Card FLM CPU	300 934
30	Support	223 029			12	Sensor	211 354
40	Clamp	228 583			13	Sensor complete	212 406
50	Adjustment weight	212 241			13a	Rubber running ring	258 582
80	Threaded strip	200 223			16	Fan complete	212 255
500	Countersunk screw M8x16	023 113			17	Threaded strip	211 801
501	Hammer head bolt M8x25	022 866			19	Yarn guide rod	211 352
503	Hexagon nut M4-6	020 838			510	Pan-head screw M5x10	023 247
504	U-washer 8,4	023 248			511	Spring nut M5	022 873
					512	Pan-head screw M5x6	023 246
					513	Sheet metal screw ST3.5x13	022 940
					514	Spring washer A5	022 454
					515	Oval head screw with washer M3x10	023 380
					516	Cap screw M5X22	023 193

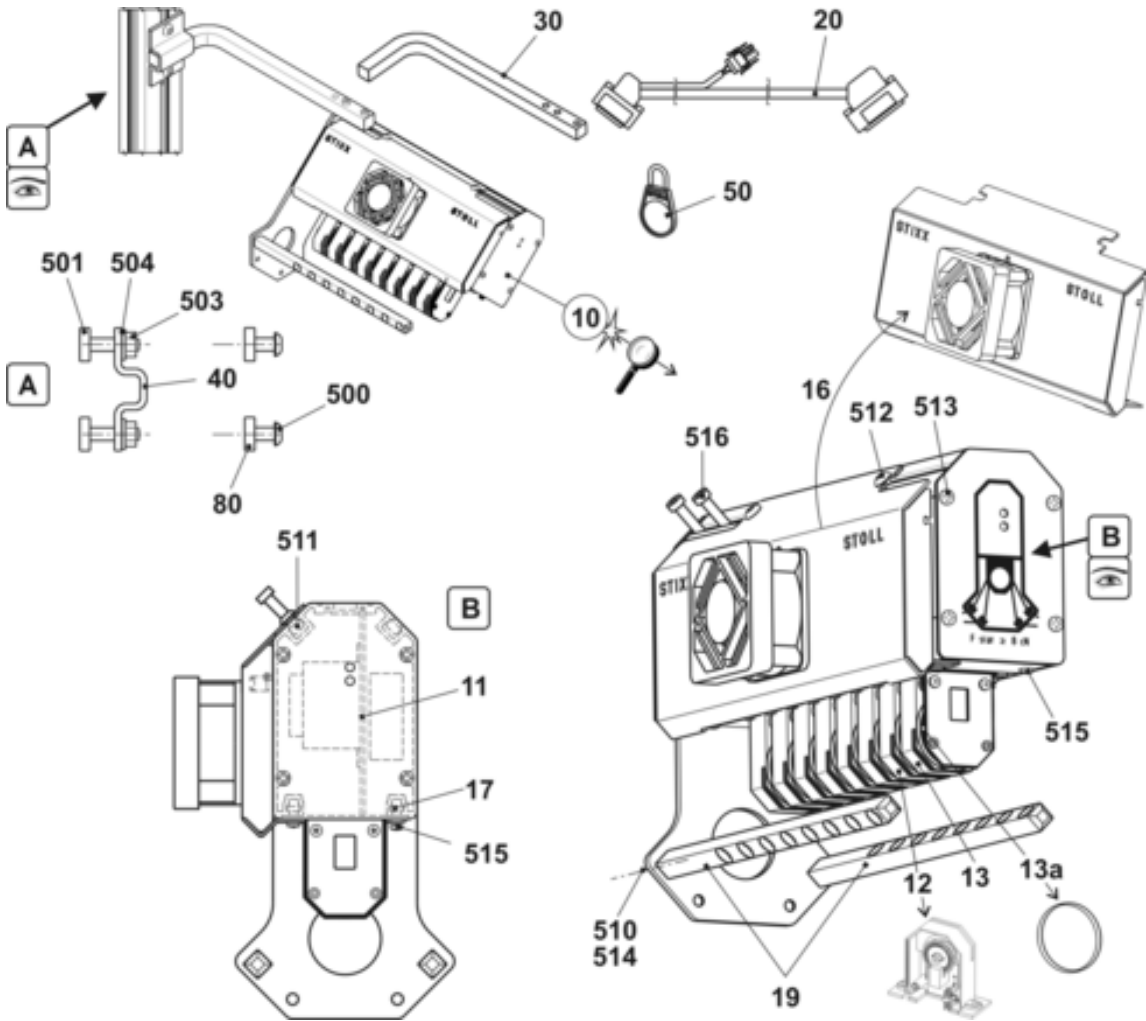

16.6 Feed wheel SFE

16.6 Feed wheel SFE

Pos	Designation	Id	Note
Σ	Mounted set storage feed wheel SFE	231 427	Please order the SFE spare parts at: MEMMINGER-IRO GMBH Jakob-Mutz-Strasse 7 D-72280 Dornstetten Phone: +49 7443 281-0 Fax: +49 (0)7443 281-101 The item no. and the designation for the SFE spare parts can be found in the enclosed assembling instructions of the company MEMMINGER-IRO.
1	Transfo with cable	231 979	
2	Mounted set SFE without transformer	231 980	
	2a SFE feed wheel	231 537	

